

**Compressor ELECTROLUX,
CUBIGEL ,GP12TB ,Hermetic
piston ,ACC ,HMBP , moteur HP
 , 3/8 HP++, 1/2 hp- , 1PH ,
R134A , Pression 1.7 Bar ,
220V**

written by Lilianne | 29 April 2020

	Model	Refr.	HP	
▶ ☐	<u>GL45PB</u>	HMBP::R134a	1/6	
▶ ☐	<u>GL45PB</u>	HMBP::R134a	1/6	
▶ ☐	<u>GL45TB</u>	HMBP::R134a	1/6	
▶ ☐	<u>GL60PB</u>	HMBP::R134a	1/5	
▶ ☐	<u>GL60TB</u>	HMBP::R134a	1/5	
▶ ☐	<u>GL80PB</u>	HMBP::R134a	1/5	
▶ ☐	<u>GL80TB</u>	HMBP::R134a	F	
▶ ☐	<u>GL90TB</u>	HMBP::R134a	1/4	
▶ ☐	<u>GP12TB</u>	HMBP::R134a	3/8	

PictureS Mbsm Dot Pro : www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO

Type: Hermetic piston compressors Producer: ACCSeries: HMBP, cooling

Model: GP12TB

General data

Mbsm_dot_pro_private_PDF_GP12TB



Private Picture Copyright : WWW.MBSM.PRO

Capillary :	0.42 , 0.32 180 psi	100mm
Refrigerant:	R134a	
Discharge element:	C-V	
Cooling:	F	
Maximum ambient temperature [°C]:	43	

Compressor's data

Cylinder capacity [cm³]:	12,1	
Displacement [m³/h]:	2,1	
Weight [kg]:	11,2	
Oil charge [cm³]:	350	

Oil type:	ISO VG 22 ESTER	
-----------	-----------------	--

Engine's data

Engine type:	CSIR	
Power [KM]:	3/8	
Starting element:	HST	
Power supply:	220V 50Hz	
Voltage range:	187-264	
Locked rotor current [A]:	13,5	
Running winding resistance (25°C) [Ω]:	5,75	
Starting winding resistance (25°C) [Ω]:	20,3	

Electrical data

Relays:	9660 A 138, MTRP 43	
Shielding element:	MRT26AMK, T0181	
Starting capacitor volume [μF]:		

Connections

Type: Hermetic piston compressors**Producer:** ACC**Series:** HMBP
Model: GP12TB

General data

Refrigerant:	R134a	
Discharge element:	C-V	
Cooling:	F	
Maximum ambient temperature [°C]:	43	

Compressor's data

Cylinder capacity [cm³]:	12,1	

Displacement [m ³ /h]:	2,1	
Weight [kg]:	11,2	
Oil charge [cm ³]:	350	
Oil type:	ISO VG 22 ESTER	

Engine's data

Engine type:	CSIR	
Power [KM]:	3/8	
Starting element:	HST	
Power supply:	220V 50Hz	
Voltage range:	187-264	
Locked rotor current [A]:	13,5	
Running winding resistance (25°C) [Ω]:	5,75	
Starting winding resistance (25°C) [Ω]:	20,3	

Electrical data

Relays:	9660 A 138, MTRP 43	
Shielding element:	MRT26AMK, T0181	
Starting capacitor volume [μF]:		

Connections

	millimeters	inches	
Suction/service tube:	8,1		
Service/suction tube:	8,1		
Discharge tube:	6,5		

PDF DOCUMENTATION

Mbsm_dot_pro_private_picture_GP12TBTélécharger




PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro

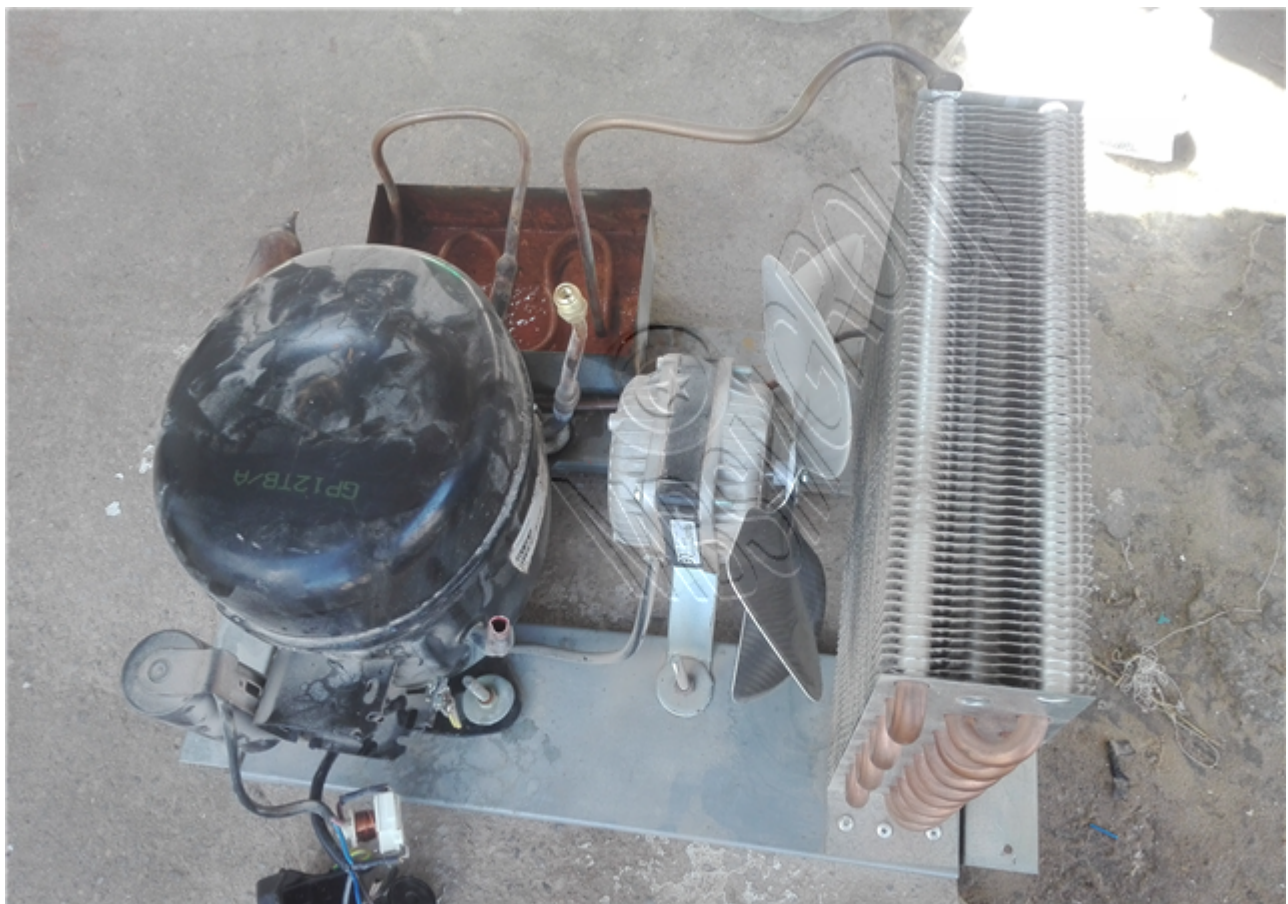

PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro




PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro

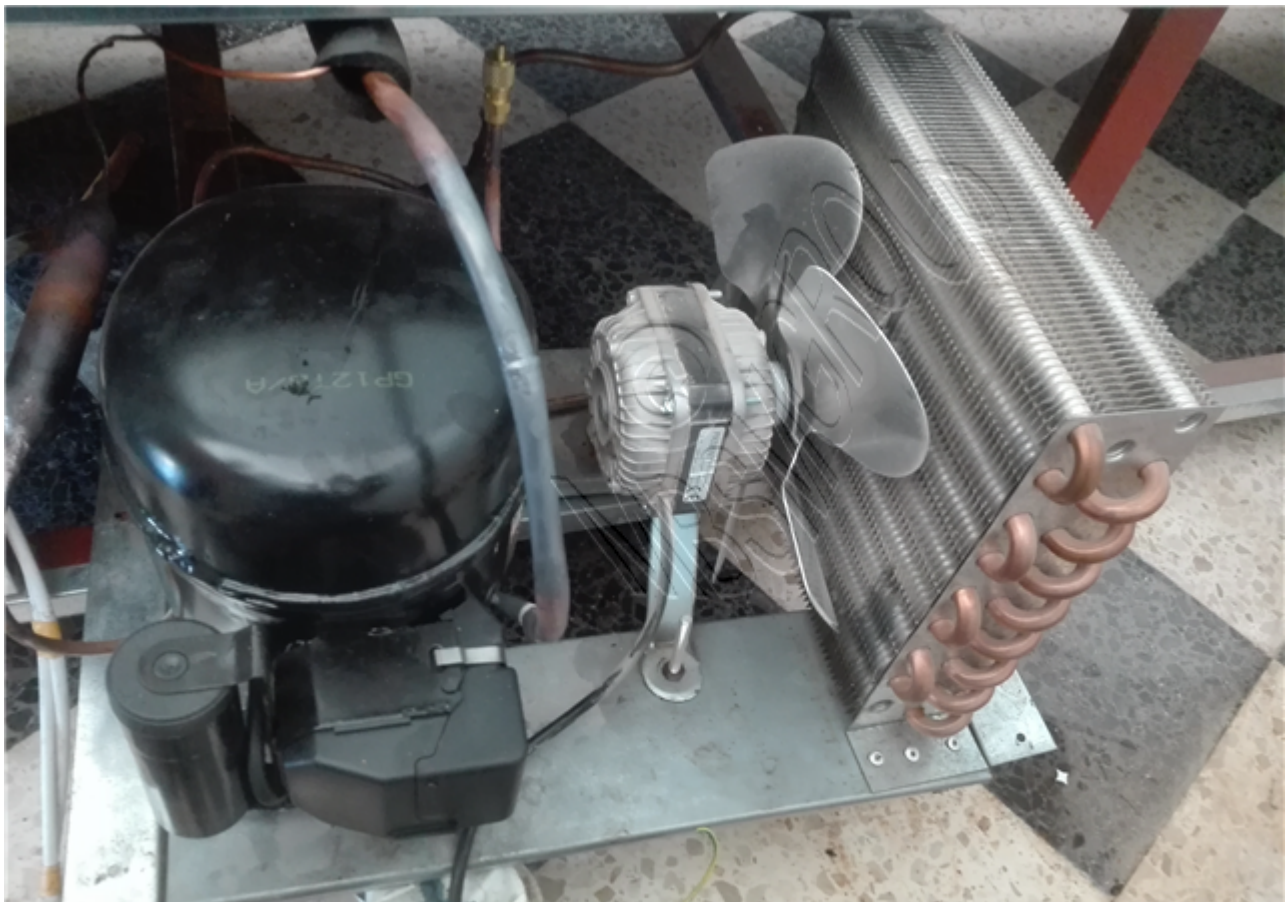


PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro

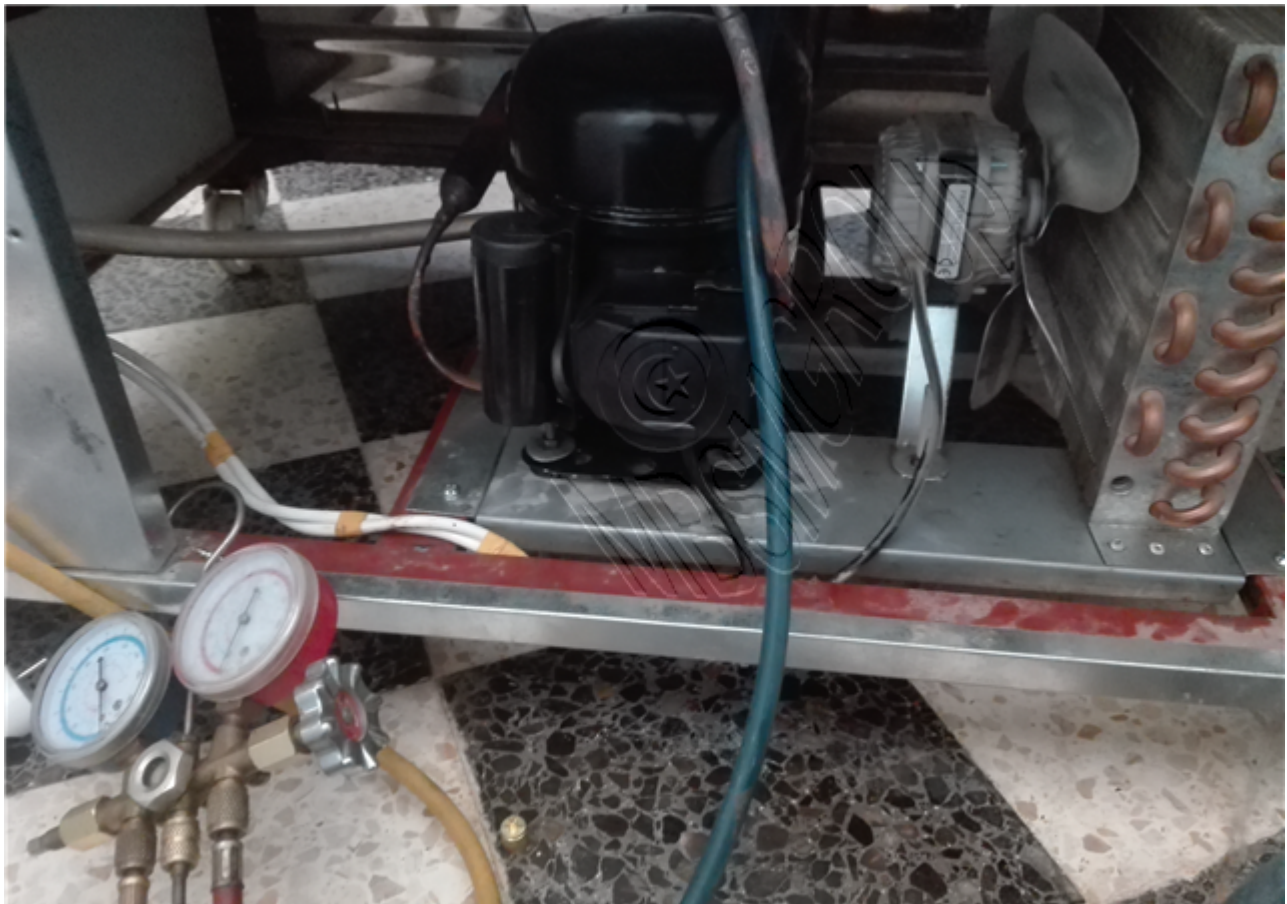

PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro

