# Compresseur, Aspera – Embraco EMT ,EMT2121U, R290 ,1/3 HP , 220-240V 50 Hz ,Cylindrée = 5.56 CM3 , Moteur type: CSIR,7.7LRA , Oil 180Ml

Category: Technologie,Tester ok
written by www.mbsm.pro | 9 May 2020




Mbsm_dot_pro_private_PDF_Catalogue_EmbracoTélécharger


Embraco
EMT2121U
RoHS
Thermaliy Protected
220-240V~
7.7LRA
R290
50Hz
ESTER OIL 180ml
1PH
SUCTION
MADE IN CHINA NO START WITHOUT STARTING DEVICE
50.330.N291
11/NOV/09
RA9TD1R4
Private Picture : www.MBSM.PRO

# embraco EMT




# R290 LBP

Private Picture : www.MBSM.PRO

| 50Hz 50-60Hz | R290 | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | LBP | VOLT. FREQ. | COOL. CAP. [W] | DISPL. [cc] | M/HBP | VOLT. FREQ. | COOL. CAP. [W] | DISPL. [cc] |
| EM | EMT1117U | A | 123 | 4,5 | EMT6144U | A | 343 | 4,50 |
| | EMT1121U | A | 159 | 5,57 | EMT6152U | A | 418 | 5,20 |
| | EMT1125U | A | 177 | 5,96 | EMT6165U | A | 485 | 5,96 |
| | EMT1130U | A | 198 | 6,76 | EMTE6181U | A | 697 | 2,77 |
| | EMT2117U | A | 123 | 4,5 | | | | |
| | EMT2121U | A | 159 | 5,57 | | | | |
| | EMT2125U | A | 177 | 5,96 | | | | |
| | EMT2130U | A | 196 | 6,76 | | | | |
| | EMTE2134U | A | 265 | 1,31 | | | | |

Private Picture : www.MBSM.PRO

## EM/NE/NT/NJ

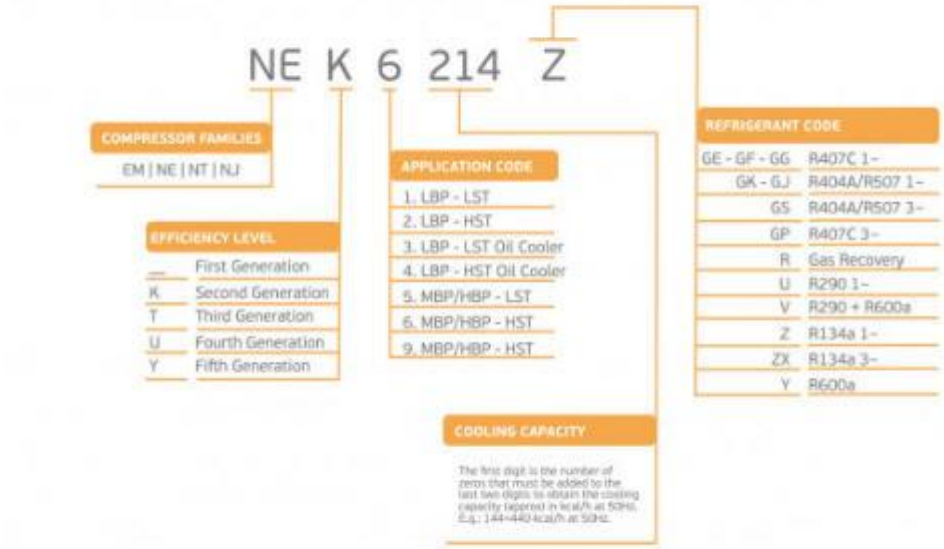


Private Picture : www.MBSM.PRO

*Electrical components*

| MOTOR TYPE | OVERLOAD PROTECTOR | STARTING DEVICE | | | CAPACITORS | |
|---|---|---|---|---|---|---|
| | | CURRENT RELAYS | VOLTAGE RELAYS | PTC | START | RUN |
| RSIR | YES | YES(1) | | YES(1) | | |
| CSIR | YES | YES | | | YES | |
| RSCR | YES | | | YES | | YES |
| PSC | YES | | | | | YES |
| CSR | YES | | YES | | YES | YES |
| 3Ø | YES | | | | | |

(1) For some RSIR models in the NB series, a PTC starting device can be used as an alternative to the current relay.
For the RSIR compressors in the BP and EM series, the PTC starting device is standard. Only some specific HBP models in the BP series can use a current relay.

Private Picture : www.MBSM.PRO