

# Compresseur, hermétique Daewoo ,HSL19JE-5, RLA 5.5 ,R134a LBP 220-240V / 50Hz , 144/155 W , 1/5 HP, 516 Btu ,RSIR

Category: Technologie,Tester ok  
written by www.mbsm.pro | 10 May 2020

Series	Model	Displacement [cc/rev]	Power [W]	kcal/h	Watt	Btu/h	EFF	COP	EER	Motor Type	Compressor Type	Weight [kg]	Qty. [cc]
							kcal/Wh	W/W	Btu/Wh				
DS	DS22LHS8	2.18	57	37	43	147	1.54	0.75	2.58	RSIR	ST	6.0	180
	DS25LHS8	2.54	63	50	58	198	1.26	0.92	3.15	RSIR	ST	6.0	180
	DS30LHS8	3.06	78	69	80	274	1.13	1.03	3.51	RSIR	ST	6.0	180
WX	WX20LHSST	2.01	58	29	34	115	2.00	0.58	1.98	RSIR	ST	5.9	180
	WX24LHS5	2.54	66	40	47	159	1.65	0.70	2.41	RSIR	ST	5.9	180
	WX24LHSST	2.54	64	40	47	159	1.60	0.73	2.48	RSIR	ST	5.9	180
	WX24LHS8	2.54	66	40	47	159	1.65	0.70	2.41	RSIR	ST	5.9	180
	WX30LHS5	3.06	86	60	70	238	1.43	0.81	2.77	RSIR	ST	5.9	180
	WX30LHSST	3.06	88	59	69	234	1.49	0.78	2.66	RSIR	ST	5.9	180
	WX30LHS8	3.06	86	60	70	238	1.43	0.81	2.77	RSIR	ST	5.9	180
	WX30LHT5W	3.06	75	52	60	206	1.44	0.81	2.75	RSIR	ST	5.9	180
	WX35LHSST	3.51	98	64	74	254	1.53	0.76	2.59	RSIR	ST	5.9	180
	WX35LHT5W	3.51	99	64	74	254	1.55	0.75	2.57	RSIR	ST	5.9	180
Y	HPL7Y-5	2.65	62	50	58	198	1.24	0.94	3.20	RSCR	ST	6.7	230
	HPL9Y-5	3.43	76	58	67	230	1.31	0.89	3.03	RSCR	ST	6.7	230
	HPL11Y-5	4.51	89	80	93	317	1.11	1.05	3.57	RSCR	ST	7.0	230
	HSL5Y-5	2.29	65	35	41	139	1.86	0.63	2.14	RSIR	ST	6.3	230
	HSL5Y-5P	2.29	64	35	41	139	1.83	0.64	2.17	RSIR	ST	6.7	230
	HSL7Y-5	2.65	74	48	56	190	1.54	0.75	2.57	RSIR	ST	6.7	230
	HSL9Y-5	3.43	74	46	53	183	1.61	0.72	2.47	RSIR	ST	6.7	230
	HSL11Y-5	4.51	109	80	93	317	1.36	0.85	2.91	RSIR	ST	7.0	230
	HSL11Y-5A	4.51	102	85	99	337	1.20	0.97	3.31	RSIR	ST	7.0	230
HSL11Y-5T	4.51	108	78	91	310	1.38	0.84	2.87	RSIR	ST	7.0	230	
JE	HPL13JE-5	4.62	97	93	108	369	1.04	1.12	3.80	RSCR	ST/FC	7.4	230
	HPL15JE-5	5.12	107	107	124	425	1.00	1.16	3.97	RSCR	ST/FC	7.7	230
	HPL17JE-5	5.55	124	123	143	488	1.01	1.15	3.94	RSCR	ST/FC	7.7	230
	HPL19JE-5	5.84	124	134	156	532	0.93	1.26	4.29	RSCR	ST/FC	8.2	230
	HSL15JE-5	5.12	114	108	126	429	1.06	1.10	3.76	RSIR	ST/FC	7.7	230
	HSL15JE-5A	5.12	117	109	127	433	1.07	1.08	3.70	RSIR	ST/FC	7.7	230
	HSL15JE-5C	5.12	115	108	126	429	1.06	1.09	3.73	RSIR	ST/FC	7.8	230
	HSL17JE-5	5.55	129	126	147	500	1.02	1.14	3.88	RSIR	ST/FC	7.7	230
	HSL17JE-5A	5.55	129	121	141	480	1.07	1.09	3.72	RSIR	ST/FC	7.7	230
	HSL19JE-5	5.84	133	130	151	516	1.02	1.14	3.88	RSIR	ST/FC	8.2	230
	HSL19JE-5A	5.84	141	135	157	536	1.04	1.11	3.80	RSIR	ST/FC	7.8	230
JX41LHS5	4.09	101	89	104	353	1.13	1.02	3.50	RSIR	ST/FC	7.6	230	

Private Picture : [www.MBSM.PRO](http://www.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_HSL19JE-5Télécharger

Series	Model	Displacement [cc/rev]	Power [W]	kcal/h	Watt	Btu/h	EFF	COP	EER	Motor Type	Compl. Type	Weight [kg]	Qty. [cc]
							kcal/Wh	W/W	Btu/Wh				
DS	DS22LHS8	2.18	57	37	43	147	1.54	0.75	2.58	RSIR	ST	6.0	180
	DS25LHS8	2.54	63	50	58	198	1.26	0.92	3.15	RSIR	ST	6.0	180
	DS30LHS8	3.06	78	69	80	274	1.13	1.03	3.51	RSIR	ST	6.0	180
WX	WX20LHS5T	2.01	58	29	34	115	2.00	0.58	1.98	RSIR	ST	5.9	180
	WX24LHS5	2.54	66	40	47	159	1.65	0.70	2.41	RSIR	ST	5.9	180
	WX24LHS5T	2.54	64	40	47	159	1.60	0.73	2.48	RSIR	ST	5.9	180
	WX24LHS8	2.54	66	40	47	159	1.65	0.70	2.41	RSIR	ST	5.9	180
	WX30LHS5	3.06	86	60	70	238	1.43	0.81	2.77	RSIR	ST	5.9	180
	WX30LHS5T	3.06	88	59	69	234	1.49	0.78	2.66	RSIR	ST	5.9	180
	WX30LHS8	3.06	86	60	70	238	1.43	0.81	2.77	RSIR	ST	5.9	180
	WX30LHT5W	3.06	75	52	60	206	1.44	0.81	2.75	RSIR	ST	5.9	180
	WX35LHS5T	3.51	98	64	74	254	1.53	0.76	2.59	RSIR	ST	5.9	180
	WX35LHT5W	3.51	99	64	74	254	1.55	0.75	2.57	RSIR	ST	5.9	180
Y	HPL7Y-5	2.65	62	50	58	198	1.24	0.94	3.20	RSCR	ST	6.7	230
	HPL9Y-5	3.43	76	58	67	230	1.31	0.89	3.03	RSCR	ST	6.7	230
	HPL11Y-5	4.51	89	80	93	317	1.11	1.05	3.57	RSCR	ST	7.0	230
	HSL5Y-5	2.29	65	35	41	139	1.86	0.63	2.14	RSIR	ST	6.3	230
	HSL5Y-5P	2.29	64	35	41	139	1.83	0.64	2.17	RSIR	ST	6.7	230
	HSL7Y-5	2.65	74	48	56	190	1.54	0.75	2.57	RSIR	ST	6.7	230
	HSL9Y-5	3.43	74	46	53	183	1.61	0.72	2.47	RSIR	ST	6.7	230
	HSL11Y-5	4.51	109	80	93	317	1.36	0.85	2.91	RSIR	ST	7.0	230
	HSL11Y-5A	4.51	102	85	99	337	1.20	0.97	3.31	RSIR	ST	7.0	230
	HSL11Y-5T	4.51	108	78	91	310	1.38	0.84	2.87	RSIR	ST	7.0	230
JE	HPL13JE-5	4.62	97	93	108	369	1.04	1.12	3.80	RSCR	ST/FC	7.4	230
	HPL15JE-5	5.12	107	107	124	425	1.00	1.16	3.97	RSCR	ST/FC	7.7	230
	HPL17JE-5	5.55	124	123	143	488	1.01	1.15	3.94	RSCR	ST/FC	7.7	230
	HPL19JE-5	5.84	124	134	156	532	0.93	1.26	4.29	RSCR	ST/FC	8.2	230
	HSL15JE-5	5.12	114	108	126	429	1.06	1.10	3.76	RSIR	ST/FC	7.7	230
	HSL15JE-5A	5.12	117	109	127	433	1.07	1.08	3.70	RSIR	ST/FC	7.7	230
	HSL15JE-5C	5.12	115	108	126	429	1.06	1.09	3.73	RSIR	ST/FC	7.8	230
	HSL17JE-5	5.55	129	126	147	500	1.02	1.14	3.88	RSIR	ST/FC	7.7	230
	HSL17JE-5A	5.55	129	121	141	480	1.07	1.09	3.72	RSIR	ST/FC	7.7	230
	HSL19JE-5	5.84	133	130	151	516	1.02	1.14	3.88	RSIR	ST/FC	8.2	230
HSL19JE-5A	5.84	141	135	157	536	1.04	1.11	3.80	RSIR	ST/FC	7.8	230	
JX41LHS5	4.09	101	89	104	353	1.13	1.02	3.50	RSIR	ST/FC	7.6	230	

Private Picture : [www.MBSM.PRO](http://www.MBSM.PRO)

**HSL19JE-5**  
AC 220-240V 50Hz (915)  
1.5A 5.5 R1344 V  
SERIALLY PROTECTED  
OPTICALLY ALIGNED  
MAGNETICALLY PROTECTED  
DAEWOO ELECTRONICS CORP  
MADE IN KOREA DATUM 11 03  
K41110678

Model	Hacim (m <sup>3</sup> )	Soğutma Kapasitesi (kcal/h)	Motor Input (W)	Motor Tipi	Soğutma Tipi*1)	Net Kilo (kg)
WX24LHS5T	2.40	40	64	RSIR	ST	5.9
WX30LHS5T	3.00	59	88	RSIR	ST	5.9
WX35LHS5T	3.50	64	98	RSIR	ST	5.9
HSL5Y-5	2.30	35	64	RSIR	ST	6.3
HSL7Y-5	2.70	48	74	RSIR	ST	6.7
HSL9Y-5	3.40	58	81	RSIR	ST	6.7
HSL11Y-5	4.50	80	109	RSIR	ST	6.7
HSL15JE-5C	5.10	108	115	RSIR	ST	7.7
HSL17JE-5	5.60	121	129	RSIR	ST	7.4
HSL19JE-5	5.80	130	144	RSIR	ST	7.7
JX41LHS5	4.10	87	102	RSIR	ST	7.4
JX46LHS5	4.60	109	131	RSIR	ST	7.4
JX51LHS5	5.10	121	137	RSIR	ST	7.4
JX58LHS5	5.80	141	139	RSIR	ST	7.4
JX58LHK5	5.80	141	139	RSIR	ST	7.4

Private Picture : [www.MBSM.PRO](http://www.MBSM.PRO)



OPPO A1k

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)


# DAEWOO

## Refrigerator

### FR-171

VOLTAGE	AC 220-240V
FREQUENCY	50Hz
MOTOR INPUT	140W
REFRIGERANT	R-134a
CHARGE	105g
NET WEIGHT	41kg
MADE IN KOREA	

## WIRING DIAGRAM

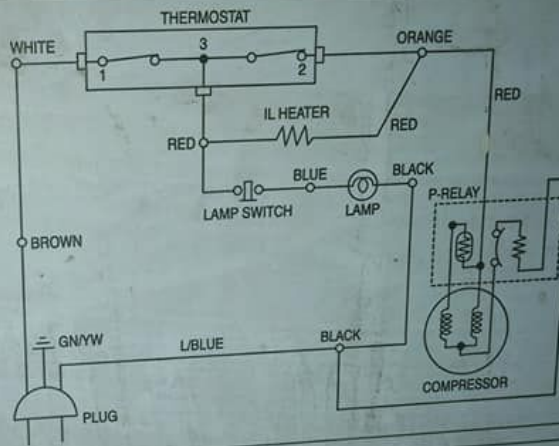

- NOTICE**
1. As this refrigerator's condensing pipe is installed beneath the side and rear plates, its surface feels hot but, not abnormal. This condition doesn't hurt cold stored foods.
  2. Allow 6 cm or more clearance between wall and side and rear plate of the refrigerator for good fresh air circulation.

OPPO A1k