


Embraco, Compressor, Fridge,
Refrigerator, 1/5HP, LBP, 1/6++,mbp
R134a, FFI7.5HAK, 220-240V/50HZ

Category: compressor

written by www.mbsm.pro | 13 June 2020

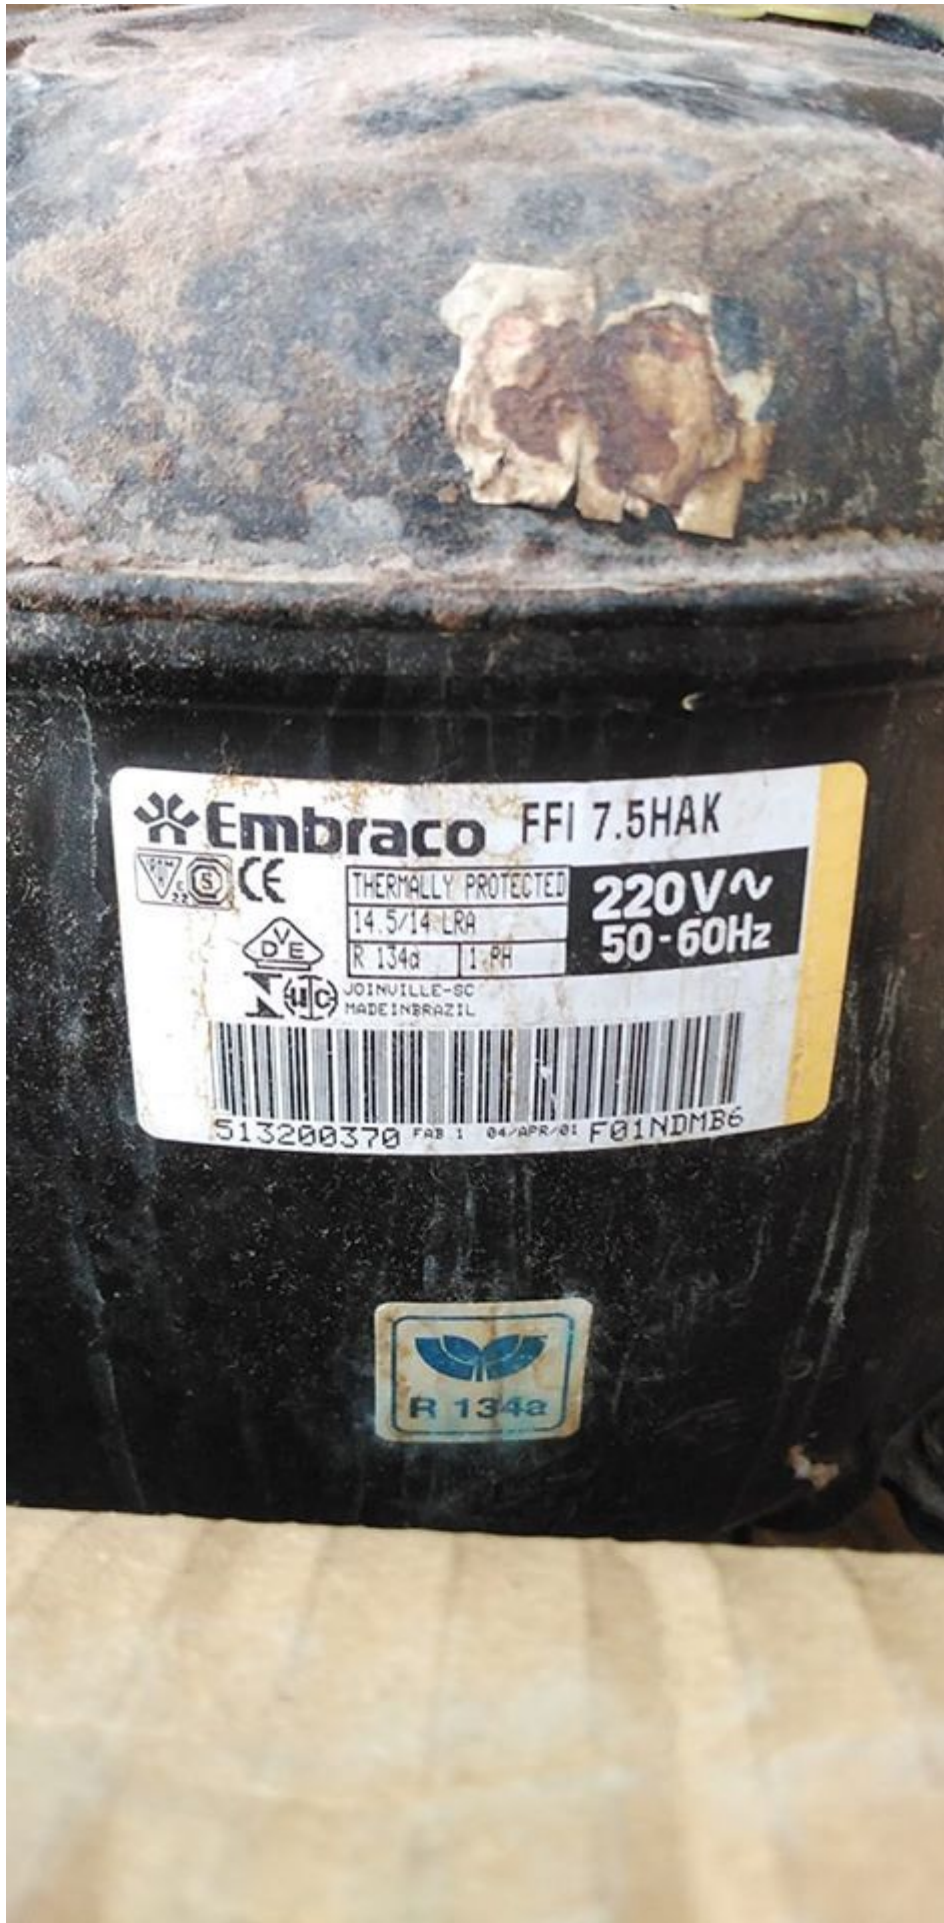

 **Embraco** FFI 7.5HAK



CE

THERMALLY PROTECTED

14.5/14 LRA

R 134a

1.8H

220V~
50-60Hz



JOINVILLE-SC
MADE IN BRAZIL



513200370 FAB 1 04/APR/01 F01NDMB6



Specifications

Description:

Refrigerant:	R-134a	Displacement (cm ³):	5,54
Voltage:	220 V 50-60 Hz 1 ~	Lubricant Type:	IS022
Frequency (Hz):	50	Lubricant Charge (ml):	160
Application:	LBP	Motor Type:	RSIR-CSIR
HP:	1/6+	Starting Torque:	LST
Efficiency:	2,05	Type of Test:	ASHRAE32
Capacity:	554		

Product Category Refrigeration Compressors and Air Conditioning Compressors
Capacity0.19 kW (0.2557 BHP) Input Power187 wattsRating RefrigerantR-134a



Embraco FFI 7.5HAK



CE

THERMALLY PROTECTED

14.5/14 LRA

R 134a 1.8H

220V~
50-60Hz



JOINVILLE-SC
MADE IN BRAZIL



513200370 FAB 1 04/APR/01 F01NDMB6



Quantity(Units) 1 – 500 >500

Est. Time(days) 15 To be negotiated

1/4HP LBP R134a Embraco Refrigerator, Fridge Compressor FFI7.5HAK 220-240V/50HZ

:

1. Brand name:Embraco Aspera
2. Voltage:200-220V,50Hz,230V 60HZ

The technical specifications of aspera hermetic compressor

Aspera Compressor

Refrigerant R22 Low Back Pressure

Item	Horse Power
NE2134E	9/16HP
T2140E	3/4HP
T2155E	1HP
T2168E	1.25HP
NJ2190E	1.5HP

Refrigerant R22 High/Medium Back Pressure

NB6152E	1/4HP
NB6165E	1/3HP
NE6210E	3/8HP
NE6211E	1/2HP
NE9213E	9/16HP
T6220E	3/4HP
NJ9266E	1HP
NJ9232E	1.5HP
NJ9238E	1.75HP

Refrigerant R134a Medium/High Back Pressure

NE6170Z	1/3HP
NE6187Z	3/8HP

Refrigerant R134a Low Back Pressure

NE1121Z	1/4HP
NE1130Z	1/3HP
NE2134Z	9/16HP

Refrigerant R404a Low Back Pressure

NEK2125GK	7/16HP
NEK2134GK	1/2HP
NEK2150GK	1/2HP
T2155GK	3/4HP
T2168GK	3/4HP
T2178GK	1HP
NJ2192GK	1.5HP
NJ2212GK	1.25HP
NE9213GK	1/6HP
T6220GK	3/4HP
T6222GK	3/4HP
NJ9226GK	1HP
NJ9232GK	1.5HP

NJ9238GK 1.75HP

External Features:

Shape	Material	Diameter (mm)
Suction Connector	Straight Copper	6,50
Discharge Connector	Straight Copper	4,94
Process Connector	Straight Copper	6,50

Oil Cooler:

Base Plate: Universal EG/F/AMEM version 2

Tray Holder: No

Weight (kg): 7,61

Application

Maximum ambient temperature (°C): 32

Expansion device: Capillary

Cooling: Fan Cooling

Air flow rate:

Mechanical Data

Bill of materials: 513307025

Starting torque: Low Starting Torque

Bore (mm): 21,00

Stroke (mm): 8,00

Weight (kg): 7,61

Electrical Data

Motor type: RSIR-CSIR

Winding Resistance (25°C) – Start: 28,20

Winding Resistance (25°C) – Run: 10,70

Stocks Always Available:

Refrigerant R134a Medium/High Back Pressure

EMT45HDR	1/6HP
EMT6170Z	1/3HP
EM65HHR	1/4HP
NE6170Z	1/3HP
NE6187Z	3/8HP
NEK6212Z	1/2HP
NEK6214Z	3/4HP
T6215Z	3/4HP
NJ6220Z	1HP
NJ6226Z	1.25HP

Refrigerant R134a Low Back Pressure

EMT45HLR	1/6HP
EMT55HLR	1/5HP
EMT65HLR	1/4HP
FF7.5HAK	1/3HP
FF10HAK	7/16HP
FF8.5HBK	1/3HP
FFI 12HBK	1/2HP
NB1118Z	1/3HP

NE1121Z

7/16HP

NE1130Z

1/2HP

NE2130Z

1/2HP

NE2134Z

9/16HP

NE2140Z

3/4HP