

Sangchai refrigeration, Fl series, Rl series, Cl series, Hitachi Compressor, FL1675-sc, 1/5 Hp, R-134A, Low back pressure, 160 w, Deplacement 7.5 cm cube, 220-240 v 50 hz

Category: compressor

written by www.mbsm.pro | 5 January 2021

Hitachi Hermetic Compressors

FL Series

STANDARD MODEL

Application & Refrigerant LBP R134a

Model	Nominal Power		Cooling Capacity				D	Cooling			O	Wg	Motor Type	Power Source					Dimension
	HP	W	Hz	W	Kcal/h	BTU/h		cm ³	N	Oil				Fan	cm ³	Kg	1	2	
FL0634	1/12	65	50	78	67	266	3.42				200	6.8		•			•		Type1-165
		60	90	77	307	•								•	•				
FL0739	1/10	75	50	95	82	324	3.94				270	7.8		•			•		Type1-179
		60	108	93	368	•								•	•				
FL0845	1/8	85	50	105	90	358	4.50				270	8.1	RSIR	•			•		Type2-180
		60	118	101	403	•								•	•				
FL1052	1/6	100	50	120	103	409	5.19	•			270	8.3	CSIR	•			•		Type1-195
		60	140	120	478	•								•	•				
FL1157	1/6	110	50	135	116	461	5.70				240	8.7		•			•		Type1-195
		60	158	136	539	•								•	•				
FL1262	1/5	125	50	150	129	512	6.23	•			320	9.5		•			•		Type2-200
		60	170	146	580	•								•	•				
FL1675	1/5	160	50	185	159	631	7.47		•	•	300	10.6		•			•		Type3-211
		60	210	181	717	•								•	•				
FL1888	1/4	180	50	215	185	734	8.83		•	•	300	11.1		•			•		Type4-216
		60	250	215	853	•								•	•				

Private Picture Copyright: WWW.MBSM.PRO

Sangchai refrigeration, Fl series, Rl series, Cl series, Hitachi Compressor, FL1675-sc, 1/5 Hp, R-134A, Low back pressure, 160 w, Deplacement 7.5, 220-240 v 50 hz



Hitachi Hermetic Compressors

FL Series

STANDARD MODEL

Application & Refrigerant LBP R134a


Model	Nominal Power		Cooling Capacity				D	Cooling			O	Wg	Motor Type	Power Source					Dimension
	HP	W	Hz	W	Kcal/h	BTU/h		cm3	N	Oil				Fan	cm3	Kg	1	2	
FL0634	1/12	65	50	78	67	266	3.42				200	6.8		•				•	Type1-165
			60	90	77	307								•	•	•			
FL0739	1/10	75	50	95	82	324	3.94				270	7.8		•			•	Type1-179	
			60	108	93	368								•	•	•			
FL0845	1/8	85	50	105	90	358	4.50				270	8.1	RSIR	•			•	Type1-179	
			60	118	101	403								•	•	•			
FL1052	1/6	100	50	120	103	409	5.19	•			270	8.3	RSCR	•			•	Type2-180	
			60	140	120	478								•	•	•			
FL1157	1/6	110	50	135	116	461	5.70				240	8.7	CSIR	•			•	Type1-195	
			60	158	136	539								•	•	•			
FL1262	1/5	125	50	150	129	512	6.23	•			320	9.5		•			•	Type2-200	
			60	170	146	580								•	•	•			
FL1675	1/5	160	50	185	159	631	7.47		•	•	300	10.6		•			•	Type3-211	
			60	210	181	717								•	•	•			
FL1888	1/4	180	50	215	185	734	8.83		•	•	300	11.1		•			•	Type4-216	
			60	250	215	853								•	•	•			

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Detail of Label

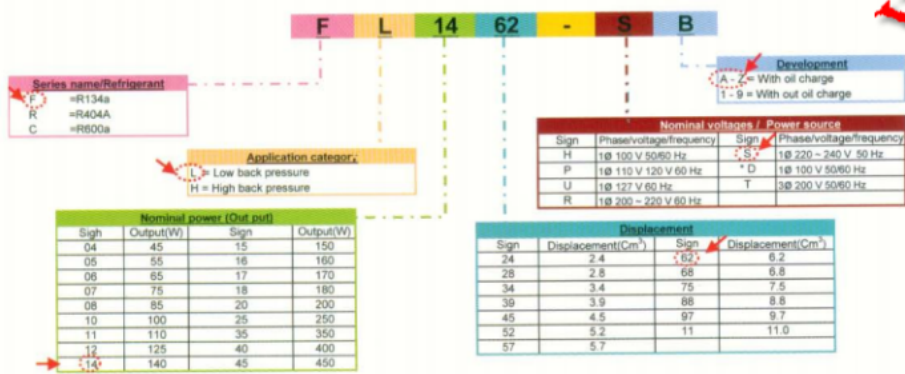

Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_Hitachi-catalogueTélécharger
Mbsm_dot_pro_private_PDF_FL1675Télécharger