

Mbsm.pro, Panasonic, rotary,  
compressor, rotary compressor, R22,  
220-240V 50HZ, 2jd550D3AA03, 2JD550D,  
35.000 BTU, Rla 5.65 A, Lra 21.0 A,  
4.375 Hp, 2.91 Ton

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 15 January 2022

**JD550D3AA03**

HERMALLY PROTECTED R22

PH 50Hz 220 - 240V

Matsushita Electric Industrial Co., Ltd.

SERIAL NO. J55A  
7077944

C0036563



## WARNING / DANGER



### Danger of Electric Shock

- Earth the equipment.
- Disconnect power before work.
- Mount the terminal cover in place.



### Danger of Explosion or Fire

- Do not use unprescribed ref. & oils.
- Do not operate air intake into the refrigerant cycle.
- Wear protective goggles.



### Caution , Hot Surface

- Do not touch with bare hands.

| □ □□□□ □□□□□ □□ □□□□ □□ □□ □□□□ □□□□□*BTU*

**JD550D3AA03**

HERMALLY PROTECTED R22

PH 50Hz 220 - 240V

Matsushita Electric Industrial Co., Ltd.

SERIAL NO. J55A  
7077944

C0036563



## WARNING / DANGER




### Danger of Electric Shock

- Earth the equipment.
- Disconnect power before work.
- Mount the terminal cover in place.




### Danger of Explosion or Fire

- Do not use unprescribed ref. & oils.
- Do not operate air intake into the refrigerant cycle.
- Wear protective goggles.



### Caution , Hot Surface

- Do not touch with bare hands.

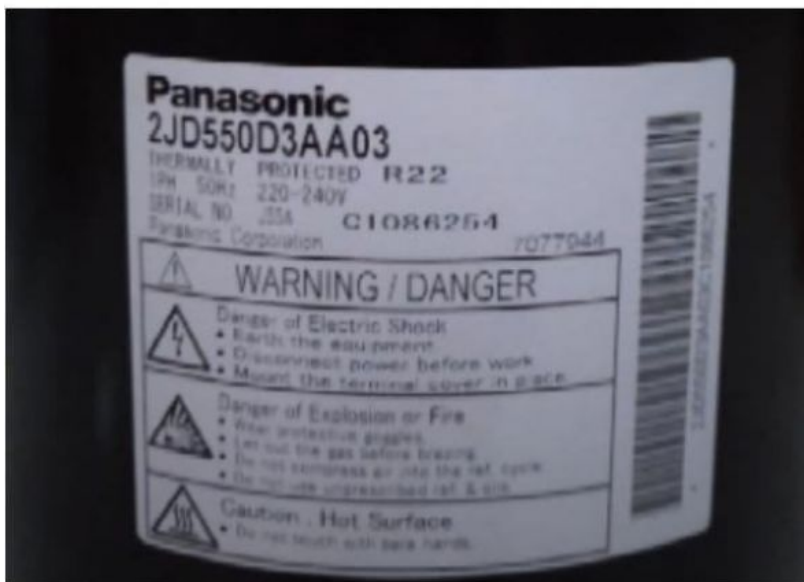

Private Picture Copyright : WWW.MBSM.PRO

**Mbsm\_dot\_pro\_private\_PDF\_2jd550D3AA03Télécharger**

Panasonic rotary compressor R-22, the world's number one sales. High performance, durable, quiet, compact size Available from 9,000 to 35,000 BTU models.

MODEL	BTU.	VOLTAGE	RUNNING	RLA	LRA	LIST PRICE
2PS164D	9,000	220/1/50	30/370	4.1	18.0	3,370
2PS206D	12,000	220/1/50	30/440	5.65	21.0	3,070
2KS210D	12,500	220/1/50	35/370	5.4	27.0	3,370
2KS282D	16,000	220/1/50	45/370	8.0	37.0	5,340
2JS318D	18,000	220/1/50	45/370	8.3	38.0	5,540
2JS330D	20,000	220/1/50	45/370	8.7	41.0	5,800
2JS386D	24,000	220/1/50	60/370	9.75	45.0	6,940
2JS438D	26,000	220/1/50	50/370	12.9	51.0	7,085
2JS464D	28,900	220/1/50	50/370	13.3	64.0	7,840
2JD514D	33,000	220/1/50	60/440	14.2	76.0	8,270
2JD550D	35,000	220/1/50	60/440	14.7	68.0	8,785

Fast data

place of origin :  
Malaysia

brand name :  
panasonic

model number :  
2JD550D3AA03.

type :  
Refrigeration Compressor

application :  
Refrigeration Parts

certification :  
THIS

Description :  
Matsushita compressor 2JD550D3AA03

Model:  
2JD550D3AA03.

BTU:  
35,000

Voltage:  
220v

Phase :  
1ph

Frequency:  
50Hz

Running:  
30/440

RLA :  
5.65

LRA:  
21.0

Packing:  
wooden

**Hot koop 220 V 1 Fase 50Hz Matsushita compressor 2JD550D3AA03**

brand name panasonic compressor  
place of origin Malaysia  
Model **2JD550D3AA03**  
BTU 35,000  
VOLTAGE 220  
PHASE 1ph  
frequency 50 hz  
Running 30/440  
RLA 5.65  
LRA 21.0  
refrigerant r22  
description airconditioner compressor

**1. High-efficiency, Energy-saving**

In order to decrease loss of machine and gas circulation in the process of design and increase high efficiency of the motor and the compressor, optimal matching clearance between dynamic and static parts is adopted. Accordingly, high-efficient compressor can also make room air-conditioner high efficient;

**2. Compact, Light**

Comparing with traditional compressors, there are comparably less mechanical parts in the compressor and the motor is directly fitted on the shell, so Matsushita compressor is compact and light, which makes room air-conditioner much more compact.

**3. High-quality, Reliable performance**

Materials for Panasonic rotary compressor are chosen through careful-research, thus made into finished components, finally assembled with computer-aided under strict conditions (temperature \ humidity and dustiness). Therefore, Panasonic rotary compressor has high-quality and reliable performance.

**Models for option:**

Series	Model	Capacity	Input	Power	COP	Run	Capacitor	N.W.(KG)
W	BTU/H	W	W/W		μF/V			
R	2R11B225ASE	1745	5954	585	2.983		12.5/460	8.2
P	2P14S225ANE	2220	7574	705	3.149		30/370	12.0
	2P17S225ANQ	2770	9451	885	3.130	30/370		12.0
	2P20C225BNG	3245	11071	1080	3.005	30/370		12.6
	2P21T225AZB	3510	11975	1130	3.106	30/370		12.4
K	2K22S225BUA	3838	13095	1230	3.120		35/370	17.0
	2K25S225BUA	4245	14483	1380	3.076	40/370		17.1
	2K28C225DUA	4660	15899	1550	3.006	45/370		17.5
	2K32S225AUD	5310	18117	1725	3.078	50/400		18.0
V	2V32S225AUA	5375	18338	1700	3.162		60/370	19.6
	2V34S225AUA	5820	19857	1880	3.096	50/370		19.6
	2V36S225BUA	6140	20948	1980	3.101	50/400		19.5
	2V40S225BUA	6780	23132	2255	3.007	60/440		21.5

2V42S225AUA 7200

24565 2340

3.077 50/370

21.