

Mbsm.pro, Formule AMP, KW, KVA, HP pour les tensions AC et DC.

Category: expertise

written by mahdi miled | 26 December 2022

E = Voltage / I = Amps / PF = Power Factor / EFF = Efficiency / HP = Horsepower				
To Find	Direct Current	Alternating Current		
		Single Phase	Two-Phase* Four-Wire	Three Phase
Amperes when Horsepower is known	$\frac{HP \times 746}{E \times EFF}$	$\frac{HP \times 746}{E \times EFF \times PF \times 2}$	$\frac{HP \times 746}{2 \times E \times EFF \times PF}$	$\frac{HP \times 746}{E \times EFF \times PF \times 1.73}$
Amperes when Kilowatts are known	$\frac{KW \times 1000}{E}$	$\frac{KW \times 1000}{E \times PF}$	$\frac{KW \times 1000}{2 \times E \times PF}$	$\frac{KW \times 1000}{E \times PF \times 1.73}$
Amperes when "KVA" is known		$\frac{KVA \times 1000}{E}$	$\frac{KVA \times 1000}{2 \times E}$	$\frac{KVA \times 1000}{E \times 1.73}$
Kilowatts	$\frac{E \times I}{1000}$	$\frac{E \times I \times PF}{1000}$	$\frac{I \times E \times 2 \times PF}{1000}$	$\frac{E \times I \times 1.73 \times PF}{1000}$
Kilovolt-Amperes "KVA"-		$\frac{I \times E}{1000}$	$\frac{I \times E \times 2}{1000}$	$\frac{E \times I \times 1.73}{1000}$
Horsepower (Output)	$\frac{E \times I \times EFF}{746}$	$\frac{E \times I \times EFF \times PF}{746}$	$\frac{I \times E \times 2 \times EFF \times PF}{746}$	$\frac{E \times I \times EFF \times PF \times 1.73}{746}$


Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Formule AMP, KW, KVA, HP pour les tensions AC et DC.

Mbsm.pro, Compressor, AQAW66X, r134a, FKD66ML, r600a, 1/5 hp, Freezer, Wanbao Refrigerator Compressor

Category: compressor

written by mahdi miled | 26 December 2022

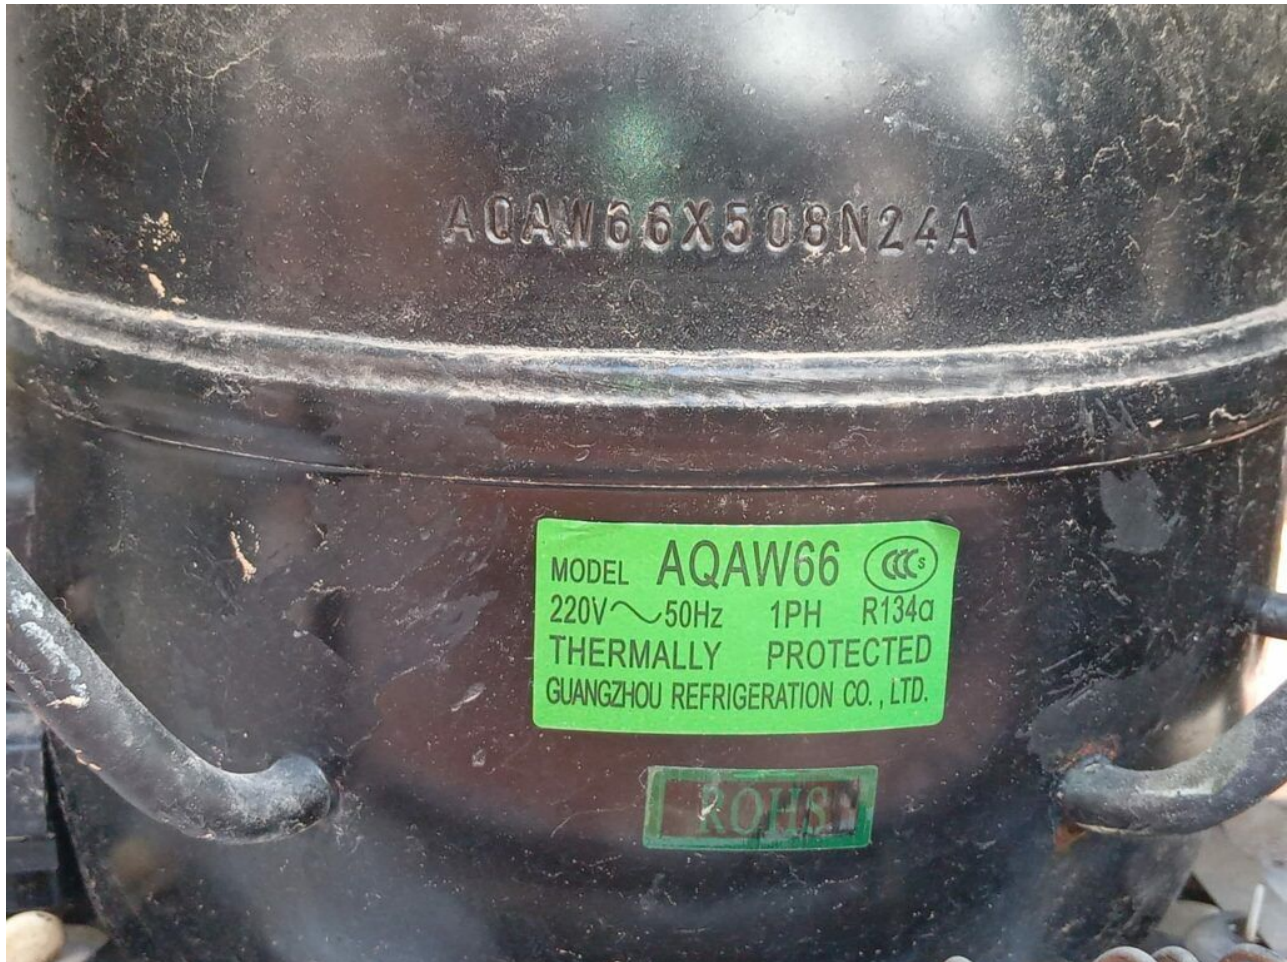

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, AQAW66X, 1/5 hp, Freezer, Wanbao Refrigerator Compressor

Mbsm.pro, Compressor Acc, hmk95at,
1/5 hp, r600a, 160 w

Category: compressor

written by mahdi miled | 26 December 2022



Private Picture Copyright : WWW.MBSM.PRO

Technical data

Click over each model for complete details and technical sheet.

Model	Refrigerant	Rated Voltage	Frequency	Displacement	Motor Type	Cooling Capacity		COP without R.C.		COP with R.C.		Approval	Height	Net Weight
						ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF			
						-23.3°	-25°	-23.3°	-25°	-23.3°	-25°			
		[V]	[Hz]	[cc]		[W]	[W]	[W/W]	[W/W]	[W/W]	[W/W]		[mm]	[Kg]
HMK70AA	R600a	220-240	50	6.6	RSIR	116	87	1.49	1.18	—	—	VDE, CE, EAC	159	7.2
HMK80AA	R600a	220-240	50	8.1	RSIR	136	102	1.50	1.18	—	—	VDE, CE, EAC	159	7.2
HMK95AA	R600a	220-240	50	9.6	RSIR	167	125	1.53	1.20	—	—	VDE, CE, EAC	159	7.5
HMK12AA	R600a	220-240	50	11.1	RSIR	198	149	1.53	1.20	—	—	VDE, CE, EAC	167	8.4
HMK95AT	R600a	200-240	50	9.6	RSIR	167	126	1.53	1.20	—	—	CE	167	8.4



Private Picture Copyright : WWW.MBSM.PRO



ht : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Refrigerator, freezer,
NR62L22A, 1/5 hp, Compressor, power,
132W, R134a

Category: Non classé

written by mahdi miled | 26 December 2022



R134a

S



LG

P

132W 0.72A

NR62L22A

220-240V ~ 50Hz 1PH

THERMALLY PROTECTED



ROHS

Taizhou LG Electronics Refrigeration Co., Ltd MADE IN CHINA



KNR62L22A113071401590

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Refrigerator, freezer, NR62L22A, 1/5 hp, Compressor, power, 132W, R134a

Mbsm.pro, Compressor, Embraco, Aspera, NJ9226GK, MBP, R404A, R507, 230V/1/50Hz, 1 HP++, 1.5 hp++, 1.75 hp

Category: compressor

written by mahdi miled | 26 December 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Embraco, Aspera, NJ9226GK, MBP, R404A, R507, 230V/1/50Hz, 1 HP++,

Mbsm.pro, Dongbei compressor, aluminum wire, R600a, R134a, S65CY1, S75CY1, S80CY1, S96CY1, H170CY1, L118CY1, L126CY1, L140CY1, K270CY1, D40CY1, D53CY1, D65CY1, A80CY1,

A100CY1, A120CY

Category: compressor

written by mahdi miled | 26 December 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Dongbei compressor, aluminum wire, R600a, R134a, S65CY1, S75CY1, S80CY1, S96CY1, H170CY1, L118CY1, L126CY1, L140CY1, K270CY1, D40CY1, D53CY1, D65CY1, A80CY1, A100CY1, A120CY

Mbsm.pro, Danfoss, Reciprocating, compressor, NLX11KK.2, 105H6971, NLX11KK.2 105H6971, 1/4 hp++, 1/3 hp-, r600a

Category: compressor

written by mahdi mild | 26 December 2022

			-35	-30	-20	-15	-10	-5	0	5	[W]	[W/W]	[W/W]	[W]	[kcal/h]	[W/W]	[kcal/Wh]
Energy optimized	1.	PLE35K	101H0360			38	52	68	87	109		27		0.68	38	33	
		TLES4KK.3	102H4438	19	29	57	75	96				42	0.90		57	49	1.18
		TLES4.8KK.3	102H4538	28	40	73	94	119				55	1.00		74	65	1.30
		TLES5.7KK.3	102H4638	36	50	89	114	144				68	1.02		91	79	1.32
	3.	TLES6.5KK.3	102H4738	45	61	105	134	168				81	1.02		108	94	1.31
		TLES7.5KK.3	102H4838	53	71	122	155	194				94	1.02	1.07	126	108	1.32
		TLES8.7KK.3	102H4938	62	83	143	181	228				110	1.03	1.08	147	126	1.33
		TLES10KK.3	102H4038									130	1.04		172	148	1.35
		NLE8.8KK.4	105H6800	63	84	141	179	223				110	1.18	1.22	147	127	1.51
		NLE10KK.4	105H6867	74	98	164	207	257				128	1.19	1.23	170	151	1.51
High Energy optimized	4.	NLE13KK.4	105H6952	82	109	184	232	290				143	1.19	1.22	191	165	1.52
		NLE13KK.4	105H6959	99	131	217	274	340				170	1.18	1.23	226	194	1.50
		NLE15KK.4	105H6968	110	146	243	307	382				190	1.20	1.25	253	213	1.53
		TLY4 KK.3	102H4442	19	29	57	74	95				42	0.96	0.99	57	49	1.26
		TLY4.8KK.3	102H4542	28	40	73	94	119				55	1.04	1.06	74	65	1.35
	3.	TLY5.7KK.3	102H4642	36	51	89	114	144				68	1.03	1.06	91	79	1.33
		TLY6.5KK.3	102H4742	46	62	106	135	170				82	1.10	1.14	110	94	1.42
		TLY7.5KK.3	102H4842	53	71	122	155	194				94	1.09	1.14	126	108	1.41
		TLY8.7KK.3	102H4942	65	86	144	182	227				112	1.12	1.16	149	126	1.44
		TLX4KK.3	102H4447	21	32	59	76	95				45		1.15***	60	52	
High Energy optimized	3.	TLX4.8KK.3	102H4547	36	52	90	116	146				57		1.24***	76	65	
		TLX5.7KK.3	102H4647	37	52	91	115	143				70		1.28***	93	80	
		TLX6.5KK.3	102H4747	46	63	106	133	165				83		1.30***	110	95	
		TLX7.5KK.3	102H4847	55	75	125	157	195				98		1.32***	130	112	
		TLX8.7KK.3	102H4947	65	88	146	184	227				115		1.31***	152	131	
	1.	NLX8.8KK	105H6874	60	83	144	182	227				111		1.35	148	127	
		NLX10KK	105H6871	74	100	169	215	269				131		1.36	174	150	
		NLX11KK	105H6984	84	112	189	240	300				147		1.36	195	168	
		NLX13KK	105H6983	98	133	223	282	350				174		1.36	231	199	
		NLX15KK	105H6981	110	147	249	317	397				193		1.34	257	221	
High Energy optimized	2.	NLX8.0KK.2	105H6010	52	73	130	167	210				99		1.47***	133	115	
		NLX8.8KK.2	105H6011	62	85	147	187	234				113		1.49***	151	130	
		NLX10KK.2	105H6101	75	101	171	217	271				133		1.49***	178	153	
		NLX11KK.2	105H6971	86	115	192	242	301				150		1.49***	200	172	

Private Picture Copyright : WWW.MBSM.PRO

Description

Product details

Gross weight 12.47 kg

Net weight 12.47 kg

Gross weight 12.47 kg

Net weight 12.47 kg

Application energy level

Applications

Auxiliary winding resistance (start winding) for single-phase compressors alt [Ohm]

Base plate type

Brand technique

Capacity control

Colour

Compressor power supply [V/Ph/Hz]

High Energy-optimized
LBP

31.8 Ohm

EU small

Reciprocating compressor

Fixed speed

Black

220-240/1/50

Configuration code	Single
Cut in current LST [A]	6.4 A
Description	NLX11KK.2
Discharge connection angle [°]	21 °
Discharge connection comments	Al-cap
Discharge connection diameter [mm]	5 mm
Discharge connection material	Cu-plated steel
Economizer	No
Free gas volume [cm3]	2360 cm3
Frequency [Hz]	50
Height from baseplate [mm]	197 mm
High value of nominal voltage at 50Hz [V]	240 V
High value of voltage range at 50Hz [V]	255 V
Length [mm]	252 mm
Liquid injection	No
Low value of nominal voltage at 50Hz [V]	220 V
Low value of voltage range at 50Hz [V]	187 V
LRA LST [A]	3.5 A
Main winding resistance for single-phase compressors [Ohm]	18.5 Ohm
Model number	NLX11KK.2
Motor type	RSCR
No. of phases (compressor)	1
Oil quantity [cm3]	270 cm3
Oil type	P0E
Packing format	Industrial pack
Packing quantity	80
Process connection angle [°]	25 °
Process connection comments	Al-cap
Process connection diameter [mm]	6.2 mm
Process connection material	Cu-plated steel
Refrigerant	R600a
Refrigerant charge [kg] [Max]	0.15 kg
RLA	0.70 A
Rotational speed at 50Hz [rpm]	3000 rpm
Run capacitor capacitance	2 µF
Segment usage	Refrigeration LT
Speed Platform	Fixed-speed
Suction connection angle [°]	2 °
Suction connection comments	Al-cap
Suction connection diameter [mm]	6.2 mm
Suction connection material	Cu-plated steel
Swept volume [cm3]	11.15 cm3
Technology	Reciprocating
Total height [mm]	203 mm
Type	NL

Type designation	Compressor
Voltage 50Hz [V]	220 V
Voltage 50Hz [V] [Max]	240 V
Width [mm]	166 mm
Winding temperature short term [°C] [Max]	110 °C
Winding temperature stat [°C] [Max]	95 °C
Application energy level	High Energy-optimized
Applications	LBP
Auxiliary winding resistance (start winding) for single-phase compressors alt [Ohm]	31.8 Ohm
Base plate type	EU small
Brand technique	Reciprocating compressor
Capacity control	Fixed speed
Colour	Black
Compressor power supply [V/Ph/Hz]	220-240/1/50
Configuration code	Single
Cut in current LST [A]	6.4 A
Description	NLX11KK.2
Discharge connection angle [°]	21 °
Discharge connection comments	Al-cap
Discharge connection diameter [mm]	5 mm
Discharge connection material	Cu-plated steel
Economizer	No
Free gas volume [cm3]	2360 cm3
Frequency [Hz]	50
Height from baseplate [mm]	197 mm
High value of nominal voltage at 50Hz [V]	240 V
High value of voltage range at 50Hz [V]	255 V
Length [mm]	252 mm
Liquid injection	No
Low value of nominal voltage at 50Hz [V]	220 V
Low value of voltage range at 50Hz [V]	187 V
LRA LST [A]	3.5 A
Main winding resistance for single-phase compressors [Ohm]	18.5 Ohm
Model number	NLX11KK.2
Motor type	RSCR
No. of phases (compressor)	1
Oil quantity [cm3]	270 cm3
Oil type	P0E
Packing format	Industrial pack
Packing quantity	80
Process connection angle [°]	25 °
Process connection comments	Al-cap
Process connection diameter [mm]	6.2 mm
Process connection material	Cu-plated steel

Refrigerant	R600a
Refrigerant charge [kg] [Max]	0.15 kg
RLA	0.70 A
Rotational speed at 50Hz [rpm]	3000 rpm
Run capacitor capacitance	2 ÂµF
Segment usage	Refrigeration LT
Speed Platform	Fixed-speed
Suction connection angle [Â°]	2 Â°
Suction connection comments	Al-cap
Suction connection diameter [mm]	6.2 mm
Suction connection material	Cu-plated steel
Swept volume [cm3]	11.15 cm3
Technology	Reciprocating
Total height [mm]	203 mm
Type	NL
Type designation	Compressor
Voltage 50Hz [V]	220 V
Voltage 50Hz [V] [Max]	240 V
Width [mm]	166 mm
Winding temperature short term [Â°C] [Max]	110 Â°C
Winding temperature stat [Â°C] [Max]	95 Â°C
Refrigerant: R600a, Segment usage: Refrigeration LT, Compressor power supply [V/Ph/Hz]: 220-240/1/50	

			Energy efficiency												
			-35	-30	-20	-10	-5	0	5	(W)	(W/W)	(W/W)	(W)		
1	Energy optimized	PLE35K	10190360		38	52	68	87	109		27	0.68	38	33	
		TLK3.5KK.3	10294438	19	29	57	75	96		42	0.90	57	49	1.18	
		TLK3.5KK.3	10294538	28	40	73	94	119		55	1.00	74	65	1.30	
		TLK3.5KK.3	10294638	36	50	89	114	144		68	1.02	91	79	1.32	
		TLK3.5KK.3	10294738	45	61	105	134	168		81	1.02	108	94	1.31	
		TLK3.5KK.3	10294838	53	71	122	155	194		94	1.02	126	108	1.32	1.14
		TLK3.5KK.3	10294938	62	83	143	181	228		110	1.03	147	126	1.33	1.14
		TLK3.5KK.3	10294838							130	1.04	172	148	1.35	1.15
		TLK3.5KK.4	10294938	61	84	141	179	223		110	1.18	147	127	1.51	1.30
		TLK3.5KK.4	10294938	74	98	164	207	257		128	1.19	173	151	1.51	1.30
		TLK3.5KK.4	10294938	82	108	184	232	290		143	1.19	191	165	1.52	1.31
		TLK3.5KK.4	10294938	99	132	217	274	340		170	1.18	226	194	1.50	1.29
2	High Energy optimized	NLK1.5KK.4	10294938	110	146	243	307	382		190	1.20	253	213	1.53	1.32
		TLK1.5KK.3	10294442	19	29	57	74	95		42	0.96	57	49	1.26	1.08
		TLK1.5KK.3	10294542	28	40	73	94	119		55	1.04	74	65	1.35	1.16
		TLK1.5KK.3	10294642	36	51	89	114	144		68	1.03	91	79	1.33	1.15
		TLK1.5KK.3	10294742	46	62	106	135	170		82	1.10	110	94	1.42	1.22
		TLK1.5KK.3	10294842	53	71	122	155	194		94	1.09	126	108	1.41	1.22
		TLK1.5KK.3	10294942	65	86	144	182	227		112	1.12	149	126	1.44	1.24
		TLK1.5KK.3	10294447	21	32	59	76	95		45	1.15***	60	52		
		TLK1.5KK.3	10294547	36	52	90	116	146		57	1.24***	76	65		
		TLK1.5KK.3	10294647	57	82	131	155	193		70	1.38***	93	80		
		TLK1.5KK.3	10294747	46	63	106	133	165		83	1.38***	110	95		
		TLK1.5KK.3	10294847	55	75	125	157	195		96	1.32***	130	112		
3	High Energy optimized	TLK1.5KK.3	10294947	65	88	146	184	227		115	1.32***	152	131		
		NLX1.5KK	10294938	60	83	144	182	227		111	1.35	148	127		
		NLX1.5KK	10294938	74	100	169	215	269		131	1.36	174	150		
		NLX1.5KK	10294938	84	112	189	240	300		147	1.36	195	168		
		NLX1.5KK	10294938	98	133	223	282	350		174	1.36	231	199		
		NLX1.5KK	10294938	110	147	249	317	397		193	1.34	257	221		
		NLX1.5KK.2	10294938	53	73	130	167	210		99	1.42***	132	115		
		NLX1.5KK.2	10294938	62	85	147	187	234		113	1.48***	151	130		
		NLX1.5KK.2	10294938	75	101	171	217	271		135	1.48***	178	153		
		NLX1.5KK.2	10294938	86	115	192	242	301		150	1.48***	200	172		

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, PW3.5VK,

DFV4.0HF, DFV4.5HF, DFV5.5HF,
DFV6.5HF, DFV6.5HF, DFV7.5HF,

Category: compressor

written by mahdi miled | 26 December 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, PW3.5VK, DFV4.0HF, DFV4.5HF, DFV5.5HF, DFV6.5HF, DFV6.5HF,
DFV7.5HF,

Mbsm.pro, Picture, reversing valve

Category: Pictures

written by mahdi miled | 26 December 2022




Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Picture, reversing valve



Private Picture Copyright : WWW.MBSM.PRO

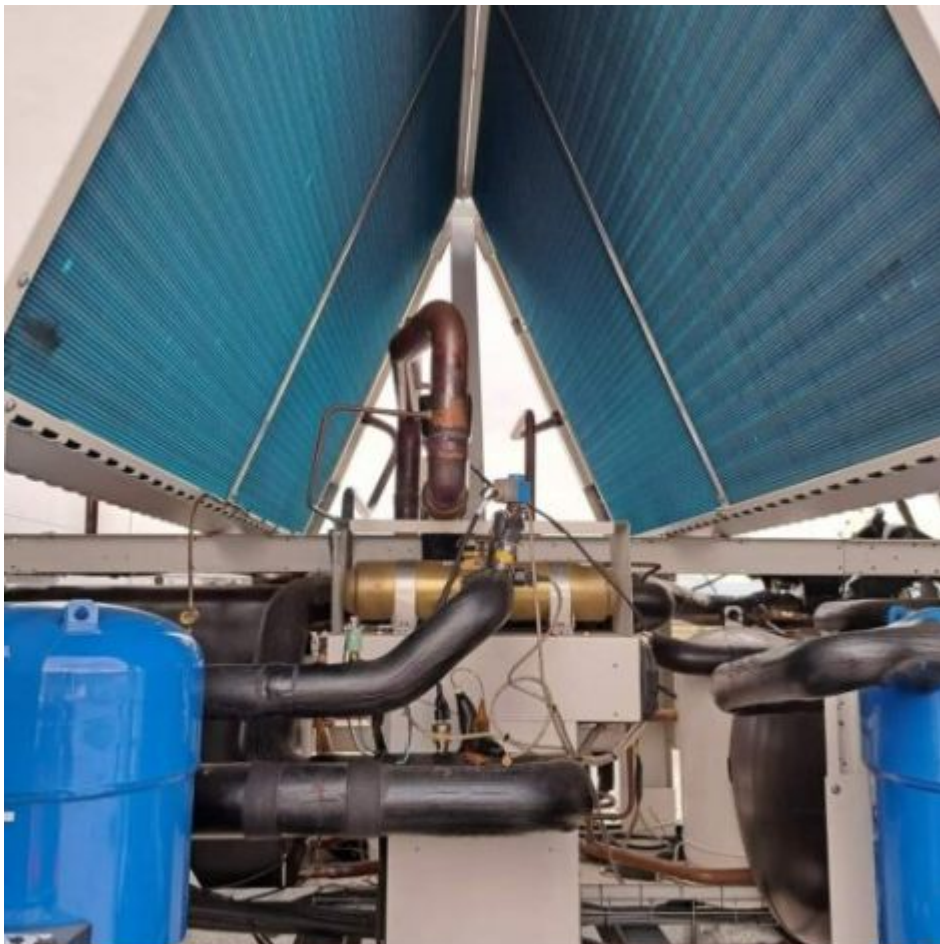

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, File, PDF, Codes and capabilities for LG compressors, exemple ,nd52labm, 1/5 hp, lbp

Category: compressor,Files

written by mahdi miled | 26 December 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, File, PDF, Codes and capabilities for LG compressors, exemple ,nd52labm, 1/5 hp, lbp