

JX51LCS5-K , Compresseur, hermétique Daewoo , 5.12 cc , R12 , 220-240V 60Hz , RSIR , 1/6 Hp , 1Phase , L B P , 134w

Category: Technologie,Tester ok

written by www.mbsm.pro | 21 May 2020



Private Picture Copyright : WWW.MBSM.PRO

JX51LCS5-K , Compresseur, hermétique Daewoo , 5.12 cc , R12 , 220-240V 60Hz ,
RSIR , 1/6 Hp , 1Phase , L B P , 134w

Tecumseh ,Compressor Az1355D, 1/6Hp , R12 ,réfrigérateur

Category: Technologie,Tester ok

written by www.mbsm.pro | 21 May 2020



Tecumseh ,Compressor Az1355D, 1/6Hp , R12 ,réfrigérateur

**NSA43LAEG ,P220MC ,4TM166RFB ,102
Watts ,1/8HP , R12 , 1 Phase**

Category: Technologie,Tester ok

written by www.mbsm.pro | 21 May 2020



AES45D , huayi compressor co.ltd , 1/8+Hp(Big , Hbp ,Pression) ,R12

Category: Technologie,Tester ok

written by www.mbsm.pro | 21 May 2020

II. AES-D & AE-DB SERIES COPRESORES DE REFRIGERACION (Low Back Pressure, Refrigerant : R12)

Model	Potencia	Cubicaje (cm ³)	Sistema de Frio	Motor Type	Capacity (W)	Input Power. (W)	Rated Current (A)	COP (W/W)	Vol./Frequency (V/Hz)
AES25D	1/12HP	2.50	ST	RSIR	55	65	0.52	0.85	220V/50~60Hz 110V/60Hz
AES30D	1/10HP	2.96	ST	RSIR	72	80	0.60	0.90	220V/50~60Hz 110V/60Hz
AES35D	1/8HP	3.49	ST	RSIR	85	90	0.75	0.94	220V/50~60Hz 110V/60Hz
AES45D	+1/8HP	4.46	ST	RSIR	105	100	0.85	1.05	220V/50~60Hz 110V/60Hz
AE1340DB	1/6HP	5.19	ST	RSIR	124	115	0.92	1.08	220V/50~60Hz 110V/60Hz
AE1350DB	1/5HP	6.28	ST	RSIR	145	132	1.00	1.10	220V/50~60Hz
AE1360DB	+1/5HP	7.16	ST	RSIR	165	150	1.13	1.10	220V/50~60Hz
AE1370DB	1/4HP	8.76	ST/FC	RSIR	200	180	1.35	1.11	220V/50~60Hz
AE1390DB	1/3/HP	9.59	FC	RSIR	223	198	1.50	1.13	220V/50~60Hz

Private Picture Copyright : WWW.MBSM.PRO

AES45D , huayi compressor co.ltd , 1/8+Hp(Big , Hbp ,Pression) ,R12

LG ,NR52AEG ,1/5Hp , R12 , 220v 50Hz , 1 Phase

Category: Technologie,Tester ok

written by www.mbsm.pro | 21 May 2020

Performance Datasheet (LGE) : R12

* : UNDER DEVELOPMENT

APPLICATION	VOLTAGE	FREQUENCY	MODEL	DISPLACEMENT	PERFORMANCE											
					50Hz @ ASHRAE					60Hz @ ASHRAE						
					CAPACITY (-23.3°C)			CONSUMPTION POWER		EER	CAPACITY (-23.3°C)			CONSUMPTION POWER		EER
					cc	kcal/h	w	Btu/h	w	Btu/wh	kcal/h	w	Btu/h	w	Btu/wh	
LBP	220	50	NS24AJG	2.42	45	52	179	80	2.23							
			NSA43AJG	4.29	96	112	381	117	3.26							
			TS24AJG	2.44	45	52	179	80	2.23							
			TS43AJG	4.24	96	112	381	117	3.26							
			LX110AJM	11.03	265	308	1052	257	4.09							
	220-240	50	NS30AEG	3.05	64	74	254	83	3.06							
			NS36AEG	3.58	74	86	294	92	3.19							
			TS30AEG	3.05	64	74	254	83	3.06							
			TS36AEG	3.61	74	86	294	92	3.19							
			NR45AEG	4.50	97	113	385	120	3.21							
			NR52AEG	5.19	121	141	480	138	3.48							
			NR62AEG	6.23	152	177	603	162	3.72							
			NR62CEG	6.23	150	174	596	167	3.57							
			NR62DEG	6.23	138	160	548	153	3.58							
			LX72AEG	7.22	175	203	695	178	3.90							
			LX86AEG	8.56	215	250	854	213	4.01							
	LX110AEH	11.03	265	308	1052	250	4.21									
	110-115	60	NS30AQG	3.05							74	86	294	106	2.77	
			NS36AQG	3.58							88	102	349	113	3.09	
			TS30AQG	3.05							74	86	294	106	2.77	
			TS36AQG	3.61							88	102	349	113	3.09	
			NR45AQG	4.50							120	140	476	137	3.48	
			NR52AQG	5.19							134	156	532	152	3.50	
	115	60	LX67AQG	6.66							200	233	794	195	4.07	
			NS24ACG	2.42							53	62	210	79	2.66	
			NS24BCG	2.42							56	65	222	73	3.05	
			NS30ACG	3.05							74	86	294	95	3.09	
			TS24ACG	2.44							53	62	210	79	2.66	
			TS24BCG	2.44							56	65	222	73	3.05	
			TS30ACG	3.05							74	86	294	95	3.09	
	177	60	NS24AFG	2.42							53	62	210	79	2.66	


Private Picture Copyright: WWW.MBSM.PRO

LG ,NR52AEG ,1/5Hp , R12 , 220v 50Hz , 1 Phase

Em40Hnp, Embraco Compressor, Aspera ,R134A 240V 50hz , 1/8 Hp , 1 Phase

Category: Technologie,Tester ok

written by www.mbsm.pro | 21 May 2020

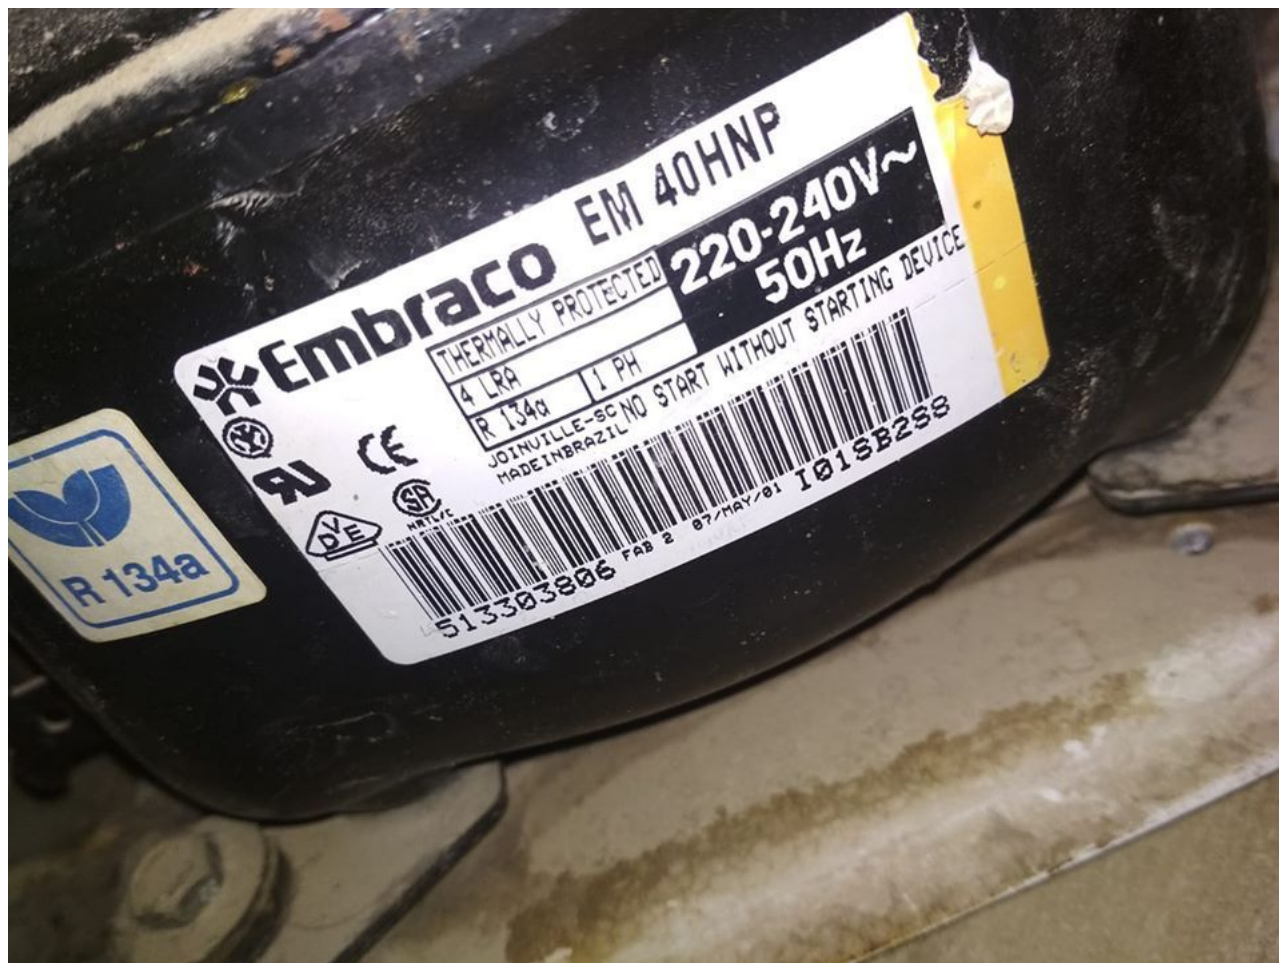

Private Picture Copyright : WWW.MBSM.PRO

Em40Hnp, Embraco Compressor, Aspera ,R134A 240V 50hz , 1/8 Hp , 1 Phase

Compresseur zel, HML170A , r600a
,LBP, 1/6hp ,9.5cm3,170W

Category: Technologie,Tester ok
written by www.mbsm.pro | 21 May 2020

C 64456384

ZEL

HML170A

18-03

A




220-240V 50Hz



SUCTION >

8 147 0081510 2



A004710

CB

Private Picture Copyright : WWW.MBSM.PRO

Compresseur zel, HML170A , r600a ,LBP, 1/6hp ,9.5cm3,170W

Tecumseh compressor model
AE4448YS,refrigeration compressor
(AVEC Condensateur), R134a , Lra
19.5A , 220 V 50Hz , 3/8 H ,CSIR ,
Medium/High Back Pressure

Category: Technologie,Tester ok

written by www.mbsm.pro | 21 May 2020



Private Picture Copyright : WWW.MBSM.PRO

Tecumseh compressor model AE4448YS, refrigeration compressor , R134a , Lra 19.5A , 220 V 50Hz , 3/8 H , CSIR , Medium/High Back Pressure

REFRIGERATION APPLICATION CHART (R12 AND R22)

Category: Technologie, Tester ok

written by www.mbsm.pro | 21 May 2020

REFRIGERATION APPLICATION CHART (R-12 AND R-22)*

H.P.	REF.	NOTE	NORMAL EVAPORATING TEMPERATURE DEGREES F							
			-10 to +5		+5 to +20		+20 to +35		+35 to +50	
1/20	R12	S-F	16 Ft.	TC-26	10 Ft.	TC-26				
1/12	R12	S-F	12 Ft.	TC-26	12 Ft.	TC-31				
1/9	R12	S	12 Ft.	TC-26	12 Ft.	TC-31				
1/9	R12	S	10 Ft.	TC-26	10 Ft.	TC-31				
1/8	R12	S-F	10 Ft.	TC-26	10 Ft.	TC-31				
1/6	R12	S	12 Ft.	TC-31	12 Ft.	TC-36	8 Ft.	TC-36	10 Ft.	TC-42
1/6	R12	F	10 Ft.	TC-31	10 Ft.	TC-36				
1/5	R12	S	10 Ft.	TC-31	10 Ft.	TC-36	7-1/2 Ft.	TC-42	7-1/2 Ft.	TC-49
1/5	R12	F	8 Ft.	TC-31	8 Ft.	TC-36	10 Ft.	TC-42	6 Ft.	TC-42
1/4	R22	S-F	12 Ft.	TC-36	6 Ft.	TC-36	8-1/2 Ft.	TC-42	6 Ft.	TC-49
1/4	R12	F	10 Ft.	TC-36	6 Ft.	TC-36	8 Ft.	TC-42	6 Ft.	TC-49
1/3	R22	F	10 Ft.	TC-36	6 Ft.	TC-36	11 Ft.	TC-49		
1/3	R12	F	12 Ft.	TC-42	6 Ft.	TC-42	9 Ft.	TC-49	6 Ft.	TC-54
1/2	R22	F	6 Ft.	TC-36	9 Ft.	TC-42	7-1/2 Ft.	TC-54	10 Ft.	TC-64
1/2	R12	F	11 Ft.	TC-54	9 Ft.	TC-49				
3/4	R22	F	11 Ft.	TC-54	9 Ft.	TC-54				
3/4	R12	F	7-1/2 Ft.	TC-54	12 Ft.	TC-70	1 Ft.	TC-80		
1	R22	F	10 Ft.	TC-64	12 Ft.	TC-70				
1	R12	F	10 Ft.	TC-70	11 Ft.	TC-54	7-1/2 Ft.	TC-54 (2 pcs)		
1-1/2	R22	F	7-1/2 Ft.	TC-54 (2 pcs)	7-1/2 Ft.	TC-54 (2 pcs)	8 Ft.	TC-64 (2 pcs)		
1-1/2	R12	F			9 Ft.	TC-64 (2 pcs)	10 Ft.	TC-80 (2 pcs)		
2	R22	F			10 Ft.	TC-70 (2 pcs)	9 Ft.	TC-75 (2 pcs)		
2	R12	F	10 Ft.	TC-70 (2 pcs)	9 Ft.	TC-75 (2 pcs)	10 Ft.	TC-85 (2 pcs)		
3	R22	F			10 Ft.	TC-70 (3 pcs)	9 Ft.	TC-75 (3 pcs)		
3	R12	F	10 Ft.	TC-70 (2 pcs)	8 Ft.	TC-64 (4 pcs)	10 Ft.	TC-80 (4 pcs)		
4	R22	F			10 Ft.	TC-70 (4 pcs)	9 Ft.	TC-75 (4 pcs)		
4	R12	F			10 Ft.	TC-70 (5 pcs)	9 Ft.	TC-75 (5 pcs)		
5	R12	F			10 Ft.	TC-80 (5 pcs)	9 Ft.	TC-85 (5 pcs)		

NOTE: Condenser Type: S = Static, F = FAN

*R-134a - It is suggested to add 10% to length.

Private Picture Copyright : WWW.MBSM.PRO

REFRIGERATION APPLICATION CHART (R12 AND R22)

REFRIGERATION APPLICATION CHART (R-12 AND R-22)*

H.P.	REF.	NOTE	NORMAL EVAPORATING TEMPERATURE DEGREES F							
			-10 to +5		+5 to +20		+20 to +35		+35 to +50	
1/20	R12	S-F	16 Ft.	TC-26	10 Ft.	TC-26				
1/12	R12	S-F	12 Ft.	TC-26	12 Ft.	TC-31				
1/9	R12	S	12 Ft.	TC-26	12 Ft.	TC-31				
1/9	R12	S	10 Ft.	TC-26	10 Ft.	TC-31				
1/8	R12	S-F	10 Ft.	TC-26	10 Ft.	TC-31				
1/6	R12	S	12 Ft.	TC-31	12 Ft.	TC-36	8 Ft.	TC-36	10 Ft.	TC-42
1/6	R12	F	10 Ft.	TC-31	10 Ft.	TC-36				
1/5	R12	S	10 Ft.	TC-31	10 Ft.	TC-36	7-1/2 Ft.	TC-42	7-1/2 Ft.	TC-49
1/5	R12	F	8 Ft.	TC-31	8 Ft.	TC-36	10 Ft.	TC-42	6 Ft.	TC-42
1/4	R22	S-F	12 Ft.	TC-36	6 Ft.	TC-36	8-1/2 Ft.	TC-42	6 Ft.	TC-49
1/4	R12	F	10 Ft.	TC-36	6 Ft.	TC-36	8 Ft.	TC-42	6 Ft.	TC-49
1/3	R22	F	10 Ft.	TC-36	6 Ft.	TC-36	11 Ft.	TC-49		
1/3	R12	F	12 Ft.	TC-42	6 Ft.	TC-42	9 Ft.	TC-49	6 Ft.	TC-54
1/2	R22	F	6 Ft.	TC-36	9 Ft.	TC-42	7-1/2 Ft.	TC-54	10 Ft.	TC-64
1/2	R12	F	11 Ft.	TC-54	9 Ft.	TC-49				
3/4	R22	F	11 Ft.	TC-54	9 Ft.	TC-54				
3/4	R12	F	7-1/2 Ft.	TC-54	12 Ft.	TC-70	1 Ft.	TC-80		
1	R22	F	10 Ft.	TC-64	12 Ft.	TC-70				
1	R12	F	10 Ft.	TC-70	11 Ft.	TC-54	7-1/2 Ft.	TC-54 (2 pcs)		
1-1/2	R22	F	7-1/2 Ft.	TC-54 (2 pcs)	7-1/2 Ft.	TC-54 (2 pcs)	8 Ft.	TC-64 (2 pcs)		
1-1/2	R12	F			9 Ft.	TC-64 (2 pcs)	10 Ft.	TC-80 (2 pcs)		
2	R22	F			10 Ft.	TC-70 (2 pcs)	9 Ft.	TC-75 (2 pcs)		
2	R12	F	10 Ft.	TC-70 (2 pcs)	9 Ft.	TC-75 (2 pcs)	10 Ft.	TC-85 (2 pcs)		
3	R22	F			10 Ft.	TC-70 (3 pcs)	9 Ft.	TC-75 (3 pcs)		
3	R12	F	10 Ft.	TC-70 (2 pcs)	8 Ft.	TC-64 (4 pcs)	10 Ft.	TC-80 (4 pcs)		
4	R22	F			10 Ft.	TC-70 (4 pcs)	9 Ft.	TC-75 (4 pcs)		
4	R12	F			10 Ft.	TC-70 (5 pcs)	9 Ft.	TC-75 (5 pcs)		
5	R12	F			10 Ft.	TC-80 (5 pcs)	9 Ft.	TC-85 (5 pcs)		

NOTE: Condenser Type: S = Static, F = FAN


*R-134a – It is suggested to add 10% to length.

Private Picture Copyright : WWW.MBSM.PRO


DIXELL XR60CX-4N1F1-UR 120V & DIXELL XR60CX-5F1N1-UR220

Category: Technologie, Tester ok
written by www.mbsm.pro | 21 May 2020


DIXELL XR60CX-4N1F1-UR 120V & DIXELL XR60CX-5F1N1-UR 220V

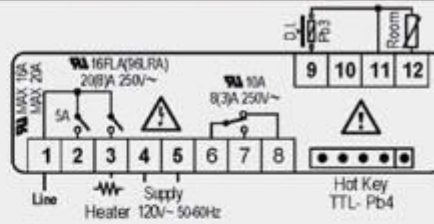


tC = 1 Heating

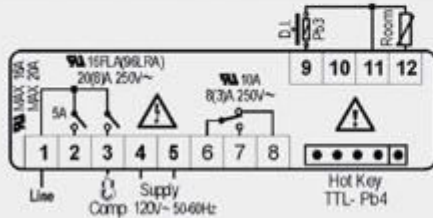


tC = 2 Cooling, Off Cycle Defrost, Time Ended

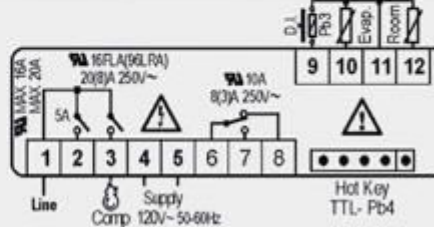


tC = 3 Cooling, Off Cycle Defrost, Time Ended

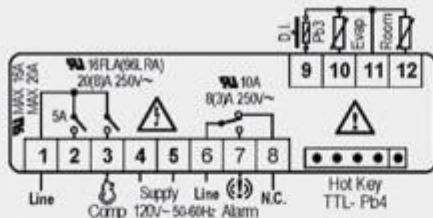


tC = 4 Cooling, Off Cycle Defrost, Time Ended, Alarm Relay

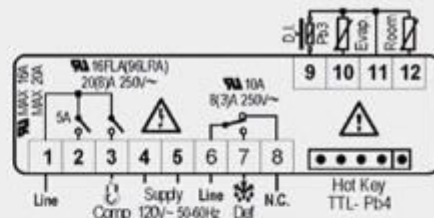

tC = 5 Cooling, Electric or Hot Gas Defrost Temp. Ended

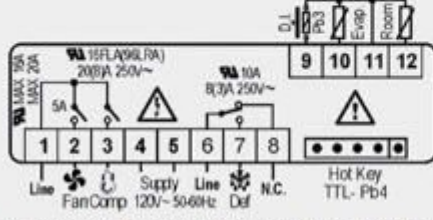

tC = 6 Low Temp. Elec. or Hot Gas Defrost, Temp. Ended, Fan Control

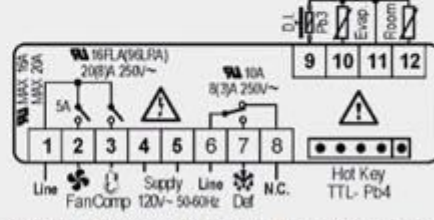

tC = 7 Open Map to be Configured for any Application

Private Picture Copyright : WWW.MBSM.PRO

DIXELL XR60CX-4N1F1-UR 120V & DIXELL XR60CX-5F1N1-UR220