Mbsm.pro, Compressor, Embraco, EGYS110CLC, 1/3 hp, lbp, r600a, 263 w, 1.1a

Category: compressor
written by www.mbsm.pro | 2 December 2024

Mbsm.pro, Compressor, Embraco, EGYS110CLC, 1/3 hp, lbp, r600a, 263 w, 1.1a

---

Mbsm.pro, Lg, compressor, LQ119NAEM, 1/3 hp, 227 w, lbp, 774 btu, r600a

Category: compressor
written by www.mbsm.pro | 2 December 2024

Mbsm.pro, Lg, compressor, LQ119NAEM, 1/3 hp, 227 w, lbp, 774 btu, r600a

---

Mbsm.pro, 1/2HP, LG, Commercial, Freezer, Compressor ,Lx110lajm, SC21G, r134a

Category: compressor
written by www.mbsm.pro | 2 December 2024

1/2HP, LG, Commercial, Freezer, Compressor ,Lx110lajm, SC21G, r134a

---

Mbsm.pro, Compressor, PH31VNET, r22, 1-1/2 hp, 1-1/2 Ton, 18000 btu/h, Capacitor 45uf, 1 ph/220v

Category: compressor
written by www.mbsm.pro | 2 December 2024

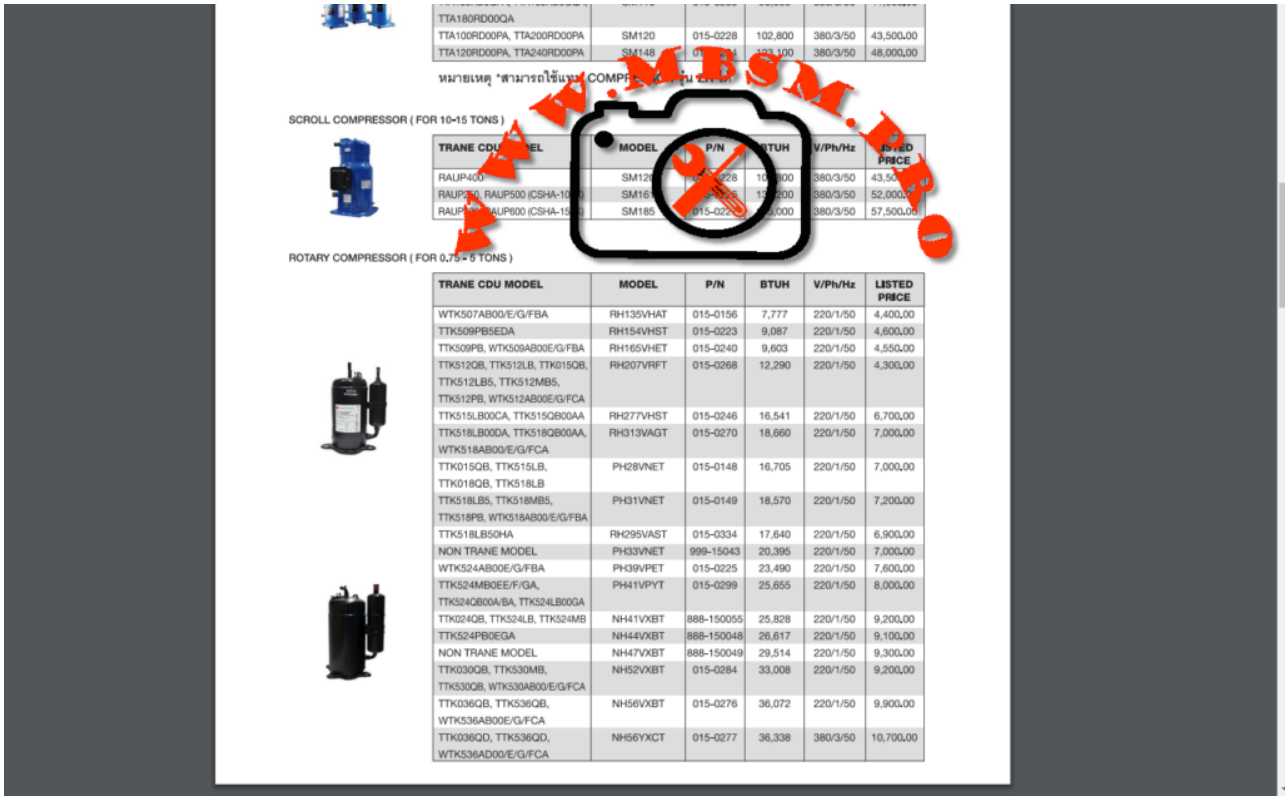

TTA180RD00QA					
TTA100RD00PA, TTA200RD00PA	SM120	015-0228	102,800	380/3/50	43,500.00
TTA120RD00PA, TTA240RD00PA	SM148	[illegible]	[illegible]	380/3/50	48,000.00

SCROLL COMPRESSOR (FOR 10-15 TONS)

TRANE CDU MODEL	MODEL	P/N	BTUH	V/Ph/Hz	LISTED PRICE
RAUP400	SM12[illegible]	[illegible]-0228	10[illegible]00	380/3/50	43,50[illegible]
RAUP[illegible]0, RAUP500 (CSHA-10[illegible])	SM16[illegible]	[illegible]	1[illegible]200	380/3/50	52,000.[illegible]
RAUP[illegible] RAUP600 (CSHA-15[illegible])	SM185	015-022[illegible]	[illegible],000	380/3/50	57,500.00

ROTARY COMPRESSOR (FOR 0.75 - 5 TONS)

TRANE CDU MODEL	MODEL	P/N	BTUH	V/Ph/Hz	LISTED PRICE
WTK507AB00/E/G/FBA	RH135VHAT	015-0156	7,777	220/1/50	4,400.00
TTK509PB5EDA	RH154VHST	015-0223	9,087	220/1/50	4,600.00
TTK509PB, WTK509AB00E/G/FBA	RH165VHET	015-0240	9,603	220/1/50	4,550.00
TTK512QB, TTK512LB, TTK015QB, TTK512LB5, TTK512MB5, TTK512PB, WTK512AB00E/G/FCA	RH207VRFT	015-0268	12,290	220/1/50	4,300.00
TTK515LB00CA, TTK515QB00AA	RH277VHST	015-0246	16,541	220/1/50	6,700.00
TTK518LB00DA, TTK518QB00AA, WTK518AB00/E/G/FCA	RH313VAGT	015-0270	18,660	220/1/50	7,000.00
TTK015QB, TTK515LB, TTK018QB, TTK518LB	PH28VNET	015-0148	16,705	220/1/50	7,000.00
TTK518LB5, TTK518MB5, TTK518PB, WTK518AB00/E/G/FBA	PH31VNET	015-0149	18,570	220/1/50	7,200.00
TTK518LB50HA	RH295VAST	015-0334	17,640	220/1/50	6,900.00
NON TRANE MODEL	PH33VNET	999-15043	20,395	220/1/50	7,000.00
WTK524AB00E/G/FBA	PH39VPET	015-0225	23,490	220/1/50	7,600.00
TTK524MB0EE/F/GA, TTK524QB00A/BA, TTK524LB00GA	PH41VPYT	015-0299	25,655	220/1/50	8,000.00
TTK024QB, TTK524LB, TTK524MB	NH41VXBT	888-150055	25,828	220/1/50	9,200.00
TTK524PB0EGA	NH44VXBT	888-150048	26,617	220/1/50	9,100.00
NON TRANE MODEL	NH47VXBT	888-150049	29,514	220/1/50	9,300.00
TTK030QB, TTK530MB, TTK530QB, WTK530AB00/E/G/FCA	NH52VXBT	015-0284	33,008	220/1/50	9,200.00
TTK036QB, TTK536QB, WTK536AB00E/G/FCA	NH56VXBT	015-0276	36,072	220/1/50	9,900.00
TTK036QD, TTK536QD, WTK536AD00/E/G/FCA	NH56YXCT	015-0277	36,338	380/3/50	10,700.00

Mbsm.pro, Compressor, PH31VNET, r22, 1-1/2 hp, 1-1/2 Ton, 18000 btu/h, Capacitor 45uf, 1 ph/220v

---

Mbsm.pro , Compressor, CR62KQM-TFD-202, Copeland, Hermetic, 5 hp, 3ph

Category: compressor
written by www.mbsm.pro | 2 December 2024

Mbsm.pro , Compressor, CR62KQM-TFD-202, Copeland, Hermetic, 5 hp, 3ph

---

Mbsm.pro, Compressor, hkk95aa, 220-240/50 1/5hp, 167w, R600a, lbp

Category: compressor
written by www.mbsm.pro | 2 December 2024

The **Comp HKK95AA** is a compressor designed for refrigeration applications, specifically operating at **220-240V** and **50Hz**, with a capacity of **1/5 HP (167W)** and using **R600a refrigerant**. Here are some key details:

- **Model**: Comp HKK95AA
- **Voltage**: 220-240V
- **Frequency**: 50Hz
- **Power**: 1/5 HP (approximately 167W)
- **Refrigerant Type**: R600a (Isobutane)
- The **Comp HKK95AA** compressor is classified as a **Low Back Pressure (LBP)** compressor. This classification means it is designed for applications that operate at lower pressure differentials, making it suitable for domestic refrigeration systems, such as:
- **Household Refrigerators**: These typically maintain temperatures between 0°C to 5°C (32°F to 41°F).
- **Domestic Freezers**: Operating around -18°C (0°F) for effective food preservation.
- LBP compressors are ideal for environments where the cooling load is moderate and consistent, which aligns with the typical usage scenarios for the HKK95AA

hkk95aaDownload

Mbsm.pro, compressor, QP306P, 18000 btu, 2.25 hp, r410a, 1.5 ton

Category: compressor
written by www.mbsm.pro | 2 December 2024

LG QP compressor

QP Series Rotary CompressorsIn Stock
50/60 Hz

Frequency	Voltage	Model	Cooling Capacity Btu/hr	Cooling Capacity Watts	Input Watts	EER Btu/W.hr	COP W/W
60Hz	1Φ,208-230V	QP306K	22,600	6,623	2,055	11.00	3.22
60Hz	1Φ,208-230V	QP325K	24,000	7,033	2,162	11.10	3.25
60Hz	1Φ,208-230V	QP348K	25,900	7,590	2,312	11.20	3.28
60Hz	1Φ,208-230V	QP362K	27,000	7,912	2,455	11.00	3.22
60Hz	1Φ,208-230V	QP376K	27,700	8,117	2,541	10.90	3.19
60Hz	1Φ,208-230V	QP390K	29,200	8,557	2,646	11.04	3.23
60Hz	1Φ,208-230V	QP407K	30,100	8,821	2,736	11.00	3.22
60Hz	1Φ,208-230V	QP425K	31,900	9,348	2,929	10.89	3.19

50Hz	1Φ,220/240V	QP306P	18,450	5,407	1,650	11.18	3.28
50Hz	1Φ,220/240V	QP325P	19,500	5,714	1,773	11.00	3.22
50Hz	1Φ,220/240V	QP348P	20,500	6,007	1,884	10.88	3.19
50Hz	1Φ,220/240V	QP376P	22,500	6,593	2,030	11.08	3.25
50Hz	1Φ,220/240V	QP390P	23,500	6,886	2,080	11.30	3.31
50Hz	1Φ,220/240V	QP407P	24,400	7,150	2,180	11.19	3.28
50Hz	1Φ,220/240V	QP425P	25,600	7,502	2,335	10.96	3.21
50Hz	3Φ,380-420V	QP425Y	25,000	7,326	2,380	10.50	3.08

LG compressors QP306K
Voltage : 208-230 V/ 60 hz/ 1ph
EER: 11.00 W
Refrigerant : R410A
BTU : 22,600
COP : 3.22
Tecnology : On/Off
Motor type : Single
Weight 8,6 kg
Dimensions : 28 Ã— 28 Ã— 38 cm
Similar models : QP325K(24,000 btu), QP348K(25,900 btu), QP362K(27,000 btu), QP376K(27,700 btu), QP390K(29,200 btu), QP407K(30,100 btu), QP425K(31,900 btu), QP306P(18,450 btu), QP325P(19,500 btu), QP348P(20,500 btu), QP376P(22,500 btu), QP390P(23,500 btu), QP407P(24,400 btu), QP425P(25,600 btu), QP425Y(25,000 btu)

Mbsm.pro, compressor, QXC-16K, 1.2 hp, 9000 btu, r407, 900w

Category: compressor
written by www.mbsm.pro | 2 December 2024

The **QXC-16K** is a rotary compressor designed for refrigeration applications, particularly in dehumidifiers and air conditioning systems. Here are its key specifications and features:

Specifications

- **Model**: QXC-16K
- **Refrigerant Type**: R407C
- **Voltage**: 220-240V, 50Hz
- **Cooling Capacity**: 2670 W (approximately 9078 Btu/h) at an evaporating temperature of +7.2°C and condensing temperature of +54.4°C.
- **Input Power**: 900 W
- **Displacement**: 16.4 cc/rev
- **Current**: 4.10 A
- **Coefficient of Performance (COP)**: 2.97
- **Height**: 293 mm

QXC-16KDownload

Mbsm.pro, Compressor, AW703ET-094-A4, Tecumseh, 2 hp, R-22, R-407C, hbp, 1ph

Category: compressor
written by www.mbsm.pro | 2 December 2024

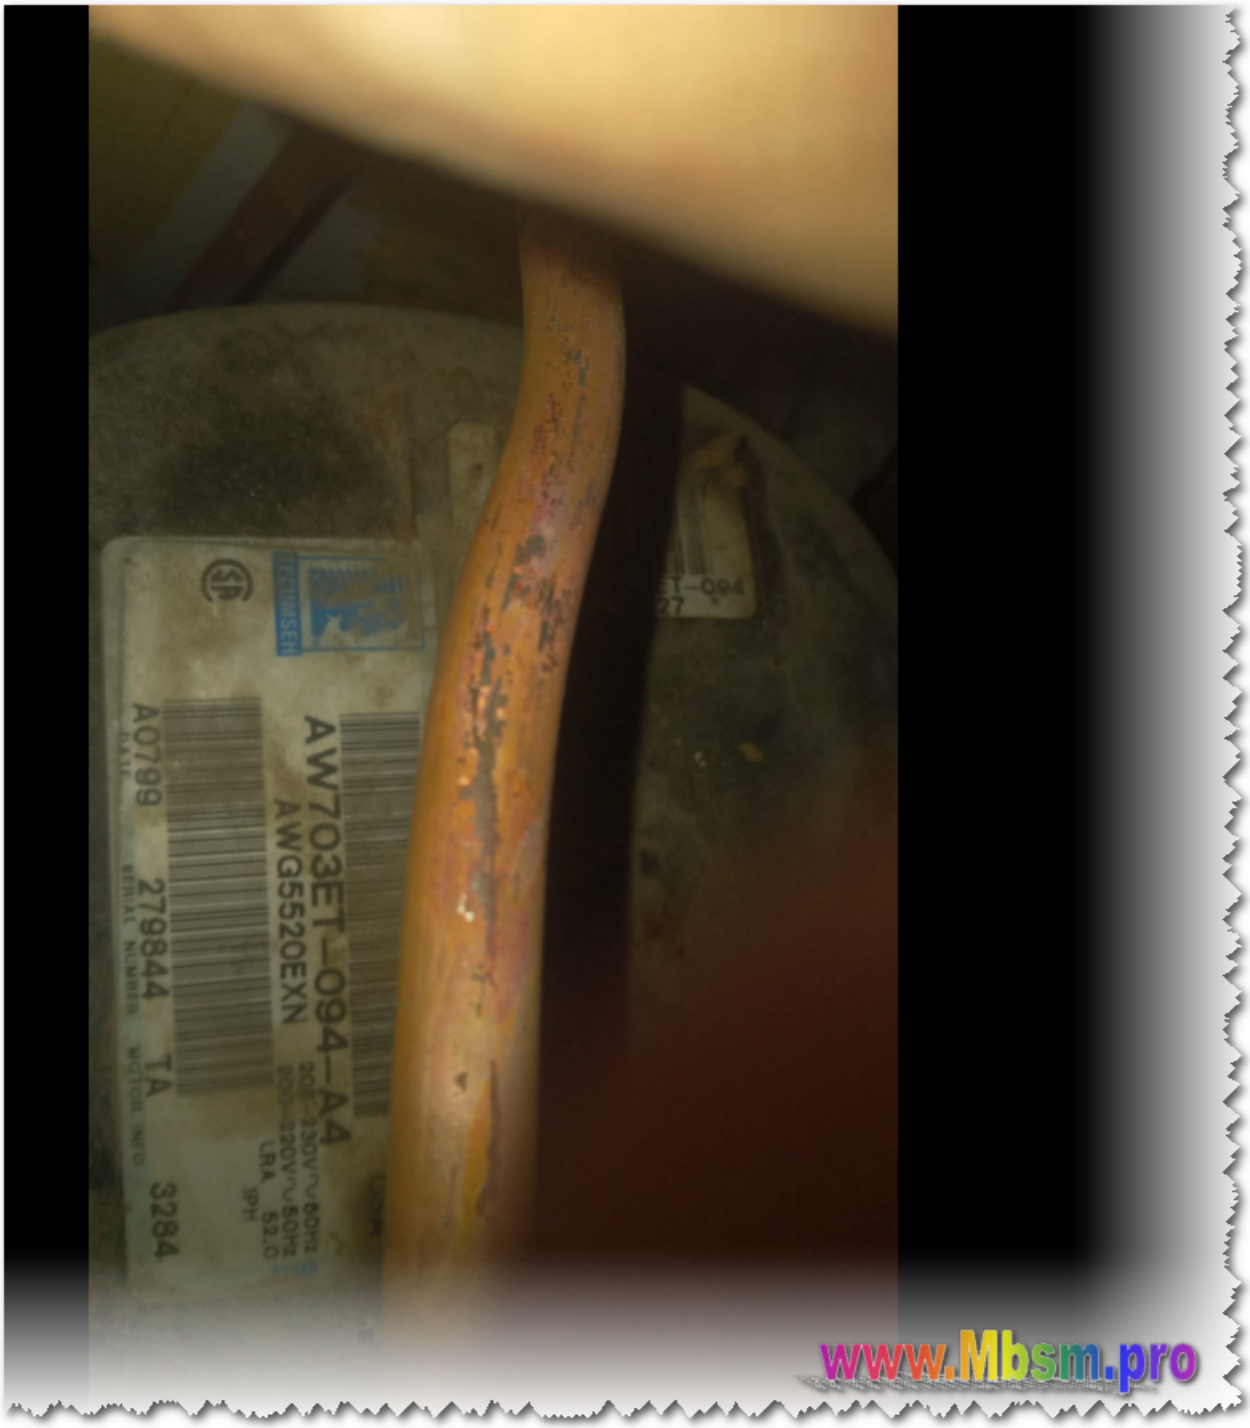

The **AW703ET-094-A4** is a model of compressor produced by Tecumseh, specifically designed for air conditioning and high back pressure (HBP) applications. Here are the key specifications:

Specifications

- **Type**: Reciprocating Compressor
- **Application**: Suitable for air conditioning (AC) and high back pressure (HBP) systems.
- **Refrigerants**: Compatible with R-22 and R-407C.
- **Power**:
  - **Horsepower**: 2 HP
  - **Voltage**:
    - 200-220V at 50Hz

    - 208-230V at 60Hz
- **Cooling Capacity**: Approximately 18,800 BTU.
- **Design**: Hermetic type, meaning it is sealed to prevent refrigerant leakage.

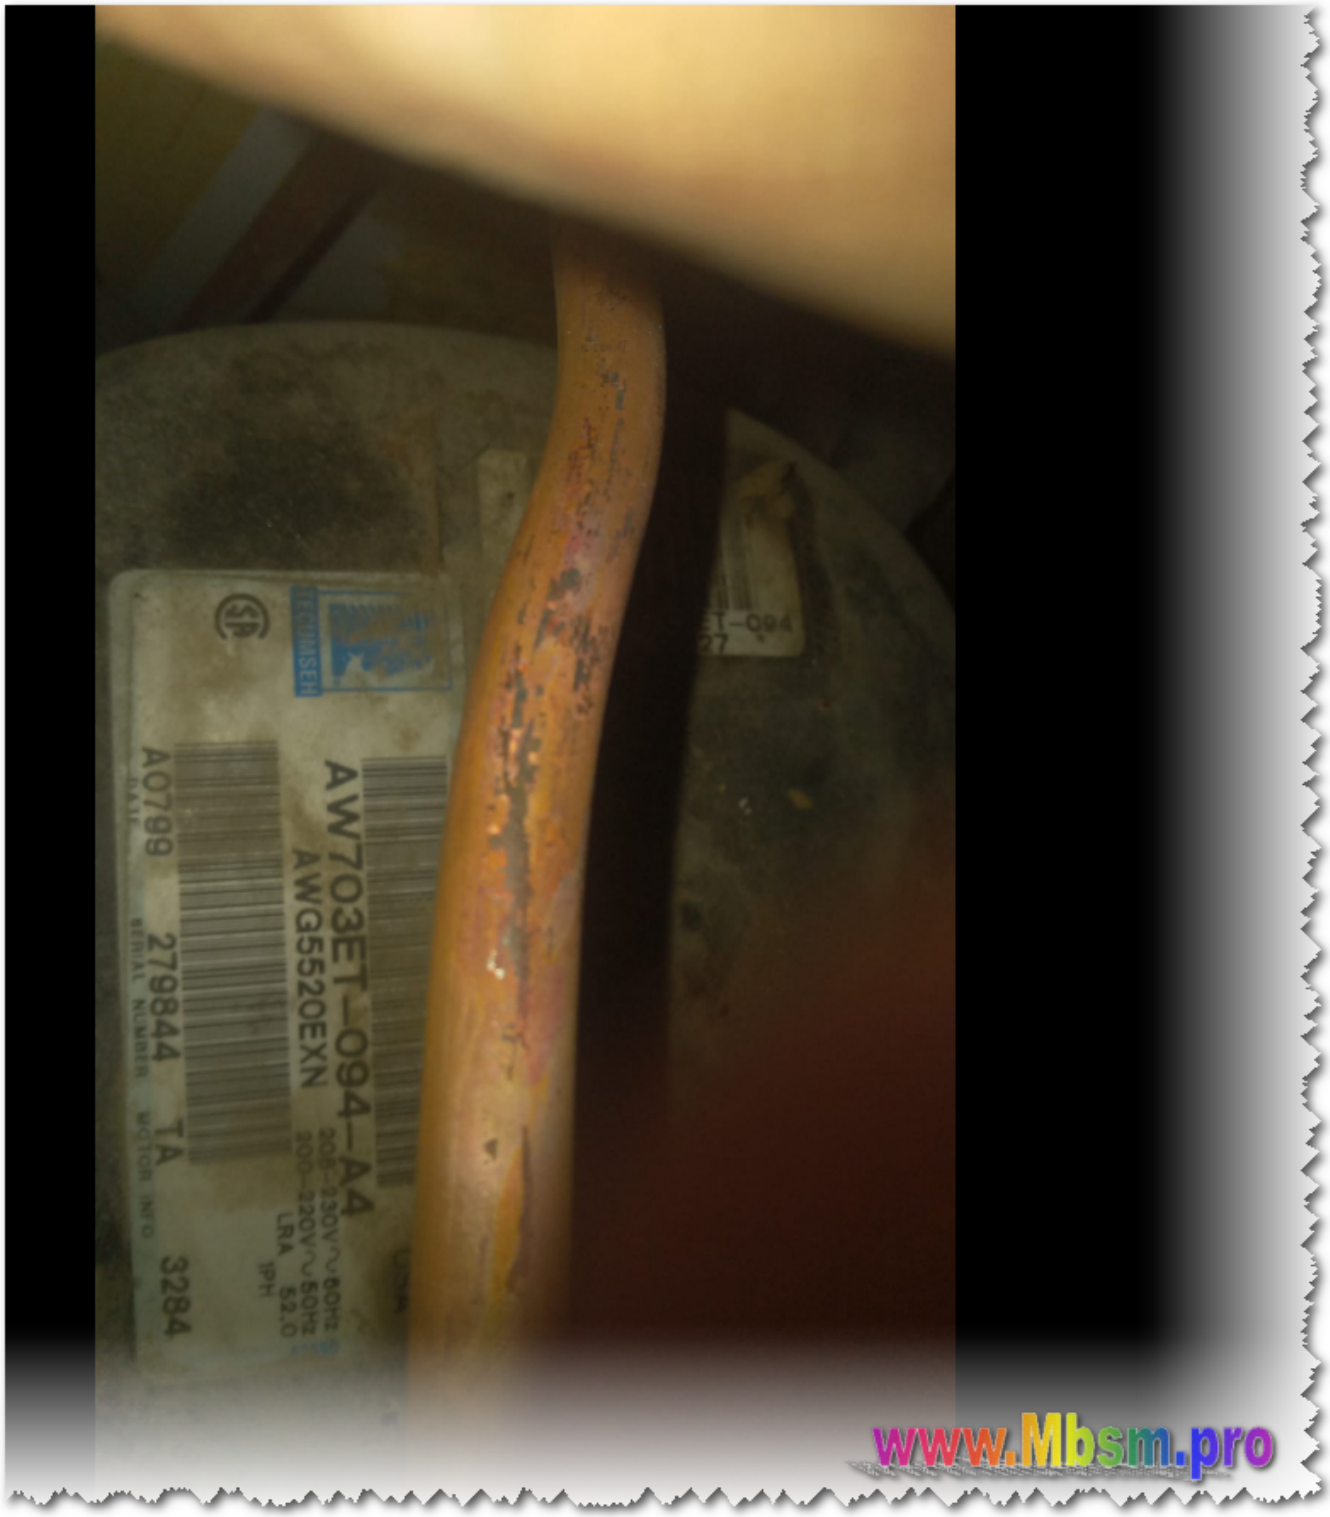

_AW703ET-094-A4Download

Mbsm.pro, compressor , Embraco, EGUS

80HLP, EGUS80HLP, lbp, 1/4 hp, r134a

Category: compressor
written by www.mbsm.pro | 2 December 2024

Embraco EGUS 80HLP compressor along with its specifications and details related to **LBP (Low Back Pressure)** applications:

Specification	Details
Model	EGUS 80HLP
Type	Hermetic Compressor
Refrigerant	R-134a
Voltage	115-127V / 220-240V
Frequency	60 Hz (for 115V) / 50 Hz (for 220V)
Nominal Horsepower	1/4 HP (0.25 HP)
Displacement	6.36 cm^3
Cooling Capacity @ -10°F	840 BTU
Cooling Capacity @ 20°F	1995 BTU
Cooling Capacity @ 45°F	3530 BTU
Power Consumption	Approximately 187 watts (0.24 kW)
Application Type	Designed for LBP applications, adaptable for medium/high back pressure (M/HBP) applications
Typical Uses	– Refrigerators – Freezers – Ice machines – Commercial displays and vending machines

This table provides a comprehensive overview of the Embraco EGUS 80HLP compressor, highlighting its specifications, performance metrics, and

suitability for low back pressure applications.

EM2U80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,32	197	6,76	ISO10	RSCR – 12 µF	LST	ASHRAE32
EM2U80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,32	197	6,76	ISO10	RSCR – 15 µF	LST	ASHRAE32
EM2U80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,46	199	6,76	ISO10	RSCR – 12 µF	LST	ASHRAE32
EM2U80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,46	199	6,76	ISO10	RSCR – 15 µF	LST	ASHRAE32
EM2U80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,42	199	6,76	ISO10	RSIR	LST	ASHRAE32
EGUS80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,38	203	6,36	ISO10	RSIR	LST	ASHRAE32
EGD80HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,59	204	6,44	ISO10	RSCR – 12 µF	LST	ASHRAE32

EGAS80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,24	204	6,44	ISO10	RSIR	LST	ASHRAE32
EGAS80HLR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4+	1,32	205	6,36	ISO10	RSIR-CSIR	LST	ASHRAE32
EGX80HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,55	205	6,36	ISO10	RSCR – 12 µF	LST	ASHRAE32
EM2Z80HLT	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,51	205	6,76	ISO10	RSCR – 12 µF	LST	ASHRAE32
EM2Z80HLT	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,51	205	6,76	ISO10	RSCR – 15 µF	LST	ASHRAE32
ONE 80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,44	207	6,36	ISO10	RSIR	LST	ASHRAE32

www.Mbsm.pro

Embraco EGUS 80HLPDownload