

Mbsm.pro, Donper, Hermetic,
Compressor , R600a, Lj126Cy,
lu126cy1, 1/3 Hp, R600a

Category: compressor

written by www.mbsm.pro | 16 March 2021




Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Donper, Hermetic, Compressor , R600a, Lj126Cy, lu126cy1, 1/3 Hp, R600a

Panasonic, refrigerator, compressor, SB48C95GAW5, 110w, White-Westinghouse refrigerator, 220v, 50 Hz, 85L, R134A/80G, 1/6 Hp

Category: compressor

written by www.mbsm.pro | 16 March 2021

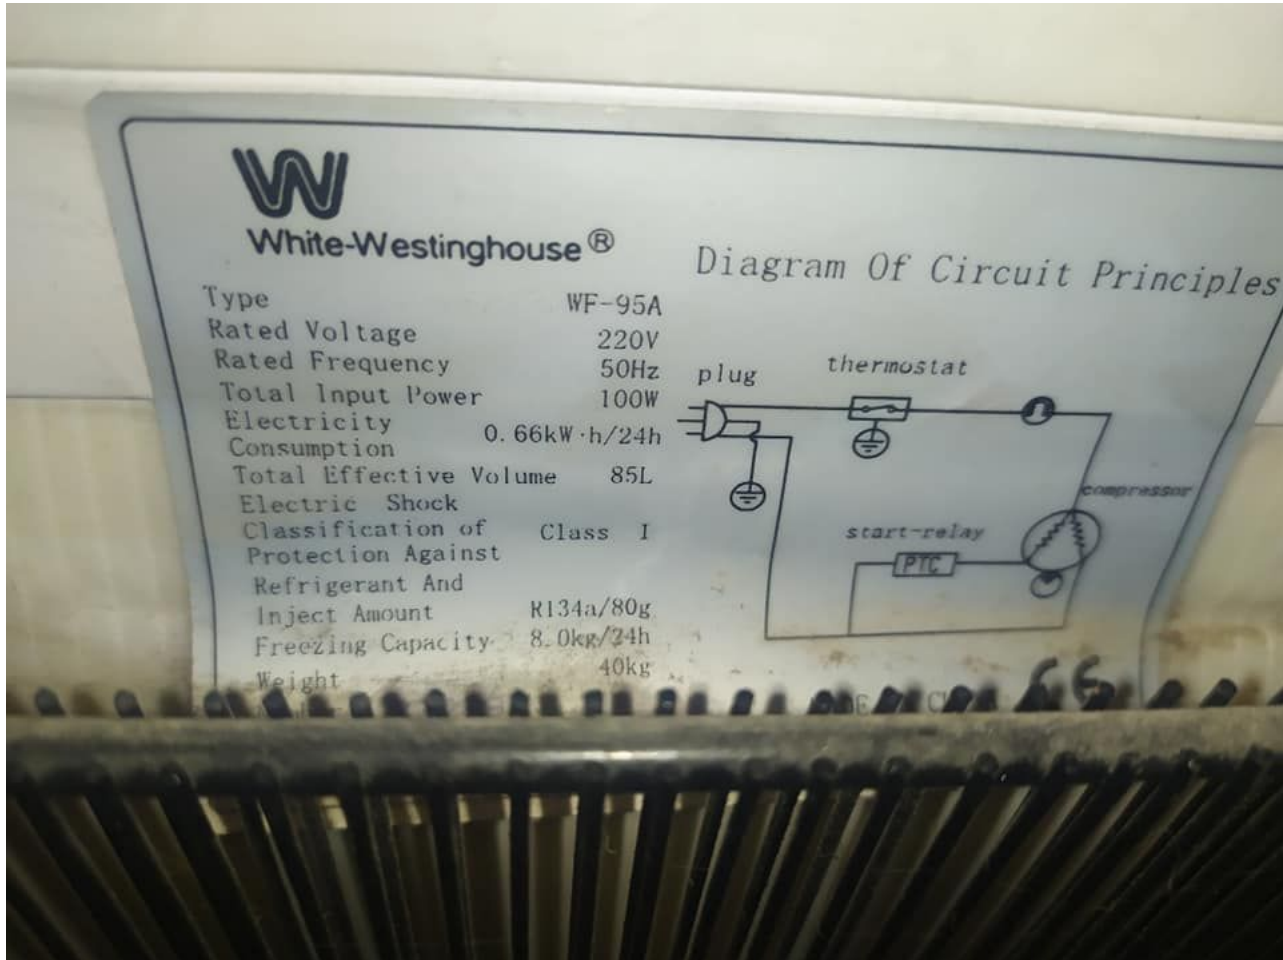


Private Picture Copyright : WWW.MBSM.PRO

Specification

Item	Performance characteristics
Refrigerant	R134a
Displacement (cm ³)	4.8
Voltage (V)	220/240
Frequency (Hz)	50
Motor Type	RSIR
Capacity@ASHRAE	110
COP@ASHRAE	1.03/0.99
Capacity@CECOMAF	—
COP@CECOMAF	—



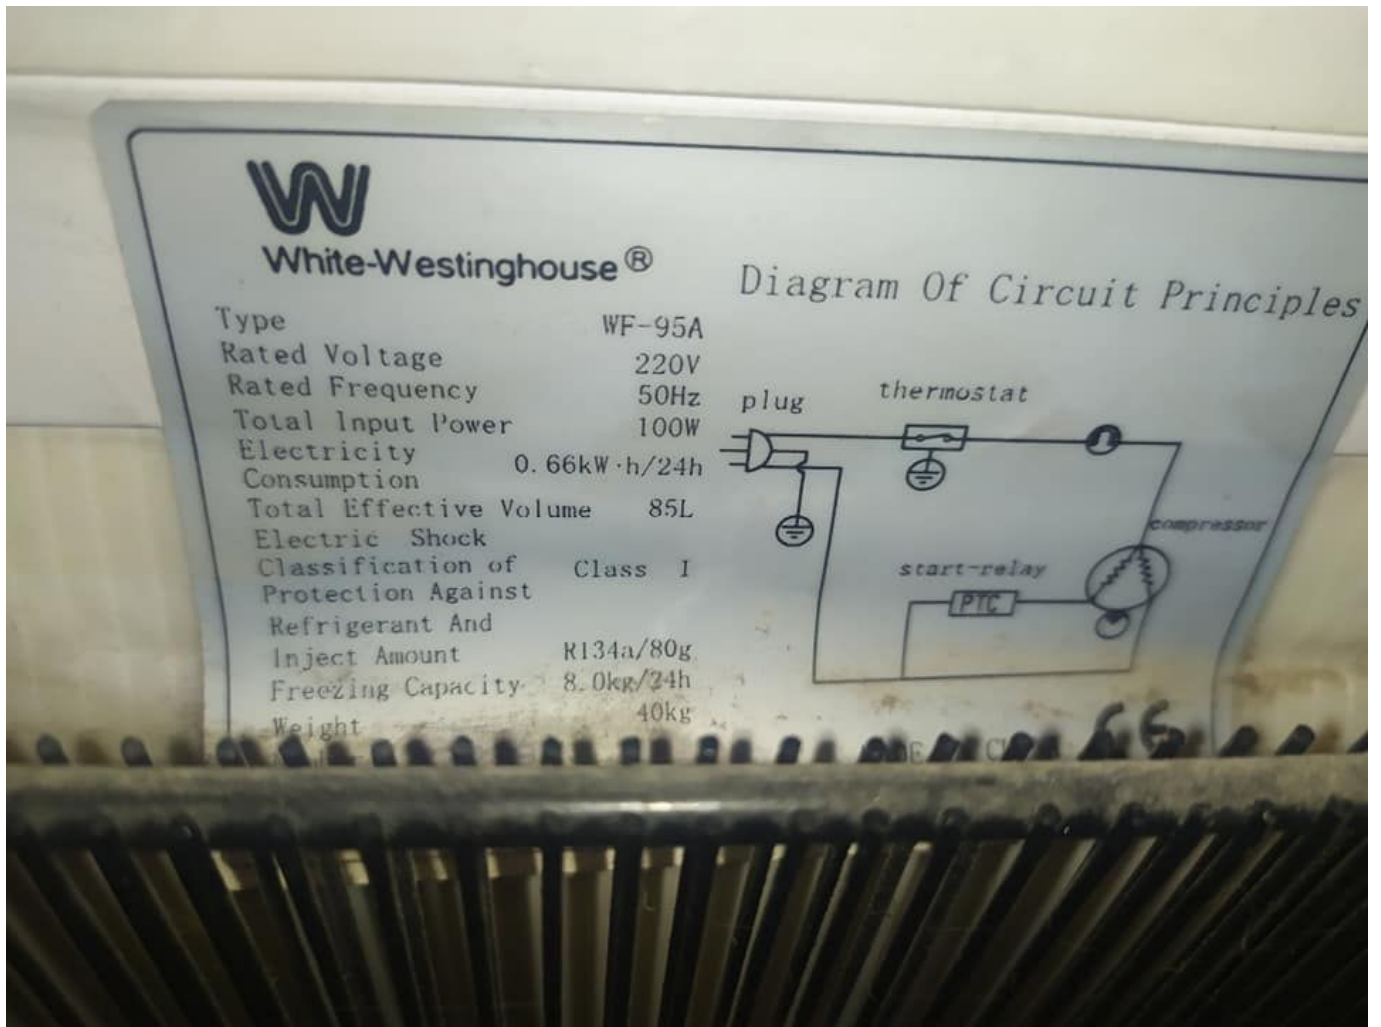

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_SB48C95GAW5Télécharger

HERMETIC, Freezer, COMPRESSOR, ZEL, GTH86AA, R134A, 1/4 Hp, Lbp, 230W, 8.6CC

Category: compressor

written by www.mbsm.pro | 16 March 2021



Private Picture Copyright : WWW.MBSM.PRO

COMPRESSOR ZEL GTH86AA

APPLICATION: LBP

FREON: R134A

DISPLACEMENT: 8.6CC

POWER SUPPLY: 220V

POWER: 1 / 4HP – 230W

APPLICATION: UNIVERSAL

Specifications

Description

Detailed Product Description

1.Low levels of noise and vibration

2.Standard,medium,high and very high levels of efficiency

R134a 220-240V/50HZ

Model	Displ.(cm ³)	Motor Type	Cooling capacity(w)	Input Power without RC(w)	Input Power with RC(w)	COP without RC(w/w)	COP with RC(w/w)	Run Capacltor	Start Capacltor	Height(mm)
Standard Efficiency Range										
0F789	4.4	RSIR	110	102		1.08				174

OF1033A5.7	RSIR	141	118	1.19				174
OF1350A7.5	RSIR	178	158	1.13				183
GTH86AA8.6	RSIR/RSCR230		161	1.43	1.50	5		174
GTH93AA9.3	RSIR/RSCR260		182	1.43	1.50	5		183
Medium Efficiency Range								
GTM40AT4.0	RSIR	102	91	1.12				163
GTM57AT5.7	RSIR	156	128	1.21				183
GTM60AT6.0	RSIR	165	136	1.27				163
GVY75AT7.5	RSIR/RSCR200		149	1.34	1.44	5		183
GTM75AA7.5	RSIR	200	166	1.20			50	183
GTM93AA9.3	RSIR	270	220	1.35				183
GTM10AA11.0	RSIR/RSCR300		222	1.35			50	183
GTM12AA12.0	RSIR/RSCR330		241	1.37			50	183



Private Picture Copyright : WWW.MBSM.PRO

Compressor, NL7.3FT, SECOP, 105G6726, DANFOSS, 6726, 105G, 105 G 6726, 105G 6726, 1/5 HP, 180W, LBP, Zanussi, Kiriazi Electric Company, TGV 335L,

NO FROST, TSV 320L, FC 83L , R134A,
125G, 220-240V 50Hz, CSIR

Category: compressor

written by www.mbsm.pro | 16 March 2021

KIRIAZI



CE



ELECTRIC
COMPANY

®

Product	No Frost Refrigerator	Class	T
Model	E 335N/3	Current / Amp.	1.1/~
Rated Voltage	220-240V/50HZ	Refrigerant	R 134a 125g
Rated input of lamp	1 x 25 w	Total Gross Volume	335 L
Ins : Basic	Type II IPX4	Total Storge Volume	320 L
Freezing Capacity	4 kg/24hr	Freezer Capacity	83L
ES 6000 / 2008		Tow Door Ref.	
ES 3793 / 2006			
Serial Number		Made in Egypt	



● ○ REDMI NOTE 8
○ ∞ AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO

R134a is a low pressure refrigerant, very efficient for high temperature applications.

This makes it ideal in air conditioning applications that may leak refrigerant like car air conditioning.

Now it is being phased out because of its high global warming potential and replaced by R134

R404a is a high pressure refrigerant ideal for applications in low and medium temperature.

You want low pressure refrigerants in household applications like refrigerators that may be inside kitchens with (possible) high ambient temperature, so you make sure nothing will blow up. For the same reason you want R134a in your car air conditioning.

R404a instead has pressures slightly above atmospheric in low temperature applications where R134a would have negative pressures and its heat transmission coefficients would be much lower.

Type de gaz	App	HP	Watt	Modèle	TL
R134A	LBP	1/6	134	TLY5.1FK	
R134A	LBP	1/4	183	TLES7FT.4	


R134A	LBP	1/5	156	NL6FT.2	
R134A	LBP	1/5	185	NL7.3FT (RSIR)	
R134A	LBP	+ 1/4	219	NL9FT.2 (RSIR)	
R134A	LBP	1/4	185	NL7.3FT (CSIR)	
R134A	LBP	+ 1/4	219	NL9FT.2 (CSIR)	NL
R134A	LBP	1/3	284	NL10FT	
R134A	MBP	1/3	621	NL11MF	
R404A	LBP	1/3	433	NL7CLX	
R404A	LBP	1/3	471	NL8.4CLX	
R134A	LBP	1/4	187	NLY6F	
R134A	LBP	+ 4 /	213	NLY7F	
		(1)			
R134A	LBP	1/3	237	NLY9FK	
R600A	LBP	+ 1/4	227	NLE13KTK.2	
R600A	LBP	1/3	253	NLE15KTK.2	
R600A	LBP	+ 1/4	225	NLX13KK.3	
R600A	LBP	1/3	254	NLX15KK.3	

R134A	LBP / MBP / 1/3 HBP	264	SC12G	
R134A	LBP / MBP / 1/2 HBP	392	SC18G	
R134A	LBP / MBP / 3/4 HBP	456	SC21G	SC
R134A	MBP 3/4	1073	SC21MFX	
R134A	LBP 3/4	567	SC21FTX	
R404A	LBP 1	1033	ST21CL	
R404A	LBP 1	986	SC18CLX.2	
R404A	MBP 1/2	359/650	SC15MLX	
R404A	MBP 7/8	762/1584	SC18MLX	

KIRIAZI



CE



ELECTRIC
COMPANY

®

Product	No Frost Refrigerator	Class	T
Model	E 335N/3	Current / Amp.	1.1/~
Rated Voltage	220-240V/50HZ	Refrigerant	R 134a 125g
Rated input of lamp	1 x 25 w	Total Gross Volume	335 L
Ins : Basic	Type II IPX4	Total Storge Volume	320 L
Freezing Capacity	4 kg/24hr	Freezer Capacity	83L
		Tow Door Ref.	

ES 6000 / 2008
ES 3793 / 2006

Serial Number


Made in Egypt



REDMI NOTE 8
AI QUAD CAMERA



REDMI NOTE 8
AI QUAD CAMERA

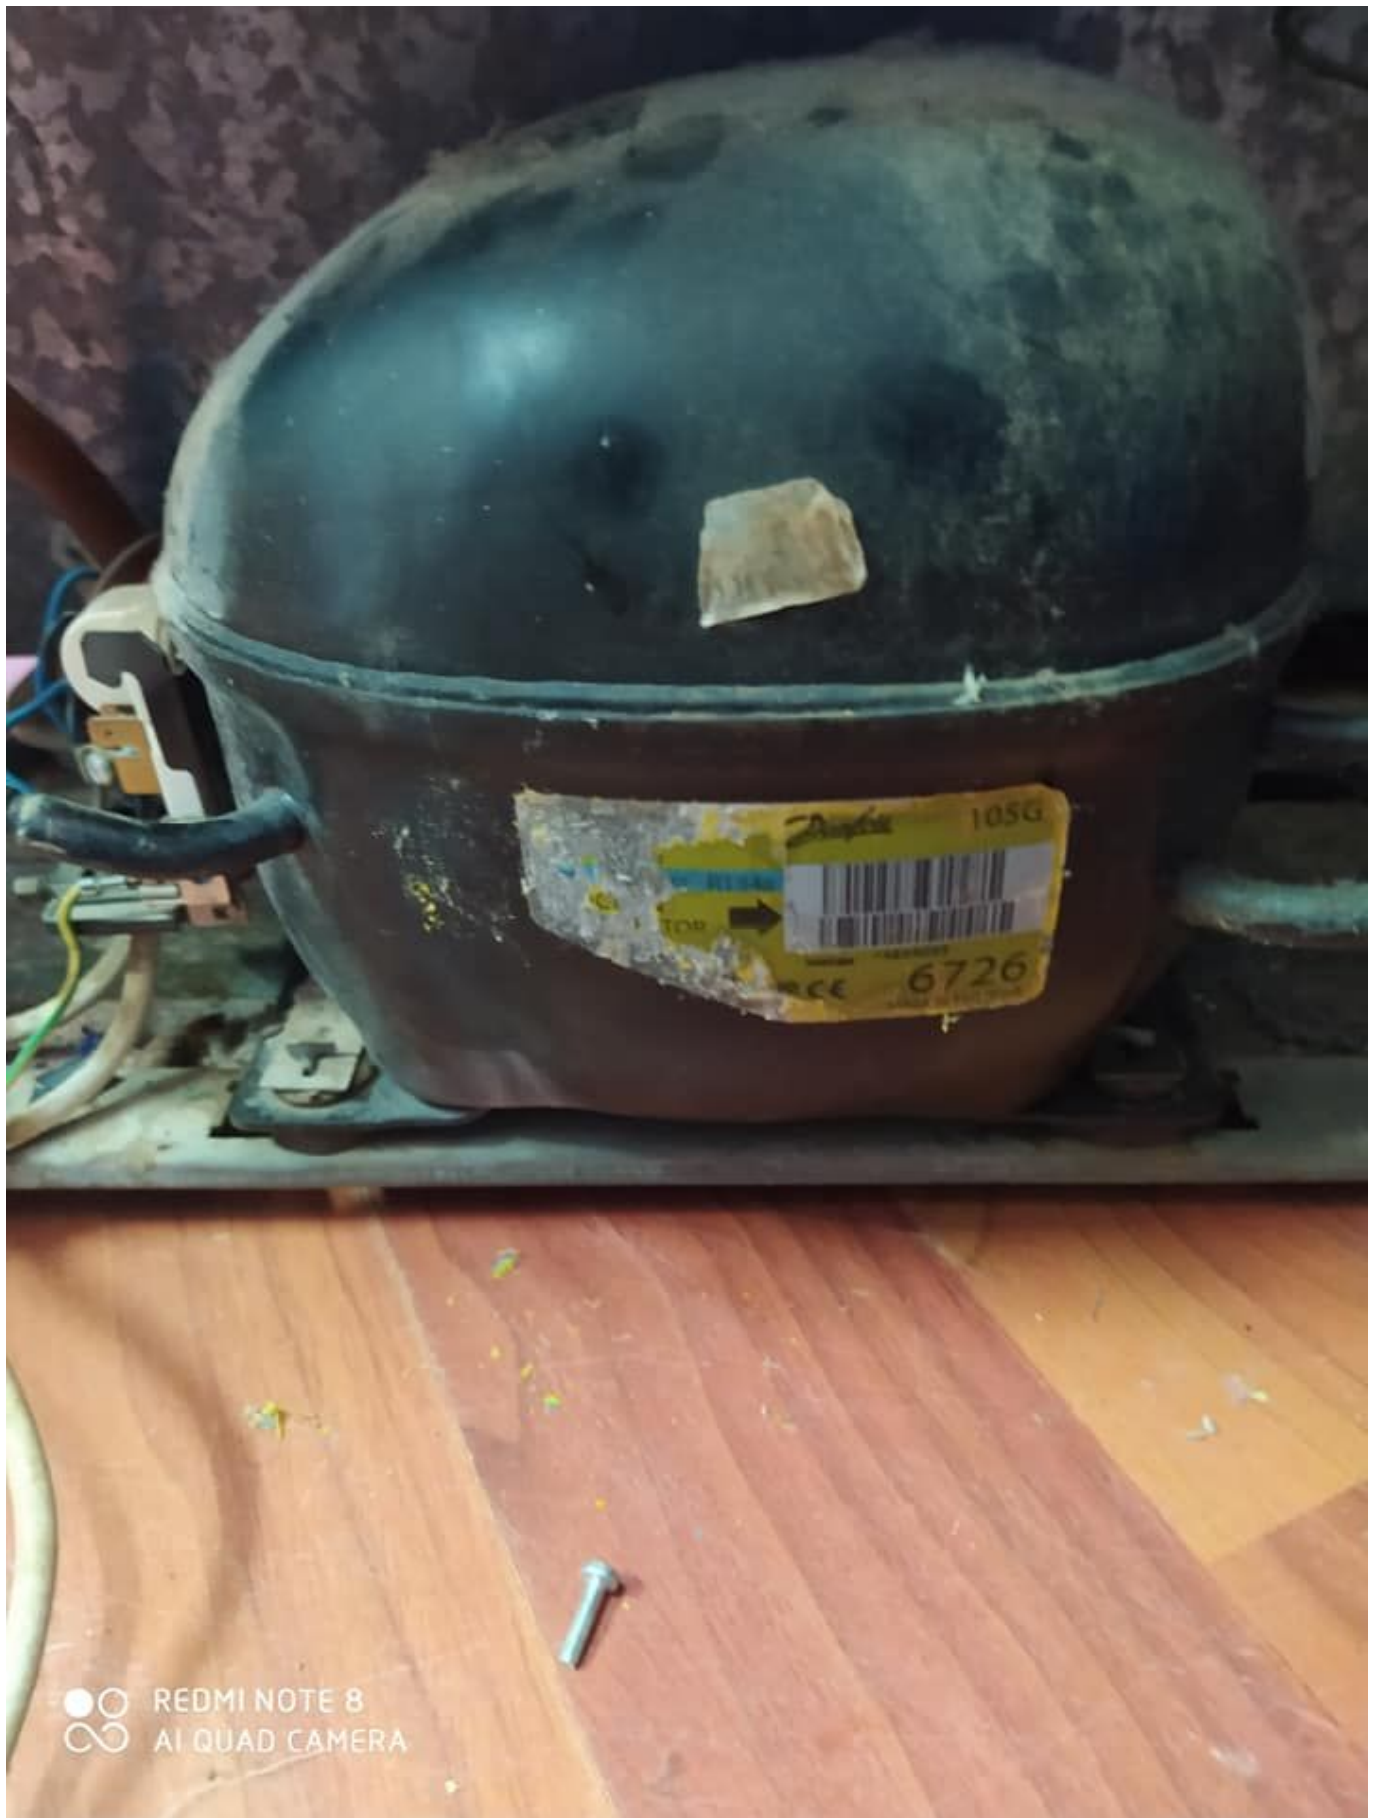

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_NL7.3FTTélécharger
Mbsm_dot_pro_private_PDF_nl73ft_105g6731_r134a_220v_50hz_11-2011_desd406c102Télé
charger

model	watt	HP	LBP/MBP	نوع گاز	توضیحات
SC12G	246	1/3	LBP/MBP	134	
SC18G	392	1/2	LBP/MBP	134	
SC21G	456	3/4	LBP/MBP	134	
SC21MFX	1073	3/4	MBP	134	هیگرتن SC21G
SC21FTX	567	3/4	LBP	134	هیگرتن SC21G
SC12CL	629		LBP	404	
SC15CL	782		LBP	404	
SC18CLX.2	986		LBP	404	
TLS5FT(PTC)	134	1/6	LBP	134	
TLES5.7FT(PTC)	163	1/5	LBP	134	
TLES6.5FT(PTC)	183	1/4	LBP	134	سفن NL7
NL6FT.2(PTC)*	156	1/5	LBP	134	
NL7FT.2(PTC)*	185	1/4	LBP	134	
NL9FT.2(PTC)*	219	1/4+	LBP	134	
NL10FT	284	1/3	LBP	134	هیگرتن SC12G (پارنه و سفن)
NL11MF	621	1/3	MBP	134	هیگرتن SC12G (پارنه و سفن)
NL7CLX	433		LBP	404	
NL8.4CLX	471		LBP	404	
NL7.3MF	393		MBP	134	
NL8.4MF	455		MBP	134	
NLY6F	187		LBP	134	سفن NL7 - High efficiency (7% در سفن)
NLY7F	213		LBP	134	سفن NL9 - High efficiency (7% در سفن)
NLY9FK	237		LBP	134	High efficiency (7% در سفن)
BD50F	72		LBP/MBP	134	
BD350GH	167		LBP/MBP	134	
GS21MLX	2200		MBP	404	
GS26CLX	1430		LBP	404	
GS34CLX	2072		LBP	404	
GS26MLX	2866		MBP	404	
GS34MLX	3726		MBP	404	

(LBP @ -33.3°C ASHRAE) زیر صفر
(MBP @ -6.7°C ASHRAE) بالای صفر

Refrigeration, Compressor, K270CZ1, 1/3++, DONPER, Dongbei , K325CZ1, K375CZ1 , freezer, R134a, White HIK-BD-500 Chest Freezers, Top Open Door, -18 degrees to +10 degrees, 500L

Category: compressor

written by www.mbsm.pro | 16 March 2021

PRODUCT PARAMETERS

MODEL NO.	K270CY1
COOLING CAPACITY	270W
REFRIGERANTS	R600a
INPUT POWER	208W
HORSE POWER	1/3+
DISPLACEMENT	16.2cm ³



Private Picture Copyright : WWW.MBSM.PRO

Quick Details

Temperature:

-25° ~ +15°

Cooling Capacity:

1ton

Panel Thickness:

50mm

Applicable Industries:

Retail

After Warranty Service:

Online support

Local Service Location:

None

Showroom Location:

None

Condition:

New

Place of Origin:

Hubei, China

Voltage:

220V, 220V/50HZ

Dimension(L*W*H):

10-10*10

Weight:

15KGS

Certification:

CE ROHS

Warranty:

1 Year

After-sales Service Provided:

Online support, No overseas service provided

Key Selling Points:

Sustainable

Machinery Test Report:

Not Availabl

Video outgoing-inspection:

Provided

Marketing Type:

New Product 2020

Warranty of core components:

1 Year

Core Components:

Motor

Color:

Balck

Product name:

Refrigerator Compressor

Refrigerant:

R134a

model:

K270CZ1

Cooling capacity:

230W

Product Description

Refrigerant	R134a	Cooling capacity	270W
Input power	220W	Hose Power	220W
Temperature application	L/MBP	Displacement	9.5cm ³
Working Current	1.5A	Voltage	220V~240V/50Hz
COP	1.3W/W	Motor type	RSIR
Cylinder capacity	9.5cm ³	Weight	9.8±0.4kg

Structure



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



PRODUCT PARAMETERS

MODEL NO.	K270CY1
COOLING CAPACITY	270W
REFRIGERANTS	R600a
INPUT POWER	208W
HORSE POWER	1/3+
DISPLACEMENT	16.2cm ³



Private Picture Copyright : WWW.MBSM.PRO

Notice : process channel and air suction pipe can not interchangeable

Product Name	: Donper Compressor	Model:	K270CZ1
Application	: Refrigerator	Power supply	:220v~240v/50Hz
Refrigeration capacity	:270W	Power	:220W
cylinder volume	:9.5cm ³	refrigerant	: R134a
Motor	:RSIR	COP	:1.3W/W
Weight	:9.8±0.4kg	working current	:1.5A



Private Picture Copyright : WWW.MBSM.PRO

Compressor Details

Production Name	Refrigerator compressor	Model	K270CZ1
Application	Refrigerator/ Freezer(300L~400L)	Power	220V~240V/50HZ
Cooling capacity	270W	Input power	220W
Cylinder volume	9.5Cm ³	Refrigerant	R134a
Motor type	RSIR	COP	1.3W/W
Weight	9.8±0.4kg	Current	1.5A

Private Picture Copyright : WWW.MBSM.PRO

Product Specification

Capacity	500 L
Type	Top Open
Temperature Range	-18 degrees to +10 degrees
Model Number	HIK-BD-500
Model Number/Name	HIK-BD-500

Energy Consumption	2.02 kWh/24hr
Product Dimensions	1650 x 755 x 830mm
Door Type	Top Open Door
Color	White
Door No.	2
Features	Adjustable Temperature Control,Digital Display,75mm Insulation Wall Thickness,Defrost Water Drain
Usage/Application	Freezer/Chiller
Weight	73kg
Depth	755mm
Refrigerant Used	R134a
Number Of Basket	2
Height	830 mm
Power Source	Electric
Energy Efficiency	2.02 kWh/24hr
Compressor Brand	Donper
Compressor Model	K270CZ1
Power	255 W
Width	1650 mm
Colour	White
Refrigerant	R134a
No of Doors	1
Number of Baskets	2

Product Description

Haikawa now launches its latest range of Chest Freezers in 200 L, 300 L, 400 L and 500 L variants. The freezers come with an Adjustable Temperature Control, enabling its use as a freezer (-18 degrees to 0 degrees) or as a chiller (0 degrees to 10 degrees), depending on requirement. The 75mm Insulation Wall Thickness helps improve energy efficiency, while the unique digital display brings in a whole new level of convenience. The Chest freezers come with removable baskets and a defrost water drain. The Inner PP lining improves hygiene while a lock and key mechanism ensures maximum safety. Insulation: Cyclopentane. Refrigerant: R134a. The HIK-BD-500 model has a rated current of 1.5A, thus lowering the power consumption. The Chest Freezer is packed with the following features:

- Adjustable Temperature Control
- Electronic Controller with Digital Display
- 75mm Insulation Wall Thickness
- Low Power Consumption
- Inner PP Lining for Improved Hygiene
- Store-More Removable Basket
- Defrost Water Drain
- Lid Handle
- Lock and Key Safety Mechanism

Additional Information

Packaging Details Box Dimensions: 1695 x 760 x 880mm Included: 1 Chest Freezer/ 1 Instruction Manual/ 2 Keys/ 2 Inner Metal Trays



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Compresseur de réfrigérant R134a Donper K375CZ1 220-240V 50Hz SC-SD-388Y

Description

Compresseur de réfrigérant R134a Donper K375CZ1 220-240V 50Hz SC-SD-388Y

Réfrigérant: R134a

Tension: 220 V ~ 240 V / 50 HZ

Puissance en chevaux: 1/2 ph

Puissance d'entrée: 235 W

Capacité de refroidissement: 325 W

Cylindre de capacité: 11,4 centimètres cubes

Courant de travail: 1.6A

Type de moteur: CSIR

Poids: 9,9 ± 0 4 kg

875000033

 **K375CZ**
220-240V~50Hz 1PH
THERMALLY PROTECTED

     1

<http://www.donper.com>

160111104220202452

R134a



Private Picture Copyright : WWW.MBSM.PRO

Reciprocating Compressors, Q Series, Reciprocating Fixed Speed, R134a, 100g, LBP, QA66C14GAX5, RSIR, 145W, 1/5HP, 170L

Category: compressor

written by www.mbsm.pro | 16 March 2021



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

MODEL QA66C14GAX5
220V ~ 50Hz 1PH R134a
THERMALLY PROTECTED
MATSUSHITA ELECTRIC IND. CO., LTD.
MADE IN MALAYSIA



Electrostar
الالكتروستار

Model **ES170 T**

طراز

W **136** وات

A **1.12** أمبير

HZ **50**

ذبذبة

Ser No.



018018

ممتثل

V

220

فولت

R134a

100 gm

وزن وسيط
التبريد

Total Capacity 170 Lit.

Class T

صنع في مصر

Reciprocating Compressors, LBP – Low Back Pressure, R-134a, TECUMSEH, 1/3hp, TP1410YS,

Category: compressor

written by www.mbsm.pro | 16 March 2021



Private Picture Copyright : WWW.MBSM.PRO

TPH1410YHS

Wholesale and retail Tecumseh/Taikang compressor, Tecumseh/Taikang piston compressor model: TPH1410YHS, type: low back pressure, refrigerant: R-134a, power supply voltage: 230V ~ 50Hz, provide Tecumseh/taikang TPH1410YHS model,

specifications, parameters, Picture, price and other data. Taikang is the world's leading manufacturer of hermetic compressors and condensers in household and commercial refrigeration and air conditioning applications
Product model: TPH1410YHS
Refrigerant: R-134a
Power frequency: 50Hz
Power supply voltage: 230V ~ 50Hz
Product Type: Low back pressure



Private Picture Copyright: WWW.MBSM.PRO


Mbsm_dot_pro_private_PDF_TP1410YS-Télécharger
Mbsm_dot_pro_private_PDF_TPH1410YGSTélécharger

Freezer, AHT, Paris 185, freezer compressor, 400w, R290, 90 g, 571 liters, inverter compressor, Dc compressor, 1/2HP, Secop compressor

Category: compressor

written by www.mbsm.pro | 16 March 2021


x

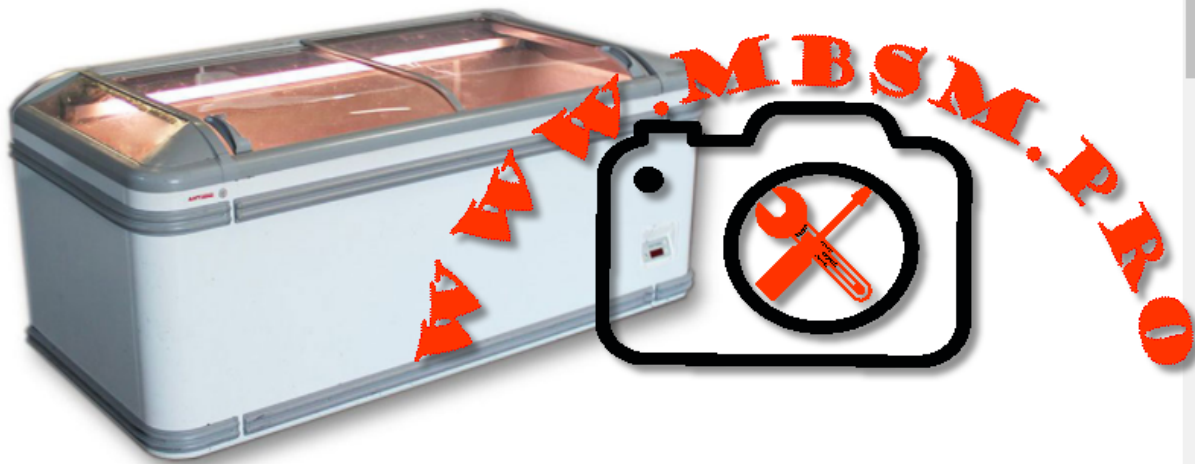

Private Picture Copyright: WWW.MBSM.PRO

FREEZER AHT PARIS 185 (-) VS AD

x

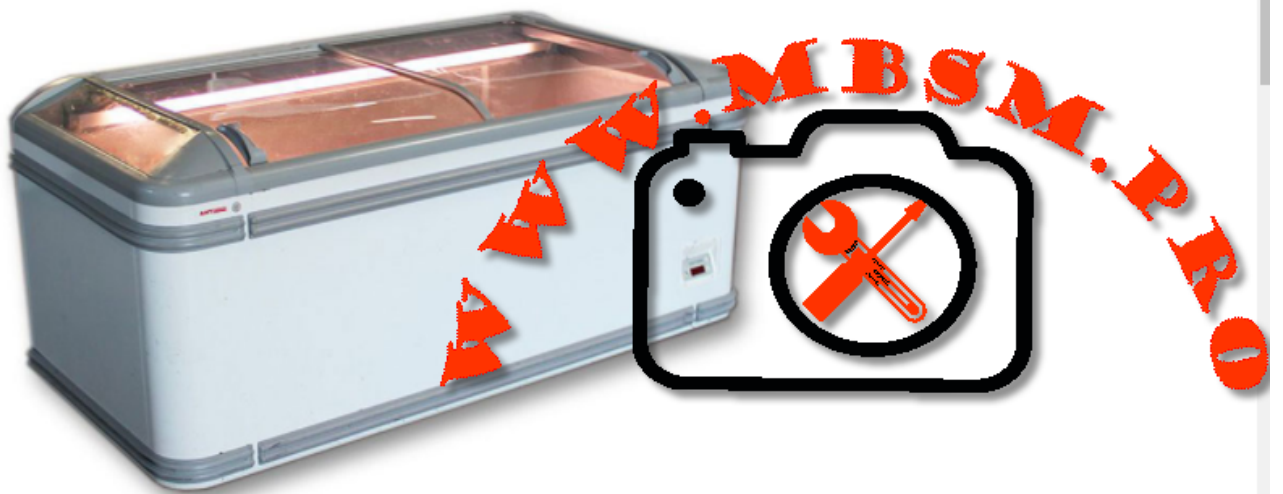

Private Picture Copyright: WWW.MBSM.PRO

AHT

Paris 185 | R290
-18°C ... -23°C



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_Super-Market-Freezer-AHT_ParisTélécharger

- Gross Content: 571 liters
- Net Content: freezing: 571 liters
- Display Area: 1,02 m²
- Ambient Temperature: +16 to +25 ° C
- Temperature Range: (Standard setting is freezing – change of temperature setting only by service technician): Freezing: -18 °C to -23 °C
- Rated Voltage / Nominal Frequency: 220 – 240 V / 50 Hz
- Rated Power Consumption: 400 W
- Rated Power Consumption Light: 41 W
- Rated Current: 1.8 A
- Protection: 16 A
- Energy consumption (at 25 °C): Freezing: 6.1 kWh / 24 h
- Length of Connection Cable: 1750 mm
- Refrigerant: R290
- Refrigerant Quantity: 90 g
- Max. Permissible Operating Pressure: 30 bar
- Length (Outside / Inside): 1854 / 1723 mm
- Depth (Outside / Inside): 853 / 723 mm
- Working Height (Front / Outside Height): 770 / 833 mm
- Stacking Height: Cooling: 380 mm / Freezing: 550 mm
- Weight (net): 120 kg
- Lighting: fluorescent tube

Meuble congélateur AHT EQ PARIS 185 – rénové

CONGÉLATEUR QUI COMBINE QUALITÉ, FLEXIBILITÉ ET EFFICACITÉ

Le congélateur / réfrigérateur enfichable qui redéfinit l'économie et élève la présentation du produit à un niveau innovant. PARIS maximise également votre

espace de vente au moyen d'inserts d'étagères, ce qui augmentera encore vos revenus. PARIS – un multitalent extrêmement efficace qui peut prétendre à une excellence prestigieuse.

AHT EQ – congélateurs d'occasion qui maximisent l'affichage de votre produit

- Grand stock jusqu'à 1000 pièces disponibles à la commande
- Garantie de six mois sur les pièces du congélateur
- Livraison rapide
- Les documents d'exportation peuvent être organisés sur demande
- Possibilité de charger des camions ou des conteneurs pleins
- Tous les congélateurs AHT EQ d'occasion sont soigneusement testés et remis à neuf dans notre atelier avant les navires
- Livraison internationale
- Emballage carton d'origine AHT Cooling Systems GmbH inclus par défaut
- Emballage d'origine renforcé AHT Cooling Systems GmbH pour les expéditions longue distance contre les routes lourdes

Avantages clés

- Une économie d'énergie élevée peut être obtenue par rapport aux unités ouvertes conventionnelles
- Écologique avec le propane réfrigérant naturel
- 100% sans CFC et sans PFC
- Modèle enfichable ne nécessitant aucune installation supplémentaire
- Faibles coûts d'investissement et d'exploitation
- Système de réfrigération sans entretien
- Compresseur à vitesse contrôlée électronique (VS) – uniquement avec le réfrigérant R290
- La solution parfaite – dégivrage semi-automatique intégré (AD) – uniquement avec le réfrigérant R290

Accessoires

- Séparateurs et jeu de grille – inclus par défaut
- Unité d'éclairage disponible en différentes versions – disponible sur demande
- Pare-chocs de protection contre les chocs disponibles en différentes couleurs – disponibles sur demande
- Couverts pour mise en ligne – disponibles sur demande
- Les plaques de protection empêchent l'eau et la poussière de tomber sous les armoires – disponibles sur demande
- Le chariot protège contre les chocs physiques – disponible sur demande
- Autres accessoires supplémentaires – disponibles sur demande

Plages de température

- Congélation: -18°C до -23°C
- Réfrigération de la viande et de la viande hachée: 0°C à $+2^{\circ}\text{C}$ (modèle universel (U) uniquement)
- Plage de température ambiante: $+16^{\circ}\text{C}$ / $+25^{\circ}\text{C}$

Modèles disponibles de congélateur AHT EQ PARIS

- AHT EQ PARIS xxx (-) / (U) / VS / AD / L

Informations utiles

- AD – dégivrage automatique (deux fois par semaine – standard)
- VS – compresseur électronique à vitesse contrôlée
- (-) – modèle standard de congélateur
- (U) – modèle universel d'armoire de congélation / réfrigération
- L – éclairage intérieur néon
- R290 – Réfrigérant ECO R290
- R404a – réfrigérant R404a

Dimensions du congélateur AHT EQ PARIS 185

- Longueur extérieur / intérieur: 1854/1723 mm
- Profondeur extérieur / intérieur: 853/723 mm
- Hauteur d'accès avant / hauteur extérieur: 770/833 mm
- Hauteur d'empilage: 550 mm
- Poids net: 120 kg
- Contenu brut: 800 litres
- Surface d'affichage totale (TDA): 1,02 m²

Données techniques du congélateur AHT EQ ATHEN

- Plug-in 230V / 50HZ
- Longueur du cordon d'alimentation: 2500-3500 mm

Options de localisation flexibles

- Peut être utilisé comme une unité autonome
- Peut être utilisé dans une ligne
- Maximise l'utilisation de l'espace au sol avec une armoire d'extrémité
- Peut être installé sous des étagères à soufflet ou intégré dans des systèmes d'étagères existants

**FR6B, Compressor, 103U2654, FR6B
103U2654, DANFOSS TL, FR and SC
Hermetic Compressors, DANFOSS,
Kiriazi, 343L, 1/5 Hp, MBP, R12,
280g, équivalence, 1/4Hp, R134A, 190g**

Category: compressor

written by www.mbsm.pro | 16 March 2021



Private Picture Copyright : WWW.MBSM.PRO

Compresseurs hermétiques DANFOSS TL, FR et SC

BOC partie No.	Code Danfoss	Puissance nominale et applic	Refrig.	Capacité nominale (watts)	Réf. BOC	Code Danfoss	Puissance nominale et applic	Réfrigérer	Capacité nominale (watts)
FR6B	103U2654	1/5 MBP	R12	354	TL3F	102G4300	1/10 LBP	R134a	58
FR8.5B	103U2854	1/4 MBP	R12	450	TL4F	102G4400	1/8 LBP	R134a	84
SC10B *	104L2510	1/3 MBP	R12	588	TL55F	102G4520	1/6 LBP	R134a	127
FR11B	103U2154	1/3 MBP	R12	624	TL57F	102G4720	1/5 LBP	R134a	162
SC12B *	104L2670	4/9 MBP	R12	756	NL7F	105G6706	1/4 LBP	R134a	183
SC15B *	104L2830	1/2 MBP (LBP)	R12 (R502)	912 (768)	NL9F **	105G6802	1/4 LBP	R134a	214
SC18B *	1042110	2/3 MBP (LBP)	R12 (R502)	1044 (900)	NL11F **	105G6910	1/4 LBP	R134a	274
SC21B	104L2310	3/4 MBP	R12	1212	SC15F **	104G8500	1/3 LBP	R134a	319
SC10B	104L2510	1/3 LBP	R502	468	SC18F **	104G8800	4/9 LBP	R134a	395
SC12B	104L2670	4/9 LBP	R502	612	TL3G	104G4350	1/8 MBP	R134a	175
SC15C	104L2832	2/3 LBP	R502	768	TL4G	102G4452	1/6 MBP	R134a	215
SC18C	104L2111	3/4 LBP	R502	900	FR6G	103G6660	1/5 MBP	R134a	351
SC10G	104G8000	1/3 MBP	R134a	591	FR8.5G	103G6780	1/4 MBP	R134a	468
SC12G	104G8240	4/9 MBP	R134a	751	FR11G	103G6980	1/3 MBP	R134a	609
SC18G	104G8820	2/3 MBP	R134a	1059	SC15G	104G8520	1/2 MBP	R134a	892
SC21G	104G8140	3/4 MBP	R134a	1256	SC10CL	104L2523	1/3 MBP	R507	450
SC12CL	104L2623	4/9 LBP	R507	624	SC15CL	104L2853	2/3 LBP	R507	758
SC18CL	104L2123	3/4 LBP	R507	893					

Remarque:

1. Les compresseurs marqués ** sont équipés de raccords de refroidisseur d'huile.
2. Les compresseurs marqués * peuvent être utilisés sur les systèmes R502 avec fonctionnement à tube capillaire dans la gamme LBP.
3. (Systèmes sans dégivrage automatique uniquement).

Capacités nominales basées sur:

LBP = -23,3 ° C température d'évaporation

MBP = -5 ° C température d'évaporation

Relais de remplacement (appareil de démarrage)	
Réf . BOC	Convient au modèle de compresseur
103N0011	TL3A à TL5A, FR7.5A à FR11A
103N0002	SC12A, SC15A





Private Picture Copyright : WWW.MBSM.PRO

FR6B	103 U26 54	1/ 5 M BP	R 1 2	3 5 4	T L 3 F	1 0 2 G 4 3 0 0	1 /	R 1 3 4 a	5 8
------	------------------	--------------------	-------------	-------------	------------------	--------------------------------------	--------	-----------------------	--------



Private Picture Copyright : WWW.MBSM.PRO

Compresseur, MPT18LA, R-404A / R-507, Cubigel Compressors, 1/2 HP, LBP, CSR

Category: compressor

written by www.mbsm.pro | 16 March 2021



cubigel
compressors
MPT18LA
 220-240V-50Hz PH1
R404A
R507 THERMALLY PROTECTED
 CE
 MADE IN SPAIN 2
 9041257434100130 09121

Le compresseur à piston hermétique à basse température Cubigel MPT18LA est utilisé dans les équipements de réfrigération avec des températures de fonctionnement d'évaporation inférieures à -20 °C:

1. Réfrigérateurs
2. Congélateurs
3. Réfrigérées vitrines
4. Chambres frigorifiques pour produits surgelés.

Caractéristiques du compresseur Cubigel MPT18LA:

- Travailler sur le fréon R404a / R507a
- Application de LBP (Low Dack Pressure)
- Volume du cylindre 18 cm³
- Capacité d'huile 450 cm³
- Type d'huile ISO VG 32 ESTER
- Courant de démarrage 19 A
- Poids 12,5 kg

Caractéristiques du moteur du compresseur Cubigel MPT18LA:

- Type de moteur CSR
- Puissance 1/2 CV
- Tension 200-220V 50Hz
- Tension admissible 170-242 V



cubigel
compressors

MPT18LA
220-240V-50Hz PH1

R404A
R507

THERMALLY PROTECTED

CE

MADE IN SPAIN

9041257434100130

09121

Mbsm_dot_pro_private_PDF_compresseur-acc-cubigell-electrolux-MPT16LATélécharger

Mbsm_dot_pro_private_PDF_huayi_compressor_mpt18la__r404a_220_50_1Télécharger