


Mbsm.pro, Pdf, File, ATET, Compressori, ZEM, WHIRLPOOL, r12, r134a

Category: Files

written by www.mbsm.pro | 23 February 2022

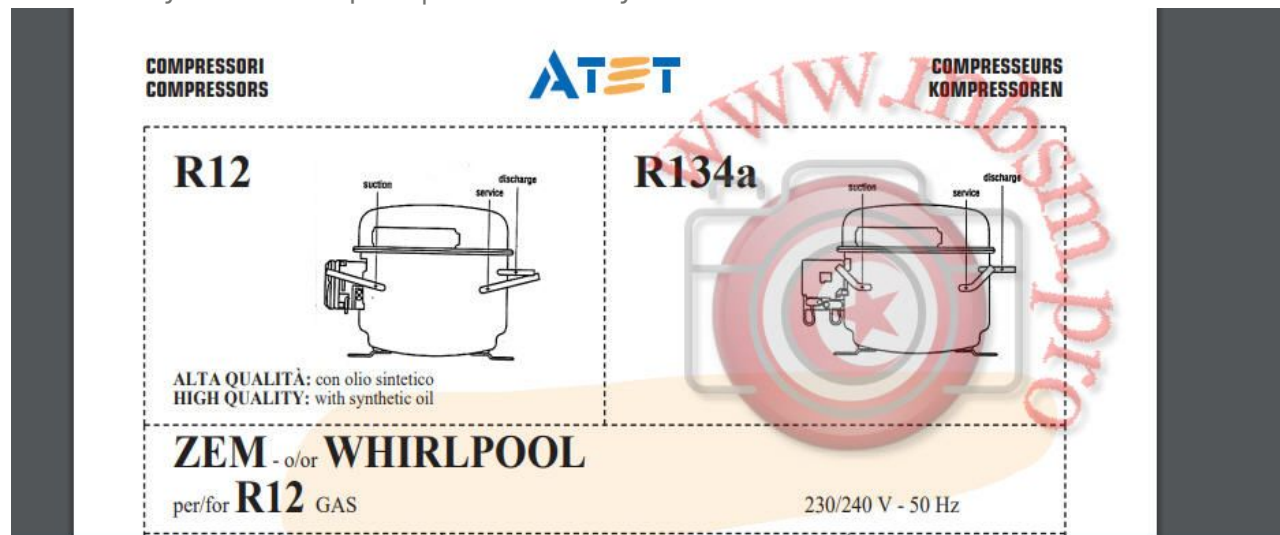


COMPRESSORI
COMPRESSORS

ATET


COMPRESSEURS
KOMPRESSOREN

R12



ALTA QUALITÀ: con olio sintetico
HIGH QUALITY: with synthetic oil

R134a



ZEM - o/or WHIRLPOOL
per/for R12 GAS

230/240 V - 50 Hz


Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Pdf, File, ATET, Compressori, ZEM, WHIRLPOOL, r12, r134a

Mbsm.pro, PDF, Files, EG AS100HLR, Compressor, Lbp, 1/3 Hp, EMBARACO

Category: Files

written by www.mbsm.pro | 23 February 2022

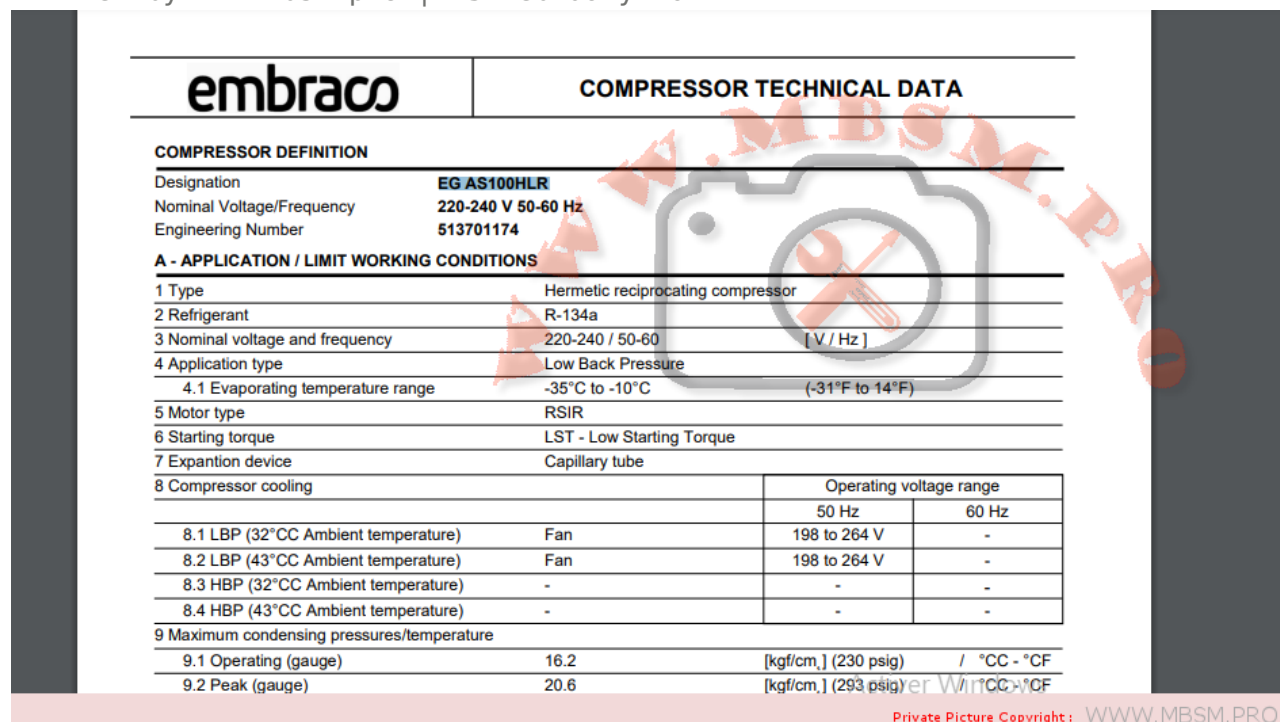

embraco		COMPRESSOR TECHNICAL DATA	
COMPRESSOR DEFINITION			
Designation	EG AS100HLR		
Nominal Voltage/Frequency	220-240 V 50-60 Hz		
Engineering Number	513701174		
A - APPLICATION / LIMIT WORKING CONDITIONS			
1 Type	Hermetic reciprocating compressor		
2 Refrigerant	R-134a		
3 Nominal voltage and frequency	220-240 / 50-60		[V / Hz]
4 Application type	Low Back Pressure		
4.1 Evaporating temperature range	-35°C to -10°C		(-31°F to 14°F)
5 Motor type	RSIR		
6 Starting torque	LST - Low Starting Torque		
7 Expansion device	Capillary tube		
8 Compressor cooling	Operating voltage range		
		50 Hz	60 Hz
8.1 LBP (32°C Ambient temperature)	Fan	198 to 264 V	-
8.2 LBP (43°C Ambient temperature)	Fan	198 to 264 V	-
8.3 HBP (32°C Ambient temperature)	-	-	-
8.4 HBP (43°C Ambient temperature)	-	-	-
9 Maximum condensing pressures/temperature			
9.1 Operating (gauge)	16.2	[kgf/cm.] (230 psig)	/ °CC - °CF
9.2 Peak (gauge)	20.6	[kgf/cm.] (293 psig)	per WirtCC°°CF

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, PDF, File, Embraco, Catalogue, r134a, Embraco Condensing Units

Category: Files

written by www.mbsm.pro | 23 February 2022

Embraco Condensing Units															
Unit Model	Motor Type	Expan. Device	Motor HP	Performance (Watts)							HRP Code	Sales Cat			
				-25°C	-20°C	-15°C	-10°C	-5°C	0°C	5°C			10°C	15°C	
R134a MHBP															
UEMT6144Z	CSIR	CV	1/5	-	-	249	308	375	451	533	-	-	208162	20A	
UEMT6160Z	CSIR	CV	1/6	-	-	335	411	499	597	706	-	-	208164	20A	
UEMT6170Z	CSIR	CV	1/4	-	-	359	443	539	646	764	-	-	208166	20A	
UNEK6187Z	CSIR	CV	1/4	-	-	405	503	616	744	887	-	-	208168	20A	
UNEK6210Z	CSIR	CV	1/3	-	-	430	564	789	929	1065	-	-	208170	20A	
UNEK6212Z	CSIR	CV	1/2	-	-	640	800	975	1157	1354	-	-	208172	20A	
UNTE215Z	CSIR	CV	1/2	-	-	705	816	1003	1188	1362	-	-	208180	20A	
UNEK6214Z	CSIR	CV	1/2	-	-	658	826	1004	1192	1395	-	-	208174	20A	
UNTE220Z	CSIR	CV	2/3	-	-	843	1050	1281	1541	1828	-	-	208184	20A	
UNJ6220Z	CSIR	CV	3/4	-	-	994	1256	1529	1843	2154	-	-	207861	20A	
UNTE217Z	CSIR	CV	3/4	-	-	993	1275	1555	1861	2178	-	-	208182	20A	
UNJ6226Z	CSIR	CV	1	-	-	1372	1686	2035	2419	2814	-	-	207888	20A	
R404A MHBP															
UEMT6144GK	CSIR	CV	1/4	-	-	277	338	400	470	543	615	-	-	208186	20A
UEMT6162GK	CSIR	CV	1/4	-	-	301	368	435	504	574	644	-	-	208188	20A
UEMT6165GK	CSIR	CV	1/3	-	-	360	445	525	626	729	815	-	-	208190	20A
UNEK6181GK	CSIR	CV	1/2	-	-	427	530	644	767	900	1040	-	-	208192	20A
UNEK6210GK	CSIR	CV	1/3	-	-	581	670	665	886	1032	1228	-	-	208194	20A
UNEK6213GK	CSIR	CV	1/2	-	-	734	904	1064	1213	1352	1468	-	-	208196	20A
UNEK6217GK	CSIR	CV	1/2	-	-	741	960	1180	1406	1640	1880	-	-	208198	20A
UNTE220GK	CSIR	CV	3/4	-	-	793	1024	1262	1505	1754	2009	-	-	208204	20A
UNTE222GK	CSIR	CV	3/4	-	-	TBA	TBA	TBA	TBA	TBA	TBA	-	-	208206	20A
UNTE226GK	CSIR	CV	1	-	-	1266	1668	1878	2198	2526	2864	-	-	208202	20A
UNJ6226GK	CSIR	CV	1	-	-	1206	1523	1822	2094	2364	2616	-	-	208140	20A
UNJ6226GS	3ph	CV	1	-	-	1206	1523	1822	2094	2364	2616	-	-	208200	20A
UNJ6232GK	CSIR	CV	1-1/4	-	-	1467	1855	2219	2550	2879	3186	-	-	208145	20A
UNJ6232GS	3ph	CV	1-1/4	-	-	1467	1855	2219	2550	2879	3186	-	-	208150	20A
UNJ6238GK	CSIR	CV	1-1/2	-	-	1817	2297	2748	3157	3565	3963	-	-	208155	20A

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, PDF, File, Embraco, Catalogue, r134a, Embraco Condensing Units

Mbsm.pro, PDF, File, Cubigel Katalog, r134a, Huayi, Electrolux, ZEM

Category: Files

written by www.mbsm.pro | 23 February 2022

R134a HMBP HBP 50 Hz										R134a compressors compatible with R12										
MODEL	DISPLACEMENT cm ³	POWER hp	APPLICATION	COP COOLING	VOLTAGE FREQUENCY	MOTOR	STARTING	EXPANSION	REFRIGERATION CAPACITY °C										WEIGHT Kg	DESIGN
									COP in W/W 1 W = 0,864 kcal/h = 3,415 BTU/h Evaporating Temperature °C											
									Cecomaf (W)					Ashrae						
									-25	-15	5	10	15	20	25	30	35	40		
GLY45RAa	4.56	1/6	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	71	139	373	1,85	452	385	2,25	9	Lb			
GLY45RAb	4.56	1/6	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	71	159	373	2,12	452	385	2,45	9	Lb			
GLY60RAa	5.98	1/5	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	106	191	486	2,08	506	500	2,36	9,9	Lc			
GLY60RAb	5.98	1/5	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	106	191	486	2,25	506	500	2,60	9,9	Lc			
GLY80RAa	8.10	1/5	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	159	275	681	2,17	819	700	2,50	10,4	Lc			
GLY80RAb	8.10	1/5	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	159	275	681	2,35	819	700	2,71	10,4	Lc			
GLY90RAa	9.09	1/4	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	169	299	748	2,08	901	770	2,37	10,5	Lc			
GLY90RAb	9.09	1/4	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	169	299	748	2,27	901	770	2,61	10,5	Lc			
GLY99RAa (**)	9.95	3/8	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	189	328	814	2,01	972	836	2,31	10,8	Ld			
GLY99RAb (**)	9.95	3/8	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	189	328	814	2,18	972	836	2,49	10,8	Ld			
GPY12RAa	12.10	3/8	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	228	401	993	2,05	1192	1020	2,35	12,6	Pd			
GPY12RAb	12.10	3/8	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	228	401	993	2,24	1192	1020	2,58	12,6	Pd			
GPY14RAa	14.32	3/8	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	296	492	1161	1,98	1386	1190	2,27	12,6	Pd			
GPY14RAb	14.32	3/8	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	296	492	1161	2,18	1386	1190	2,50	12,6	Pd			
GPY16RAa	16.15	3/8	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	315	522	1248	2,20	1490	1351	2,31	12,8	Pd			
GPY16RAb	16.15	3/8	HMBP	F	220-240V 50Hz ~1	CSIR	R	C-V	315	522	1248	2,38	1490	1351	2,50	12,8	Pd			

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, PDF, File, Cubigel Katalog, r134a, Huayi, Electrolux, ZEM

Mbsm.pro, Baxi radiators aluminum, File, pdf , the best in Algeria

Category: Files

written by www.mbsm.pro | 23 February 2022



Copyright : WWW.MBSM.PRO

The best thank you in Algeria
Mbsm.pro, Baxi radiators aluminum, File, pdf , the best in Algeria

Mbsm_dot_pro_private_PDF_Mbsm.pro-Baxi-radiators-aluminum-File-pdf-the-best-in-AlgeriaTélécharger



Copyright: WWW.MBSM.PRO

Mbsm.pro, Pdf, Book, Catalog, Electrolux, Compressor, r12, R22

Category: Files
 written by www.mbsm.pro | 23 February 2022

Model / Modèle / Modelo	Power / Puissance / Leistung / Potenza	Refrigerating capacity / Capacité frigorifique / Kälteleistung / Producción frigorífica / CCF in MW / $1 \text{ W} = 0.864 \text{ kcal/h} = 3.413 \text{ Btu/h}$	Displacement / Déplacement / Volumen / Cilindrada	Evaporating temp. / Temp. de evaporación / Verdampfungstemp. / Temp. d'évaporation	Expansion / Expansion / Expansión / Espansione	Oil / Aceite / Öl / Olio	Weight / Peso / Gewicht / Pesa	Motor / Motor / Motor / Motor	Starting / Arranque / Anlauf / Demarage						
										CECOMAF (W)	ASHRAE				
HMBP															
R22		CECOMAF (W)				ASHRAE		R22							
50 Hz		-20 -15 0 10				7.3		50 Hz							
		W COP				bath COP									
220-240V 50Hz -1															
L40TNa	1.6	F	4.04	149	194	458	3.88	544	460	1.91	C	300	9.5	PSR	P
L40TNb	1.6	F	4.04	149	194	458	3.88	544	460	1.91	CV	300	9.5	CSR	R
L45TN	1.5	F	4.50	156	206	497	3.68	592	500	1.91	CV	300	9.5	CSR	R
LS7TNa	1.5	F	5.67	194	255	612	3.72	728	615	1.93	C	300	9.5	PSR	P
LS7TNb	1.5	F	5.67	194	255	612	3.72	728	615	1.93	CV	300	9.5	CSR	R
L75TN	3.9	F	7.57	268	347	816	3.72	871	800	1.95	CV	470	10.0	CSR	R
L88TN	3.8	F	8.85	322	414	975	3.74	1161	960	1.97	CV	400	10.6	CSR	R
P10TN	3.7	F	10.78	394	509	1194	3.63	1421	1200	2.1	CV	400	13.3	CSR	R
P12TN	1.2	F	12.00	412	537	1312	3.00	1574	1323	2.36	CV	400	12.3	CSR	R
R18TN	3.9	F	18.10	554	755	2022	2.16	2454	2050	2.46	CV	640	20.3	CSR	R
S18TN	3.9	F	18.10	554	755	2022	2.16	2454	2050	2.46	CV	640	21.8	CSR	R

Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF-Electrolux-Compressor-r12-R22-1ph-1Télécharger

Mbsm.pro, book, catalog compressor ZEL pdf

Category: compressor,Files
 written by www.mbsm.pro | 23 February 2022



孔贤西电气机械天津压缩机有限公司
 中国天津滨海新区(空港保税B区)1号
 电话: +86 22 84881088
 传真: +86 22 84881087
 邮箱: info@zcl.com

ZANUSSI ELETTROMECCANICA COMPRESSOR TIANJIN CO., LTD
 ADDRESS: 1613 GAOJIAO ROAD, TIANJIN FREE TRADE ZONE
 (AIRPORT INDUSTRIAL PARK), TIANJIN CITY, P.R. CHINA
 ZIP CODE: 300308
 PHONE: +86 22 84881088
 FAX: +86 22 84881087

GENERAL CATALOGUE ZEL COMPRESSORS COMPRESSORS

R600a - R134a
 All solutions inside.



Private Picture Copyright : WWW.MBSM.PRO

ZEL

Copyright : WWW.MBSM.PRO

		cc	hp		hz	w	w	w	w/w	w/w	µF	mm	kg
220-240V/50Hz													
普效系列 Standard Efficiency Range													
HML140A	Al	8.0	1/8	RSIR/RSCR	50	140	96	90	1.46	1.56	3	152	6.3
中效系列 Medium Efficiency Range													
HDL100A	Al	5.7	1/10	RSIR/RSCR	50	98	65	60	1.50	1.64	2.5	161	6.9
HDL125A	Al	7.0	1/10	RSIR/RSCR	50	125	77	71	1.62	1.75	2.5	164	7.2
HDL140A	Al	8.0	1/8	RSIR/RSCR	50	140	86	80	1.63	1.76	2.5	164	7.2
高效系列 High Efficiency Range													
HXL100A	Cu	5.7	1/15	RSCR	50	98		52		1.88	2	161	7.3
HXL125A	Cu	7.0	1/10	RSCR	50	125		65		1.91	2	161	7.3
HXL140A	Cu	8.0	1/10	RSCR	50	140		73		1.91	2	161	7.3
HXL170A*	Cu	9.3	1/8	RSCR	50	170		89		1.91	2	161	7.3
超高效系列 Top Efficiency Range													
HPL100A*	Cu	5.7	1/14	CSCR	50	100		50		2.00	2	161	7.3
HPL125A*	Cu	7.0	1/12	CSCR	50	125		63		2.00	2	161	7.3
HPL140A*	Cu	8.0	1/10	CSCR	50	140		70		2.00	2	161	7.3

220-240V/60Hz

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_catalogo-compresores-ZEL-pdf-2Télécharger

Types of Electrical Motors, RSIR, CSIR, RSCR, CSR, PTC, NTC, LST, HST, MBP, HBP, LBP

Category: compressor, Files

written by www.mbsm.pro | 23 February 2022

Types of Electrical Motors

RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start up. Standard energy efficiency.

CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor. Auxiliary winding is disconnected after start up. Standard efficiency.

RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up. Used for high efficiency in small capacity compressors (particularly in household refrigeration)

CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running). Auxiliary winding remains connected after start up. Used for high efficiency in small compressors and for size reduced size motors in compressors with comparatively large displacements.



Private Picture Copyright : WWW.MBSM.PRO

Types of Electrical Motors

RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start up. Standard energy efficiency.

CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor.

Auxiliary winding is disconnected after start up. Standard efficiency.

RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up.

Used for high efficiency in small capacity compressors (particularly in household refrigeration)

CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running).

Auxiliary winding remains connected after start up.

Used for high efficiency in small compressors and for size reduced size motors in compressors with comparatively large displacements

Types of Electrical Motors

RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start up. Standard energy efficiency.

CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor. Auxiliary winding is disconnected after start up. Standard efficiency.

RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up. Used for high efficiency in small capacity compressors (particularly in household refrigeration)

CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running). Auxiliary winding remains connected after start up. Used for high efficiency in small compressors and for size reduced size motors in compressors with comparatively large displacements.



Private Picture Copyright : WWW.MBSM.PRO

Type of starting device

Current relay – (electromechanical). RSIR/CSIR motors and CSR low/medium-power motors with NTC (the NTC is connected in series with the starting capacitor and the main purpose is to reduce the current peaks in the relay contacts)

Potential relay – (electromechanical). CSR high-power motors.

PTC – (Positive Temperature Coefficient), the resistance increases with the temperature. Device only with RSIR or RSCR motors in the (Small L, B), L and P ranges.

NTC – (Negative Temperature Coefficient), the resistance decreases with the temperature. Used in some CSR in order to reduce dimensions and components.

Type of starting device

Current relay – (electromechanical). RSIR/CSIR motors and CSR low/medium-power motors with NTC (the NTC is connected in series with the starting capacitor and the main purpose is to reduce the current peaks in the relay contacts)

Potential relay – (electromechanical). CSR high-power motors.

PTC – (Positive Temperature Coefficient), the resistance increases with the temperature. Device only with RSIR or RSCR motors in the (Small L, B), L and P ranges.

NTC – (Negative Temperature Coefficient), the resistance decreases with the temperature. Used in some CSR in order to reduce dimensions and components.



Private Picture Copyright : WWW.MBSM.PRO

Type of torque

LST – Low Starting Torque – Systems with capillary tube or balanced pressures at start up.

HST – High Starting Torque – Systems with expansion valve or capillary tube, with unbalanced pressures at start up.


Type of torque

LST – Low Starting Torque – Systems with capillary tube or balanced pressures at start up.

HST – High Starting Torque – Systems with expansion valve or capillary tube, with unbalanced pressures at start up.




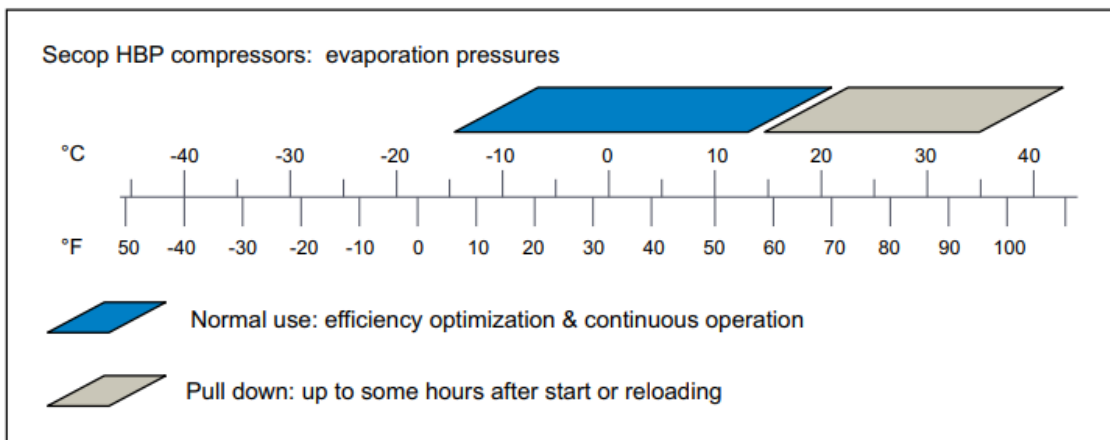


Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

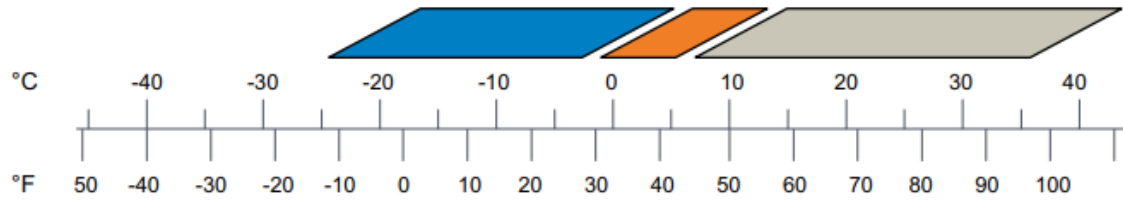Secop MBP compressors: evaporation pressures







-  Normal use: efficiency optimization & continuous operation
-  High load: continuous operation
-  Pull down: up to some hours after start or reloading



Private Picture Copyright : WWW.MBSM.PRO

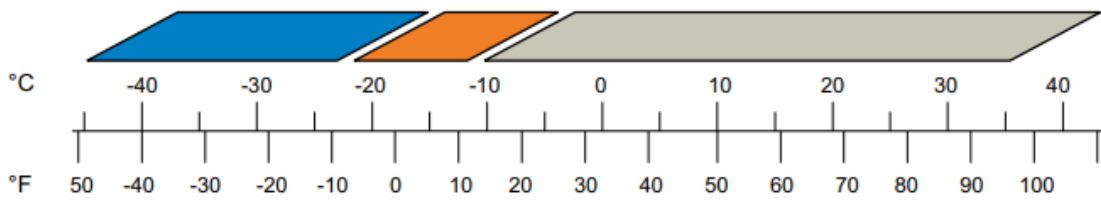Secop LBP compressors: evaporation pressures



-  Normal use: efficiency optimization & continuous operation
-  High load: continuous operation
-  Pull down: short time operation (<60min.) after start or defrost



Private Picture Copyright : WWW.MBSM.PRO

Catalogue, DANFOSS, All Compressor, PDF Catalogs, Documentation

Category: compressor,Files

written by www.mbsm.pro | 23 February 2022



Private Picture Copyright : WWW.MBSM.PRO

Catalogue, DANFOSS, All Compressor, PDF Catalogs, Documentation

[Mbsm_dot_pro_private_PDF_DANFOSS-FRCC.PK_.046.A1.02Télécharger](#)

[Mbsm_dot_pro_private_PDF_Danfoss_scroll_compressors_HXX_R410ATélécharger](#)

[Mbsm_dot_pro_private_PDF_DANFOSS-1Télécharger](#)

[Mbsm_dot_pro_private_PDF_DANFOSSTélécharger](#)



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, PDF, CONGELATEUR, No-Frost, ENIM, ALGERIE, REFREGERATEUR, FR 4506, FR 4506 K, FR-4506K, Classe N

Category: Files

written by www.mbsm.pro | 23 February 2022



Picture Copyright : WWW.MBSM.PRO



Picture Copyright : WWW.MBSM.PRO

[Mbsm_dot_pro_private_PDF_HPL23YH-5-3Télécharger](#)

[Mbsm_dot_pro_private_PDF_HPL23YH-5-Télécharger](#)