Mbsm.pro, QA57C12GAX5 , 1PH , 1/6 HP ,Panasonic ,Matsushita Electric, Company, Malaysia , R134a , 220/240V 50Hz

Category: Solutions,Tester ok
written by Jamila | 8 October 2018



Mbsm.pro, QA57C12GAX5 , 1PH , 1/6 HP ,Panasonic ,Matsushita Electric, Company, Malaysia , R134a , 220/240V 50Hz



Mbsm.pro , L76AV ,Compresseur, 1/5 HP ,149W, R12 ,E80101 ,Zem ,HMBP ,Hermetic piston compressors , 220V/50 , 1PH(phase)

Category: Solutions,Tester ok
written by Jamila | 8 October 2018



Mbsm.pro , L76AV ,Compresseur, 1/5 HP ,149W, R12 ,E80101 ,Zem ,HMBP ,Hermetic piston compressors , 220V/50 , 1PH(phase)

MBSM.PRO , HYE69YL ,Compressor (LBP) , China R134a ,Huayi Compressor Co., Ltd, 69 YL ,1/4 Hp ,168Kcal , 220V

Category: Solutions,Tester ok
written by Jamila | 8 October 2018



MBSM.PRO , HYE69YL ,Compressor (LBP) , China R134a ,Huayi Compressor Co., Ltd, 69 YL ,1/4 Hp ,168Kcal , 220V

Test conditions	According to ASHRAE
Evaporating temperature	-23.3□
Condensing temperature	54.4□
Subcooling temperature	32.2□
Suction temperature	32.2□
Ambient temperature	32.2□
Working condition limit:R134a	
Max ambient temperature	43[□]
Evaporation temperature range	-35~-15[□]
Working voltage range.	187~254/98~127[V]
Max discharge pressure	2.0[Mpa](gauge pressure)
Max allowable housing temperature	95[□]
Max discharge temperature	125[□]
Max pressure housing endured	2.7[Mpa](gauge pressure)
Low voltage start	0.4/0.4Mpa(gauge pressure)187V/98V

Product model:HYE69YL
Cooling capacity:195W
COP□W/W□:1.15
Voltage□V□:220-240~
Frequency(Hz):50



PictureS Mbsm Dot Pro : www.mbsm.pro

- Products
- R134a Compressor (LBP)
  - HYE Serie
  - HY Serie
  - HYB Serie
  - HYS Serie
- R600a Compressor (LBP)
  - HYE Serie
  - HY Serie
  - HYB Serie
  - HYS Serie
- R134a Compressor (MBP,HBP)
  - HY Serie
  - HYE Serie
- Newest Catalog Download

www.mbsm.pro



Product model:HYE69YL
Cooling capacity:195W
COP（W/W）:1.15
Voltage（V）:220-240~
Frequency(Hz):50

Test conditions	According to ASHRAE
Evaporating temperature	-23.3℃
Condensing temperature	54.4℃
Subcooling temperature	32.2℃
Suction temperature	32.2℃
Ambient temperature	32.2℃
Working condition limit:R134a	
Max ambient temperature	43[℃]
Evaporation temperature range	-35~-15[℃]
Working voltage range.	187~254/98~127[V]
Max discharge pressure	2.0[Mpa](gauge pressure)
Max allowable housing temperature	95[℃]
Max discharge temperature	125[℃]
Max pressure housing endured	2.7[Mpa](gauge pressure)
Low voltage start	0.4\0.4Mpa(gauge pressure)187V/98V

PictureS Mbsm Dot Pro : www.mbsm.pro



AE 1330 Y

1 / 12 HP



AE 1340 Y

1 / 6 HP



AE 1350 Y

1 / 6 HP

www.mbsm.pro



AE 1360 Y

1 / 5 HP



AE 1370 Y

1 / 4 HP



AE 1390 Y

1 / 4 HP

PictureS Mbsm Dot Pro : www.mbsm.pro



HY 81 Y

1 / 4 HP



HYE 55 YL 63

1 / 6 HP



HYE 60 YL 63

1 / 5 HP



HYE 69 YL

1 / 4 HP



HYE 125 MSU

1 / 4 HP

www.mbsm.pro

PictureS Mbsm Dot Pro : www.mbsm.pro

Huayi HYE 69 YL 1/4 Hp 168Kcal R134a 220V

Huayi - Huayi

Huayi HYE 55 YL 63 1/6 Hp 129Kcal R134a 220V

Huayi - Huayi

Huayi HYE 60 YL 63 1/5 Hp 146Kcal R134a 220V

Huayi - Huayi

Huavi HY 81 Y 1/4+ Hp 202Kcal R134a 220V

PictureS Mbsm Dot Pro : www.mbsm.pro

HYE 125 MSU

HYE 69 YL

HYE 60 YL 63

HYE 55 YL 63

HY 81 Y

AE 1390 Y

AE 1370 Y

AE 1360 Y

AE 1350 Y

AE 1340 Y

AE 1330 Y

PictureS Mbsm Dot Pro : www.mbsm.pro



Private Picture Copyright : WWW.MBSM.PRO



Mbsm.pro , COMPRESSOR TECUMSEH, CAJ4511Y, R134a, HMBP(HBP – High Back Pressure),1 HP, 1PH, 220-240 VOLTS , High Start Torque (HST) ,

Category: Solutions,Tester ok
written by Jamila | 8 October 2018



Mbsm.pro , COMPRESSOR TECUMSEH,

L’unite hermetique Compressor

CAJ4511Y, R134a, HMBP(HBP – High Back Pressure),1 HP, 1PH, 220-240 VOLTS , High Start Torque (HST)
Condensateur Perm./ Run capacitor : 15 µF / 400 V

Données techniques

- Modèle: **CAJ4511Y**
- Gaz: **R-134a**
- Température/Pression: **Haute Pression**
- Puissance: **1 HP**
- Voltage: **230 V**
- Type De Courant: **Monophasé**
- Fréquence: **50 Hz**
- Type De Compresseur: **Hermétique**
- Décalage: **32.7 cm³**
- Cons.Énergie -5ºC: **920 W**
- Cons.Énergie 0ºC: **1030 W**
- Cons.Énergie +5ºC: **1140 W**
- Cons.Énergie +10ºC: **1250 W**
- T° De Condensation: **55 °C**
- Capacidad Frigorífica -5°C: **1376 Kcal/h**
- Capacidad Frigorífica 0°C: **1737 Kcal/h**
- Capacidad Frigorífica 5°C: **2150 Kcal/h**
- Capacidad Frigorífica 7.2°C: **2347 Kcal/h**
- Capacidad Frigorífica 10°C: **2614 Kcal/h**
- Tipo Test: **EN.12900**





Mbsm.pro, ZEL GTM93AG, 1/3 Hp , Compressor for wine coolers

,200-220V/50Hz 220-230V/60Hz, R134A

Category: Solutions,Tester ok
written by Jamila | 8 October 2018



Mbsm.pro, ZEL GTM93AG, 1/3 Hp , Compressor for wine coolers ,200-220V/50Hz 220-230V/60Hz, R134A





Place of Origin: China

Product Description


Product Description

ZEL GTM93AG Compressor for wine coolers 200-220V/50Hz 220-230V/60Hz R134A
Specifications
Refrigeration Compressor
Refrigerator, freezer, drinking fountains and home ice cream,
Refrigeration Compressor
Application: Refrigerator, freezer, drinking fountains and home ice cream, ice-making machines and other products
Production Standard: CCC, DVE, RoHS, UL certificate
Packing: Carton
Household Applications
– Freezers
– Refrigerators
– Wine Coolers
Commercial Applications
– Horzontal Freezers
– Merchandisers
– Equipment for professional kitchens
– Dispenser
– Water Coolers
– Wine Coolers
– Ice makers
– Vending Machines
– Minibar
They are the best selling high-tech compressors sold in the world. They are ideal for domestic refrigeration and also for small commercial applications.

They are small, have low noise and vibration levels, they achieve the highest levels of efficiency available in the market for this category.
For more details of the refrigeration compressor, please contact us.

Model	Displacement	Height	Motor	Type	Cooling capacity	COP	Power Supply
	cm3	MM			W	W/W	V/Hz
GTM93AG	9.3	183	CSIR		248	1.15	200-220/50
		183	CSIR		290	1.30	220-230/60

Related Keywords
Compressor Wine Coolers , Coolers For Wine Bottles , Air Compressor For Engineerin
China Compressor Wine Coolers , China Coolers For Wine Bottles , China Air Compressor For Engineerin

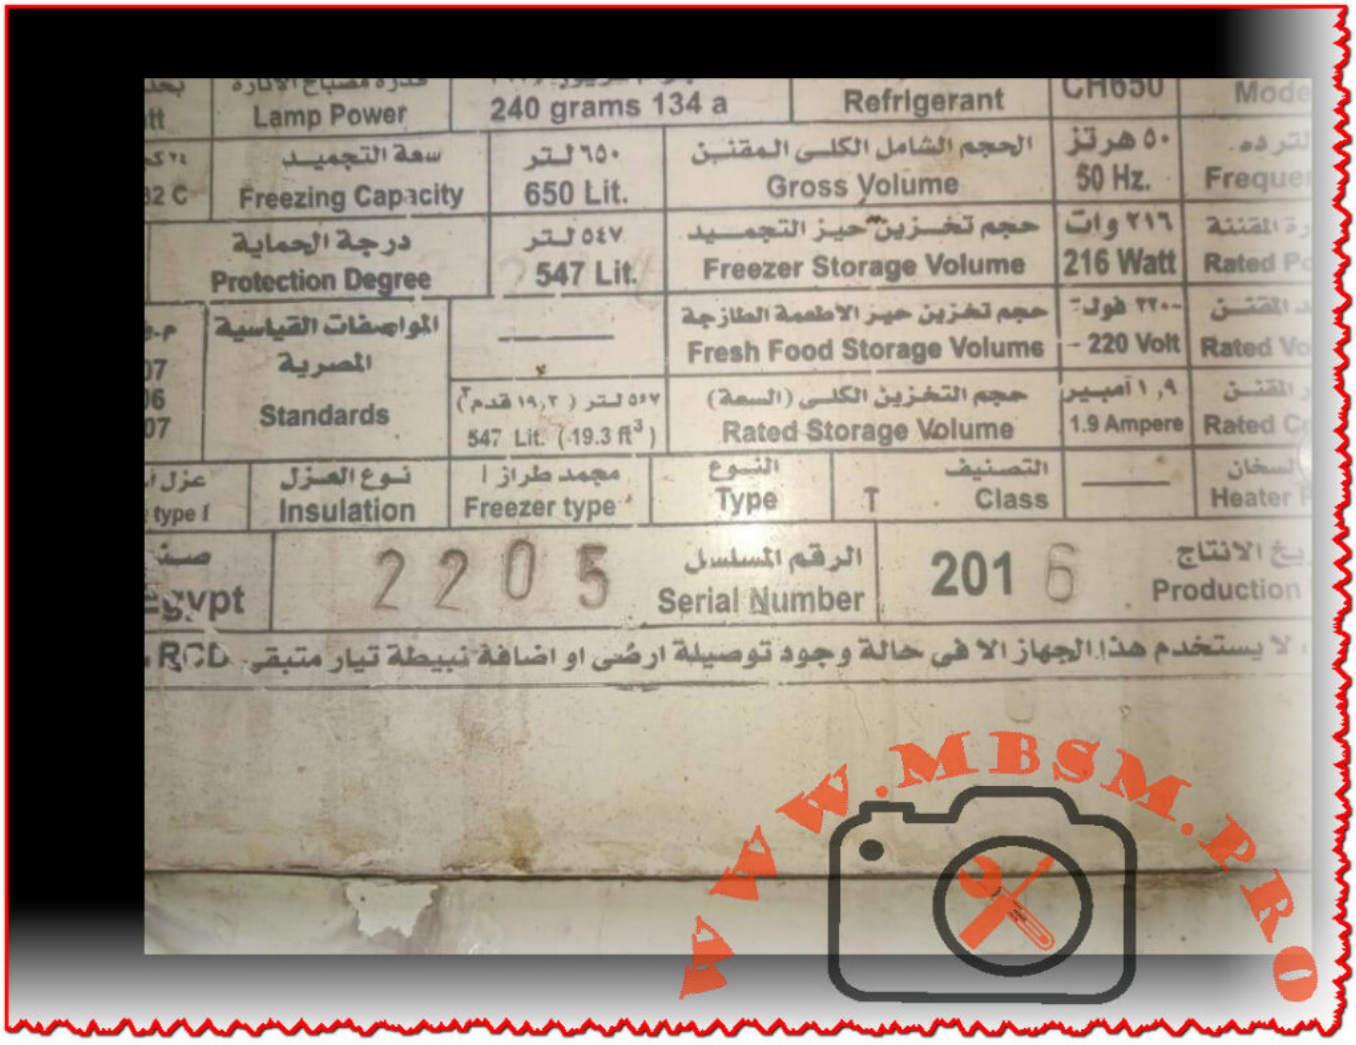

Mbsm.pro , Compressor ACC ,Cubigel Huayi, Electrolux ZEM, GP12TG, HMBP-R134a, 220-230V ,50/60Hz, 3.8 HP

Category: Solutions,Tester ok
written by Jamila | 8 October 2018



Mbsm.pro , Compressor ACC ,Cubigel Huayi, Electrolux ZEM, GP12TG, HMBP-R134a, 220-230V ,50/60Hz, 3.8 HP



PictureS Mbsm Dot Pro : www.mbsm.pro

TECHNICAL DATA SHEET

GP12TG VE01
200-220/220-230V 50/60Hz ~1

COMPRESSOR	
Displacement (cm3)	12
Diameter (mm)	29.37
Stroke (mm)	17.8
Net Weight (Kg)	11.2
Oil type	ISO VG 22 ESTER
Oil charge (cm3)	400

MOTOR	
Approximate Power (CV)	3/8
Voltage/Frequency (V/Hz)	200V 50Hz
Voltage range (V)	170-242
Code	61.575
Type	CSIR
Phase number	1 PH
Locked rotor current (A)	16.0
Main W. resist. at 25°C (Ω)	4.59
Start W. resist. at 25°C (Ω)	16.52

APPLICATION	
Application	High/Mid. back pressure
Refrigerant	R134a
Evaporating (°C)	-25 to 10
Expansion	Capillar/Valve
Comp. cooling	Fan cooled
Max. ambient temp. (°C)	43

NOMINAL PERFORMANCE	CYCLE C	CYCLE D
Cooling capacity (kcal/h)	768	920
Input power (W)	505	530
EER (kcal/Wh)	1.52	1.73
COP (W/W)	1.76	2.01
Current (A)	3.29	3.39
TEST CONDITIONS		
Evaporating temp. (°C)	5.0	7.2
Condensing temp. (°C)	55.0	55.0
Liq.t. entering expan. (°C)	55.0	46.0
Ambient t. and return (°C)	32.0	35.0
Tens/Freq (V/Hz)	200V 50Hz	200V 50Hz


www.mbsm.pro

ELECTRICAL COMPONENTS	
Relay	2014 149.
Pick-Up (A)	7.80


PictureS Mbsm Dot Pro : www.mbsm.pro

ELECTRICAL COMPONENTS		
Relay	2014 149.	
Pick-Up (A)	7,80	
Drop-Out (A)	6,65	
Protector	MRT20APK	T0188
Current (A)	13.2	12.3
Time check (seg)	7.5-14	7.5-14
Disc temp. (Open/Close) (°C)	105.0 / 61.0	115.0 / 61.0
Starting capacitor (µF/V)F/V)	47- 56 / 330	

DIMENSIONS AND ELECTRICAL DIAGRAM

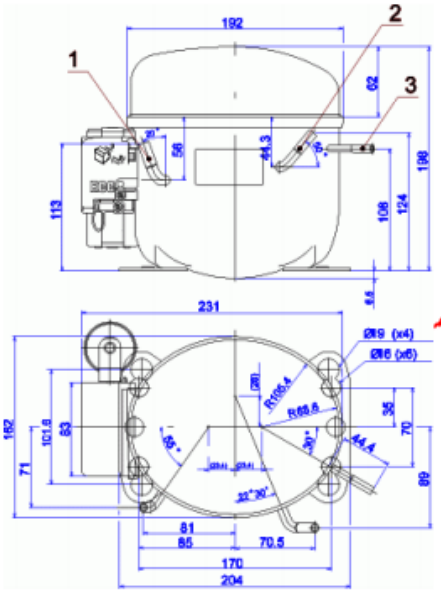

	DESIGNATION	INTERNAL DIAM. (MM)
1	Suction/Service	8,1
2	Service/Suction	8.1
3	Discharge	6.5



www.mbsm.pro

PictureS Mbsm Dot Pro : www.mbsm.pro

MBSM.PRO , Compressor, Electrolux-Zem GL60AA R134A ,1/6 HP , 1PH , 220-240 V 50 Hz

Category: Solutions,Tester ok
written by Jamila | 8 October 2018



MBSM.PRO , Compressor, Electrolux-Zem GL60AA R134A ,1/6 HP , 1PH , 220-240 V 50 Hz



- Puissance en cheval 1/6 CV
- Cylindrée 5.99 cm³
- 220-240 V 50 Hz
- Gaz R134a LBP
- Température d’utilisation max. 32°C
- Avec boitier et système de démarrage

La photo montre l’aspect du compresseur, pas son étiquette réelle

Codes fabricants

- ACC-GL60AA
- ACC-GL60AB
- ACC-GL60AH
- CUBIGEL-GL60AA
- CUBIGEL-GL60AB
- CUBIGEL-GL60AH
- MONDIAL ELITE-4106004
- MONDIAL ELITE-1147031
- Embraco Aspera- B1112Z



PictureS Mbsm Dot Pro : www.mbsm.pro





Mbsm_dot_pro_private_PDF_GL60AATélécharger
Mbsm_dot_pro_private_PDF_-GL60AATélécharger



Private Picture Copyright : WWW.MBSM.PRO

Type: Hermetic piston compressorsProducer: ACCSeries: HMBP
Model: GL60AA
General data

Refrigerant:	R134a
Discharge element:	C
Cooling:	S
Maximum ambient temperature [ºC]:	43

Compressor’s data

Cylinder capacity [cm³]:	6
Displacement [m³/h]:	1
Weight [kg]:	9,1
Oil charge [cm³]:	265
Oil type:	ISO VG 19 ESTER

Engine’s data

Engine type:	RSIR
Power [KM]:	1/6
Starting element:	LST
Power supply:	220V 50Hz
Voltage range:	187-264
Locked rotor current [A]:	9,9
Running winding resistance (25ºC) [Ω]:	15,6
Starting winding resistance (25ºC) [Ω]:	21,31

Electrical data

Relays:	3003
Shielding element:	MRA38028, T0508, AF18FU
Starting capacitor volume [µF]:	

Connections

	milimeters	inches
Suction tube:	6,5	
Service tube:	6,5	
Discharge tube:	4,9	

Mbsm.pro , Qb73c15gax5 ,R134a , Refrigeration Compressor ,1/4 Hp, Panasonic compressor catalogue, QB series , 1Ph , 220V 50Hz

Category: Solutions,Tester ok
written by Jamila | 8 October 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Qb73c15gax5 ,R134a , Refrigeration Compressor ,1/4 Hp, Panasonic compressor catalogue, QB series , 1Ph , 220V 50Hz

Rated voltage / Frequency	Model	ASHRAE								Voltage range
		50Hz				60Hz				
		Capacity		COP - W/W		Capacity		COP – W/W		
		W	kcal/hr	RSIR	RSCR	W	kcal/hr	RSIR	RSCR	
220V 50Hz/60Hz	QB51C99GAX0	128	110	1.14	-	157	135	1.17	-	170V-250V 50Hz 187V-242V 60Hz
	QB57C11GAX0	146	126	1.18	-	175	151	1.22	-	
	QB66C16GAX0	165	142	1.20	-	200	172	1.27	-	
	QB77C18GAX0	202	174	1.21	-	224	193	1.27	-	
	QB91C24GAX0	236	203	1.19	-	255	219	1.22	-	
220V 50Hz	QB66C13GAX5	165	142	1.19	-					170V-250V
	QB73C15GAX5	185	159	1.19	-					
	QB77C16GAX5	202	174	1.22	-					
	QB91C19GAX5	236	203	1.25	-					

Rated voltage / Frequency	Model	ASHRAE								Voltage range
		50Hz				60Hz				
		Capacity		COP - W/W		Capacity		COP – W/W		
		W	kcal/hr	CSIR	RSCR	W	kcal/hr	CSIR	RSCR	
220V 50z/60Hz	QB110C25CAX0	273	235	1.18	-	279	240	1.19	-	170V-250V 50Hz 198V-242V 60Hz

www.mbsm.pro

PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro


Panasonic — Compressor R134a QB series

Performance DATA

Application & Refrigerant LBP R134a

Voltage	Model	Displacement cm^3	*2) Capacity (W) Evaporating temperature -30°C	-25°C	-23.3°C	-20°C	-15°C	*3) C.O.P. Run. capa. NO	YES	*4) Motor type	Compressor cooling *5) ST	OC	FC	Net weight kg ST/FC	OC	Oil charge cm^3 ST/FC	OC
*6) 100V 50/60Hz	QB57C88RA00	5.65	118	161	178	213	271	1.27	1.33	RSIR/RSCR	O	-	O	9.1	-	250	-
	QB66C12CA00	6.55	119	164	185	219	293	1.19	-	CSIR	-	-	O	8.8	-	250	-
	QB66C13RA00	6.55	133	182	200	239	304	1.28	1.37	RSIR/RSCR	O	-	O	9.4	-	280	-
	QB86C18TA00	8.56	170	226	248	295	376	-	1.35	CSCR	-	-	O	9.9	-	280	-
	QB91C18CA00	9.07	163	226	251	303	394	-	1.21	CSIR	-	-	O	9.6	-	250	-
220V 50Hz	QB66C13GAX5	6.55	108	149	165	200	263	1.23	-	RSIR	O	-	-	9.2	-	250	-
	QB73C15GAX5	7.27	121	167	185	224	294	1.23	-	RSIR	O	O	-	9.7	9.9	250	300
	QB77C16GAX5	7.69	131	182	202	245	319	1.26	-	RSIR	O	O	-	9.8	10.0	250	300
	QB86C18GAX5	8.56	145	200	222	268	347	1.26	-	RSIR	O	O	O	9.9	10.1	250	300
	QB91C19GAX5	9.07	154	213	236	285	372	1.29	-	RSIR	-	O	O	10.2	10.5	250	300
	QB110C25GAX5	10.86	176	246	273	331	432	1.18	-	RSIR	-	O	O	10.4	10.6	250	300
*4) 220-240V 50Hz	QB51C74GAW5	5.10	84	116	128	153	196	1.21	-	RSIR	O	-	-	9.7		250	-
	QB57C87GAW5	5.65	97	132	146	175	225	1.23	-	RSIR	O	-	-				-
	QB66C97GAW5	6.55	108	149	165	200	263	1.25	-	RSIR	O	O					
	QB73C12GAW5	7.27	121	167	185	224	294	1.26	-	RSIR	O						
	QB77C13GAW5	7.69	131	182	202	245	319	1.27	-	RSIR	O						
	QB86C13GAW5	8.56	145	200	222	268	347	1.27	-	RSIR							
	QB91C16GAW5	9.07	154	213	236	285	372	1.28	-	RSIR							

www.mbsm.pro
PictureS Mbsm Dot Pro : www.mbsm.pro

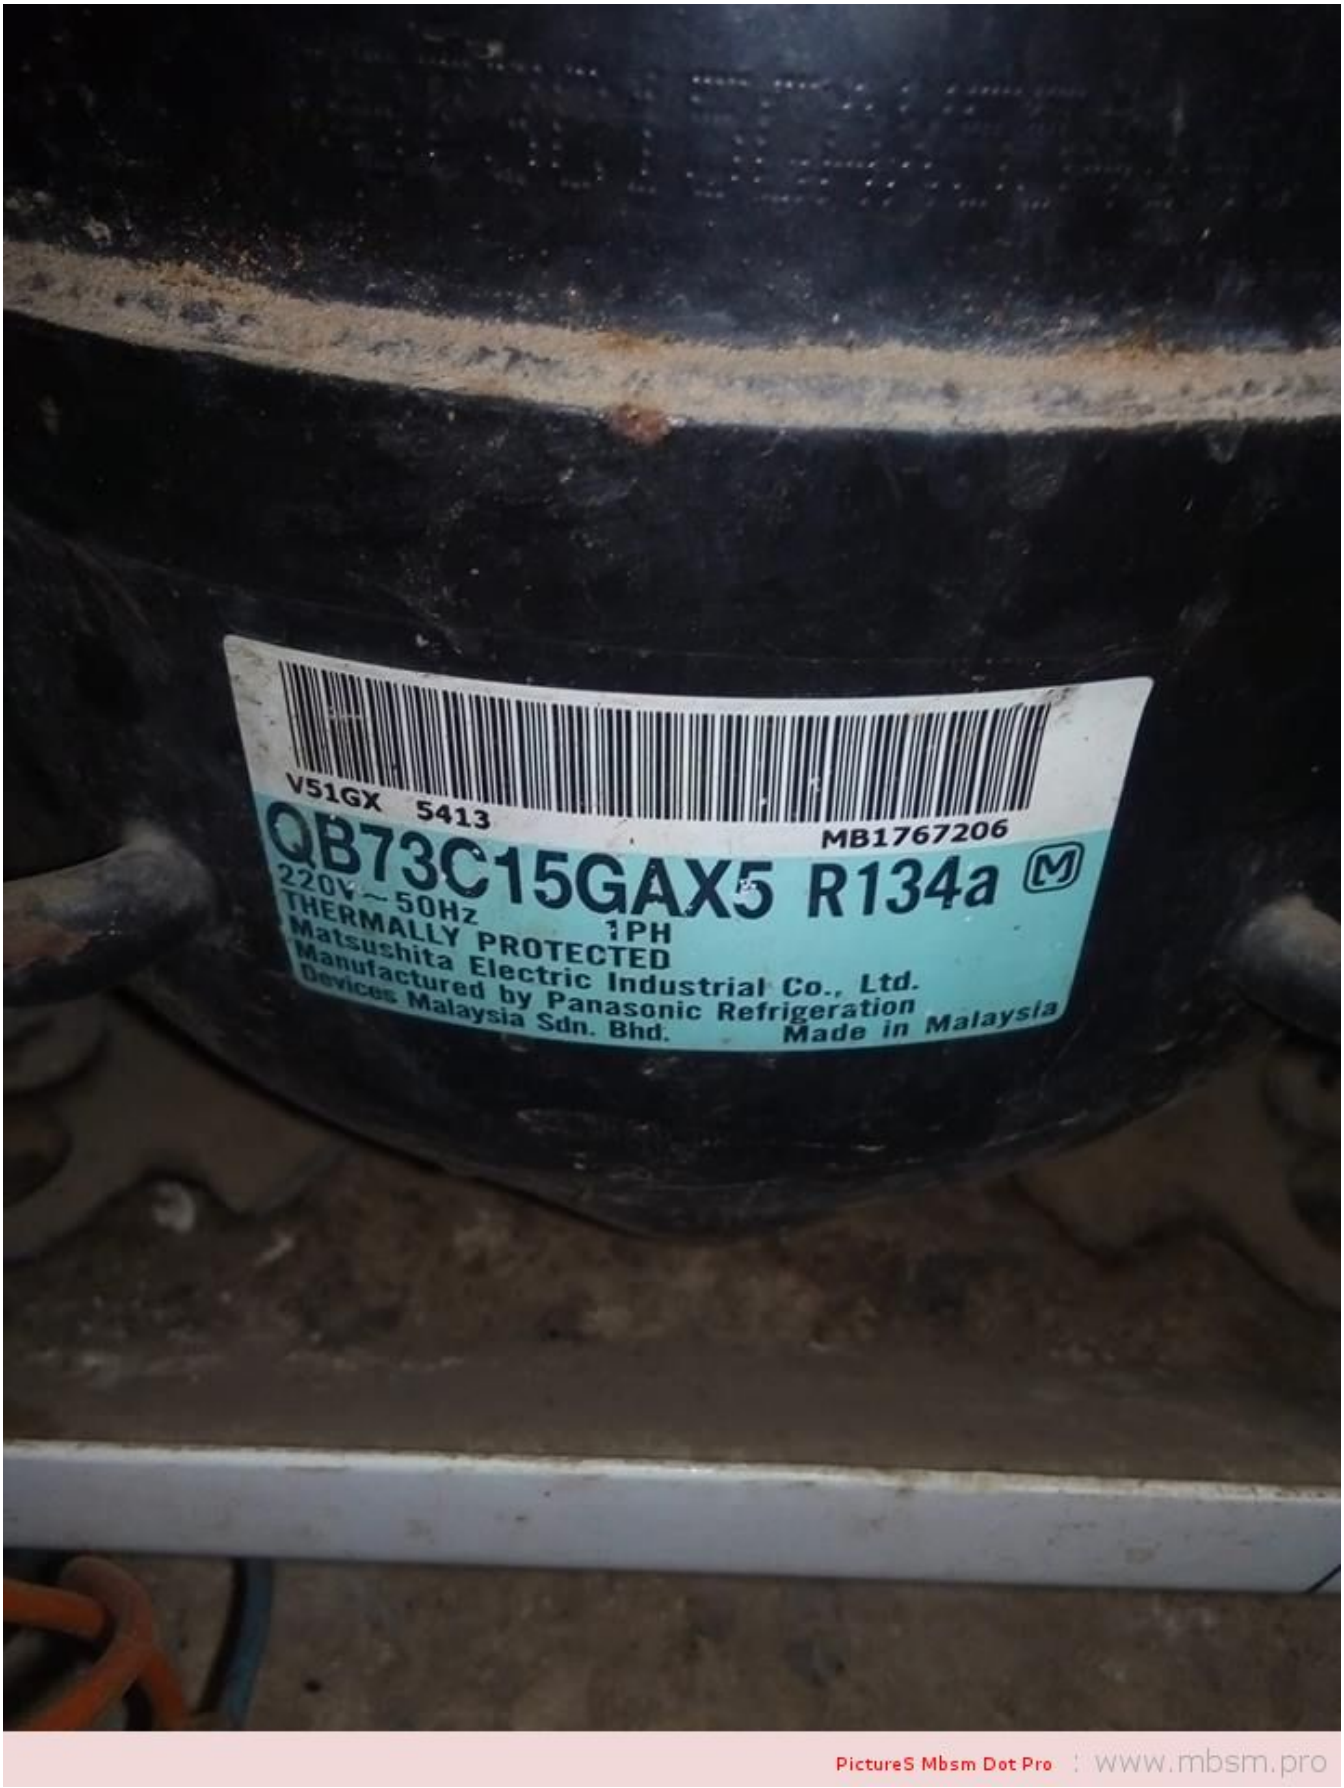

Mbsm_dot_pro_private_PDF_Panasonic-compressor-catalogue-QB-seriesTélécharger

Mbsm.pro , Fn77q17g , 1/4Hp , Electrostar , R12 Refrigerator Compressors , 220V/50-60Hz , 1Ph ,for Refrigerator/Freezer

Category: Solutions,Tester ok
written by Jamila | 8 October 2018



Mbsm.pro , Fn77q17g , 1/4Hp , Electrostar , R12 Refrigerator Compressors , 220V/50-60Hz , 1Ph ,for Refrigerator/Freezer



PictureS Mbsm Dot Pro : www.mbsm.pro

1)SO60LKAA OR equivalent in 1/10 HP

2)FN43Q88G OR equivalent in 1/8 HP

3)FN51Q10G OR equivalent in 1/6 HP

4)FN57Q12G OR equivalent in 1/5 HP

5)FN66Q14G OR equivalent in 1/5 HP Powerful

6)FN77Q17G OR equivalent in 1/4 HP

7)FN91Q20G OR equivalent in 1/4 HP Powerful

8)FN110Q24G OR equivalent in 1/3 HP

www.mbsm.pro

PictureS Mbsm Dot Pro : www.mbsm.pro

Compressor tests - Calorimeter

Type / Parameter		FN77Q17G 1)	QA77C17GAX5		QA91C22GAX5	
Evaporation temp.	[°C]	LBP -23,3	LBP -25 2)	-23,3	LBP -25	-23,3
Refrigerant		R12	R134a		R134a	
Qo						
CECOMAF	[W]		116,7		135	
ASHRAE	[W]	191		154,2		187,1
ASHRAE	[kcal/h]	165		132,6		161
P_1						
CECOMAF	[W]		144,1		166,4	
ASHRAE	[W]	180		148,4		171,4
COP						
CECOMAF	[W/W]		0,81		0,81	
ASHRAE	[W/W]	1,06		1,04		1,09
Start test						
cold tw = 32 °C		-	o.k		o.k	
warm tw = 100 °C		-	o.k		o.k	

1) Leaflet data, original compressor
2) average two compressors, measuring

www.mbsm.pro
PictureS Mbsm Dot Pro : www.mbsm.pro

1)SO60LKAA OR equivalent in 1/10 HP
2)FN43Q88G OR equivalent in 1/8 HP
3)FN51Q10G OR equivalent in 1/6 HP
4)FN57Q12G OR equivalent in 1/5 HP
5)FN66Q14G OR equivalent in 1/5 HP Powerful
6)FN77Q17G OR equivalent in 1/4 HP
7)FN91Q20G OR equivalent in 1/4 HP Powerful
8)FN110Q24G OR equivalent in 1/3 HP



PictureS Mbsm Dot Pro : www.mbsm.pro




Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro ,Jx58lhs5-k , DAEWOO COMPRESSOR ,FOR REFRIGERATOR ,1/5 Hp , 220/240 V , R134A

Category: Solutions,Tester ok
written by Jamila | 8 October 2018



Mbsm.pro ,Jx58lhs5-k , DAEWOO COMPRESSOR ,FOR REFRIGERATOR ,1/5 Hp , 220/240 V , R134A

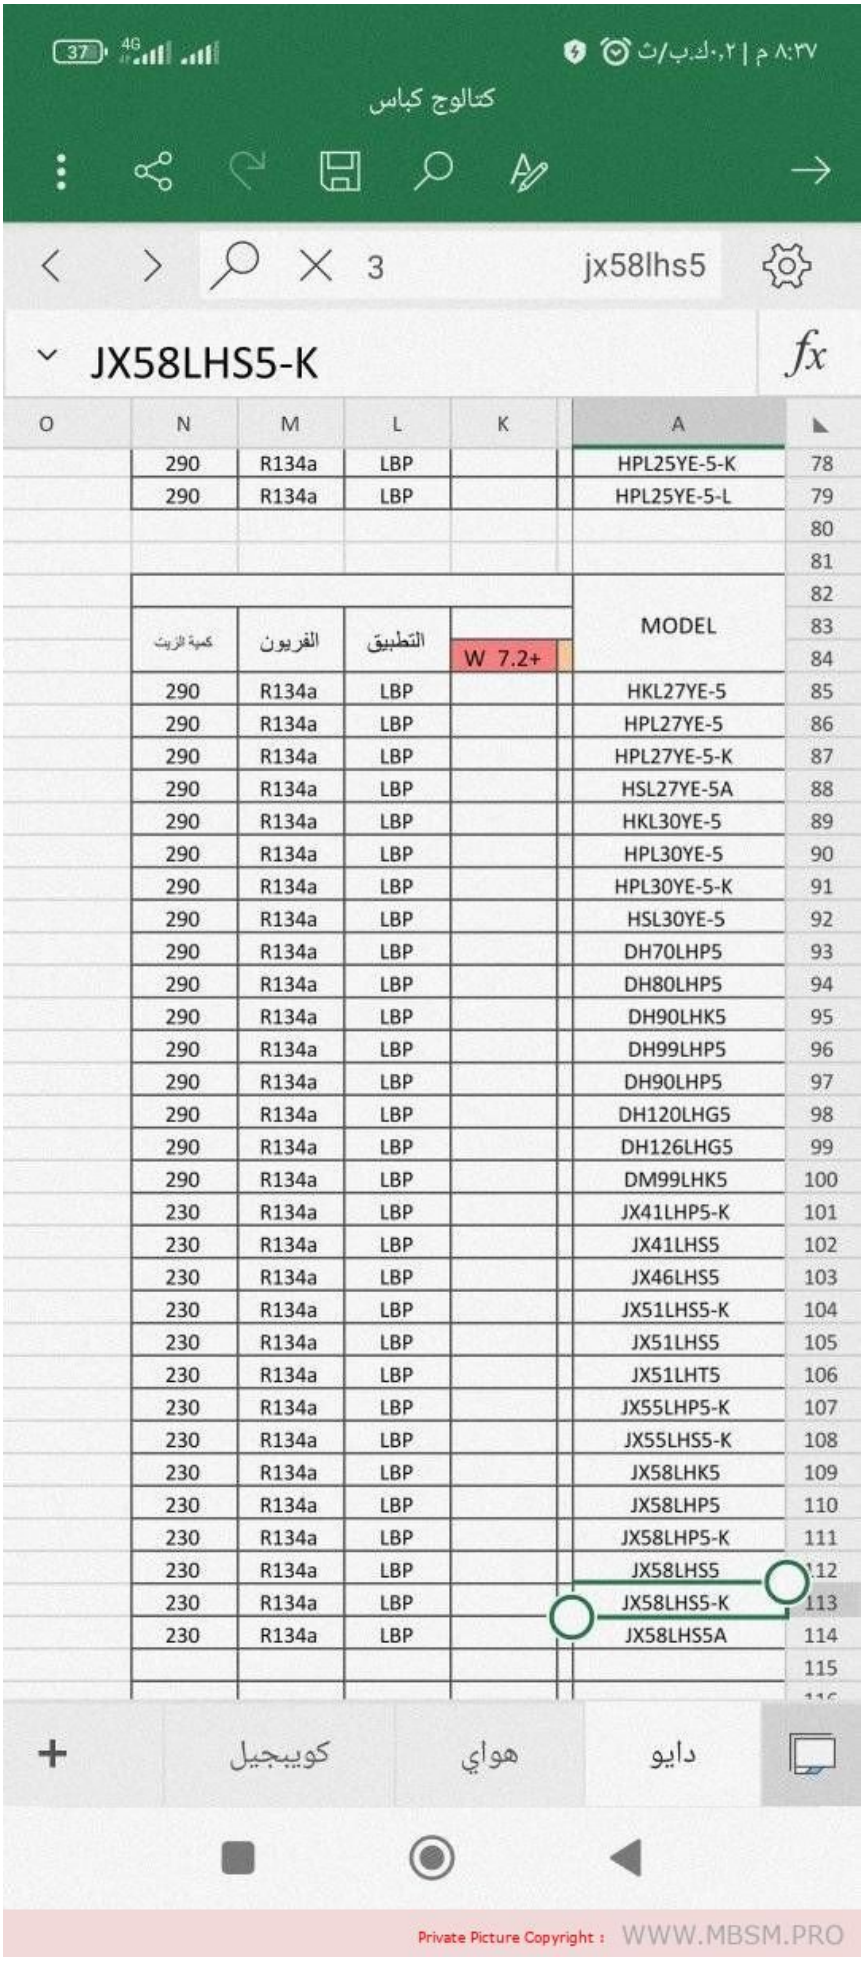


O	N	M	L	K	A	
	290	R134a	LBP		HPL25YE-5-K	78
	290	R134a	LBP		HPL25YE-5-L	79
						80
						81
						82
	كمية الزيت	الفريون	التطبيق	W 7.2+	MODEL	83
						84
	290	R134a	LBP		HKL27YE-5	85
	290	R134a	LBP		HPL27YE-5	86
	290	R134a	LBP		HPL27YE-5-K	87
	290	R134a	LBP		HSL27YE-5A	88
	290	R134a	LBP		HKL30YE-5	89
	290	R134a	LBP		HPL30YE-5	90
	290	R134a	LBP		HPL30YE-5-K	91
	290	R134a	LBP		HSL30YE-5	92
	290	R134a	LBP		DH70LHP5	93
	290	R134a	LBP		DH80LHP5	94
	290	R134a	LBP		DH90LHK5	95
	290	R134a	LBP		DH99LHP5	96
	290	R134a	LBP		DH90LHP5	97
	290	R134a	LBP		DH120LHG5	98
	290	R134a	LBP		DH126LHG5	99
	290	R134a	LBP		DM99LHK5	100
	230	R134a	LBP		JX41LHP5-K	101
	230	R134a	LBP		JX41LHS5	102
	230	R134a	LBP		JX46LHS5	103
	230	R134a	LBP		JX51LHS5-K	104
	230	R134a	LBP		JX51LHS5	105
	230	R134a	LBP		JX51LHT5	106
	230	R134a	LBP		JX55LHP5-K	107
	230	R134a	LBP		JX55LHS5-K	108
	230	R134a	LBP		JX58LHK5	109
	230	R134a	LBP		JX58LHP5	110
	230	R134a	LBP		JX58LHP5-K	111
	230	R134a	LBP		JX58LHS5	112
	230	R134a	LBP		JX58LHS5-K	113
	230	R134a	LBP		JX58LHS5A	114
						115

Private Picture Copyright : WWW.MBSM.PRO



PictureS Mbsm Dot Pro : www.mbsm.pro

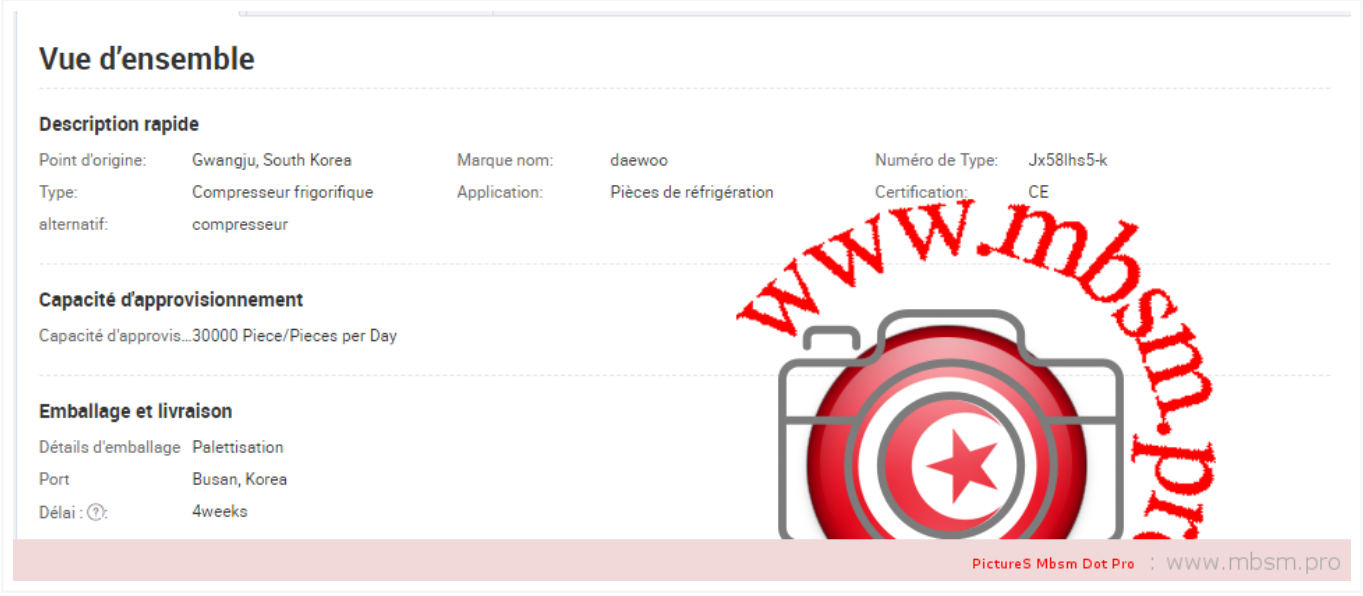

Vue d'ensemble

Description rapide

Point d'origine:	Gwangju, South Korea	Marque nom:	daewoo	Numéro de Type:	Jx58lhs5-k
Type:	Compresseur frigorifique	Application:	Pièces de réfrigération	Certification:	CE
alternatif:	compresseur				


Capacité d'approvisionnement

Capacité d'approvis...30000 Piece/Pieces per Day

Emballage et livraison

Détails d'emballage	Palettisation
Port	Busan, Korea
Délai :	4weeks

www.mbsm.pro
PictureS Mbsm Dot Pro : www.mbsm.pro

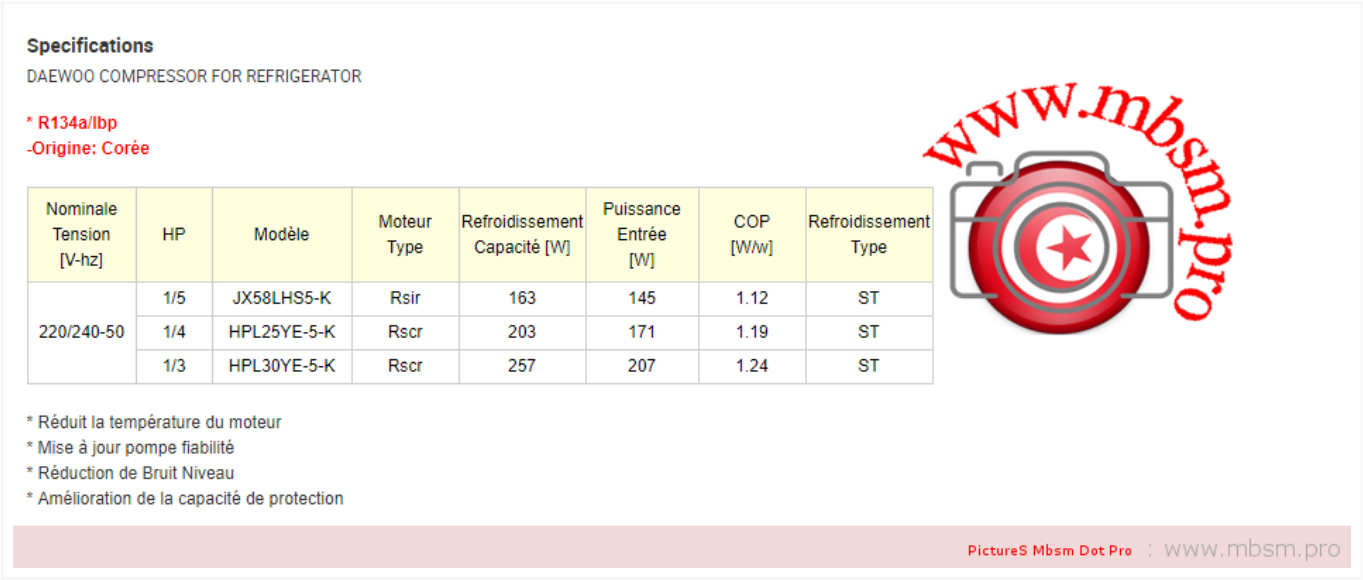

Specifications

DAEWOO COMPRESSOR FOR REFRIGERATOR

* R134a/lbp
-Origine: Corée

Nominale Tension [V-hz]	HP	Modèle	Moteur Type	Refroidissement Capacité [W]	Puissance Entrée [W]	COP [W/w]	Refroidissement Type
220/240-50	1/5	JX58LHS5-K	Rsir	163	145	1.12	ST
	1/4	HPL25YE-5-K	Rscr	203	171	1.19	ST
	1/3	HPL30YE-5-K	Rscr	257	207	1.24	ST

* Réduit la température du moteur
* Mise à jour pompe fiabilité
* Réduction de Bruit Niveau
* Amélioration de la capacité de protection

www.mbsm.pro
PictureS Mbsm Dot Pro : www.mbsm.pro

Description rapide

Point d'origine:
Gwangju, South Korea

Marque nom:
daewoo

Numéro de Type:
Jx58lhs5-k

Type:
Compresseur frigorifique

Application:
Pièces de réfrigération

Certification:

CE

alternatif:
compresseur

Capacité d’approvisionnement

Capacité d’approvisionnement:
30000 Piece/Pieces per Day

Emballage et livraison

Détails d’emballage
Palettisation

Port
Busan, Korea

Délai : :
4weeks

Specifications

DAEWOO COMPRESSOR FOR REFRIGERATOR
*** R134a/lbp**
-Origine: Corée

Nominale Tension [V-hz]	HP	Modèle	Moteur Type	Refroidissement Capacité [W]	Puissance Entrée [W]	COP [W/w]	Refroidissement Type
220/240-50	1/5	JX58LHS5-K	Rsir	163	145	1.12	ST
	1/4	HPL25YE-5-K	Rscr	203	171	1.19	ST
	1/3	HPL30YE-5-K	Rscr	257	207	1.24	ST

* Réduit la température du moteur
* Mise à jour pompe fiabilité
* Réduction de Bruit Niveau
* Amélioration de la capacité de protection