

Mbsm.pro, Compressor, D77C18RAX5, RSIR , 1/4 Hp, D Series, r134a, LBP, 186 W, Toshiba, Refrigerator, 14 Feet, GR-EF40, 2 Doors, New Compressor, PE75H1C, 250 w, 1/4 hp

Category: compressor

written by www.mbsm.pro | 28 February 2022

Performance

Application : Low Back Pressure

Refrigerant : R134a (CF₃CH₂F)

Evaporator Temperature Range : -35°C to -5°C

Series	Model	Displacement (cm ³)	Voltage / Frequency	Motor Type	ASHRAE		CECOMAF	
					Capacity	COP	Capacity	COP
					W	W/W	W	W/W
	D77C15RAW5	7.7	220/240V 50Hz	RSIR	186 / 186	1.27 / 1.24	-	-
				RSCR	186 / 186	1.32 / 1.27	-	-
	D77C17GAX6	7.7	220V 60Hz	RSIR	236	1.25	-	-
				RSCR	-	-	-	-
	D77C17RAT6	7.7	110V 60Hz	CSIR	-	-	-	-
				CSCR	236	1.34	-	-
	D77C18RAX5	7.7	220V 50Hz	RSIR	186	1.24	-	-
				RSCR	186	1.31	-	-
	D91C18RAW5	9.1	220/240V 50Hz	RSIR	227 / 227	1.29 / 1.24	-	-
				RSCR	227 / 227	1.37 / 1.31	-	-
	D91C18TA00	9.1	100V 50/60Hz	CSIR	-	-	-	-

Private Picture Copyright : WWW.MBSM.PRO

Item Performance characteristics

Refrigerant	R134a
Displacement (cm ³)	7.7
Voltage (V)	220
Frequency (Hz)	50
Motor Type	RSIR
Capacity@ASHRAE	186
COP@ASHRAE	1.24
Capacity hp	1/4 hp



Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO


GMCC

PE75H1C

RoHS

THERMALLY
PROTECTED
R134a

220V-240V~ 50Hz , 1Ph



905019357EYBLELA Made in China



ANHUI MEIZHI COMPRESSOR CO., LTD

TOSHIBA NO FROST REFRIGERATOR


MODEL
RATED VOLTAGE
RATED FREQUENCY
RATED INPUT
RATED INPUT OF HEATING ELEMENT
DEFROSTING INPUT
RATED MAXIMUM INPUT OF LAMP
RATED CURRENT
CLIMATIC CLASS
ENERGY CONSUMPTION
INSULATION TYPE
REFRIGERANT
CHARGING VOLUME
FREEZING CAPACITY
WEIGHT
STORAGE VOLUME (L)
FREEZER
REFRIGERATOR
TOTAL GROSS VOLUME (L)
PERFORMANCE TEST SPEC.
PROTECTION DEGREE

GR-EF40P
220 V
50 Hz
134 W
170 W
170 W
1.6 W
0.68 A
ST
1.3 kWh/24h
R-134a
130 g
5 Kg/24 H
68 kg
356
110
246
378
IEC2007/62552, 3793/2006
IPx0

4YDQF09633

تعليمات : لا تستخدم هذا الجهاز إلا في حالة وجود توصيلات أرضي بالمبنى أو بخضعة لنظام تيار متلف (RCD) مع لوحة شمسية
Made in EGYPT
Produced by EL ARABY Co. for ENGINEERING Ind., Under License
of TOSHIBA Corporation JAPAN

WIRING DIAGRAM

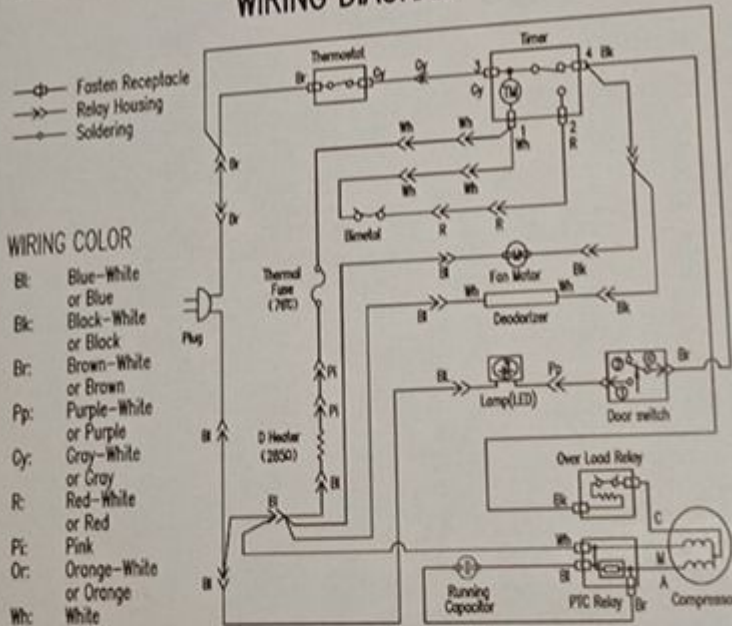

TOSHIBA العربي



19F26#03S799PD39A



Performance

Application : Low Back Pressure

Refrigerant : R134a (CF₃CH₂F)

Evaporator Temperature Range : -35°C to -5°C

Series	Model	Displacement (cm ³)	Voltage / Frequency	Motor Type	ASHRAE		CECOMAF	
					Capacity	COP	Capacity	COP
					W	W/W	W	W/W
	D77C15RAW5	7.7	220/240V 50Hz	RSIR	186 / 186	1.27 / 1.24	-	-
				RSCR	186 / 186	1.32 / 1.27	-	-
	D77C17GAX6	7.7	220V 60Hz	RSIR	236	1.25	-	-
				RSCR	-	-	-	-
	D77C17RAT6	7.7	110V 60Hz	CSIR	-	-	-	-
				CSCR	236	1.34	-	-
	D77C18RAX5	7.7	220V 50Hz	RSIR	186	1.24	-	-
				RSCR	186	1.31	-	-
	D91C18RAW5	9.1	220/240V 50Hz	RSIR	227 / 227	1.29 / 1.24	-	-
				RSCR	227 / 227	1.37 / 1.31	-	-
	D91C18TA00	9.1	100V 50/60Hz	CSIR	-	-	-	-

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_PE75H1CTélécharger

Mbsm_dot_pro_private_PDF_d77c18rax5Télécharger