Maintenance et réparation MG rouleuse de pate cc900

Category: Mecanique
written by www.mbsm.pro | 24 February 2021





Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO




Moteur, bolt f180E, motorisé, télécommandé, Moteur central, Porte Rideau 180Kg, installation, Réglage, carte de commande Somefy Double commande

Category: electricity
written by www.mbsm.pro | 24 February 2021



Private Picture Copyright : WWW.MBSM.PRO

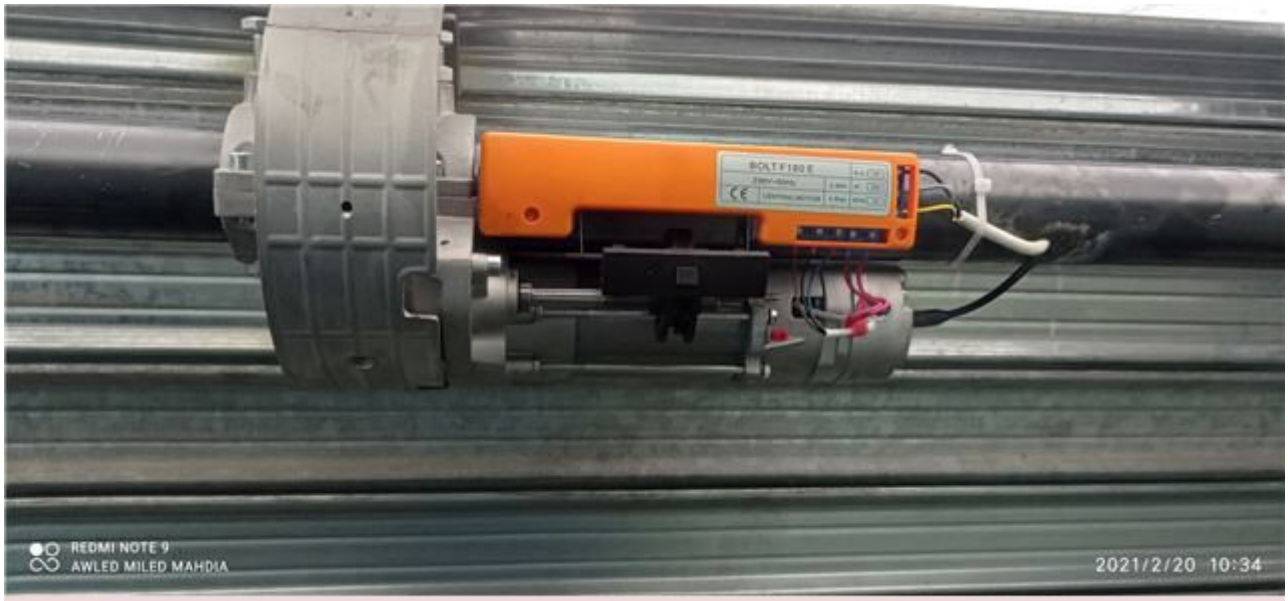

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO




Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO




Private Picture Copyright : WWW.MBSM.PRO

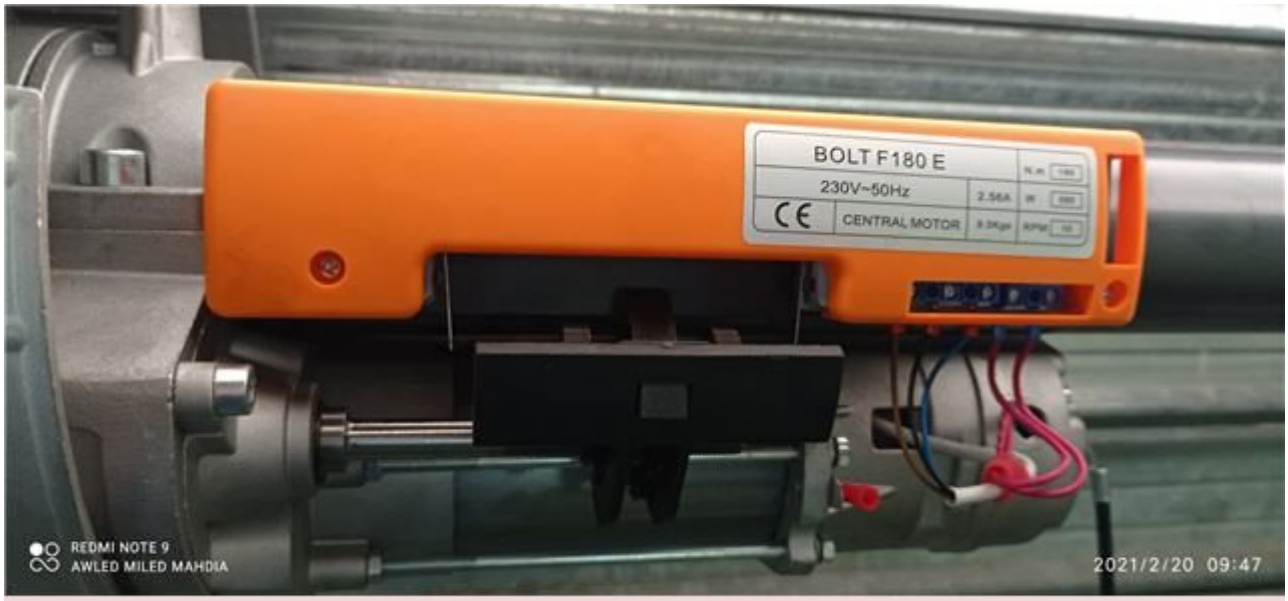


Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

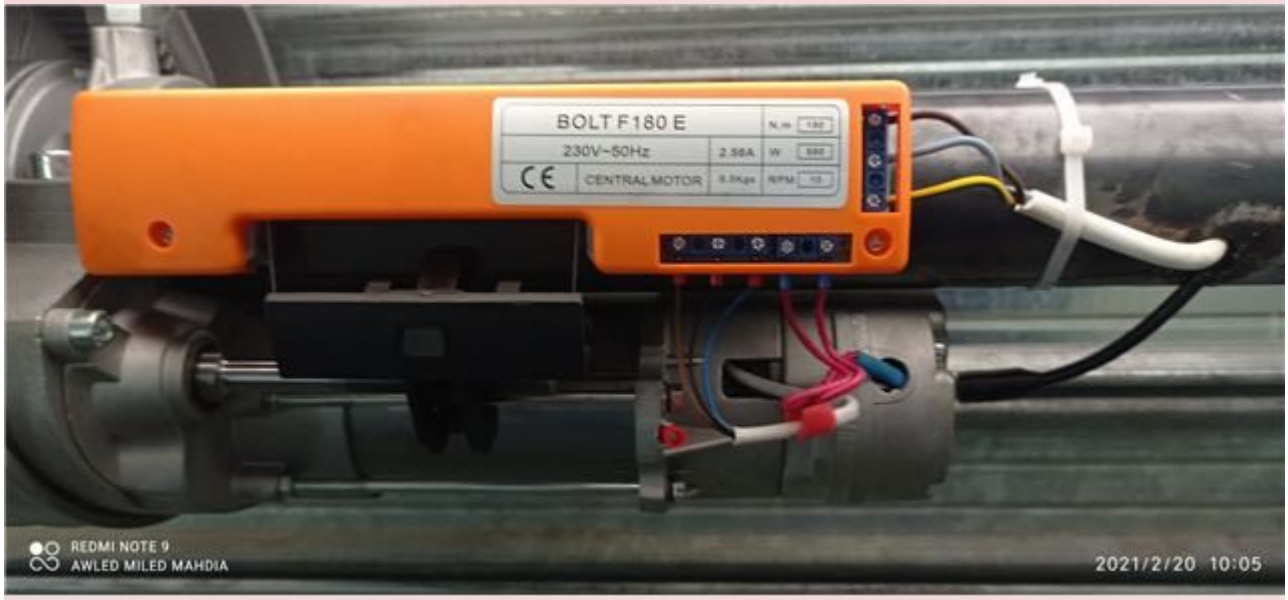

Private Picture Copyright : WWW.MBSM.PRO

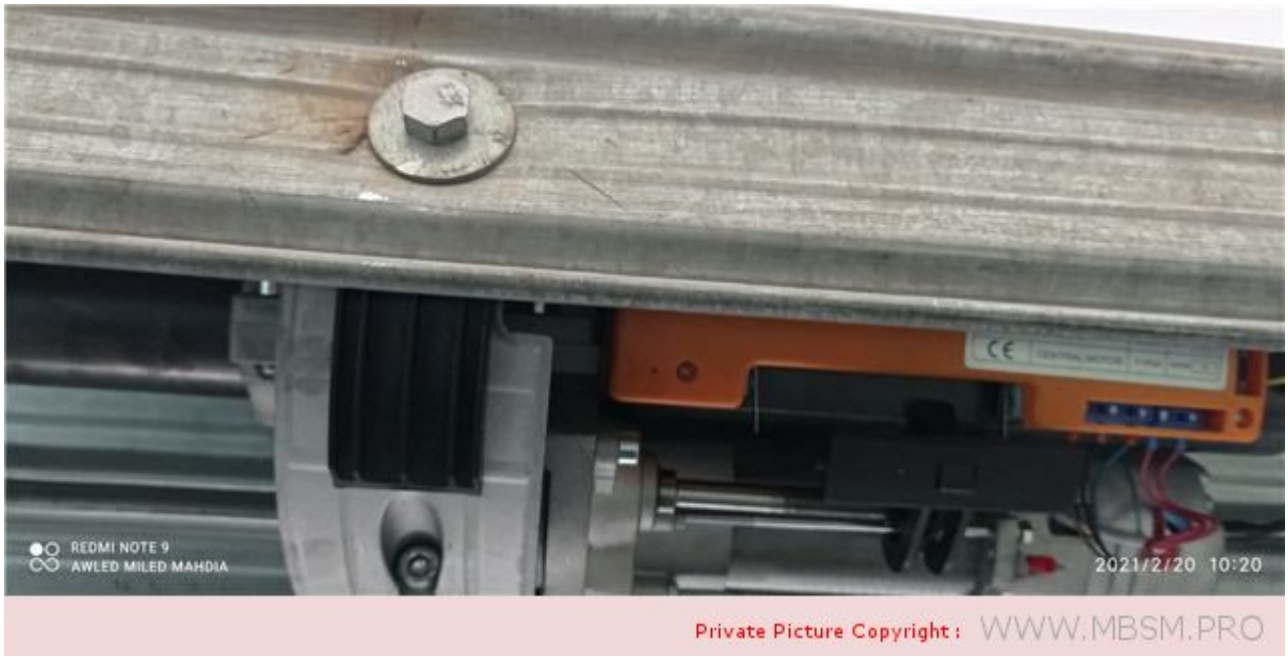

Description rapide

Garantie:
Plus de 5 Ans

Service après – vente:
Support technique en ligne

Solution de projet Capacité:
Conception graphique

Application:
Entrepôt

Style de conception:
Traditionnel

Point d’origine:
China

Marque nom:
Simple

Numéro de Type:
BOLT F180E

Type:
door motor, Door & Window Rollers

usage:
rolling door
Model:

autmatic gate roller

Rated torque:
120N.m

R.P.M:
10

Limit switch:
6m

Cut out tempreture:
4min

Power:
670w

Consumption:
2.9A

Weight:
8~9kg

Capacité d’approvisionnement

Capacité d’approvisionnement:
8000 Set/Sets per Month we will delivery roller shutter gear within 25days


Emballage et livraison

Détails d’emballage
Détails d’emballage: carton d’exportation navigable et palette

Port
Ningbo/Shanghai

Délai : :

Quantité(Sets)	1 – 1	2 – 200	>200
Durée estimée (jours)	7	15	À négocier

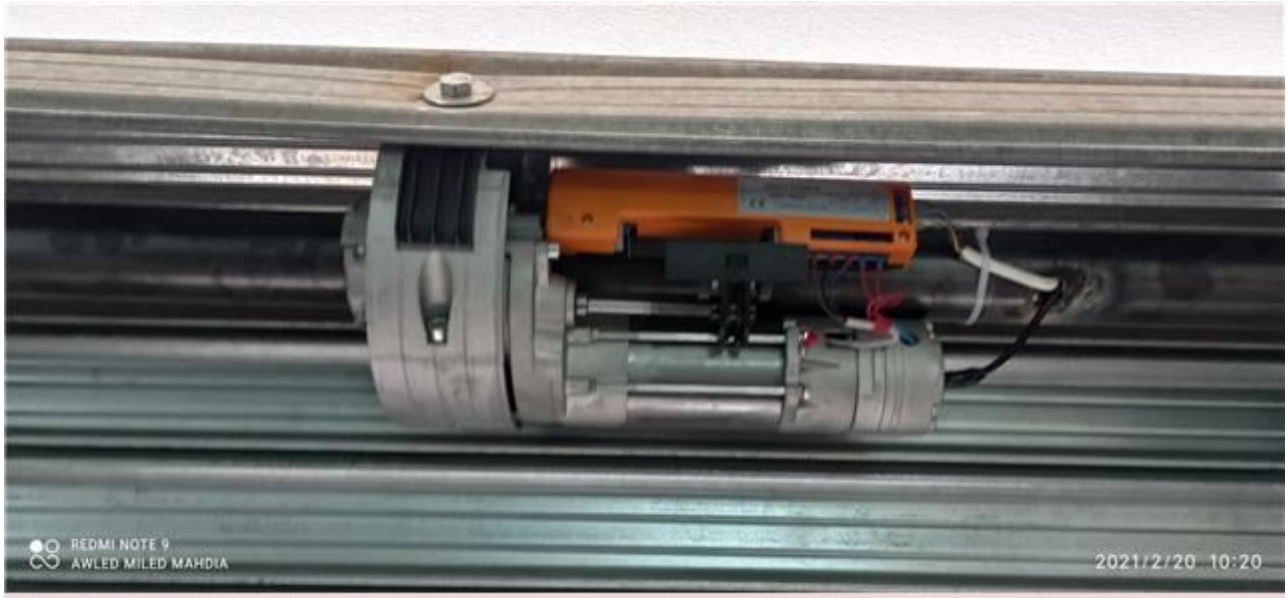

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Réservoirs encastrés Geberit, installation, Photos

Category: Plomberie
written by www.mbsm.pro | 24 February 2021



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Geberit International Sales AG est une société du groupe Geberit chargée du secteur Moyen-Orient / Afrique, nouveaux marchés et marchés en expansion. Son siège principal se situe à Rapperswil, en Suisse.

HERMETIC, Freezer, COMPRESSOR, ZEL, GTH86AA, R134A, 1/4 Hp, Lbp, 230W, 8.6CC

Category: compressor
written by www.mbsm.pro | 24 February 2021



Private Picture Copyright : WWW.MBSM.PRO

COMPRESSOR ZEL GTH86AA

APPLICATION: LBP
FREON: R134A
DISPLACEMENT: 8.6CC
POWER SUPPLY: 220V
POWER: 1 / 4HP – 230W
APPLICATION: UNIVERSAL

Specifications

Description

Detailed Product Description

1.Low levels of noise and vibration

2.Standard,medium,high and very high levels of efficiency


R134a 220-240V/50HZ

Model	Displ.(cm^3)	Motor Type	Cooling capacity(w)	Input Power without RC(w)	Input Power with RC(w)	COP without RC(w/w)	COP with RC(w/w)	Run Capacltor	Start Capacltor	Height(mm)
Standard Efficiency Range										
OF789	4.4	RSIR	110	102		1.08				174
OF1033A	5.7	RSIR	141	118		1.19				174
OF1350A	7.5	RSIR	178	158		1.13				183
GTH86AA	8.6	RSIR/RSCR	230	161	153	1.43	1.50	5		174
GTH93AA	9.3	RSIR/RSCR	260	182	173	1.43	1.50	5		183
Medium Efficiency Range										
GTM40AT	4.0	RSIR	102	91		1.12				163
GTM57AT	5.7	RSIR	156	128		1.21				183
GTM60AT	6.0	RSIR	165	136		1.27				163
GVY75AT	7.5	RSIR/RSCR	200	149	139	1.34	1.44	5		183
GTM75AA	7.5	RSIR	200	166		1.20			50	183
GTM93AA	9.3	RSIR	270	220		1.35				183
GTM10AA	11.0	RSIR/RSCR	300	222		1.35			50	183
GTM12AA	12.0	RSIR/RSCR	330	241		1.37			50	183




Photos, Assemblage Machine A Linge, LG, 10kg

Category: Solutions,Technologie,Tester ok
written by www.mbsm.pro | 24 February 2021

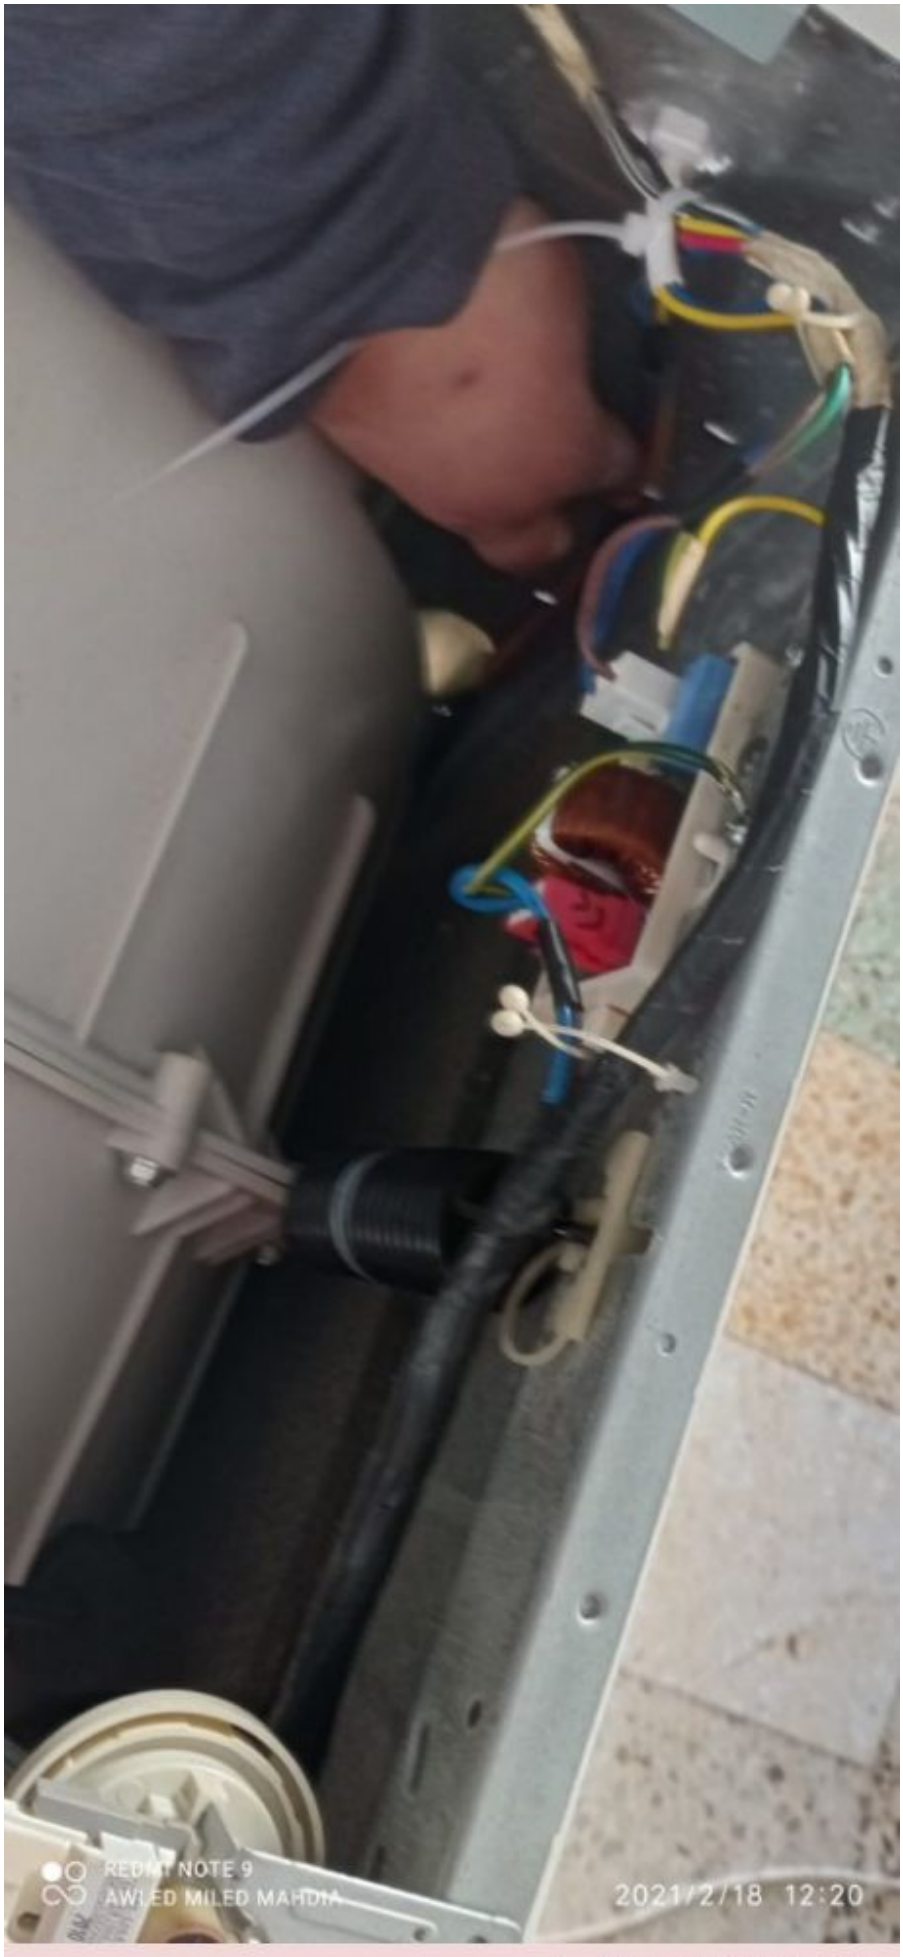

Private Picture Copyright : WWW.MBSM.PRO

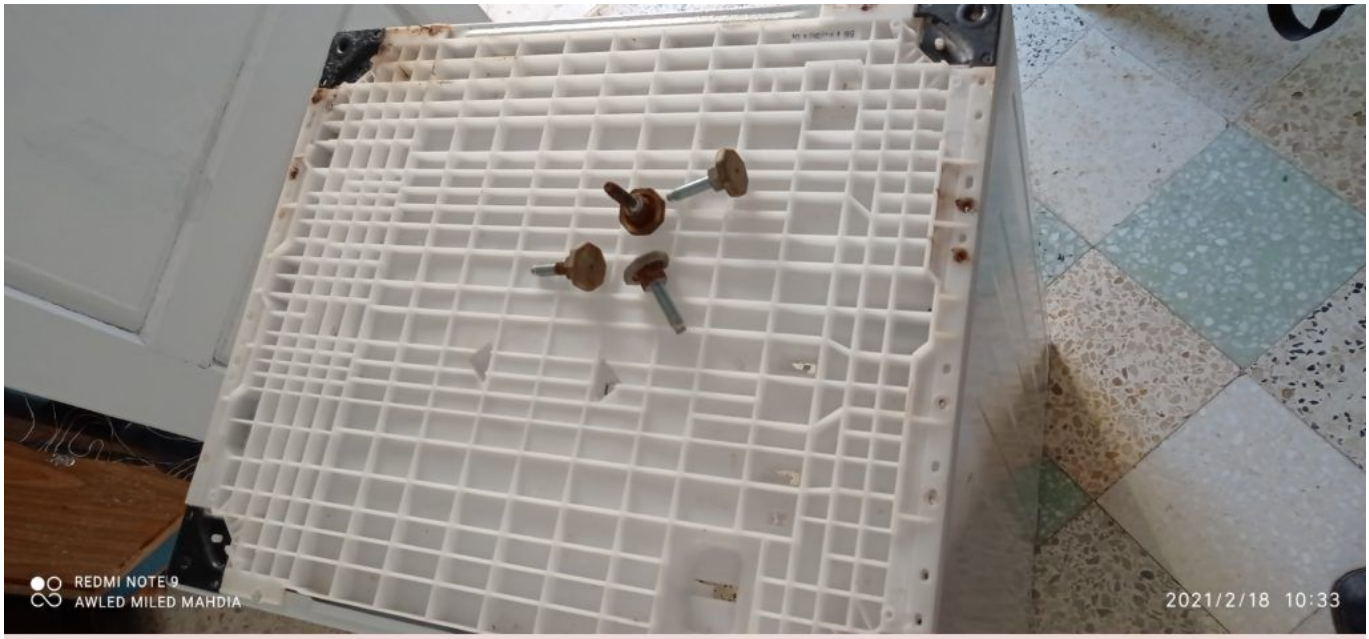

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO




Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

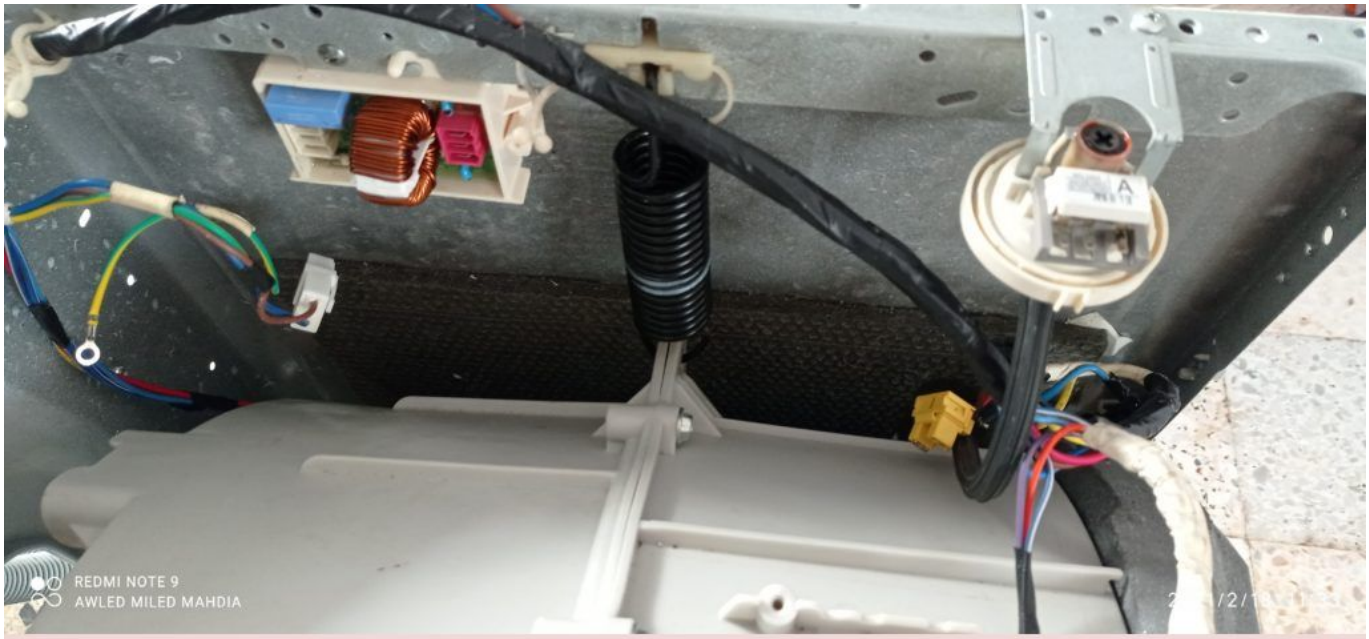

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO




Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

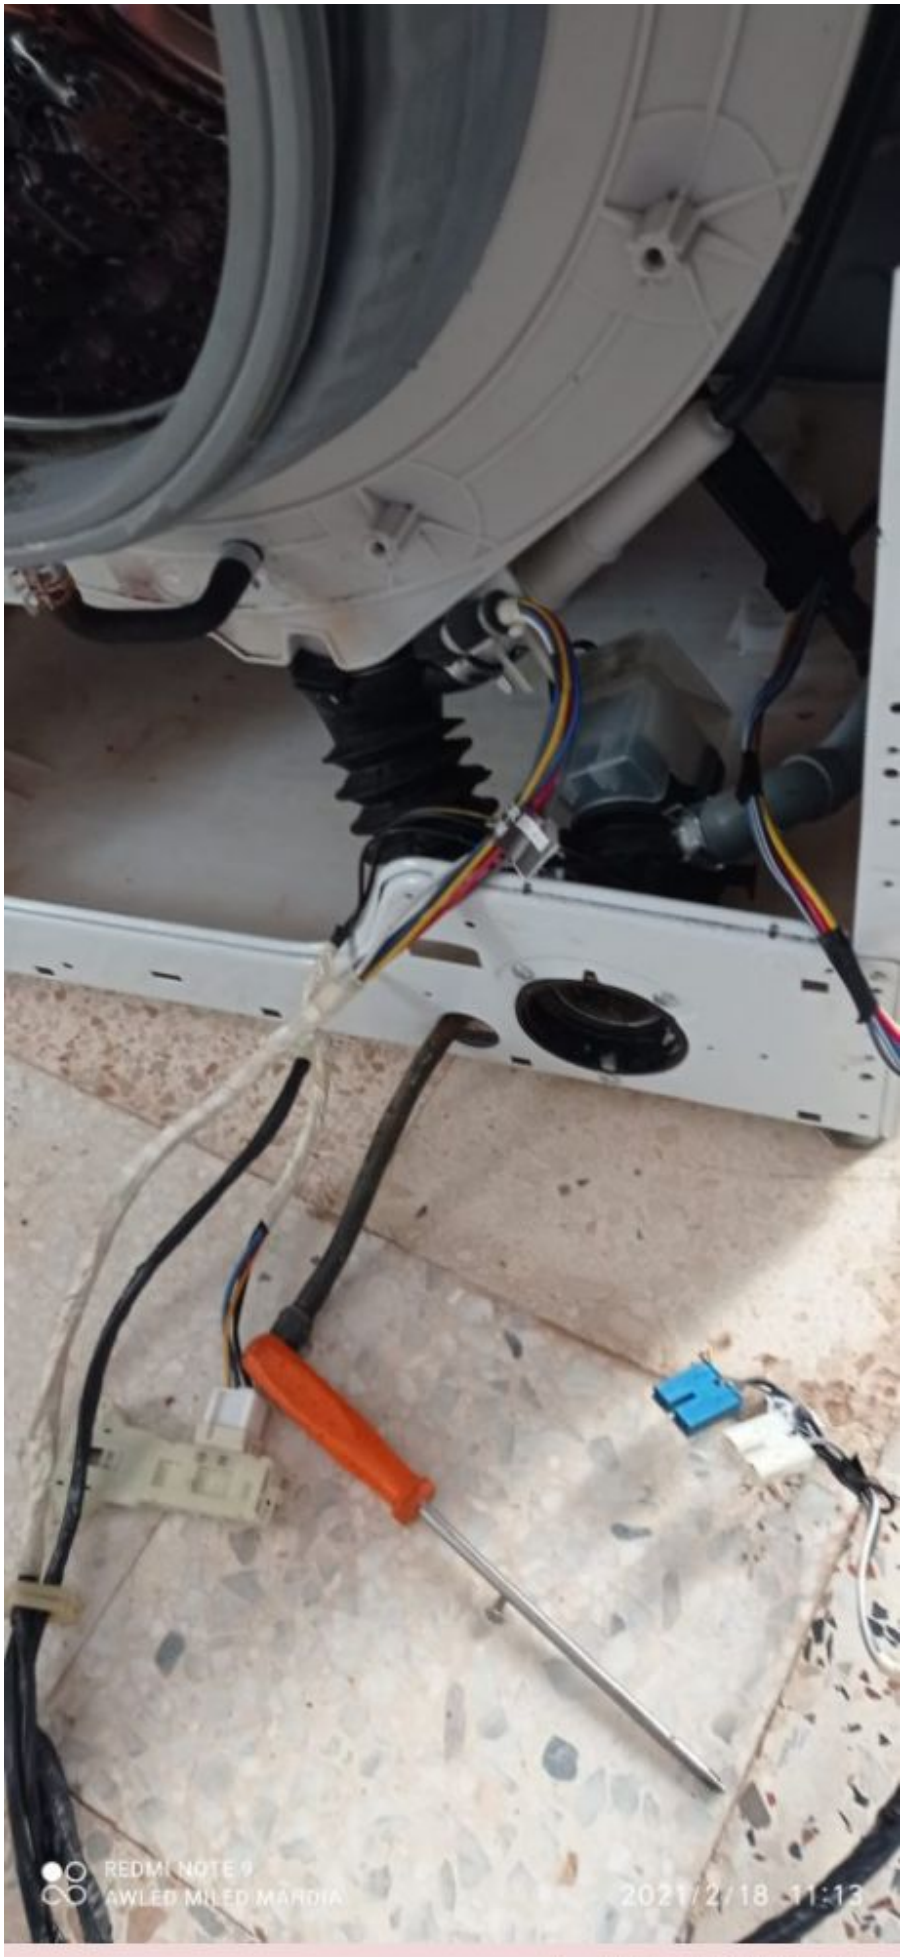

Private Picture Copyright : WWW.MBSM.PRO




Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

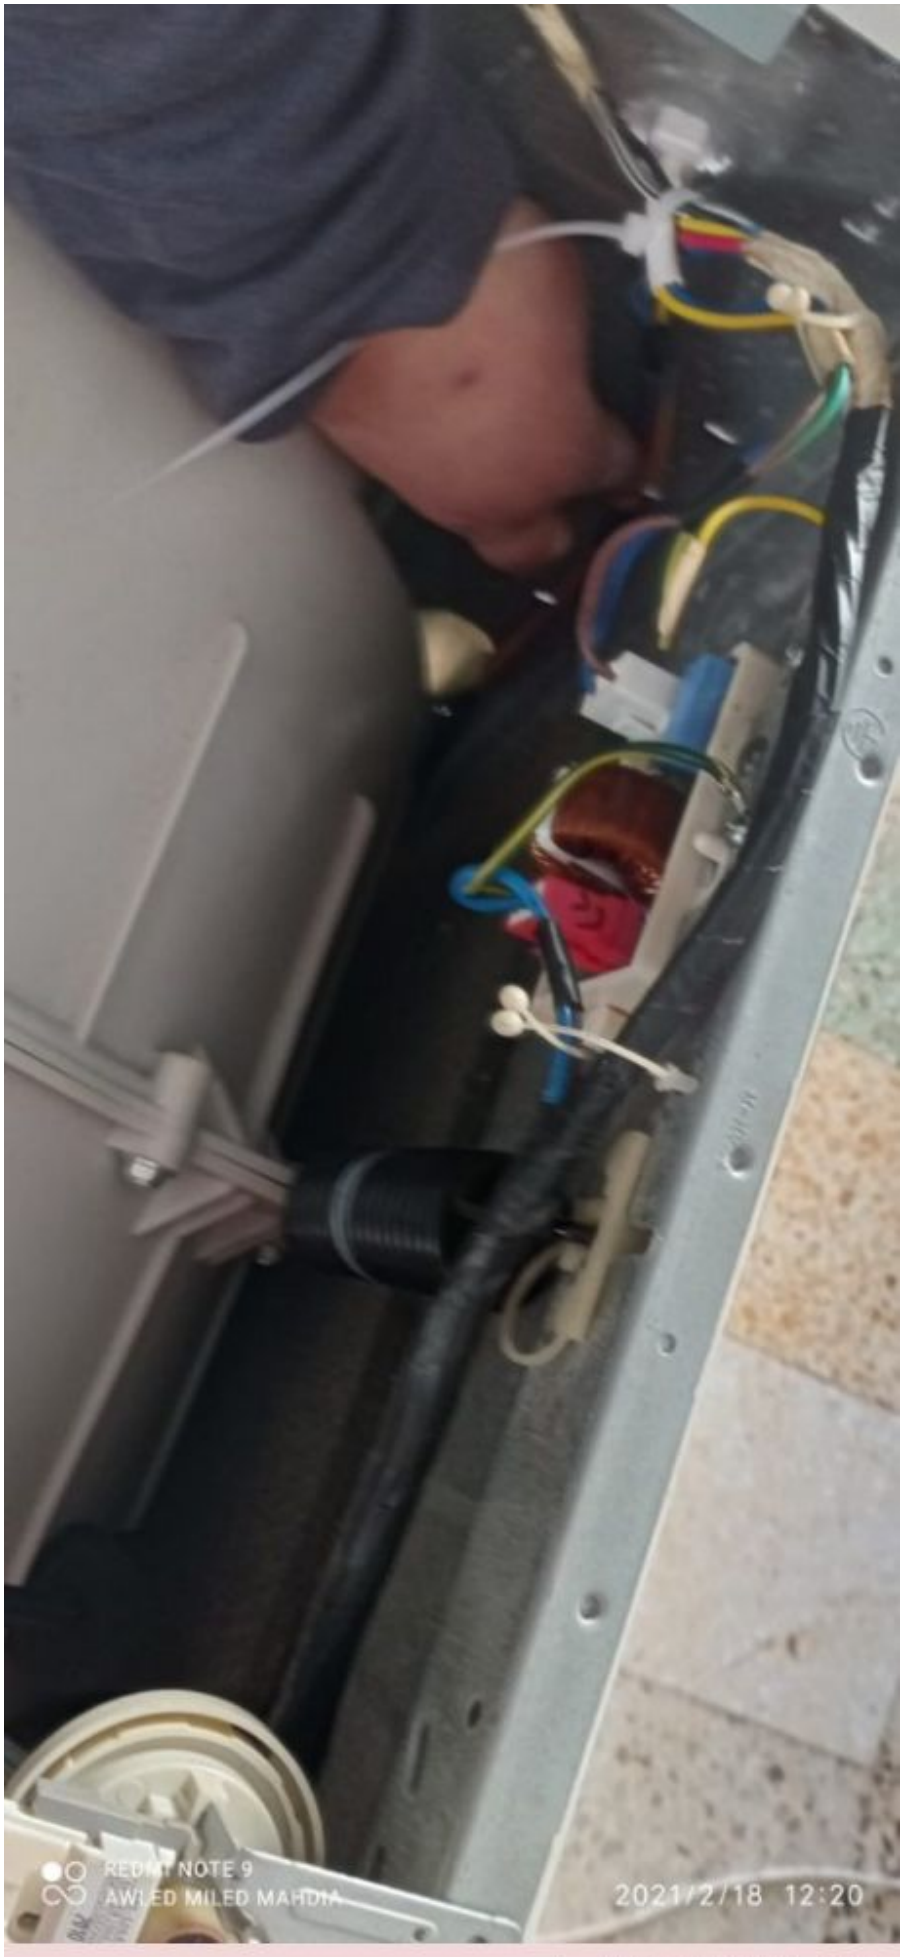

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Traverse métallique haut de machine lave linge 10kg, Mesure et photos

Category: Solutions,Technologie
written by www.mbsm.pro | 24 February 2021





Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO




Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

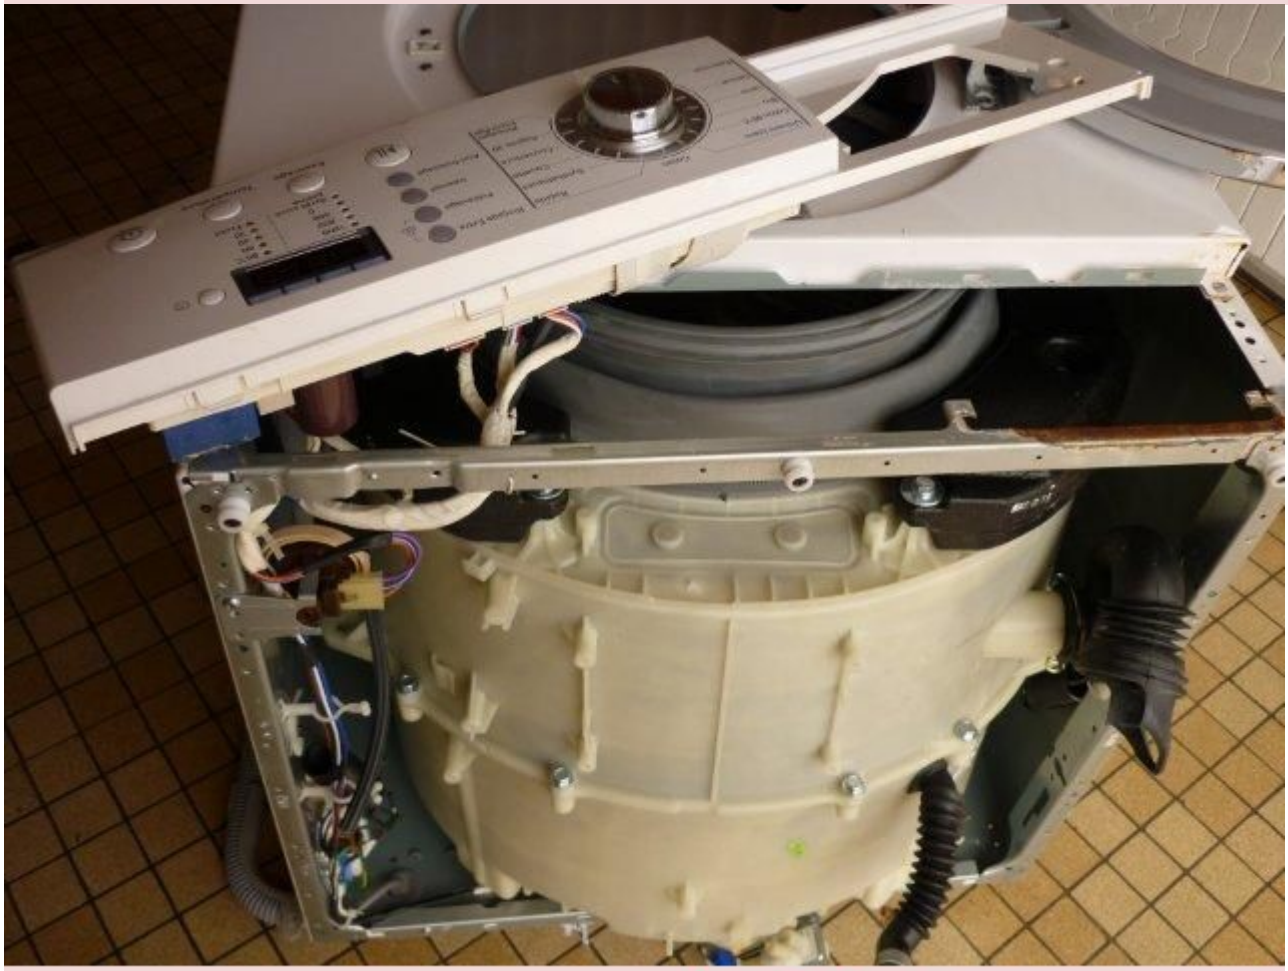

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Compressor, NL7.3FT, SECOP, 105G6726, DANFOSS, 6726, 105G, 105 G 6726, 105G 6726, 1/5 HP, 180W, LBP, Zanussi, Kiriazi Electric Company, TGV 335L, NO FROST, TSV 320L, FC 83L , R134A, 125G, 220-240V 50Hz, CSIR

Category: compressor
written by www.mbsm.pro | 24 February 2021



Private Picture Copyright : WWW.MBSM.PRO

R134a is a low pressure refrigerant, very efficient for high temperature applications.
This makes it ideal in air conditioning applications that may leak refrigerant like car air conditioning.
Now it is being phased out because of its high global warming potential and replaced by R134

R404a is a high pressure refrigerant ideal for applications in low and medium temperature.
You want low pressure refrigerants in household applications like refrigerators that may be inside kitchens with (possible) high ambient temperature, so you make sure nothing will blow up. For the same reason you want R134a in your car air conditioning.
R404a instead has pressures slightly above atmospheric in low temperature applications where R134a would have negative pressures and its heat transmission coefficients would be much lower.

Type de gaz	App	HP	Watt	Modèle	TL
R134A	LBP	1/6	134	TLY5.1FK	
R134A	LBP	1/4	183	TLES7FT.4	

R134A	LBP	1/5	156	NL6FT.2	
R134A	LBP	1/5	185	NL7.3FT (RSIR)	
R134A	LBP	+ 1/4	219	NL9FT.2 (RSIR)	
R134A	LBP	1/4	185	NL7.3FT (CSIR)	
R134A	LBP	+ 1/4	219	NL9FT.2 (CSIR)	NL
R134A	LBP	1/3	284	NL10FT	
R134A	MBP	1/3	621	NL11MF	
R404A	LBP	1/3	433	NL7CLX	
R404A	LBP	1/3	471	NL8.4CLX	
R134A	LBP	1/4	187	NLY6F	
R134A	LBP	+ 4 / (1)	213	NLY7F	
R134A	LBP	1/3	237	NLY9FK	
R600A	LBP	+ 1/4	227	NLE13KTK.2	
R600A	LBP	1/3	253	NLE15KTK.2	
R600A	LBP	+ 1/4	225	NLX13KK.3	
R600A	LBP	1/3	254	NLX15KK.3	

R134A	LBP / MBP / HBP	1/3	264	SC12G	
R134A	LBP / MBP / HBP	1/2	392	SC18G	
R134A	LBP / MBP / HBP	3/4	456	SC21G	SC
R134A	MBP	3/4	1073	SC21MFX	
R134A	LBP	3/4	567	SC21FTX	
R404A	LBP	1	1033	ST21CL	
R404A	LBP	1	986	SC18CLX.2	
R404A	MBP	1/2	359/650	SC15MLX	
R404A	MBP	7/8	762/1584	SC18MLX	



Private Picture Copyright : WWW.MBSM.PRO




Private Picture Copyright : WWW.MBSM.PRO



Mbsm_dot_pro_private_PDF_NL7.3FTTélécharger
Mbsm_dot_pro_private_PDF_nl73ft_105g6731_r134a_220v_50hz_11-2011_desd406c102Télécharger

Refrig	Applic			oil cooling		Evporating temperature [°C]											Evporating tem	
						-35	-30	-25	-20	-15	-10	-5	0	5	10	15	-25	-10
R134a	LBP	PL50F	101G0220		1/20	14	26	40	56	74	95						60	86
		TLS3FT	102G4324		1/16	21	34	50	69	92	120						62	93
		TLS4FT	102G4424		1/10	27	43	63	88	117	152						88	123
		TLS5FT	102G4524		1/8+	48	71	98	131	170	216						114	165
		TLES5.7FT.3	102G4615		1/6	66	90	120	156	200	253						120	170
		TLES6.5FT.3 ❍	102G4703		1/5			136									139	
		NL6FT	105G6628		1/6	60	84	115	152	198	253						123	184
		NL6.1FT	105G6620		1/6	60	84	115	152	198	253						123	184
		NL7FT	105G6728	105G6738	1/5	71	100	136	181	235	299						145	220
		NL7.3FT	105G6726		1/5	71	100	136	181	235	299						145	220
		NL8.4FT	105G6865		1/4	87	120	162	213	275	350						169	252
		NL9FT	105G6828	105G6838	1/4	87	120	162	213	275	350						169	252
		NL10FT	105G6829	105G6839	1/3	113	158	213	281	361	455						215	316
		NLE7.3FT ❍	105G6710		1/4	92	118	154	201	258	325						148	221
		SC12FT	104G8205	104G8215	1/3	103	163	233	314	408	517	645					265	380
		SC15FT	104G8505		1/2	126	197	280	376	489	620	772					311	451
		SC18FTX	104G8805		5/8	144	229	325	437	567	719	896					365	517
		SC21FTX 50Hz	104G8105		3/4	192	296	415	553	713	901	1119					428	613
		SC21FTX 60Hz	104G8106		3/4	240	345	470	620	800	1012	1262					475	707
	LBP/MBP/(HBP)	TL2.5G	102G4251		1/12	11	23	36	51	69	90	116	145	179	219	264	60	84
		TL3G	102G4350		1/12		25	41	59	81	106	136	170	211	258	312	66	96
		TL4G	102G4452		1/8		41	58	80	107	140	180	226	280	342	413	83	118
		TL5G	102G4550		1/6		56	79	107	139	178	224	278	341	414	497	100	149
		FR6G	103G6660		1/5		48	83	124	171	226	290	365	452	552		109	172
		FR7.5G	103G6680	103G6690	1/5		62	99	142	193	254	325	408	505	618		126	194
		FR8.5G	103G6780	103G6790	1/4		85	123	171	228	298	381	478	592	722		151	231
		FR10G	103G6880	103G6890	1/4		92	136	188	250	324	412	516	638	779		179	265
		FR11G	103G6980		1/3		115	170	233	307	395	501	628	780			202	317
		TL6.5MF ❍	102G4781		1/4				174	219	279	349	425	520				202
		NL6.1MF	105G6660		1/5				141	189	245	312	390	482	588	709		187
		NL7.3MF	105G6772		1/4				179	236	304	385	480	591	719	867		227
		NL8.4MF	105G6879		1/4+				213	277	353	445	553	679	825	994		261
		NL10MF	105G6885		1/3				266	346	441	554	687	843	1023	1231		323
		NLE10MF	105G6888		1/3	88	137	194	262	343	440	554	688	845			198	308
		NL11MF	105G6151		3/8				292	380	485	609	756	927	1125	1354		360
		SC10G	104G8000		5/16	23	60	113	183	268	369	486	618	764	925	1100	181	290
		SC12G	104G8240	104G8250	3/8	65	113	175	252	348	464	603	768	960	1182	1437	227	355
		SC15G	104G8520	104G8530	1/2			164	290	424	568	728	908	1110	1340	1600	233	440
		SC18G	104G8820	104G8830	1/2+			283	394	526	684	870	1087	1337	1624	1950	331	507

Private Picture Copyright : WWW.MBSM.PRO

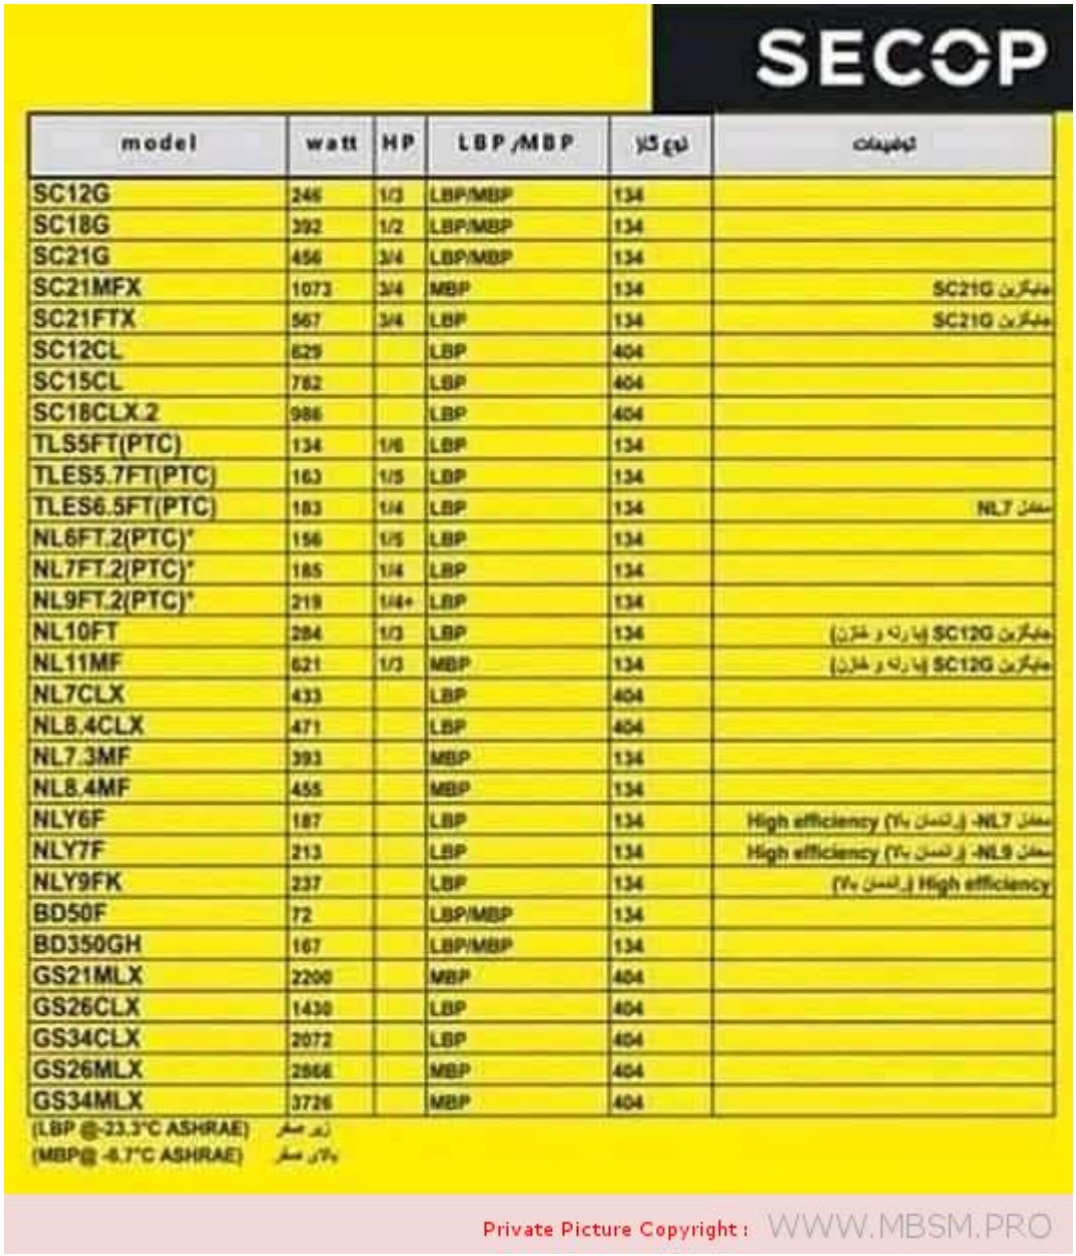

SECOP

model	watt	HP	LBP /MBP	گاز	توضیحات
SC12G	246	1/3	LBP/MBP	134	
SC18G	392	1/2	LBP/MBP	134	
SC21G	456	3/4	LBP/MBP	134	
SC21MFX	1073	3/4	MBP	134	جایگزین SC21G
SC21FTX	567	3/4	LBP	134	جایگزین SC21G
SC12CL	629		LBP	404	
SC15CL	762		LBP	404	
SC18CLX.2	986		LBP	404	
TLS5FT(PTC)	134	1/6	LBP	134	
TLES5.7FT(PTC)	163	1/5	LBP	134	
TLES6.5FT(PTC)	183	1/4	LBP	134	معادل NL7
NL6FT.2(PTC)*	156	1/5	LBP	134	
NL7FT.2(PTC)*	185	1/4	LBP	134	
NL9FT.2(PTC)*	219	1/4+	LBP	134	
NL10FT	284	1/3	LBP	134	جایگزین SC12G (با رله و خازن)
NL11MF	621	1/3	MBP	134	جایگزین SC12G (با رله و خازن)
NL7CLX	433		LBP	404	
NL8.4CLX	471		LBP	404	
NL7.3MF	393		MBP	134	
NL8.4MF	455		MBP	134	
NLY6F	187		LBP	134	معادل NL7- (با راندمان بالا) High efficiency
NLY7F	213		LBP	134	معادل NL9- (با راندمان بالا) High efficiency
NLY9FK	237		LBP	134	(با راندمان بالا) High efficiency
BD50F	72		LBP/MBP	134	
BD350GH	167		LBP/MBP	134	
GS21MLX	2200		MBP	404	
GS26CLX	1430		LBP	404	
GS34CLX	2072		LBP	404	
GS26MLX	2866		MBP	404	
GS34MLX	3726		MBP	404	

(LBP @-23.3°C ASHRAE) زیر صفر
(MBP@ -6.7°C ASHRAE) بالای صفر

Private Picture Copyright : WWW.MBSM.PRO

Refrigeration, Compressor, K270CZ1, 1/3++, DONPER, Dongbei , K325CZ1, K375CZ1 ,freezer, R134a, White HIK-BD-500 Chest Freezers, Top Open Door, -18 degrees to +10 degrees, 500L

Category: compressor
written by www.mbsm.pro | 24 February 2021

Product Description

PRODUCT PARAMETERS

MODEL NO.	K270CY1
COOLING CAPICITY	270W
REFRIGERANTS	R600a
INPUT POWER	208W
HORSE POWER	1/3+
DISPLACEMENT	16.2cm^3



Private Picture Copyright: WWW.MBSM.PRO

Quick Details

Temperature:
-25□ ~ +15□

Cooling Capacity:
1ton

Panel Thickness:
50mm

Applicable Industries:
Retail

After Warranty Service:
Online support

Local Service Location:
None

Showroom Location:
None

Condition:
New

Place of Origin:
Hubei, China

Voltage:
220V, 220V/50HZ

Dimension(L*W*H):
10-10*10

Weight:
15KGS

Certification:
CE ROHS

Warranty:
1 Year

After-sales Service Provided:
Online support, No overseas service provided

Key Selling Points:
Sustainable

Machinery Test Report:
Not Availabl

Video outgoing-inspection:
Provided

Marketing Type:
New Product 2020

Warranty of core components:
1 Year

Core Components:
Motor

Color:
Balck

Product name:
Refrigerator Compressor

Refrigerant:
R134a

model:
K270CZ1

Cooling capacity:
230W

Product Description

Refrigerant	R134a	**Cooling capicity**	270W
Input power	220W	**Hose Power**	220W
Temperature application	L/MBP	**Displacement**	9.5cm³
Working Current	1.5A	**Voltage**	220V~240V/50Hz
COP	1.3W/W	**Motor type**	RSIR
Cylinder capacity	9.5cm³	**Weight**	9.8±0.4kg

Structure



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Product Description

PRODUCT PARAMETERS

MODEL NO.	K270CY1
COOLING CAPICITY	270W
REFRIGERANTS	R600a
INPUT POWER	208W
HORSE POWER	1/3+
DISPLACEMENT	16.2cm^3



Private Picture Copyright : WWW.MBSM.PRO

Notice:process channel and air suction pipe can not interchangeable

Product Name : Donper Compressor	Model: K270CZ1
Application : Refrigerator	Power supply :220v~240v/50Hz
Refrigeration capacity:270W	Power :220W
cylinder volume:9.5cm³	refrigerant: R134a
Motor :RSIR	COP:1.3W/W
Weight :9.8±0.4kg	working current :1.5A

Private Picture Copyright : WWW.MBSM.PRO

Compressor Details

Production Name	Refrigerator compressor	Model	K270CZ1
Application	Refrigerator/ Freezer(300L~400L)	Power	220V~240V/50HZ
Cooling capacity	270W	Input power	220W
Cylinder volume	9.5Cm^3	Refrigerant	R134a
Motor type	RSIR	COP	1.3W/W
Weight	9.8±0.4kg	Current	1.5A

Private Picture Copyright : WWW.MBSM.PRO

Product Specification

Capacity	500 L
Type	Top Open
Temperature Range	-18 degrees to +10 degrees
Model Number	HIK-BD-500
Model Number/Name	HIK-BD-500

Energy Consumption	2.02 kWh/24hr
Product Dimensions	1650 x 755 x 830mm
Door Type	Top Open Door
Color	White
Door No.	2
Features	Adjustable Temperature Control,Digital Display,75mm Insulation Wall Thickness,Defrost Water Drain
Usage/Application	Freezer/Chiller
Weight	73kg
Depth	755mm
Refrigerant Used	R134a
Number Of Basket	2
Height	830 mm
Power Source	Electric
Energy Efficiency	2.02 kWh/24hr
Compressor Brand	Donper
Compressor Model	K270CZ1
Power	255 W
Width	1650 mm
Colour	White
Refrigerant	R134a
No of Doors	1
Number of Baskets	2

Product Description

Haikawa now launches its latest range of Chest Freezers in 200 L, 300 L, 400 L and 500 L variants. The freezers come with an Adjustable Temperature Comtrol, enabling its use as a freezer (-18 degrees to 0 degrees) or as a chiller (0 degrees to 10 degrees), depending on requirement. The 75mm Insulation Wall Thickness helps improve energy efficiency, while the unique digital display brings in a whole new level of convenience. The Chest freezers come with removable baskets and a defrost water drain. The Inner PP lining improves hygiene while a lock and key mechanism ensures maximum safety. Insulation: Cyclopentane. Refrigerant: R134a. The HIK-BD-500 model has a rated current of 1.5A, thus lowering the power consumption. The Chest Freezer is packed with the following features:

- Adjustable Temperature Control
- Electronic Controller with Digital Display
- 75mm Insulation Wall Thickness
- Low Power Consumption
- Inner PP Lining for Improved Hygiene
- Store-More Removable Basket
- Defrost Water Drain
- Lid Handle
- Lock and Key Safety Mechanism

Additional Information

Packaging Details	Box Dimensions: 1695 x 760 x 880mm Included:1 Chest Freezer/ 1 Instruction Manual/ 2 Keys/ 2 Inner Metal Trays



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Compresseur de réfrigérant R134a Donper K375CZ1 220-240V 50Hz SC-SD-388Y

Description

Compresseur de réfrigérant R134a Donper K375CZ1 220-240V 50Hz SC-SD-388Y
Réfrigérant: R134a
Tension: 220 V ~ 240 V / 50 HZ
Puissance en chevaux: 1/2 ph
Puissance d’entrée: 235 W
Capacité de refroidissement: 325 W
Cylindre de capacité: 11,4 centimètres cubes
Courant de travail: 1.6A
Type de moteur: CSIR
Poids: 9,9 ± 0 4 kg



Private Picture Copyright : WWW.MBSM.PRO




Private Picture Copyright : WWW.MBSM.PRO

schéma électrique d’ installation double va et vient


Category: electricity
written by www.mbsm.pro | 24 February 2021

schéma de branchement interrupteur double va et vient

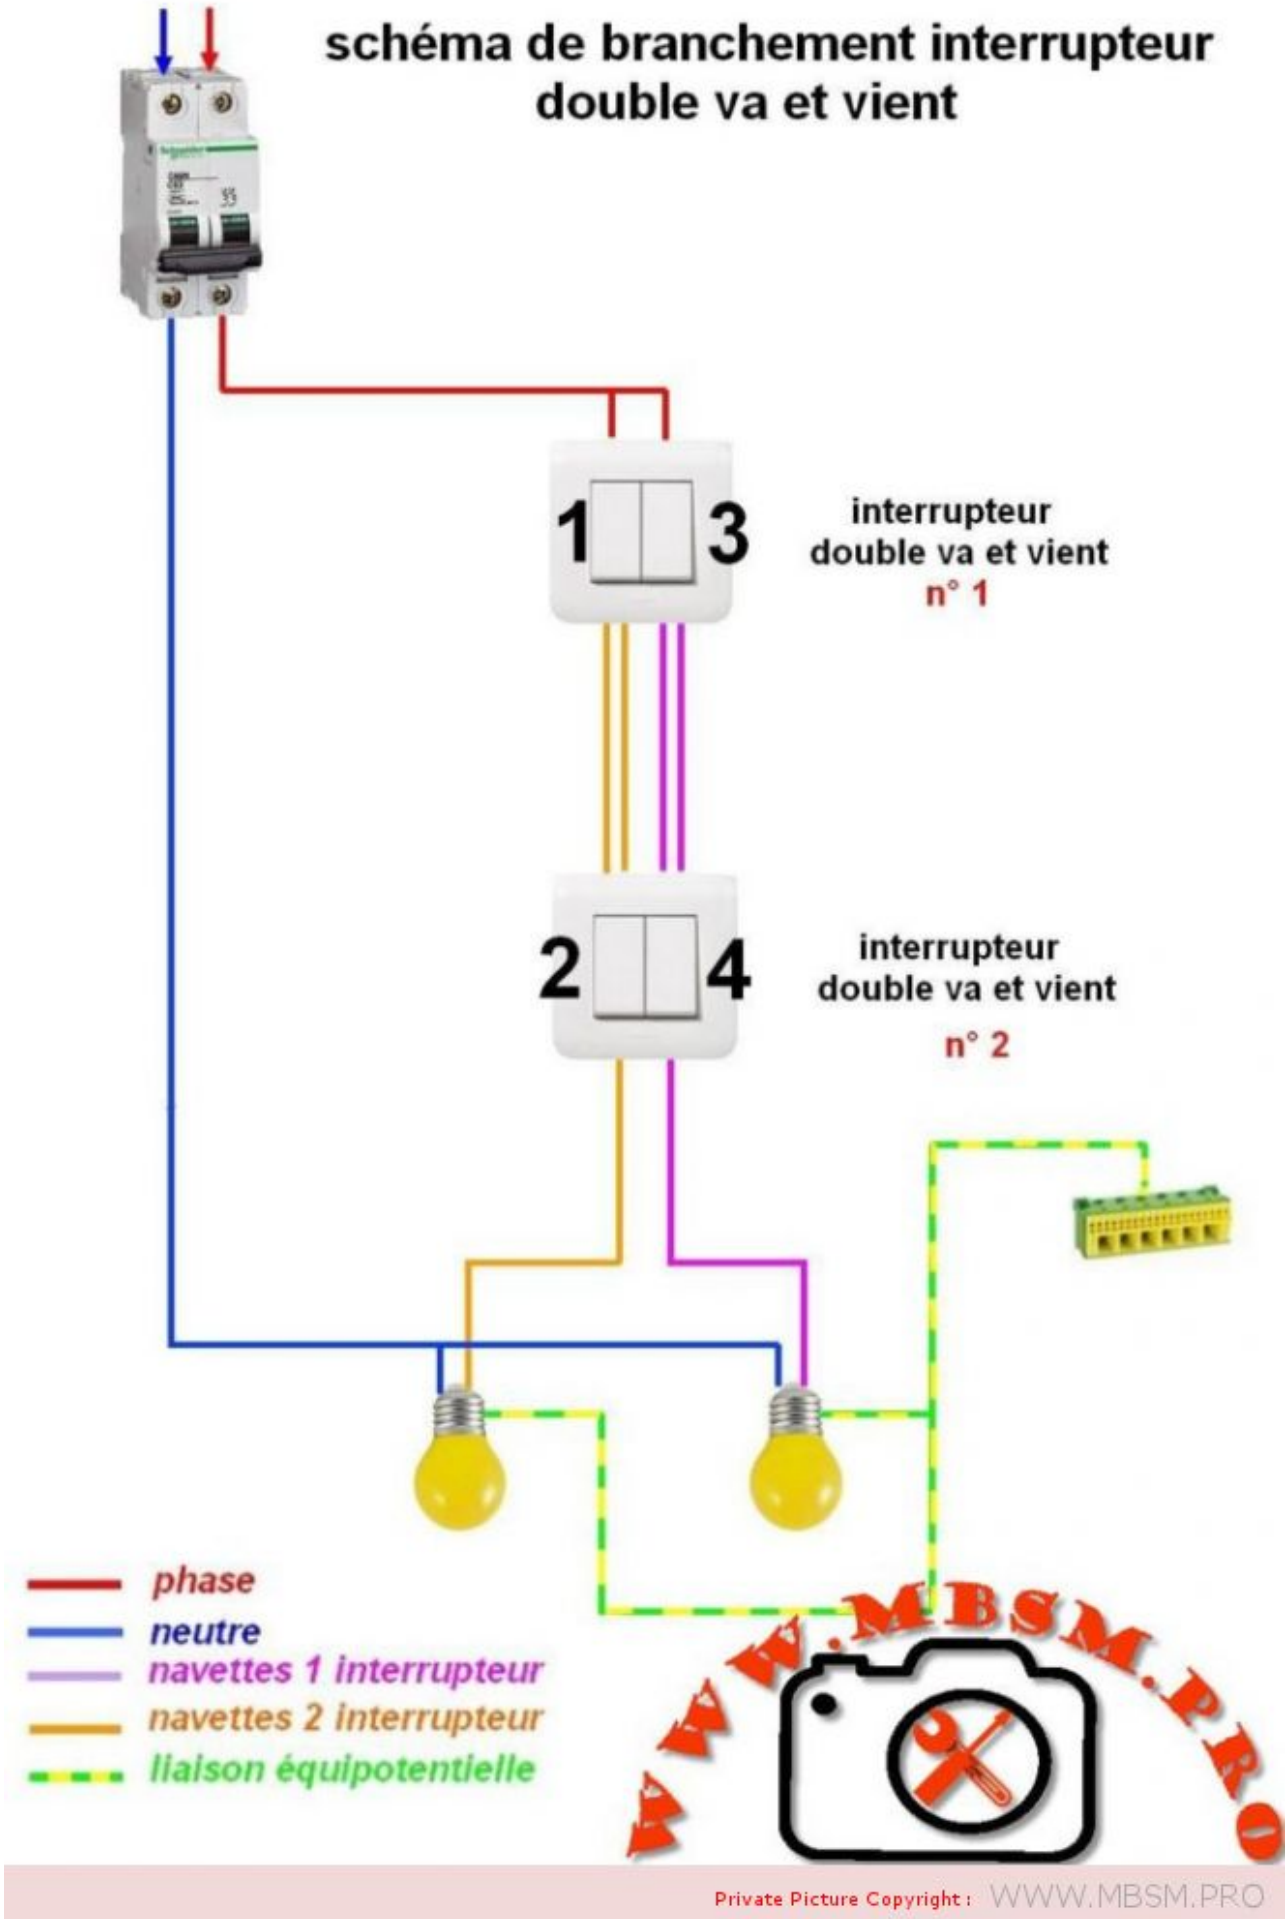

Private Picture Copyright : WWW.MBSM.PRO

schéma de branchement interrupteur double va et vient

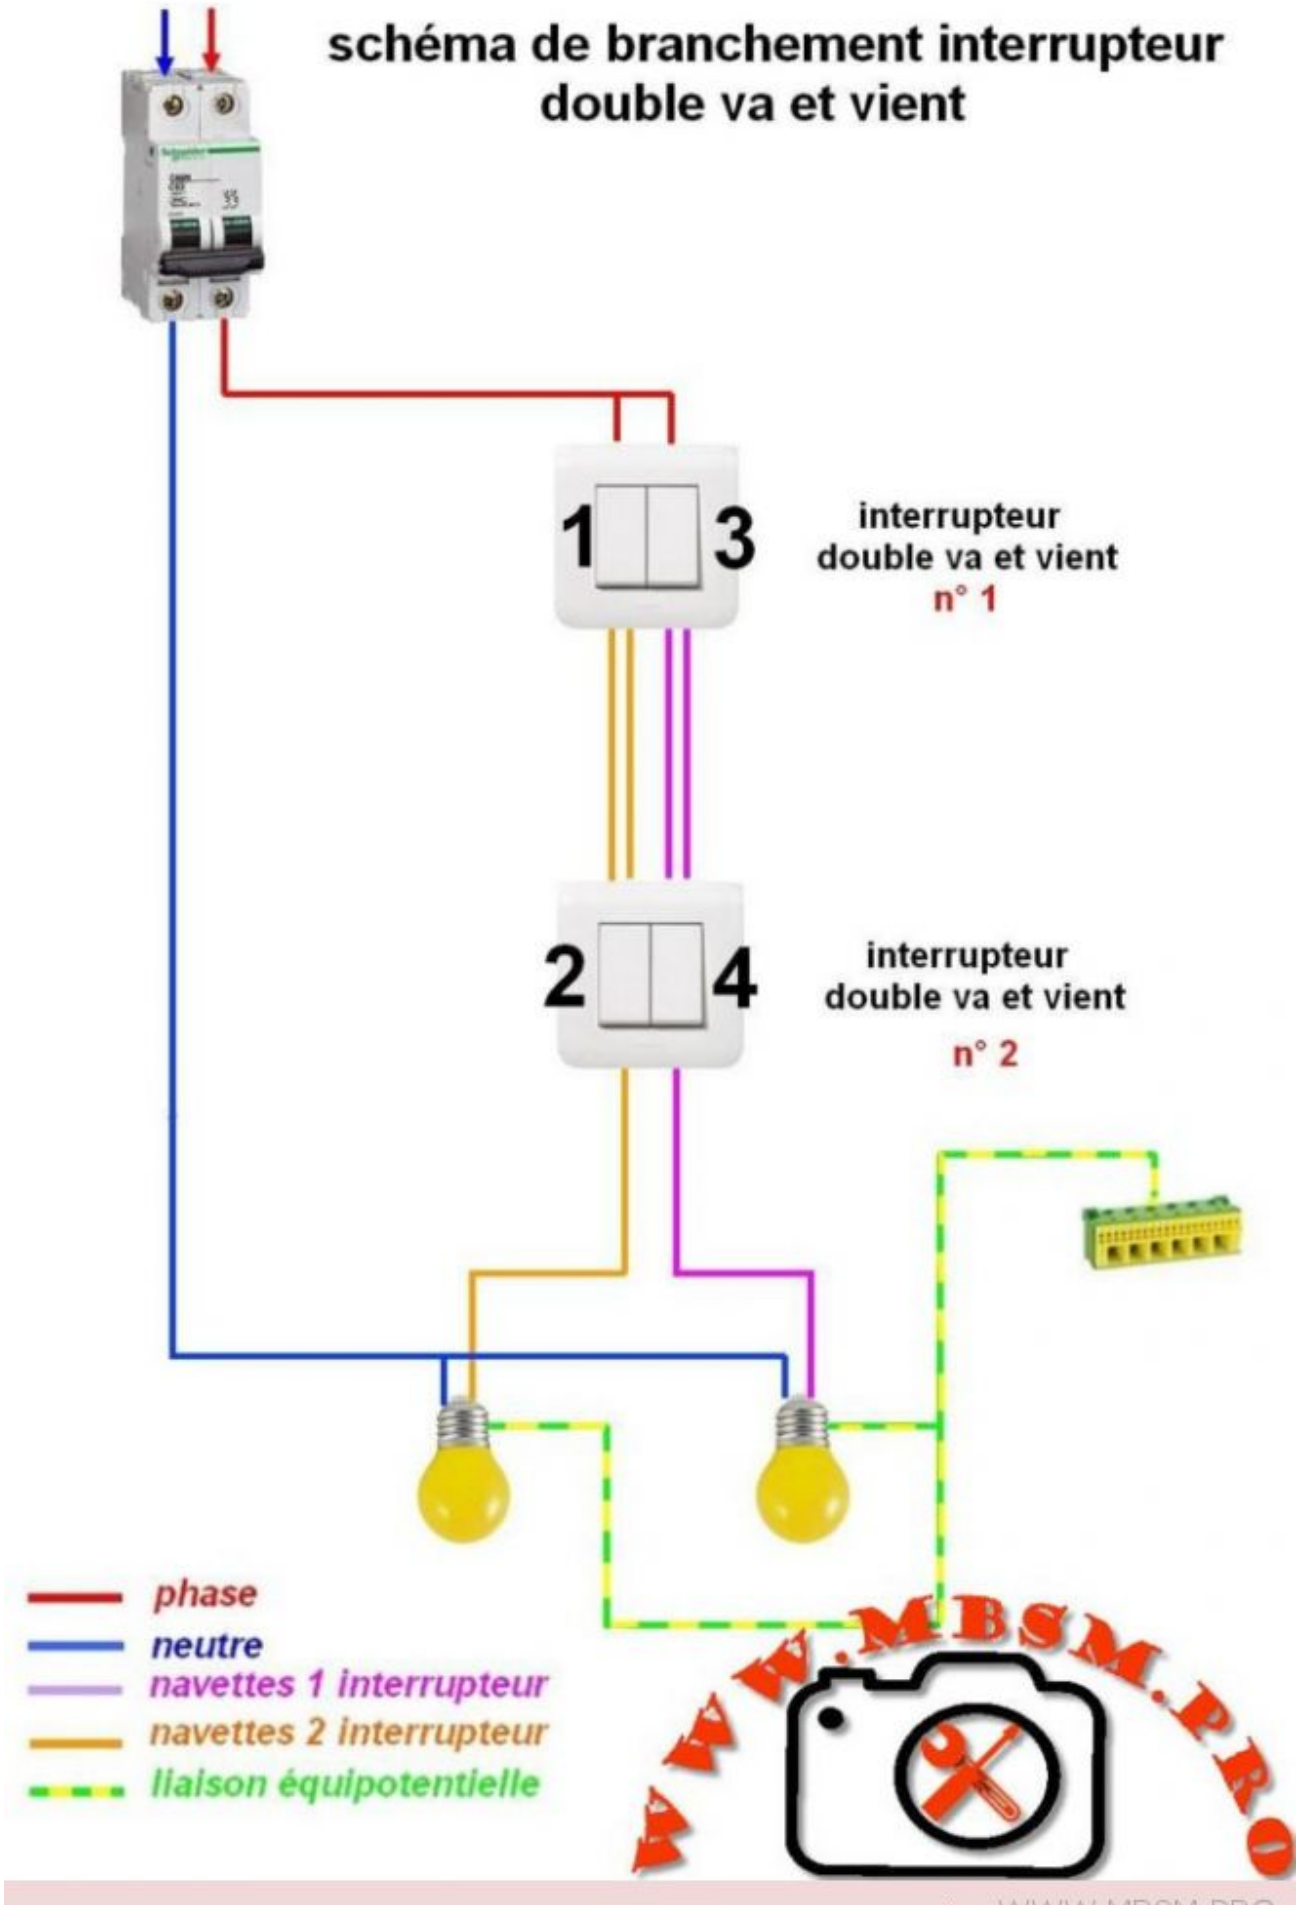

Private Picture Copyright : WWW.MBSM.PRO


– schéma électrique d’ installation double va et vient
– schéma de branchement double va et vient
– exemple de câblage et raccordement les différents types interrupteurs double va et vient

---


schéma electrique minuterie unipolaire

Category: electricity
written by www.mbsm.pro | 24 February 2021

schéma électrique minuterie

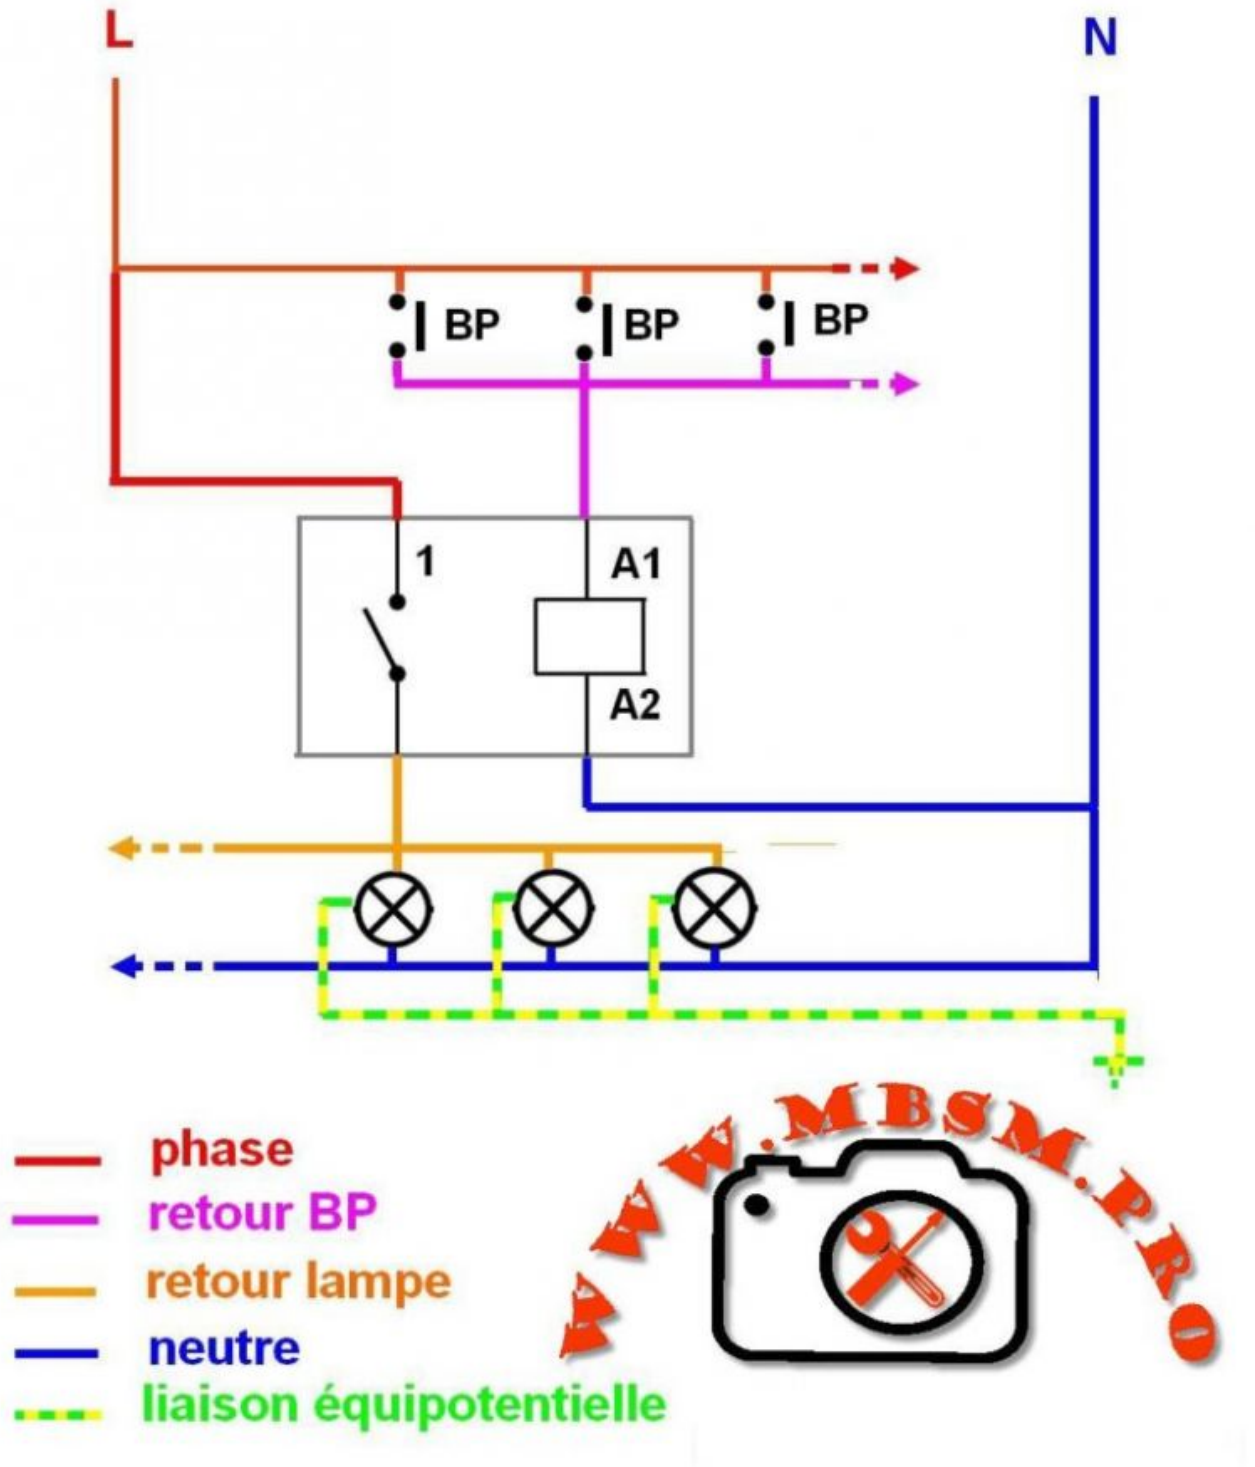

Private Picture Copyright : WWW.MBSM.PRO

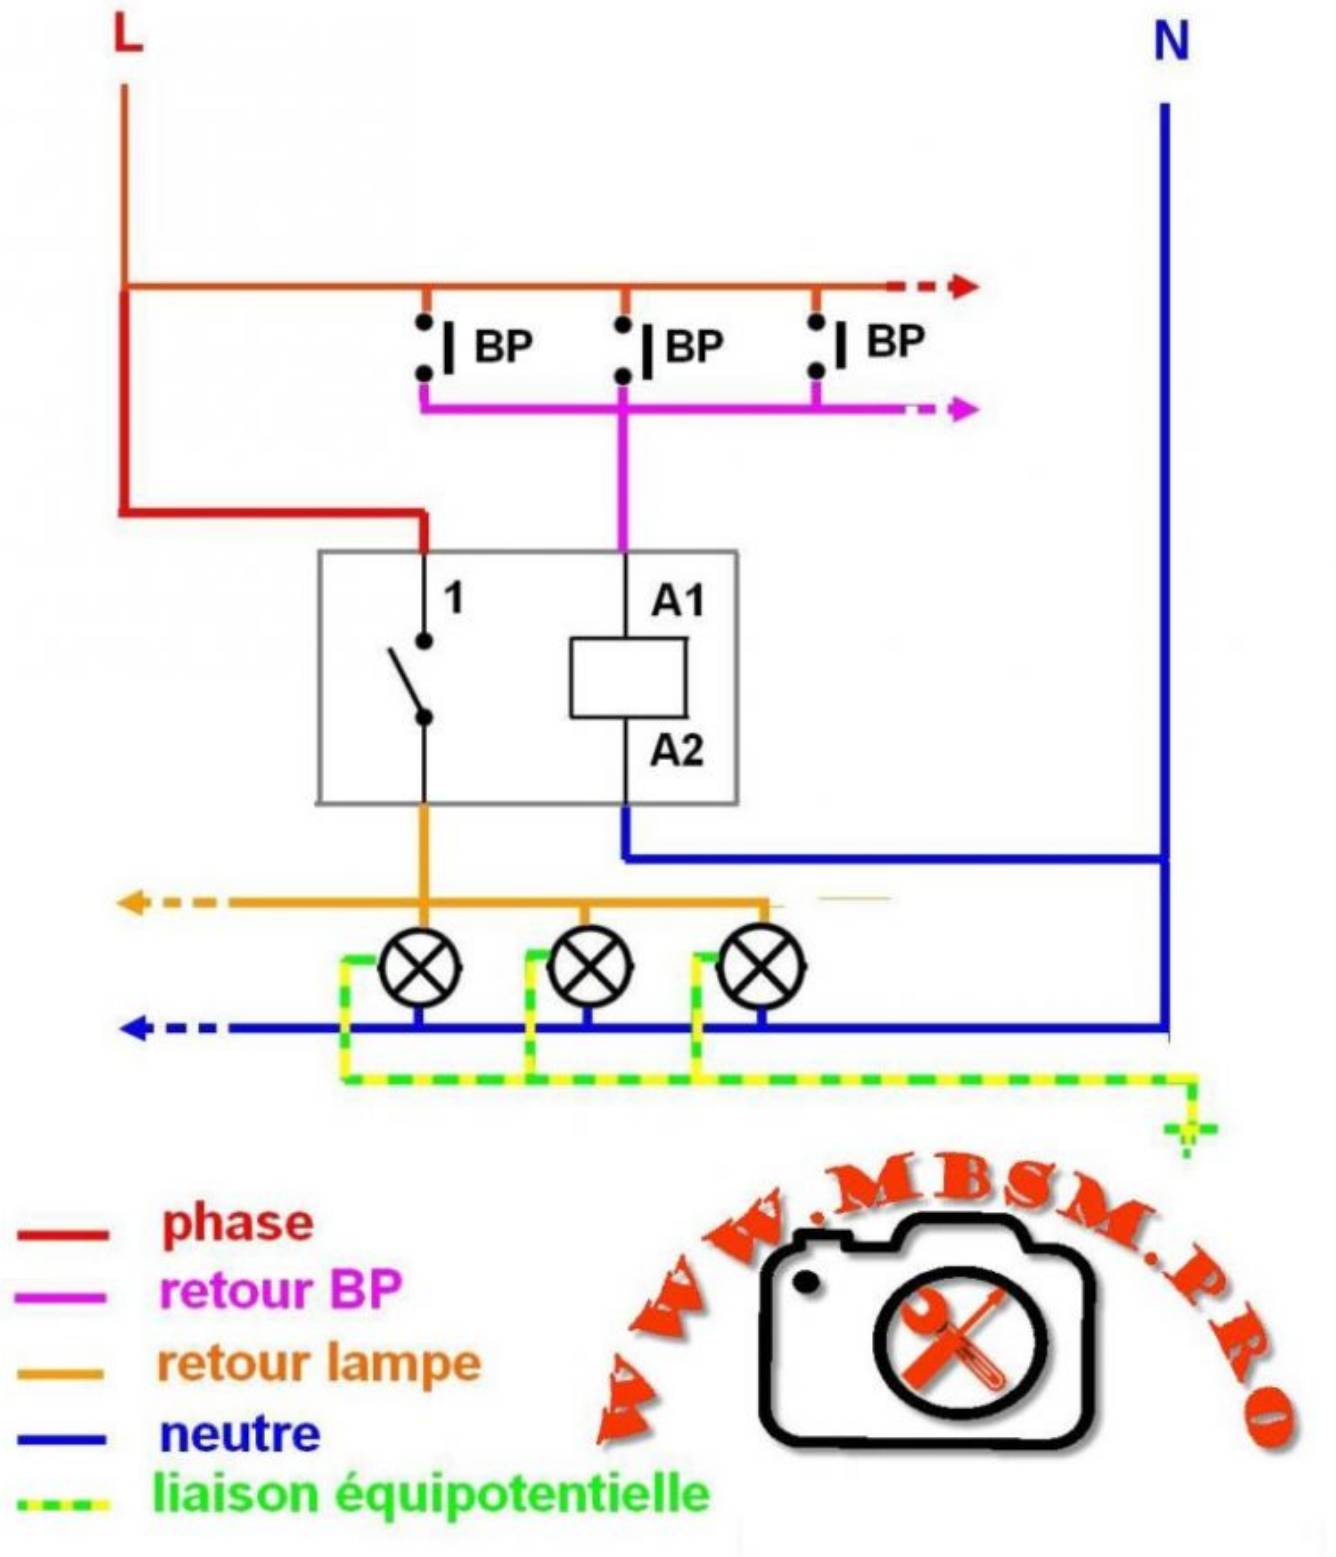

– schéma electrique minuterie unipolaire
-branchement et installation d’une minuterie a 3 fils
-câblage et raccordement les différent types minuterie schneider, hager , legrand , theben …