

LG rotary, compressor, model,
QJS222PMA, 12700BTU 5.6Amps, EER =
10.7, air conditioner

Category: compressor


written by www.mbsm.pro | 11 April 2021

LG rotary, compressor, model, QJS222PMA, 12700BTU 5.6Amps, EER = 10.7, air conditioner

PH360G2C-4FTS1, 22000BTU, GMCC,
Compressor rotary, 2 Ton, air
conditioner, R22, refrigeration
compressor , 50HZ 220V / 240V

Category: compressor

written by www.mbsm.pro | 11 April 2021

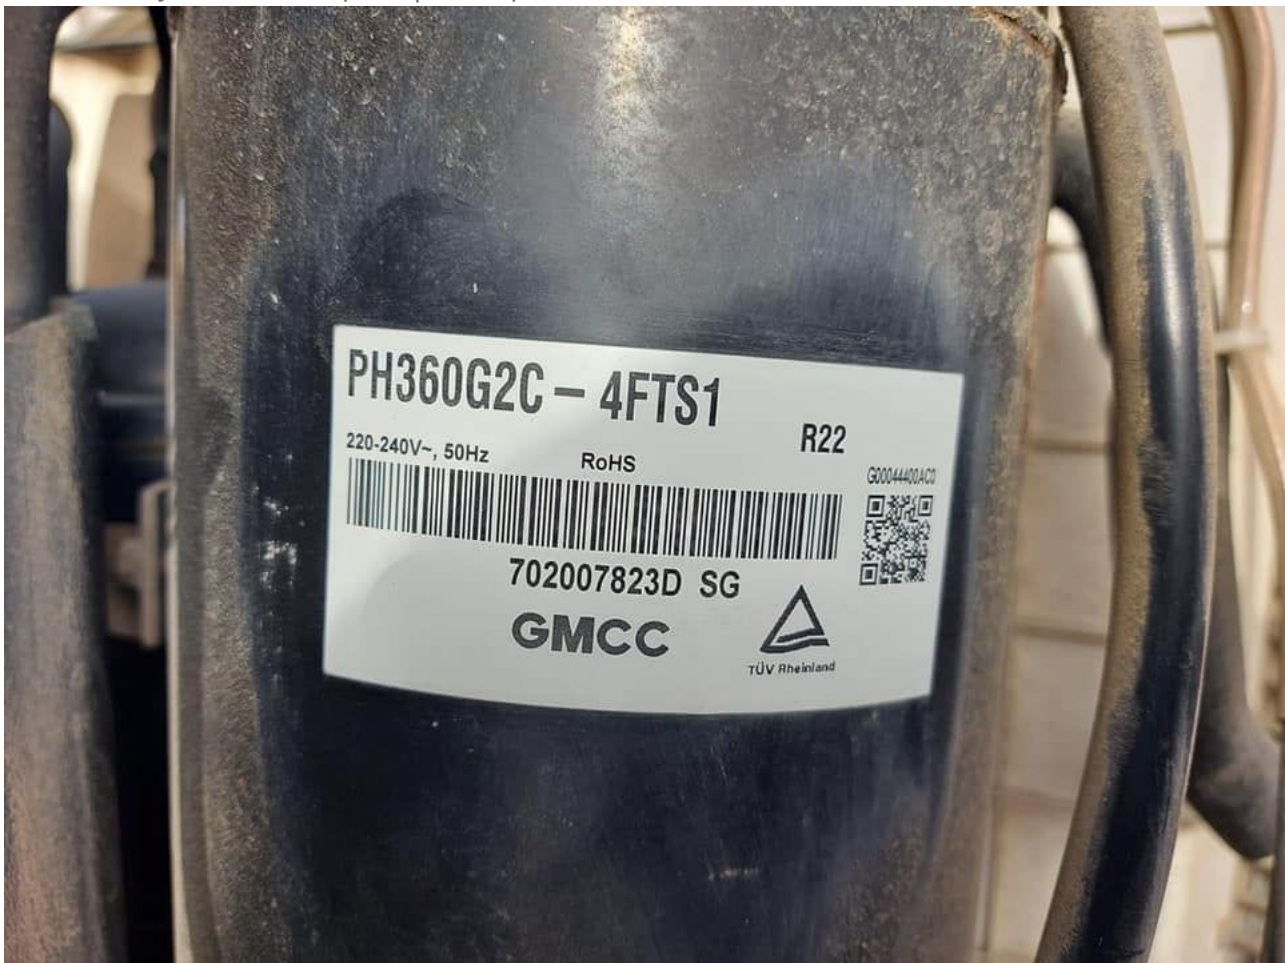

Private Picture Copyright : WWW.MBSM.PRO

PH360G2C-4FTS1, 22000BTU, GMCC, Compressor rotary, air conditioner, R22,
refrigeration compressor , 50HZ 220V / 240V

Pressure and boiling Temperature list, standing, Refrigerant, suction, discharge

Category: Chaud&Froid

written by www.mbsm.pro | 11 April 2021

Some Refrigerant Standing, Suction, Discharge Pressure & Boiling Temperature List.				
Refrigerant Name	Standing Pressure	Suction Pressure	Discharge Pressure	Boiling Temp
R-22	150-155 psi	60-70 psi	250-300 psi	-40.8 C
R-410a	225-230 psi	120-130 psi	450-500 psi	-51.4 C
R-134a	85-95 psi	12-15 psi		-26.2 C
R-600a	40-50 psi	Below 0-1 psi		-11.7 C
R-32	240-245 psi	110-115 psi		-52.0 C
R-290	125-130 psi	65-70 psi	275-300 psi	-42.1 C
R-407c	180-185 psi	75-80 psi	275-300 psi	-45.0 C
R-404a	180-185 psi	80-90 psi		-46.2 C
R-417	140 psi	65 psi	261 psi	



Private Picture Copyright : WWW.MBSM.PRO

Pressure and boiling Temperature list, standing, Refrigerant, sustion, discharge

no frost, egl99aa zmc refrigerator, DF40, silver, ideal, zanussi, IDEAL ZANUSSI, EGL99AA ZMC, DF 40 Elgance, Compressor, ACC Cubigel, Huayi, Electrolux, ZEM GL99AA, GL99AA, LBP , R134a, 220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm3, motor type RSIR, LRA 14.4A

Category: compressor

written by www.mbsm.pro | 11 April 2021





[Mbsm_dot_pro_private_PDF_GL99AA-compresseur-acc-cubigell-gl99aaTélécharger](#)
[Mbsm_dot_pro_private_PDF_GL99AATélécharger](#)

Compressor ACC Cubigel Huayi Electrolux ZEM GL99AA, LBP – R134a, 220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm³, motor type RSIR, LRA 14.4A, expansion device: capillary, cooling: static, weight 11 kg, the statutory warranty period shall apply (24 months), Delivery time Info: with “immediately available” and “scarce stock”, usually delivery within 2 days. For “currently not available” delivery time usually 2 weeks or delivery time in urgent cases contact us.

Refrigerant:	R134a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	4,9 mm
Suction:	6,5 mm
Working area:	LBP
Design type:	Hermetic
Model series:	GL
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 22 Ester
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions (length × width × height):	23,10 × 16,20 × 18,60 cm
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	GL99AA
Stroke volume (cm ³):	9,93
Cooling capacity (W):	174
Power (HP):	0,25
Max. Starting current (A):	14,4
Max. Operating current (A):	1,31
Engine type:	RSIR
COP:	0,92
Note:	Static cooling
Conveying and suction volume (m ³):	1,72
Oil quantity (l):	0,295
Compressor type:	Piston
Cooling:	Static
RPM:	2900
Power range:	-35 C to -10 C

Alternative:	HLY90AA, NL11F
Pressure line (mm):	4,9
Suction line (mm):	6,5



GL99AAa VE09
220-240V 50Hz ~1

COMPRESSOR

Displacement (cm ³)	9.95
Diameter (mm)	25.4
Stroke (mm)	19.62
Net Weight (Kg)	9.6
Oil type	ISO VG 22 ESTER
Oil charge (cm ³)	295

MOTOR

Approximate Power (CV)	1/4
Voltage/Frequency (V/Hz)	220V 50Hz
Voltage range (V)	187-264
Code	-
Type	RSIR
Phase number	1 PH
Locked rotor current (A)	14.0
Main W. resist. at 25°C (Ω)	9.96
Start W. resist. at 25°C (Ω)	20.39

ELECTRICAL COMPONENTS

Relay	PTC 3003 - K100		
Nominal voltage (V)	200 - 240		
Resistance μ	14,00		
Protector	MRP336JZ	T0377	AE11FU

APPLICATION

Application	Low back pressure
Refrigerant	R134a
Evaporating (°C)	-35 to -10
Expansion	Capillar
Comp. cooling	Static
Max. ambient temp. (°C)	43

NOMINAL PERFORMANCE

	CYCLE A	CYCLE B
Cooling capacity (W)	175	238
Input power (W)	189	200
EER (kcal/Wh)	0.79	1.02
COP (W/W)	0.92	1.19
Current (A)	1.31	1.34

TEST CONDITIONS

Evaporating temp. (°C)	-25.0	-23.3
Condensing temp. (°C)	55.0	55.0
Liq.t. entering expan. (°C)	55.0	32.0
Ambient t. and return (°C)	32.0	32.0
Tens/Freq (V/Hz)	220V 50Hz	220V 50Hz

موديل : KGT1

الشركة العالمية لصناعة الأجهزة المنزلية - الاسكندرية

١,٢ أمبير

١٩٥ وات

٥٠ هيرتز

٢٢٠ فولت

السعة : ١,٣ اقدم

درجة الحماية : IPX2

التصنيف : ST

الشحنة : ١٧٠ جم ف ١٣٤ ا

سنة الانتاج

No.

م.ق.م

صنع في مصر

200

3 2

٢٠٠٥/٢٢٠

Made in Egypt



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO




Picture Copyright : WWW.MBSM.PRO



Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

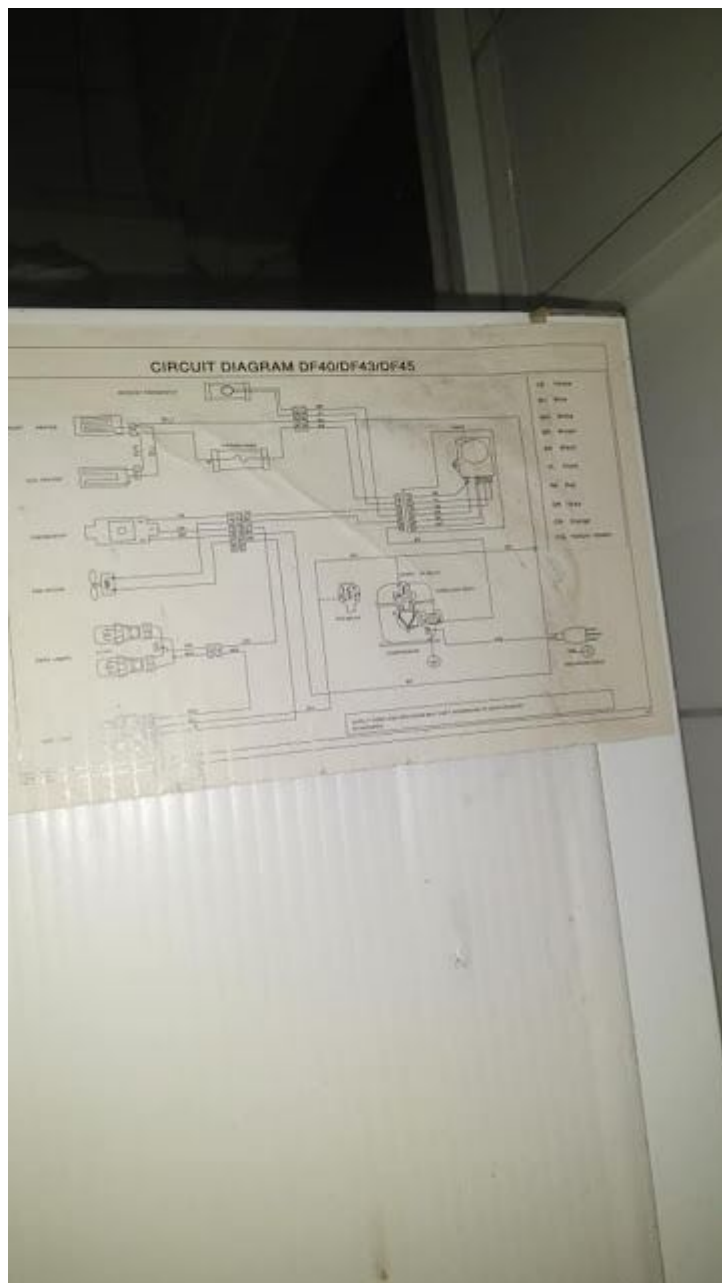

Private Picture Copyright : WWW.MBSM.PRO

ZMC

EGL99AA 1002

220-240V~50Hz

R 134 a

MADE IN EGYPT



3

480

0250659



Tecumseh, Copeland, Compressor,
Cross, Reference, P12FW, Compressor,
R-12, 1/3HP, 230V, HMBP, ACC-
ELECTROLUX, CUBIGEL/HUAYI

Category: compressor

written by www.mbsm.pro | 11 April 2021

Tecumseh, Copeland, Compressor, Cross, Reference, P12FW, Compressor, R-12,
1/3HP, 230V, HMBP, ACC-ELECTROLUX, CUBIGEL/HUAYI

Types of Electrical Motors, RSIR, CSIR, RSCR, CSR, PTC, NTC, LST, HST, MBP, HBP, LBP

Category: compressor, Files

written by www.mbsm.pro | 11 April 2021

Types of Electrical Motors

RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start up. Standard energy efficiency.

CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor.

Auxiliary winding is disconnected after start up. Standard efficiency.

RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up.

Used for high efficiency in small capacity compressors (particularly in household refrigeration)

CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running).

Auxiliary winding remains connected after start up.

Used for high efficiency in small compressors and for size reduced size motors in compressors with comparatively large displacements

Types of Electrical Motors

RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start up. Standard energy efficiency.

CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor.

Auxiliary winding is disconnected after start up. Standard efficiency.

RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up.

Used for high efficiency in small capacity compressors (particularly in household refrigeration)

CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running).

Auxiliary winding remains connected after start up.

Used for high efficiency in small compressors and for size reduced size motors in compressors with comparatively large displacements.



Private Picture Copyright : WWW.MBSM.PRO

Type of starting device

Current relay – (electromechanical). RSIR/CSIR motors and CSR low/medium-power motors with NTC (the NTC is connected in series with the starting capacitor and the main purpose is to reduce the current peaks in the relay contacts)

Potential relay – (electromechanical). CSR high-power motors.

PTC – (Positive Temperature Coefficient), the resistance increases with the temperature. Device only with RSIR or RSCR motors in the (Small L, B), L and P ranges.

NTC – (Negative Temperature Coefficient), the resistance decreases with the temperature. Used in some CSR in order to reduce dimensions and components.


Type of starting device

Current relay – (electromechanical). RSIR/CSIR motors and CSR low/medium-power motors with NTC (the NTC is connected in series with the starting capacitor and the main purpose is to reduce the current peaks in the relay contacts)

Potential relay – (electromechanical). CSR high-power motors.

PTC – (Positive Temperature Coefficient), the resistance increases with the temperature. Device only with RSIR or RSCR motors in the (Small L, B), L and P ranges.

NTC – (Negative Temperature Coefficient), the resistance decreases with the temperature. Used in some CSR in order to reduce dimensions and components.

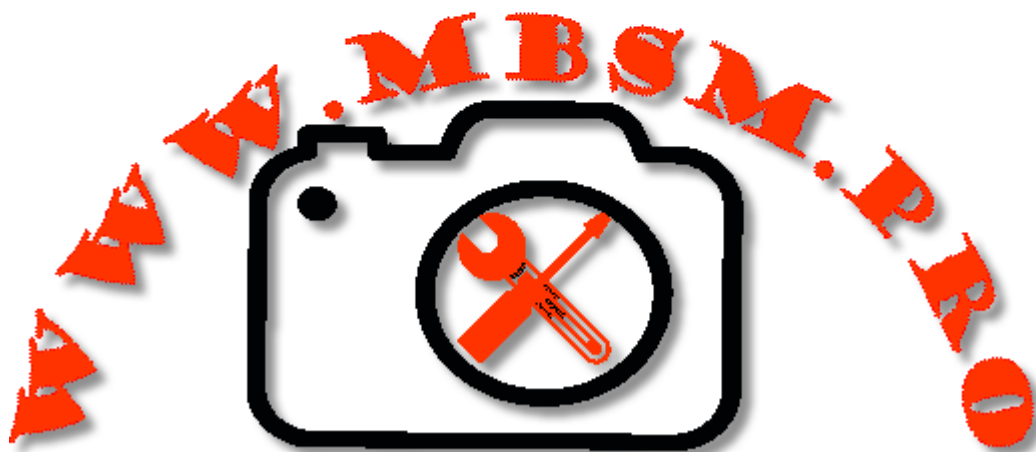

Private Picture Copyright : WWW.MBSM.PRO

Type of torque


LST – Low Starting Torque – Systems with capillary tube or balanced pressures at start up.

HST – High Starting Torque – Systems with expansion valve or capillary tube, with unbalanced pressures at start up.

Type of torque


LST – Low Starting Torque – Systems with capillary tube or balanced pressures at start up.

HST – High Starting Torque – Systems with expansion valve or capillary tube, with unbalanced pressures at start up.

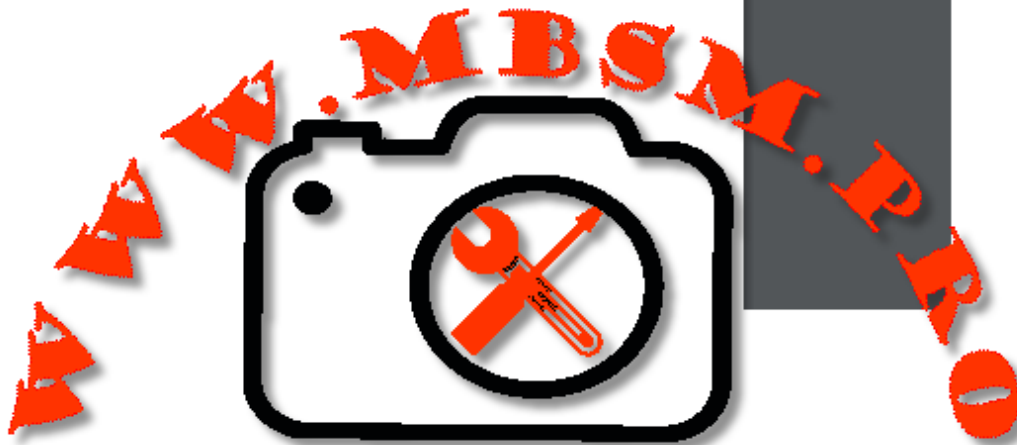



Private Picture Copyright : WWW.MBSM.PRO

Secop HBP compressors: evaporation pressures

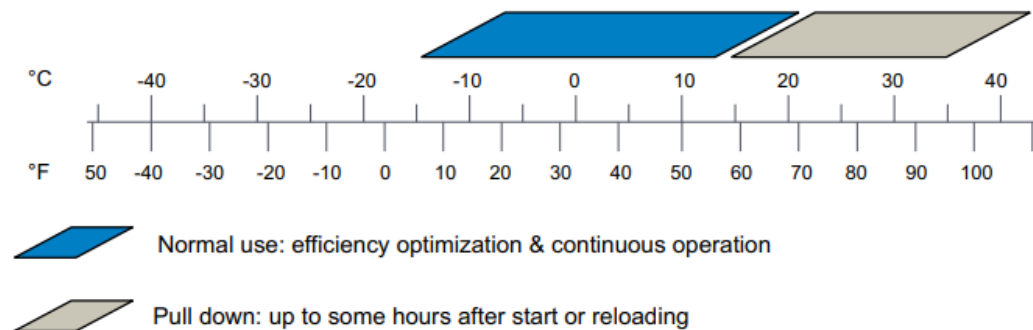


Private Picture Copyright : WWW.MBSM.PRO

Secop MBP compressors: evaporation pressures

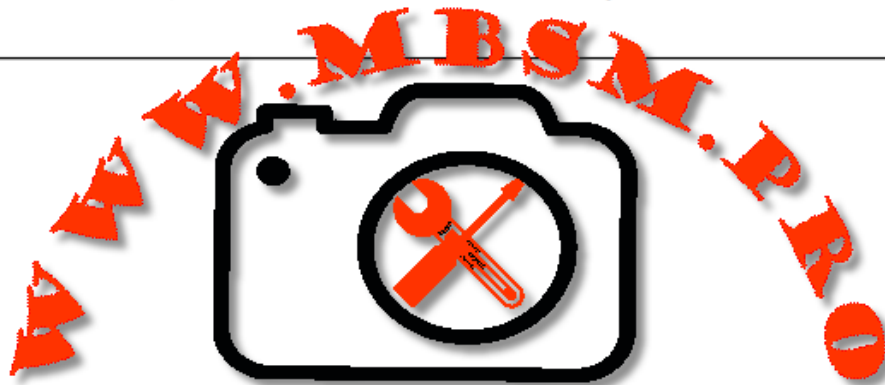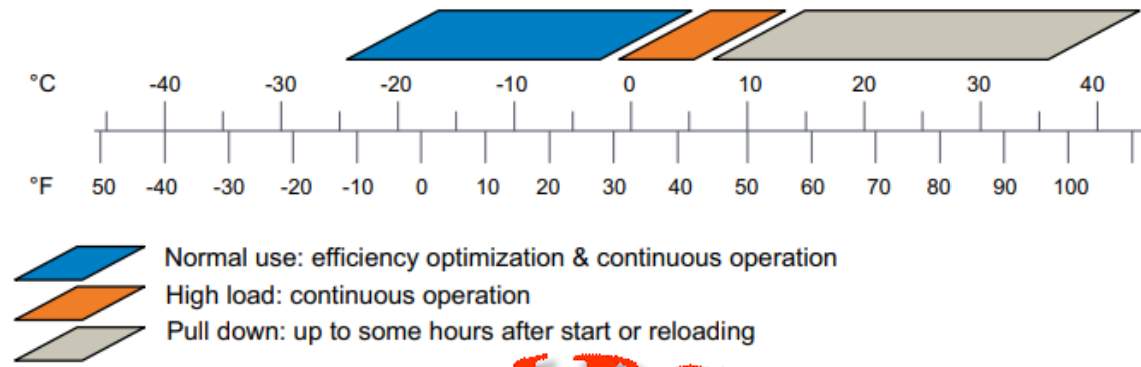

Private Picture Copyright: WWW.MBSM.PRO

Secop LBP compressors: evaporation pressures

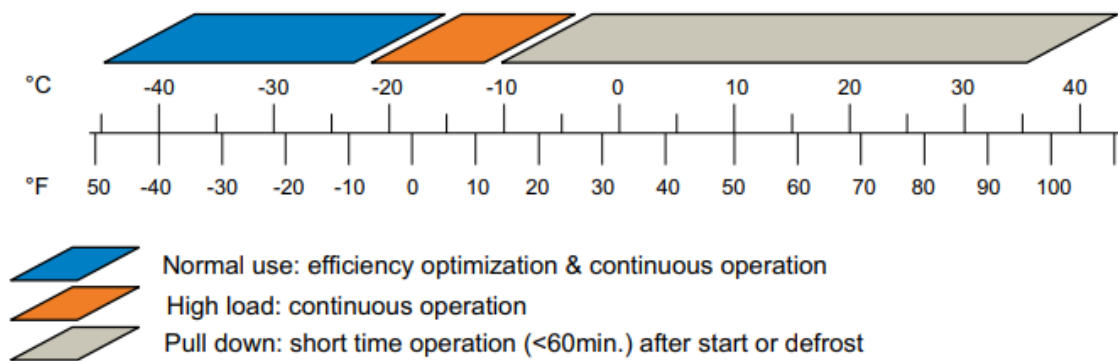

Private Picture Copyright: WWW.MBSM.PRO

Catalogue, DANFOSS, All Compressor, PDF Catalogs, Documentation

Category: compressor,Files

written by www.mbsm.pro | 11 April 2021


Catalogue, DANFOSS, All Compressor, PDF Catalogs, Documentation

[Mbsm_dot_pro_private_PDF_DANFOSS-FRCC.PK_.046.A1.02Télécharger](#)

[Mbsm_dot_pro_private_PDF_Danfoss_scroll_compressors_HXX_R410ATélécharger](#)

[Mbsm_dot_pro_private_PDF_DANFOSS-1Télécharger](#)

[Mbsm_dot_pro_private_PDF_DANFOSSTélécharger](#)

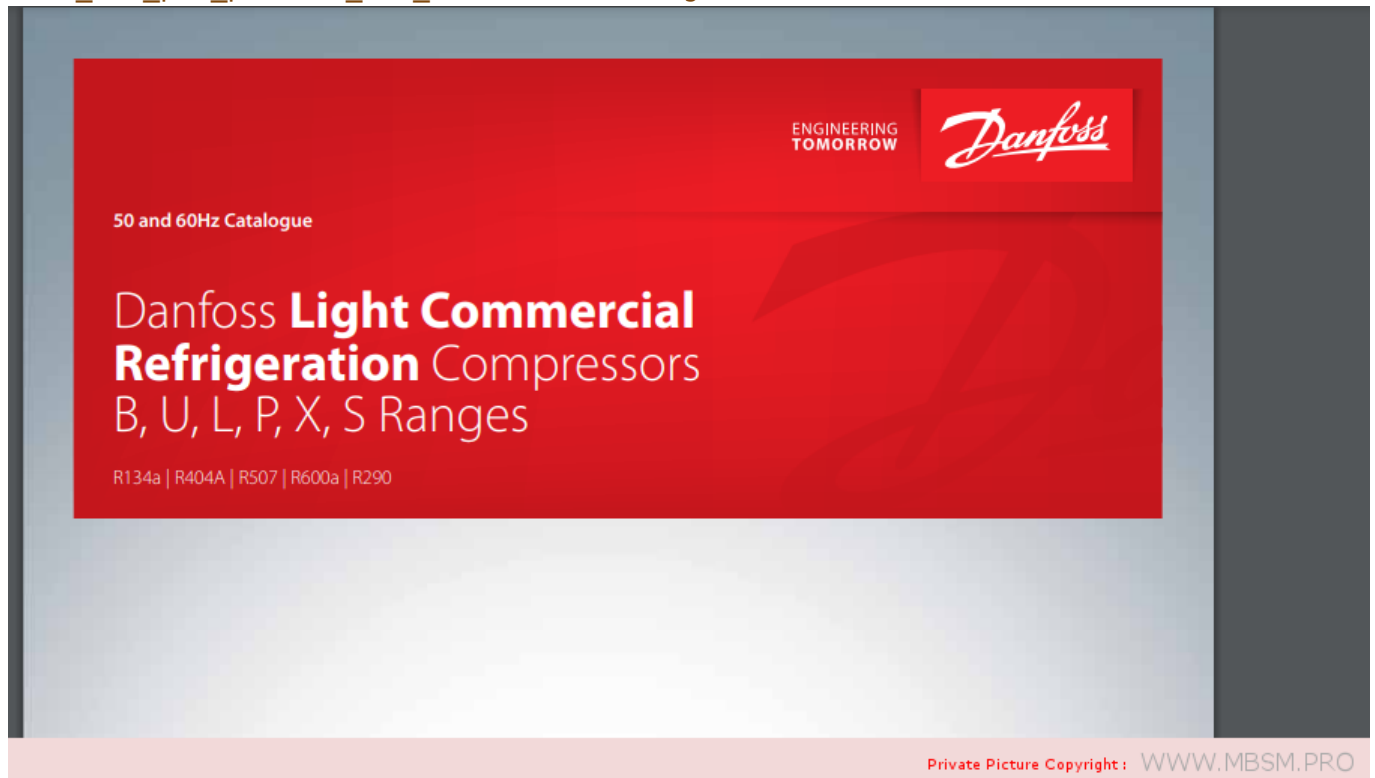

Compressor Embraco Aspera NEK6210GK, MBP – R404A, R507, 220 – 240V/1/50Hz, 1/2 HP, discharge 8.77 cm³, motor type CSIR, lubricant type POE 22, lubricant charge 350 ml.1318 W at +7.2 / +54.4 °, expansion device: capillary or valve, cooling: fan cooling, weight 11 kg

Category: compressor

written by www.mbsm.pro | 11 April 2021

Compressor ASPERA NEK6210GK | NEK 6210 GK

Compressor Embraco Aspera NEK6210GK, MBP – R404A, R507, 220 – 240V/1/50Hz, 1/2 HP, discharge 8.77 cm³, motor type CSIR, lubricant type POE 22, lubricant charge 350 ml.1318 W at +7.2 / +54.4 °, expansion device: capillary or valve, cooling: fan cooling, weight 11 kg

Refrigerant	R404A/R507
Working range[stC] MBP	-20 do +10
Nominal capacity [W] (evaporating temperature +7,2C, Condensing temperatur +54,4C)	1303
Power supply	220-240V 50Hz
Engine type	CSIR
Displacement [cm ³]	8,77
Weight [kg]	11

Evaporating temperature +55 C

Evaporating Temperature	Cooling Capacity +/-5%	Power Consumption +/-5%	Current Consumption +/-5%	Gas Flow Rate +/-5%	Efficiency +/-7%			
°C	(kcal/h)	(W)	(Btu/h)	(W)	(A)	(kg/h)	(kcal/Wh)	(W/W)
-20	384	447	1.525	365	2,36	11,99	1,05	1,22
-15	467	544	1.855	419	2,58	14,69	1,12	1,30
-10	574	668	2.278	470	2,79	18,18	1,22	1,42
-5	704	819	2.795	519	3,00	22,51	1,36	1,58
0	858	998	3.405	565	3,20	27,73	1,52	1,77
5	1.036	1.204	4.109	609	3,40	33,90	1,70	1,98
10	1.237	1.438	4.907	650	3,59	41,06	1,90	2,21

Substitutes for this compressor are: Electrolux ML90TB , L'Unite

Hermetique/Tecumseh AE4450Z

Refrigerant: R404A, R507

 **Embraco aspera** **NEK6210GK**

THERMALLY PROTECTED		220-240V ~ 50Hz
	R 404A	
POE OIL 350°C	1 PH	

MADE IN SLOVAKIA NO START WITHOUT STARTING DEVICE


958CA51  LX  N10ZGP43



Specification for r-22 Compressor, Ph Rotary Models Specification, PH41VPJT, 2 Ton, Mitsubishi Rotary Compressor, 24000BTu

Category: compressor

written by www.mbsm.pro | 11 April 2021

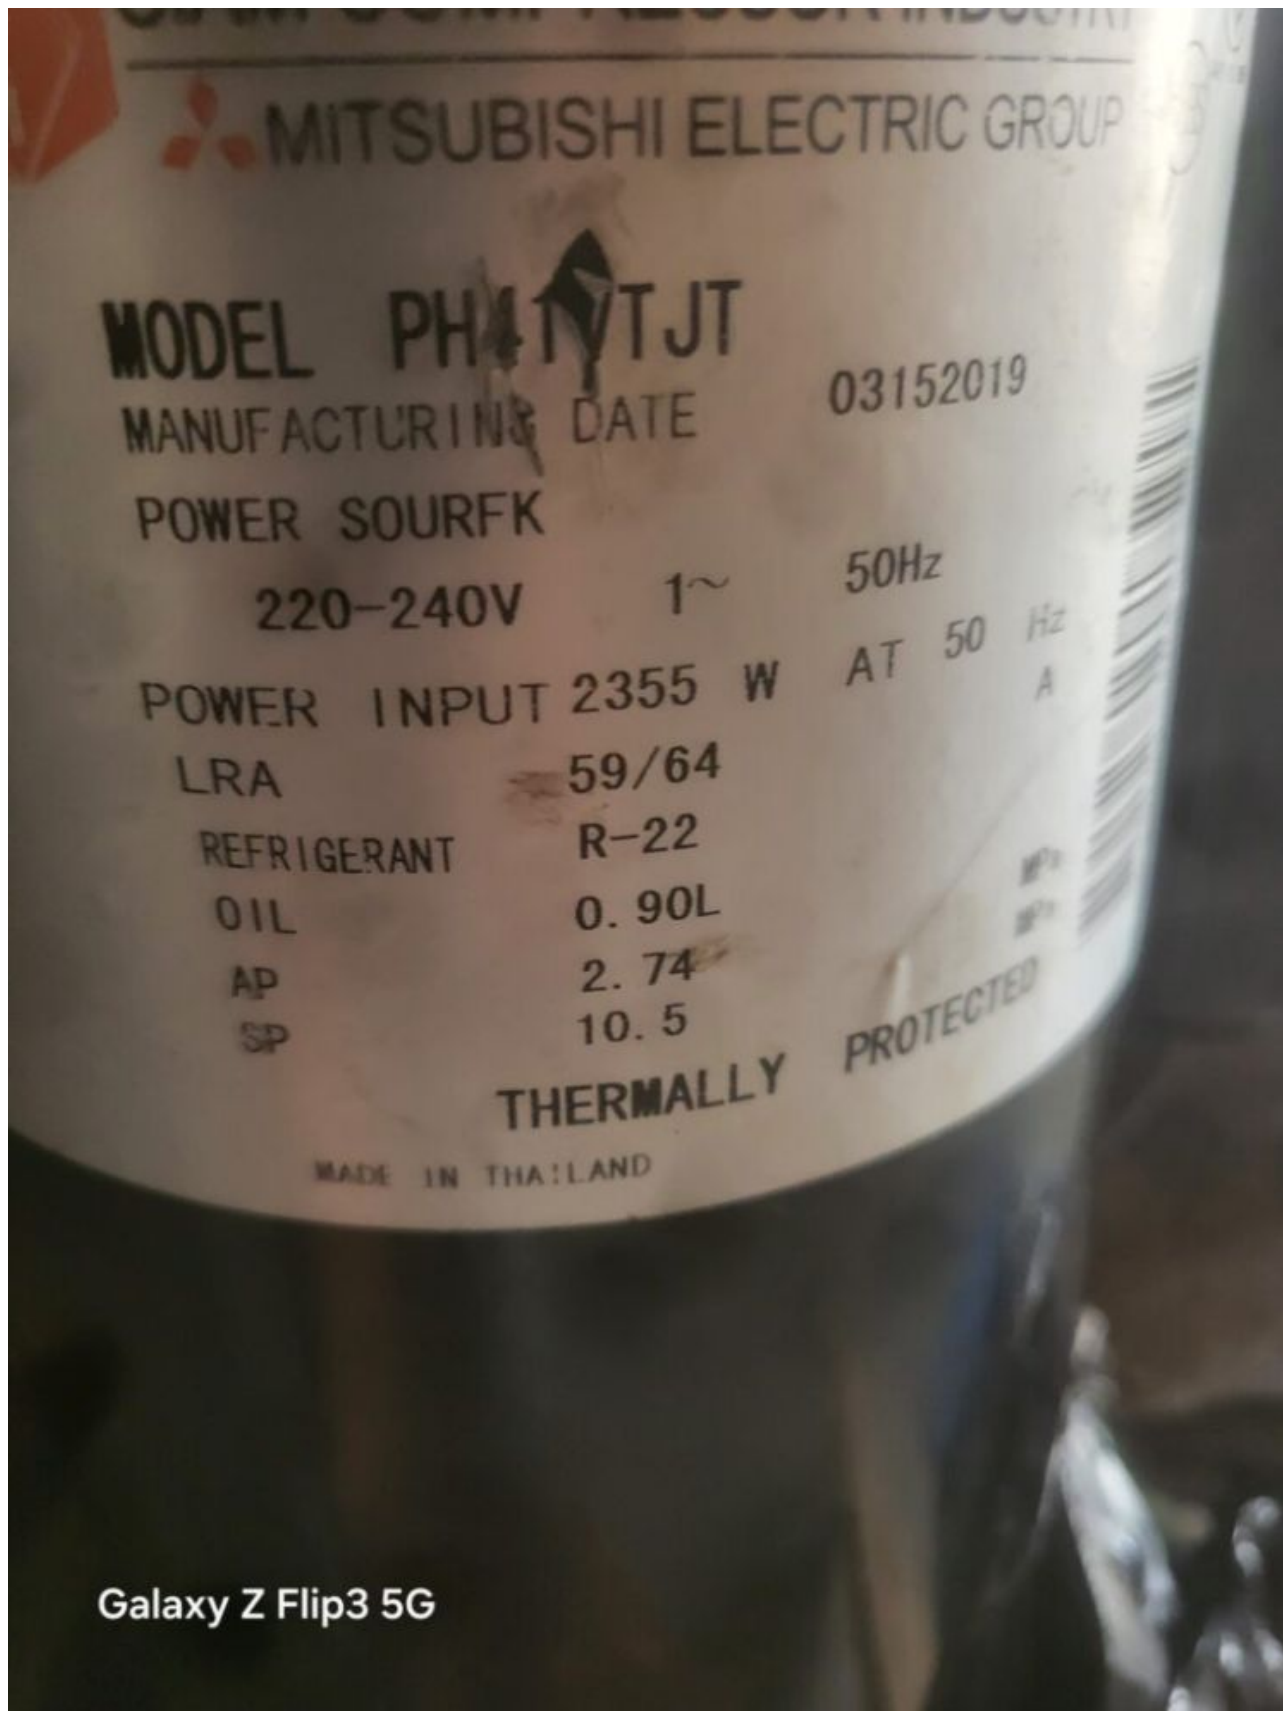

Private Picture Copyright : WWW.MBSM.PRO

Product Specification

Horse Power

2 Ton

Brand

Mitsubishi

Compressor Technology

Rotary Compressor

Rental Available	No
Spares Available	No
Is It Portable	Yes
Installation/After Sales Service Available	No
Cylinder	1
Warranty	1 Year
Phase	Single
Weight	28 Kg
No. Of Cylinder	1
Cylinder Type	Round
Voltage	220 V
Material	Copper
Accessories	No
Application	AC
Color	Black



REFRIGERANT COMPRESSOR

MODEL PH41VPJT

DATE 28022004

PHASE

VOLT AC 220-240

FREQ. 50 Hz

L.R.A. 59/64

REFRIGERANT R-22

OIL MS-32NI

AP 28 Kg/cm^2

SP 84 Kg/cm^2



PH41VPJT A0019344AA

LICENSED BY MITSUBISHI ELECTRIC
SIAM COMPRESSOR INDUSTRY CO., LTD.

MADE IN
THAILAND

ZMC, zanussi, Made in Egypt, Compressors

Category: compressor

written by www.mbsm.pro | 11 April 2021

R134a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ ☐ GL45AA	LBP::R134a	1/8	43	A	96	82	1.06	0.82		
▶ ☐ GL45AN	LBP::R134a	1/8	50	C	96	81	1.05	0.8		
▶ ☐ GL60AA	LBP::R134a	1/6	43	A	132	114	1.14	0.89		
▶ ☐ GL60AF	LBP::R134a	1/6	43	D	132	113	1.07	0.82		
▶ ☐ GL60AH	LBP::R134a	1/6	43	A	133	114	1.31	1.01		
▶ ☐ GL60AN	LBP::R134a	1/6	50	C	132	114	1.07	0.83		
▶ ☐ GL70AA	LBP::R134a	1/5	43	A	149	128	1.18	0.92		
▶ ☐ GL70AN	LBP::R134a	1/5	50	D	150	129	1.08	0.83		
▶ ☐ GL70AT	LBP::R134a	1/5	43	E	144	122	1.09	0.84		
▶ ☐ GL75AA	LBP::R134a	1/5	43	A	155	133	1.18	0.92		
▶ ☐ GL80AA	LBP::R134a	1/5	43	A	173	148	1.19	0.93		
▶ ☐ GL80AF	LBP::R134a	1/5	43	D	166	141	1.14	0.88		
▶ ☐ GL80AH	LBP::R134a	1/5	43	A	175	150	1.35	1.06		
▶ ☐ GL80AN	LBP::R134a	1/4	43	A	196	168	1.36	1.06		
▶ ☐ GL90AA	LBP::R134a	1/4	43	A	195	167	1.19	0.93		
▶ ☐ GL90AH	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
▶ ☐ GL90AN	LBP::R134a	1/4	50	D	190	163	1.1	0.85		
▶ ☐ GL90AT	LBP::R134a	1/4	43	E	190	161	1.19	0.92		
▶ ☐ GL99AA	LBP::R134a	1/4	43	A	214	182	1.24	0.96		
▶ ☐ GL99AH	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
▶ ☐ GL80AD	LBP::R134a	1/5	43	W	0	0	0	0		
▶ ☐ GL90AD	LBP::R134a	1/4	43	W	0	0	0	0		

R12

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ ☐ L45AV	LBP::R12	1/8	43	B	221	192	0.91	0.71		
▶ ☐ L55AV	LBP::R12	1/6	43	B	115	101	0.99	0.78		
▶ ☐ L55BV	LBP::R12	1/6	43	B	115	101	0.99	0.78		
▶ ☐ L76AV	LBP::R12	1/5	43	B	145	127	1.05	0.84		
▶ ☐ L76BV	LBP::R12	1/5	43	B	145	127	1.05	0.84		
▶ ☐ L88AV	LBP::R12	1/4	43	B	171	150	1.02	0.81		
▶ ☐ L88BV	LBP::R12	1/4	43	B	171	150	1.02	0.81		
▶ ☐ LT45AV	LBP::R12	1/8	50	B	94	83	1.04	0.83		
▶ ☐ LT55AV	LBP::R12	1/6	50	B	115	102	1.06	0.85		
▶ ☐ LT55BV	LBP::R12	1/6	50	B	115	102	1.06	0.85		
▶ ☐ LT76BV	LBP::R12	1/5	50	B	155	137	1.14	0.91		
▶ ☐ LT88BV	LBP::R12	1/4	50	B	190	169	1.16	0.93		
▶ ☐ P12BW	LBP::R12	1/3	43	A	221	192	0.91	0.71		

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_catalogo_cubigel_R134aTélécharger

R600a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ ☐ HL80AH	LBP::R600a	1/7	43	A	104	89	1.37	1.06		
▶ ☐ HL90AH	LBP::R600a	1/7	43	A	115	99	1.38	1.08		
▶ ☐ HL99AH	LBP::R600a	1/6	43	A	120	103	1.34	1.03		

Private Picture Copyright : WWW.MBSM.PRO

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP _a
					CECOMAF	ASHRAE	
					5°C W	7.2°C kcal/h	
▶ ☐ GL45PB	HMBP::R134a	1/6	43	A			
▶ ☐ GL45PB	HMBP::R134a	1/6	0	300			
▶ ☐ GL45TB	HMBP::R134a	1/6	43	A			
▶ ☐ GL60PB	HMBP::R134a	1/5	43	A			
▶ ☐ GL60TB	HMBP::R134a	1/5	43	A			
▶ ☐ GL80PB	HMBP::R134a	1/5	43	A			
▶ ☐ GL80TB	HMBP::R134a	F	0	300			
▶ ☐ GL90TB	HMBP::R134a	1/4	43	A			
▶ ☐ GP12TB	HMBP::R134a	3/8	43	A			