

Compressor ELECTROLUX, CUBIGEL ,GP12TB ,Hermetic piston ,ACC ,HMBP , moteur HP , 3/8 HP++, 1/2 hp- , 1PH , R134A , Pression 1.7 Bar , 220V

Category: compressor,Technologie,Tester ok
written by www.mbsm.pro | 29 April 2020

	Model	Refr.	HP
▶ ☐	<u>GL45PB</u>	HMBP::R134a	1/6
▶ ☐	<u>GL45PB</u>	HMBP::R134a	1/6
▶ ☐	<u>GL45TB</u>	HMBP::R134a	1/6
▶ ☐	<u>GL60PB</u>	HMBP::R134a	1/5
▶ ☐	<u>GL60TB</u>	HMBP::R134a	1/5
▶ ☐	<u>GL80PB</u>	HMBP::R134a	1/5
▶ ☐	<u>GL80TB</u>	HMBP::R134a	F
▶ ☐	<u>GL90TB</u>	HMBP::R134a	1/4
▶ ☐	<u>GP12TB</u>	HMBP::R134a	3/8

PictureS Mbsm Dot Pro : www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO

Type: Hermetic piston compressors Producer: ACCSeries: HMBP, cooling

Model: GP12TB

General data



Private Picture Copyright : WWW.MBSM.PRO

Capillary : 0.42 , 0.32 100mm
180 psi
Refrigerant: R134a
Discharge element: C-V
Cooling: F
Maximum ambient temperature [°C]: 43

Compressor's data

Cylinder capacity [cm³]: 12,1
Displacement [m³/h]: 2,1
Weight [kg]: 11,2
Oil charge [cm³]: 350
Oil type: ISO VG 22 ESTER

Engine's data

Engine type: CSIR
Power [KM]: 3/8
Starting element: HST
Power supply: 220V 50Hz

Voltage range: 187-264
Locked rotor current [A]: 13,5
Running winding resistance (25°C) [Ω]: 5,75
Starting winding resistance (25°C) [Ω]: 20,3

Electrical data

Relays: 9660 A 138, MTRP 43
Shielding element: MRT26AMK, T0181
Starting capacitor volume [μF]:

Connections

Type: Hermetic piston compressors**Producer:** ACC**Series:** HMBP
Model: GP12TB

General data

Refrigerant: R134a
Discharge element: C-V
Cooling: F
Maximum ambient temperature [°C]: 43

Compressor's data

Cylinder capacity [cm³]: 12,1
Displacement [m³/h]: 2,1
Weight [kg]: 11,2
Oil charge [cm³]: 350
Oil type: ISO VG 22 ESTER

Engine's data

Engine type: CSIR
Power [KM]: 3/8
Starting element: HST
Power supply: 220V 50Hz
Voltage range: 187-264
Locked rotor current [A]: 13,5
Running winding resistance (25°C) [Ω]: 5,75
Starting winding resistance (25°C) [Ω]: 20,3

Electrical data

Relays: 9660 A 138, MTRP 43
Shielding element: MRT26AMK, T0181
Starting capacitor volume [μF]:

Connections

milimeters inches

Suction/service tube: 8,1
Service/suction tube: 8,1
Discharge tube: 6,5



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro




PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro

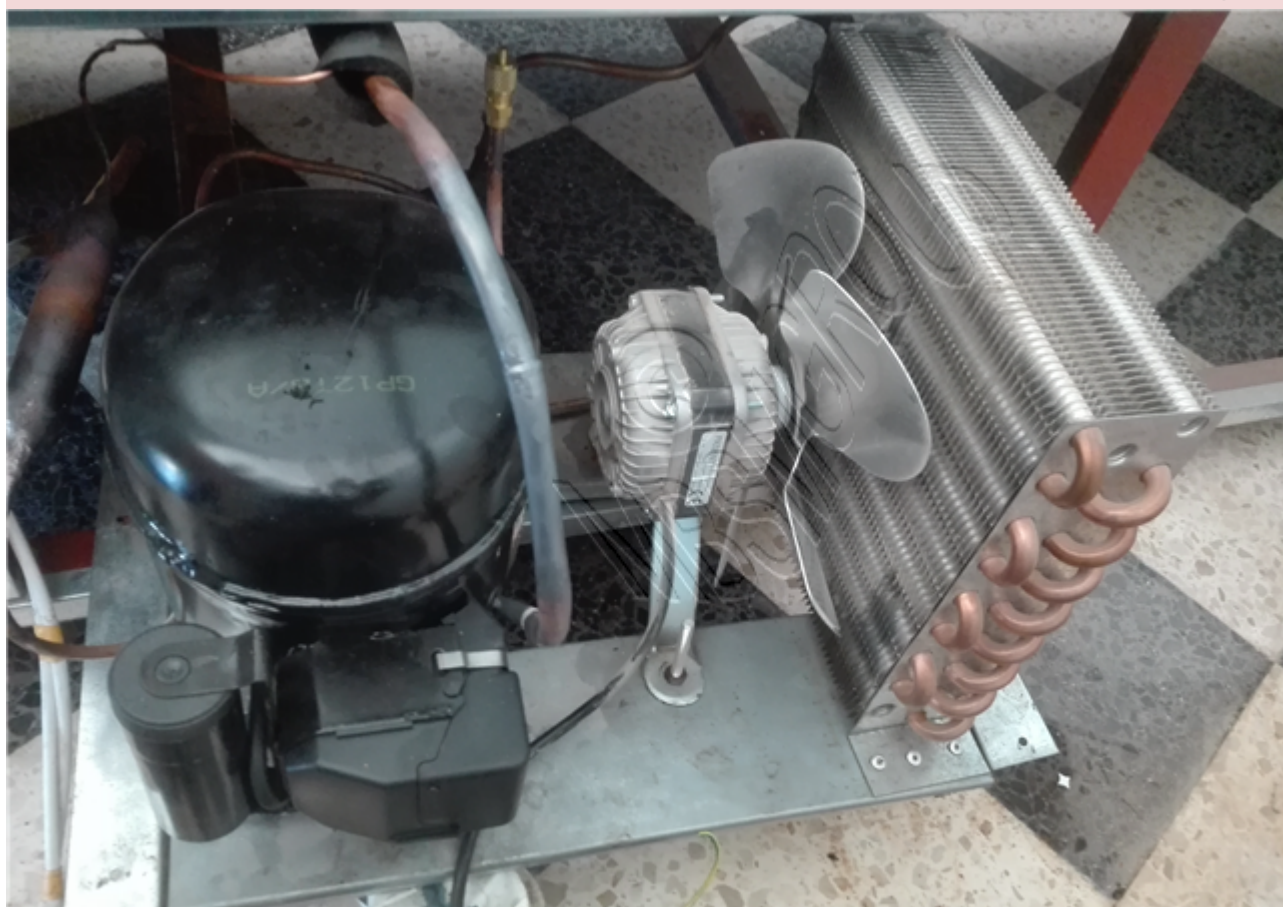


PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro

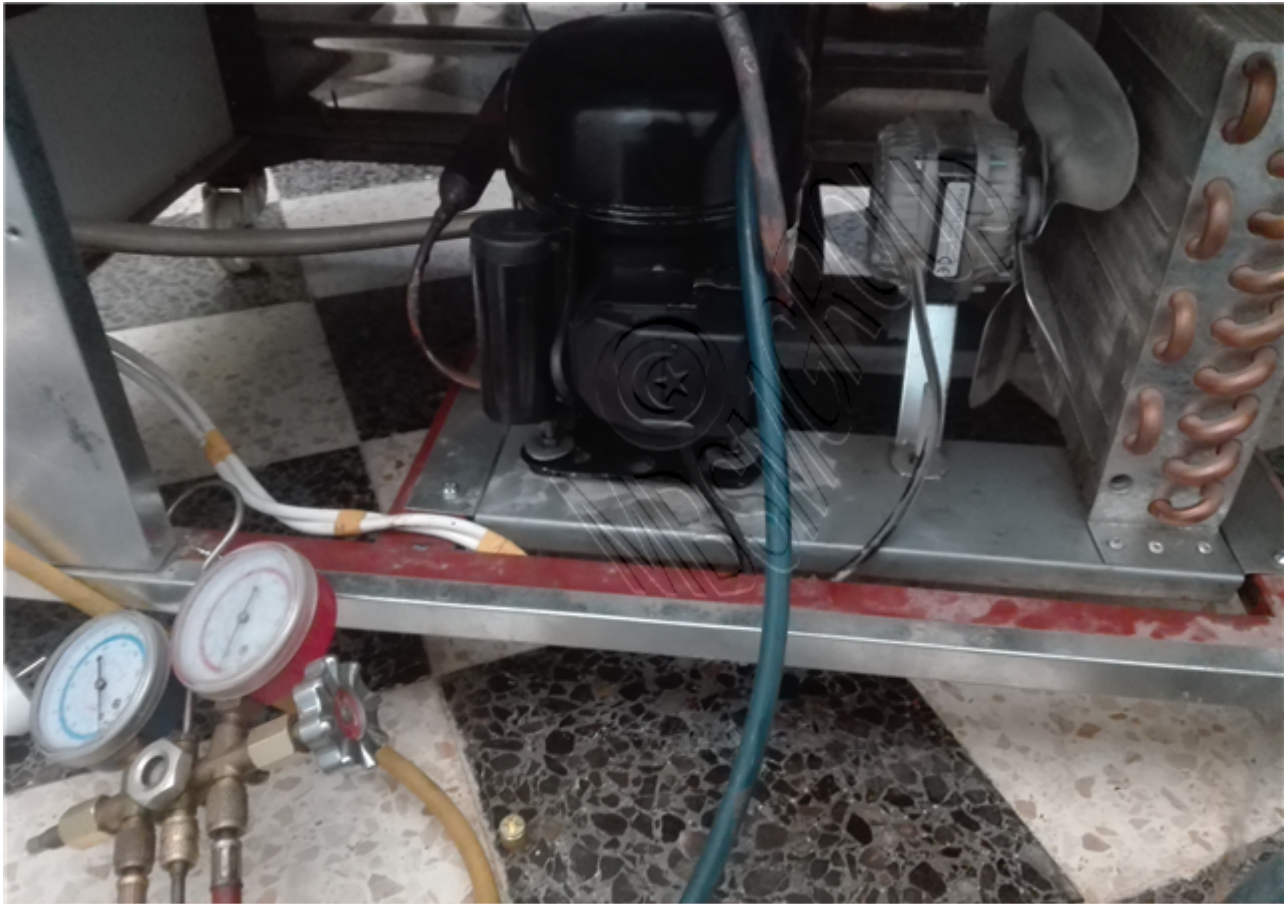

PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro

