

# Tecumseh, Compressor, 5/8HP, HMBP – R404A , R448A , R449A, MBP, CAJ9480Z, 230V

written by Lilianne | 18 March 2021

## Caractéristiques techniques

- Marque : TECUMSEH UNITÉ HERMÉTIQUE
- Modèle : CAJ9480Z-R
- CYLINDRÉE (CM<sup>3</sup>) 15,2
- FLUIDER404A , R448A , R449A
- APPLICATIONHMBP
- PLAGES D'APPLICATION-25/+15
- PUISSANCE (W)1159
- PUISSANCE FRIGORIFIQUE (TK+40°C)15/3350 5/2355 -10/1294 -25/609
- TENSION (V)240/1/50
- DÉMARRAGECSR
- I.MAX (A)6,7
- Ø ASPIRATION1/2
- Ø REFOULEMENT5/16
- DIMENSIONS (MM)235x178x280
- Gaz: **R-404a**
- Température/Pression: **Haute Pression**
- Puissance: **5/8 HP**
- Voltage: **230 V**
- Type De Courant: **Monophasé**
- Fréquence: **50 Hz**
- Type De Compresseur: **Hermétique**
- Décalage: **15.2 cm<sup>3</sup>**
- Cons.Énergie -25°C: **496 W**
- Cons.Énergie -10°C: **669 W**

- Cons.Énergie -5°C: **718 W**
- Cons.Énergie 0°C: **762 W**
- Cons.Énergie +5°C: **798 W**
- Cons.Énergie +10°C: **828 W**
- T° De Condensation: **40 °C**
- Capacidad Frigorífica -25°C: **524 Kcal/h**
- Capacidad Frigorífica -20°C: **692 Kcal/h**
- Capacidad Frigorífica -15°C: **887 Kcal/h**
- Capacidad Frigorífica -10°C: **1113 Kcal/h**
- Capacidad Frigorífica -5°C: **1374 Kcal/h**
- Capacidad Frigorífica 0°C: **1677 Kcal/h**
- Capacidad Frigorífica 5°C: **2025 Kcal/h**
- Capacidad Frigorífica 10°C: **2425 Kcal/h**
- Tipo Test: **EN.12900**

Compresseur L'unité Hermetique – Tecumseh CAJ9480Z – R404A, R449A, R407A, R452A

220 – 240V 1~ 50 Hz

Cylindrée = 15.2 CM3

APPLICATIONS = HBP / MHBP

Moteur type: CSR



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





REDMI NOTE 9 PRO  
AI QUAD CAMERA

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





● ○ REDMI NOTE 9 PRO  
○ ∞ AI QUAD CAMERA

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





Mbsm\_dot\_pro\_private\_PDF\_caj9480Z\_2494-speceTélécharger

Compresseur AJ = Le produit de référence associant silence, fiabilité et efficacité du froid commercial.

| Product Code | Model Number | Compressor Horsepower | Compressor Displacement    | Cooling | Oil Charge |
|--------------|--------------|-----------------------|----------------------------|---------|------------|
|              | CAJ9480Z-FZ  | 5/8 HP                | 15.2 cm <sup>3</sup> /rev  | Fan     | 475 ml     |
|              | CAJ9510Z-FZ  | 1 HP                  | 18.3 cm <sup>3</sup> /rev  | Fan     | 475 ml     |
|              | CAJ9513Z-FZ  | 1 1/8 HP              | 24.2 cm <sup>3</sup> /rev  | Fan     | 475 ml     |
|              | CAJ4517Z-FZ  | 1.25 HP               | 25.95 cm <sup>3</sup> /rev | Fan     | 475 ml     |
|              | TAJ4517Z-TZ  | 1.25 HP               | 25.95 cm <sup>3</sup> /rev | Fan     | 475 ml     |
|              | CAJ4519Z-FZ  | 1.5 HP                | 34.45 cm <sup>3</sup> /rev | Fan     | 475 ml     |
|              | TAJ4519Z-TZ  | 1.5 HP                | 34.45 cm <sup>3</sup> /rev | Fan     | 475 ml     |

---

**Whirlpool, Aspera, NE2125E, LBP, capacitive, start inductive run, hermetic compressor, R22, 1/4Hp++ or 1/3Hp–**


written by Lilianne | 18 March 2021

ompressor Aspera NE2125E, LBP – R22, 220-240V / 1 / 50Hz, stroke volume 8.78 cm<sup>3</sup>, LRA 11.0A, motor type CSIR, capillary tube / expansion valve operation, oil AB 46.Cooling capacity measured for condensation temperature of: 45 ° C, Measurement conditions: ASHRAE

Unfortunately the compressor is no longer available.

If you would like an offer for an identical alternative, please email us or give us a short call, we will prepare an offer for you. Cooling capacity (W) at To

| - 10 ° C | - 15 ° C | - 20 ° C | - 25 ° C | - 30 ° C |
|----------|----------|----------|----------|----------|
| 651      | 517      | 401      | 304      | 226      |

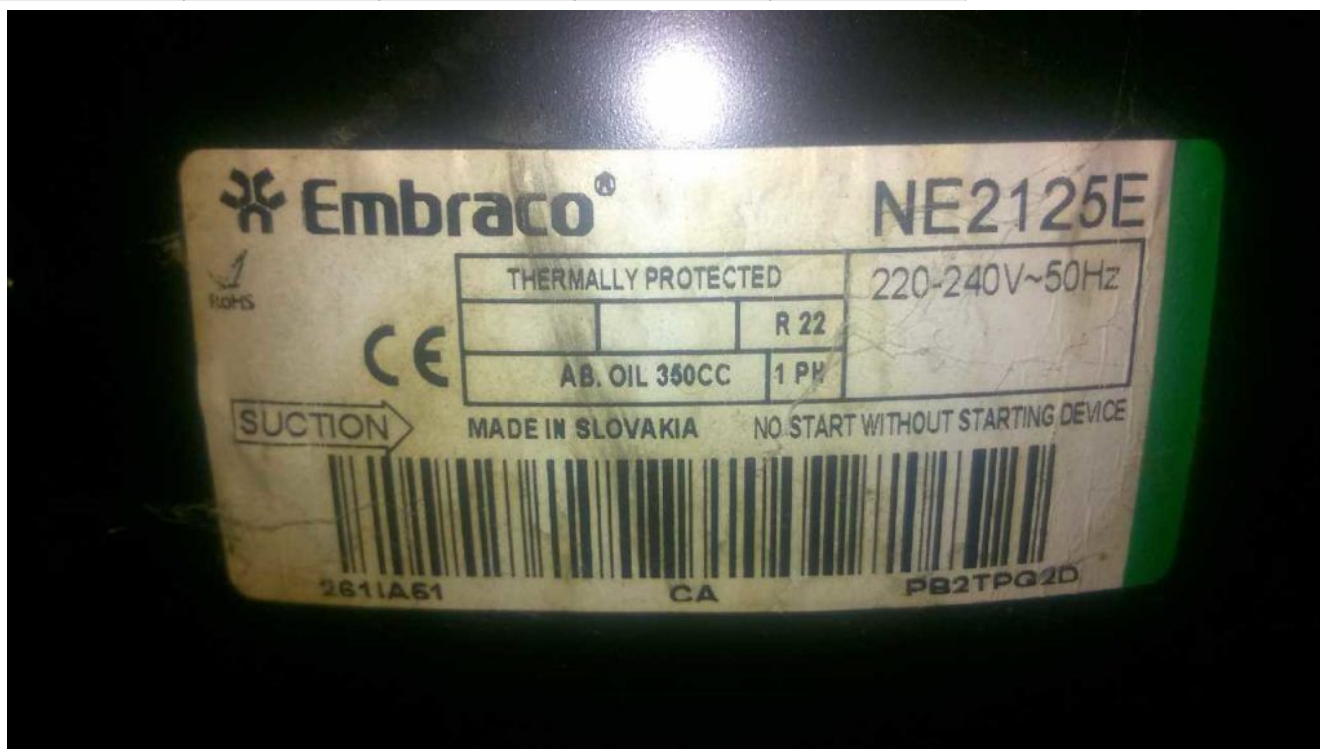



## R22 - LBP Applications

| COMPRESSOR | FREQUENCY | DIMENSION                           |   |
|------------|-----------|-------------------------------------|---|
|            |           | (from -30°C to -5°C<br>evap. temp.) | - |
| NE2125E    | 50 Hz     | 0.91 mm I.D. × 3.2 m                | - |
|            | 60 Hz     | 0.91 mm I.D. × 2.85 m               | - |
| NE2134E    | 50 Hz     | 0.91 mm I.D. × 2.8 m                | - |
|            | 60 Hz     | 0.91 mm I.D. × 2.5 m                | - |
| T2140E     | 50 Hz     | 0.91 mm I.D. × 2.6 m                | - |
|            | 60 Hz     | 0.91 mm I.D. × 2.3 m                | - |
| T2155E     | 50 Hz     | 1.20 mm I.D. × 3.9 m                | - |
|            | 60 Hz     | 1.20 mm I.D. × 3.5 m                | - |
| T2168E     | 50 Hz     | 1.20 mm I.D. × 3.3 m                | - |
|            | 60 Hz     | 1.20 mm I.D. × 2.8 m                | - |
| NJ2178E    | 50 Hz     | 1.20 mm I.D. × 3.0 m                | - |

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)









Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_ne2125e-Embraco\_VerdichterTélécharger

|                                 |                      |
|---------------------------------|----------------------|
| <b>Shipping Class</b>           | Default              |
| <b>Scope Of Application</b>     | LBP                  |
| <b>Delivery Time</b>            | 2-3 Weeks            |
| <b>Stock Availability</b>       | In Stock             |
| <b>Type</b>                     | Reciprocating Piston |
| <b>Condensation Temperature</b> | 45 ° C               |
| <b>Manufacturer</b>             | Aspera               |
| <b>Manufacturer No.</b>         | NE2125E              |
| <b>Power In Hp</b>              | 1/4 +                |



|                              |            |
|------------------------------|------------|
| Starting Torque              | HST        |
| Stroke Volume In Cm3         | 8.78       |
| Measurement Conditions       | Ashrae     |
| Refrigerant                  | R22        |
| Oil Type                     | ISO46      |
| Series                       | NE         |
| Condensing Units Compressors | Compressor |
| Tension                      | 220-240V   |
| Weight In Kg                 | 10.4       |

---

# Compressor, ACC, Cubigel, GL60AN, R134a, 220-240V, HMBP, 1/6HP

written by Lilianne | 18 March 2021

Type: Hermetic piston compressors Producer: ACC Series: HMBP

Model: GL60AN

## General data

|                                   |       |  |
|-----------------------------------|-------|--|
| Refrigerant:                      | R134a |  |
| Discharge element:                | C     |  |
| Cooling:                          | S     |  |
| Maximum ambient temperature [°C]: | 50    |  |

## Compressor's data

|                          |   |  |
|--------------------------|---|--|
| Cylinder capacity [cm³]: | 6 |  |
| Displacement [m³/h]:     | 1 |  |

|                                |                 |  |
|--------------------------------|-----------------|--|
| Weight [kg]:                   | 9,9             |  |
| Oil charge [cm <sup>3</sup> ]: | 345             |  |
| Oil type:                      | ISO VG 19 ESTER |  |

### Engine's data

|                                         |           |  |
|-----------------------------------------|-----------|--|
| Engine type:                            | RSIR      |  |
| Power [KM]:                             | 1/6       |  |
| Starting element:                       | LST       |  |
| Power supply:                           | 220V 50Hz |  |
| Voltage range:                          | 170-264   |  |
| Locked rotor current [A]:               | 14,6      |  |
| Running winding resistance (25°C) [Ω]:  | 9,33      |  |
| Starting winding resistance (25°C) [Ω]: | 10,81     |  |

### Electrical data

|                                 |                         |  |
|---------------------------------|-------------------------|--|
| Relays:                         | 3003                    |  |
| Shielding element:              | MRA38085, T0515, AF11BJ |  |
| Starting capacitor volume [μF]: |                         |  |

### Connections

|                 |             |        |  |
|-----------------|-------------|--------|--|
|                 | millimeters | inches |  |
| Suction tube:   | 6,5         |        |  |
| Service tube:   | 6,5         |        |  |
| Discharge tube: | 4,9         |        |  |



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_GL60ANTélécharger



---

# **Copeland, Piston Type, Maneurop, Scroll type, Compressor**

written by Lilianne | 18 March 2021

Copeland, Piston Type, Maneurop, Scroll type, Compressor

**Copeland - Piston Type**

|               |       |     |    |
|---------------|-------|-----|----|
| CRFD-0250TFD  | 2.5HP | 220 | 30 |
| CRFD-02750TFD | <3HP  | 220 | 30 |
| CRFD-02750TFD | <3HP  | 380 | 30 |
| CRFD-0300TFD  | 3HP   | 220 | 30 |
| CRFD-0300TFD  | 3HP   | 380 | 30 |
| CRFD-0400TFD  | 4HP   | 380 | 30 |
| CRFD-0450TFD  | 4.5HP | 380 | 30 |
| CRFD-0500TFD  | 5HP   | 380 | 30 |

**Copeland - Scroll Type**

|         |       |     |    |
|---------|-------|-----|----|
| ZR22KC  | 2HP   | 220 | 16 |
| ZR28KC  | 2.5HP | 220 | 16 |
| ZR34K1  | 3HP   | 220 | 16 |
| ZR34K3  | 3HP   | 380 | 16 |
| ZR36K1  | >3HP  | 220 | 16 |
| ZR36K3  | >3HP  | 380 | 16 |
| ZR47K3  | 4HP   | 380 | 16 |
| ZR57K3  | 5HP   | 380 | 16 |
| ZR61K3  | >5HP  | 380 | 16 |
| ZR72K3  | 6HP   | 380 | 16 |
| ZR81K3  | 7HP   | 380 | 16 |
| ZR94K3  | 8HP   | 380 | 16 |
| ZR125K3 | 10HP  | 380 | 12 |
| ZR144K3 | 12HP  | 380 | 12 |

**Copeland - Piston type**

|        |       |     |   |
|--------|-------|-----|---|
| QR90K1 | 7.5HP | 380 | 4 |
| QR12M1 | 10HP  | 380 | 4 |
| QR15M1 | 12HP  | 380 | 4 |

**Maneurop - Piston Type**

|       |          |     |   |
|-------|----------|-----|---|
| MT28  | 7378BTU  | 220 | 8 |
| MT36  | 9272BTU  | 380 | 8 |
| MT40  | 10475BTU | 380 | 8 |
| MT50  | 12324BTU | 380 | 8 |
| MT64  | 15820BTU | 380 | 8 |
| MT80  | 19534BTU | 380 | 8 |
| MT100 | 23403BTU | 380 | 4 |
| MT125 | 30429BTU | 380 | 4 |
| MT160 | 38273BTU | 380 | 4 |


**Bristol - Piston type**

|             |       |     |    |
|-------------|-------|-----|----|
| H2NG104FRDF | 8HP   | 380 | 8  |
| H2NG124FRDF | 10HP  | 380 | 8  |
| H25G144DBEE | 10HP  | 380 | 8  |
| H2NG184FRDF | 15HP  | 380 | 4  |
| H2NG204FRDF | 17HP  | 380 | 4  |
| H2NG244FRDF | 20HP  | 380 | 4  |
| H2NG294FRDF | 25HP  | 380 | 4  |
| H24B25QDBEA | 2HP   | 380 | 20 |
| H24B28QDBEA | 2.5HP | 380 | 20 |
| H24B31QDBEA | 3HP   | 380 | 20 |
| H24A62QDBEA | 5HP   | 380 | 20 |

---

# Compressor, R0HS, 1/3HP, R134A, Tecumseh, CAE4448Y, HBP, 208V/50HZ 230V/60HZ

written by Lilianne | 18 March 2021

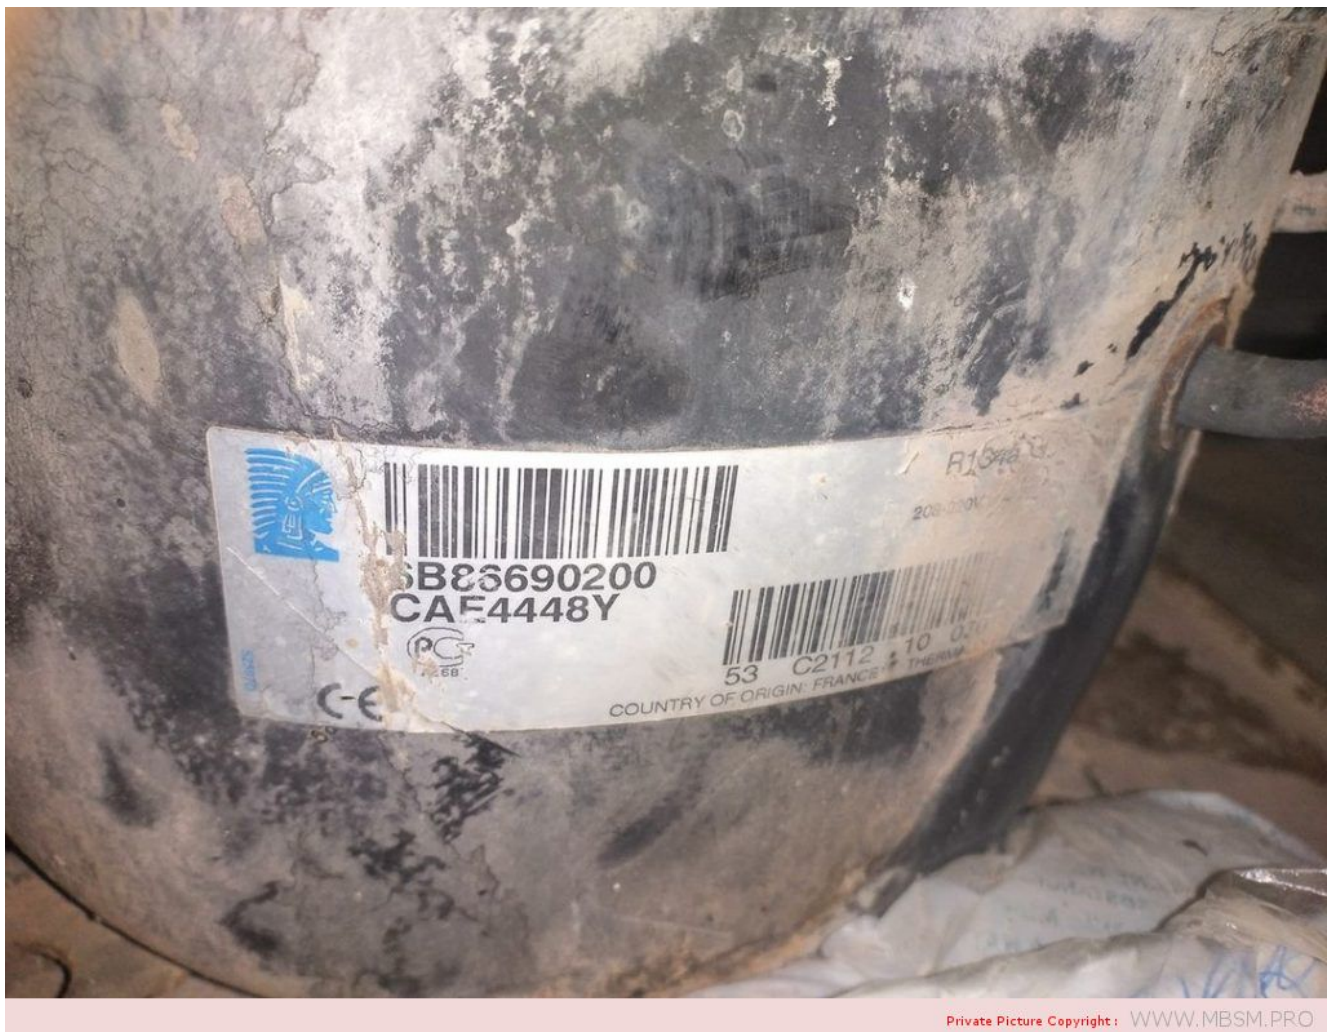

Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

## Basic Info.

Model NO.  
CAE4448Y  
Refrigerant Type  
Ammonia  
Refrigerant



R134A  
Voltage  
208V/50Hz 230V/60Hz  
Horsepower  
1/3HP  
Capacity(W)  
519W  
Input Power(Kw)  
400W  
Oil Charge (Cm3)  
450  
Net Weight(Kg)  
12kg  
Cop(W/W)  
1.64  
Trademark  
tecumseh  
Transport Package  
Wooden Box  
Specification  
208V/50HZ 230V/60HZ  
Origin  
France  
HS Code  
8414309010

**1/3HP HBP Original Made in France R134A Tecumseh Compressor  
CAE4448Y Refrigerator Compressor For  
Refrigerator/Showcase/Cold Room  
Product Description**

**Model: CAE4448Y**

Brand : Tecumseh

Type: hermetic

Refrigerant: R134A

Voltage: 208V/50HZ 230V/60HZ

Cooling capacity: 519W

Input Power Watts: 400 W

Power: 1/3 HP

#### Description rapide

Condition: Nouveau  
Configuration: Stationnaire  
Modèle de lubrifica... Lubrifié  
Point d'origine: Guangdong, China  
Numéro de Type: CAE4448Y  
Dimension (L\*W\*H): 1 unité  
Certification: ROHS  
Service après-vente...Aucun service d'outre-mer fourni  
Chevaux: 1/3HP

Type: Piston  
Source d'énergie: Alimentation AC  
Muet: Oui  
Marque nom: tecumseh  
Tension: 208 ~ 220V/1PH/50HZ  
Poids: 20kg  
Garantie: 1 année  
Gaz: R134a

Private Picture Copyright : WWW.MBSM.PRO

| Compressors | Displacement<br>CC | Motor | Cooling capacity (Watt) EN12900 condensing T° +45°C ,<br>subcooling 0K, Return Gas 20°C |     |     |      |      |      |      | EN12900<br>evaporating T° -10°C |           | Weight<br>Kg |
|-------------|--------------------|-------|-----------------------------------------------------------------------------------------|-----|-----|------|------|------|------|---------------------------------|-----------|--------------|
|             |                    |       | evaporating T°                                                                          |     |     |      |      |      |      | Power<br>input(Watt)            | COP (W/W) |              |
|             |                    |       | -15                                                                                     | -10 | -5  | 0    | 5    | 10   | 15   |                                 |           |              |
| AE4425Y     | 6,69               | CSIR  | 266                                                                                     | 342 | 424 | 519  | 633  | 770  | 938  | 199                             | 1,72      | 9,1          |
| AEZ4425Y    | 7,6                | CSIR  | 239                                                                                     | 320 | 414 | 522  | 641  | 771  | 912  | 205                             | 1,56      | 9,7          |
|             |                    |       |                                                                                         |     |     |      |      |      |      |                                 | 9%        |              |
| AE4430Y     | 8,02               | CSIR  | 254                                                                                     | 382 | 488 | 613  | 760  | 930  | 1127 | 237                             | 1,61      | 9,4          |
| AEZ4430Y    | 8,8                | CSIR  | 316                                                                                     | 404 | 512 | 639  | 784  | 946  | 1122 | 258                             | 1,57      | 10,2         |
|             |                    |       |                                                                                         |     |     |      |      |      |      |                                 | 3%        |              |
| AE4440Y     | 10,33              | CSIR  | 399                                                                                     | 508 | 637 | 790  | 968  | 1176 | 1417 | 302                             | 1,68      | 9,6          |
| CAE4440Y    | 12                 | CSIR  | 399                                                                                     | 519 | 666 | 837  | 1033 | 1250 | 1489 | 342                             | 1,52      | 10,8         |
|             |                    |       |                                                                                         |     |     |      |      |      |      |                                 | 10%       |              |
| AE4450Y     | 13,24              | CSIR  | 526                                                                                     | 672 | 843 | 1042 | 1273 | 1540 | 1847 | 370                             | 1,82      | 10,5         |
| CAE4448Y    | 14,2               | CSIR  | 519                                                                                     | 654 | 822 | 1023 | 1253 | 1512 | 1797 | 400                             | 1,64      | 11,9         |
|             |                    |       |                                                                                         |     |     |      |      |      |      |                                 | 10%       |              |
| AE4456Y     | 14,51              | CSIR  | 579                                                                                     | 737 | 921 | 1133 | 1380 | 1664 | 1990 | 424                             | 1,74      | 11           |
| CAE4456Y    | 16                 | CSIR  | 590                                                                                     | 744 | 933 | 1156 | 1411 | 1695 | 2006 | 486                             | 1,53      | 12,5         |
|             |                    |       |                                                                                         |     |     |      |      |      |      |                                 | 12%       |              |
| AE4460Y     | 15,09              | CSR   | 597                                                                                     | 766 | 958 | 1181 | 1437 | 1732 | 2070 | 409                             | 1,87      | 11,3         |

Private Picture Copyright : WWW.MBSM.PRO

#### Basic Info.

|                 |                     |
|-----------------|---------------------|
| Model NO.       | CAE4448Y            |
| Refrigerant     | R134A               |
| Horsepower      | 1/3HP               |
| Input Power(Kw) | 400W                |
| Net Weight(Kg)  | 12kg                |
| Trademark       | tecumseh            |
| Specification   | 208V/50HZ 230V/60HZ |
| HS Code         | 8414309010          |

|                   |                     |
|-------------------|---------------------|
| Refrigerant Type  | Ammonia             |
| Voltage           | 208V/50Hz 230V/60Hz |
| Capacity(W)       | 519W                |
| Oil Charge (Cm3)  | 450                 |
| Cop(W/W)          | 1.64                |
| Transport Package | Wooden Box          |
| Origin            | France              |

Private Picture Copyright : WWW.MBSM.PRO

**Mbsm.pro, Donper, Hermetic,  
Compressor , R600a, Lj126Cy,  
lu126cy1, 1/3 Hp, R600a**

written by Lilianne | 18 March 2021





Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Donper, Hermetic, Compressor , R600a, Lj126Cy,  
lu126cy1, 1/3 Hp, R600a

---


# Panasonic, refrigerator, compressor, SB48C95GAW5, 110w, White-Westinghouse refrigerator, 220v, 50 Hz, 85L, R134A/80G, 1/6 Hp

written by Lilianne | 18 March 2021  
Specification

| Item                            | Performance characteristics |
|---------------------------------|-----------------------------|
| Refrigerant                     | R134a                       |
| Displacement (cm <sup>3</sup> ) | 4.8                         |
| Voltage (V)                     | 220/240                     |
| Frequency (Hz)                  | 50                          |
| Motor Type                      | RSIR                        |
| Capacity@ASHRAE                 | 110                         |
| COP@ASHRAE                      | 1.03/0.99                   |
| Capacity@CECOMAF                | —                           |
| COP@CECOMAF                     | —                           |



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

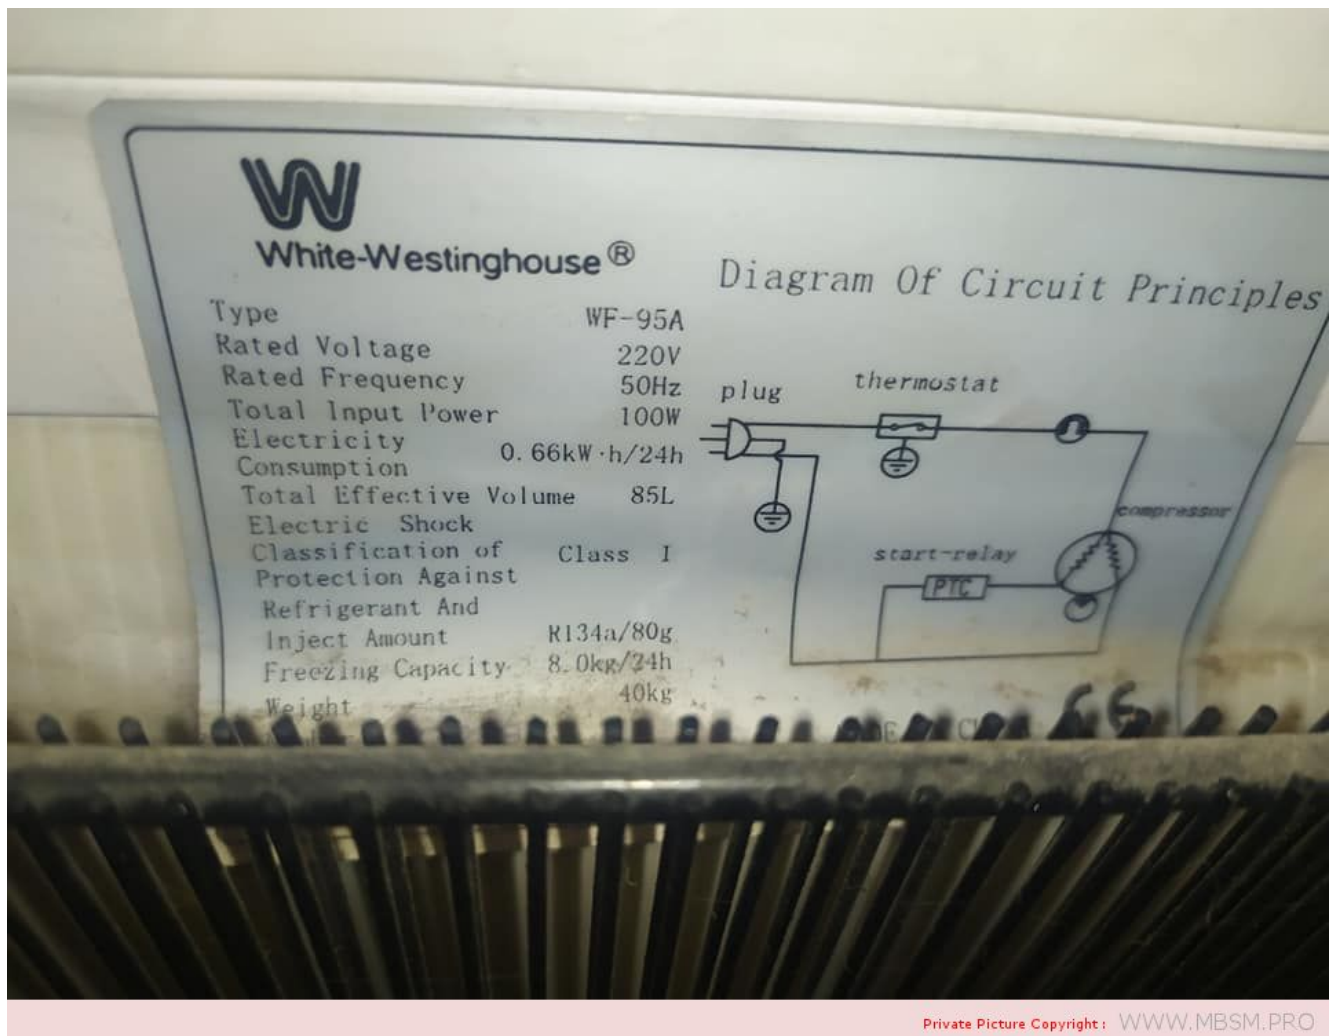

Mbsm\_dot\_pro\_private\_PDF\_SB48C95GAW5Télécharger

# Maintenance et réparation MG rouleuse de pate cc900

written by Lilianne | 18 March 2021











REDMI NOTE 9  
AWLED MILED MAHOLA

2021/2/23 12:24

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



REDMI NOTE 9  
AWLED MILED MAHOLA

2021/2/23 12:25

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





REDMI NOTE 9  
AWLED MILED MAHDIA

2021/2/24 11:27







Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





REDMI NOTE 9  
AWLED MILED MAHDIA

2021/2/23 12:14

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



REDMI NOTE 9  
AWLED MILED MAHDIA

2021/2/23 12:14

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



---

**Moteur, bolt f180E, motorisé,**

# télécommandé, Moteur central, Porte Rideau 180Kg, installation, Réglage, carte de commande Somfy Double commande

written by Lilianne | 18 March 2021





REDMI NOTE 9  
AWLED MILED MAHDIA

2021/2/20 11:36





REDMI NOTE 9  
AWLED MILED MAHDIA

2021/2/20 11:37



REDMI NOTE 9  
AWLED MILED MAHDIA

2021/2/20 09:45

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



REDMI NOTE 9  
AWLED MILED MAHDIA

2021/2/20 09:45



REDMI NOTE 9  
AWLED MILED MAHDIA

2021/2/20 09:47





Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Description rapide

Garantie:

Plus de 5 Ans

Service après – vente:

Support technique en ligne

Solution de projet Capacité:

Conception graphique

Application:

Entrepôt

Style de conception:  
Traditionnel

Point d'origine:  
China

Marque nom:  
Simple

Numéro de Type:  
BOLT F180E

Type:  
door motor, Door & Window Rollers

usage:  
rolling door

Model:  
automatic gate roller

Rated torque:  
120N.m

R.P.M:  
10

Limit switch:  
6m

Cut out temperature:  
4min

Power:  
670w

Consumption:  
2.9A

Weight:  
8~9kg

Capacité d'approvisionnement

Capacité d'approvisionnement:  
8000 Set/Sets per Month we will delivery roller shutter gear within 25days

Emballage et livraison

Détails d'emballage

Détails d'emballage: carton d'exportation navigable et palette


Port

Ningbo/Shanghai

Délai : :

| Quantité(Sets)        | 1 – 1 | 2 – 200 | >200       |
|-----------------------|-------|---------|------------|
| Durée estimée (jours) | 7     | 15      | À négocier |



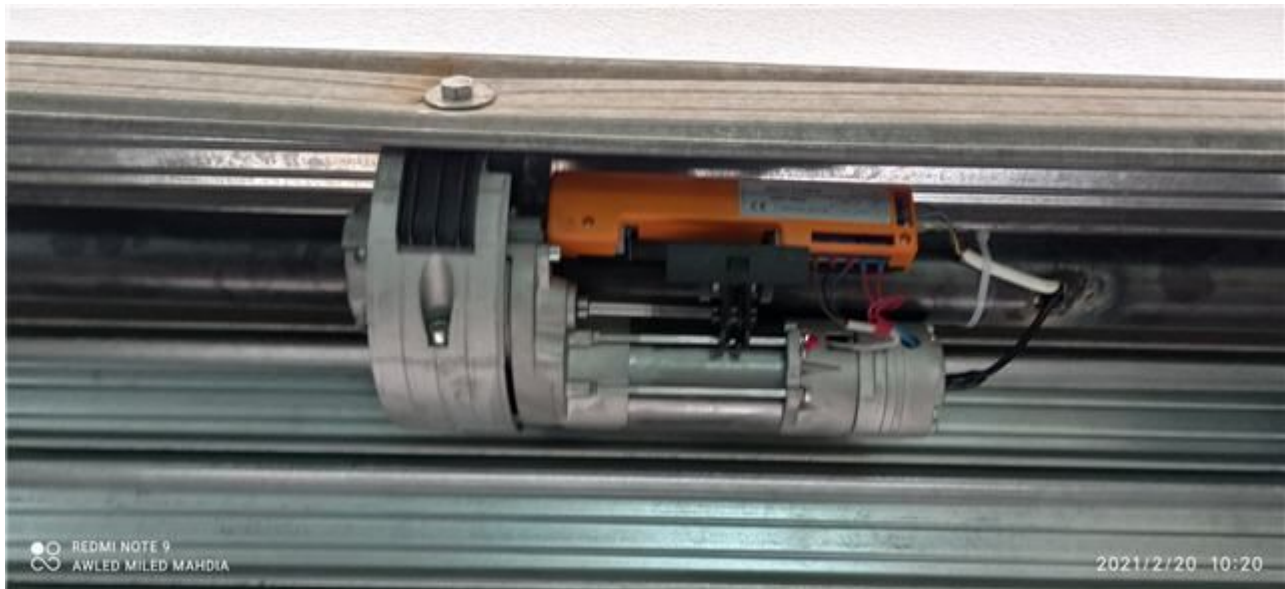

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



# Réservoirs encastrés Geberit, installation, Photos

written by Lilianne | 18 March 2021





REDMI NOTE 9  
AWLED MILED MAHDIA

2021/2/19 16:13

Geberit International Sales AG est une société du groupe Geberit chargée du secteur Moyen-Orient / Afrique, nouveaux marchés et marchés en expansion. Son siège principal se situe à Rapperswil, en Suisse.