

# BONNAMY AUTOMATIC TUBE BENDER

Category: Pictures

written by [www.mbsm.pro](http://www.mbsm.pro) | 29 December 2021













# White whale look machine a laver

Category: Pictures

written by [www.mbsm.pro](http://www.mbsm.pro) | 29 December 2021







## Tambour samsung 5kg

Category: Pictures

written by [www.mbsm.pro](http://www.mbsm.pro) | 29 December 2021





Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

# Chaudiere saunier duval 24kw

Category: Pictures

written by [www.mbsm.pro](http://www.mbsm.pro) | 29 December 2021

[Mbsm\\_dot\\_pro\\_private\\_picture\\_chaudiere-saunier-duval-24kw](#)Télécharger



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

---

Mbsm.pro, PANASONIC, DA73C12RBU6, A/C

Compressor, 881 BtuH, 115V. More details: A/C Compressor, BtuH 881, Voltage 115, 1 Phase, Refrigerant Type R-134A, Nominal HP 1/4, 60 Hz, Length 11 In., Width 9-1/2 In., Height 8-1/2 In.

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 29 December 2021

PANASONIC DA73C12RBU6 A/C Compressor, 881 BtuH, 115V. More details: A/C Compressor, BtuH 881, Voltage 115, 1 Phase, Refrigerant Type R-134A, Nominal HP 1/4, 60 Hz, Length 11 In., Width 9-1/2 In., Height 8-1/2 In.

Reference:

DA73C12RBU6

Description:

- Btu / h: 881
- Voltage: 115
- Phase: 1
- Refrigerant Type: R-134A
- Nominal HP: 1/4
- Hz: 60
- Length: 11 "

Mark: panasonic

Item	Performance characteristics
Refrigerant	R134a
Displacement (cm <sup>3</sup> )	7.3
Voltage (V)	115
Frequency (Hz)	60
Motor Type	RSCR
Capacity@ASHRAE	258
COP@ASHRAE	1.57



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_DA73C12RBU6Télécharger

Mbsm.pro, Compressor, JIAXIPERA,  
ND1080Y, 1/8HP, ND1090Y, 1/8+HP,  
ND1110Y, 1/7HP, ND1111Y, 1/6-HP,  
ND1112Y, 1/6+HP, NX1080Y, 1/8HP,  
NX1090Y, 1/8+HP, NX1110Y, 1/7HP,  
NX1111Y, 1/6HP, NX1112Y, 1/6+HP,  
NX1113Y, 1/5HP, NX1114Y, 1/5+HP,  
NX1116Y, 1/4HP, NX1117Y, 1/4HP,  
NX1119Y, 1/4+HP, NX1120Y, 1/4+HP,  
TB1080Y, 1/8HP, TB1090Y, 1/8+HP,  
TB1110Y, 1/7HP, TB1111Y, 1/6HP,  
TB1112Y, 1/6+HP, TB1113Y, 1/5HP,  
TB1114Y, 1/5+HP, TX1080Y, 1/8HP,  
TX1090Y, 1/8+HP, TX1110Y, 1/7HP,  
TX1111Y, 1/6HP, TX1112Y, 1/6+HP,  
TX1113Y, 1/5HP, TX1114Y, 1/5+HP,



# VNX1111Y, 1/6HP, VNX1113Y, 1/5HP, VNX1116Y, 1/4HP, ZBX1117CY, 1/4HP, ZBX1119CY, 1/4+HP, ZBX1121CY, 1/4+HP

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 29 December 2021

Mbsm.pro, Compressor, JIAXIPERA, ND1080Y, 1/8HP, ND1090Y, 1/8+HP, ND1110Y, 1/7HP, ND1111Y, 1/6-HP, ND1112Y, 1/6+HP, NX1080Y, 1/8HP, NX1090Y, 1/8+HP, NX1110Y, 1/7HP, NX1111Y, 1/6HP, NX1112Y, 1/6+HP, NX1113Y, 1/5HP, NX1114Y, 1/5+HP, NX1116Y, 1/4HP, NX1117Y, 1/4HP, NX1119Y, 1/4+HP, NX1120Y, 1/4+HP, TB1080Y, 1/8HP, TB1090Y, 1/8+HP, TB1110Y, 1/7HP, TB1111Y, 1/6HP, TB1112Y, 1/6+HP, TB1113Y, 1/5HP, TB1114Y, 1/5+HP, TX1080Y, 1/8HP, TX1090Y, 1/8+HP, TX1110Y, 1/7HP, TX1111Y, 1/6HP, TX1112Y, 1/6+HP, TX1113Y, 1/5HP, TX1114Y, 1/5+HP, VNX1111Y, 1/6HP, VNX1113Y, 1/5HP, VNX1116Y, 1/4HP, ZBX1117CY, 1/4HP, ZBX1119CY, 1/4+HP, ZBX1121CY, 1/4+HP



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



**TB 1080 Y**

**1 / 8 HP**

**TB 1090 Y**

**1 / 8 + HP**

**TB 1110 Y**

**1 / 7 HP**



**TB 1111 Y**

**1 / 6 HP**



**TB 1112 Y**

**1 / 6 + HP**



**TB 1113 Y**

**1 / 5 HP**



**TB 1114 Y**

**1 / 5 + HP**



**TX 1080 Y**

**1 / 8 HP**



**TX 1090 Y**

**1 / 8 + HP**



**NX 1110 Y**

**1 / 7 HP**

**NX 1111 Y**

**1 / 6 HP**

**NX 1112 Y**

**1 / 6 + HP**



**NX 1113 Y**

**1 / 5 HP**

**NX 1114 Y**

**1 / 5 + HP**

**NX 1116 Y**

**1 / 4 HP**



**NX 1117 Y**

**1 / 4 HP**

**NX 1119 Y**

**1 / 4 + HP**

**NX 1120 Y**

**1 / 4 + HP**

**MH 1110 Y**

**1 / 6 - HP**

**ND 1070 Y**

**1 / 9 HP**

**ND 1080 Y**

**1 / 8 HP**



**ND 1090 Y**

**1 / 8 + HP**



**ND 1110 Y**

**1 / 7 HP**



**ND 1111 Y**

**1 / 6 - HP**



**ND 1112 Y**

**1 / 6 + HP**



**NX 1080 Y**

**1 / 8 HP**



**NX 1090 Y**

**1 / 8 + HP**



**JK 1080 Y**

**1 / 8 + HP**



**JK 1090 FY**

**1 / 6 - HP**



**JK 1110 Y**

**1 / 7 HP**



**JK 1111 HY**

**1 / 6 - HP**



**MH 1050 Y**

**1 / 12 HP**



**MH 1090 Y**

**1 / 8 + HP**

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Deep, freezer, congela, 383 Litre, Compressor, R134A, 215W, 1/4 Hp++, 1/3 Hp-, 215W

Category: Chaud&Froid,Freezer

written by [www.mbsm.pro](http://www.mbsm.pro) | 29 December 2021

□ □□□□ □□□□ , □□□□□□□□ □□ □□□□□□□ □□□□□□ □□□□□ , □□□hp , □□□□□  
□ □□□□ □□□□□, □□□□ □□□□□hp

<p> <b>INPUT FREQUENCY:</b> 60 Hz  <b>MAXIMUM VOLTAGE:</b> 127 V  <b>RATED VOLTAGE:</b> 115 V  <b>RATED INPUT:</b> 215 W  <b>RATED DEFROST INPUT:</b> 690 W  <b>RATED DEFROST CURRENT:</b> 6.00 A  <b>RUN TIME (90°F):</b> 65-75%  <b>TEMPERATURE DESIGN RATING:</b> 60-70%  <b>SUPPLY TYPE:</b> T  <b>LAMP RATING:</b> 40 W  <b>FUSE RATING:</b> 15 A  <b>ICE HARVEST: (24 hrs):</b> 1.8 kg  <b>POWER USAGE: (24 hrs):</b> 2.9 kWh  <b>STORAGE VOLUME:</b> 683 litres </p>	<p> <b>FRECUENCIA NOMINAL:</b> 60 Hz  <b>TENSION MAXIMUM:</b> 127 V  <b>TENSION NOMINALE:</b> 115 V  <b>PUISSANCE D'ENTREE NOMINALE:</b> 215 W  <b>PUISSANCE D'ENTREE NOMINALE DEGIVRAGE:</b> 690 W  <b>INTENSITE NOMINALE DEGIVRAGE:</b> 6.00 A  <b>TEMPS FONCTIONNEMENT A 32° C:</b> 65-75%  <b>TYPE D'ALIMENTATION:</b> T  <b>CALIBRE LAMPES:</b> 40 W  <b>CALIBRE FUSIBLE:</b> 15 A  <b>GLACONS-24 H:</b> 1.8 kg  <b>CONSUMMATION ELECTRIQUE-24 H:</b> 2.9 kWh  <b>VOLUME RANGEMENT:</b> 683 litres </p>	<p> <b>FRECUENCIA NOMINAL:</b> 60 Hz  <b>VOLTAGE MAXIMUM:</b> 127 V  <b>VOLTAGE NOMINAL:</b> 115 V  <b>ENTRADA NOMINAL:</b> 215 W  <b>ENTRADA NOMINAL DEL DESCONGELADOR:</b> 690 W  <b>CORRIENTE NOMINAL PARA EL DESCONGELADOR:</b> 6.00 A  <b>TIEMPO DE FUNCIONAMIENTO (a 32° C):</b> 65-75%  <b>CLASIFICACION DE LA TEMPERATURA:</b> T  <b>TIPO DE SUMINISTRO:</b> T  <b>TIPO DE BOMBILLA:</b> 40 W  <b>PRODUCCION DE HIELO (24 horas):</b> 1.8 kg  <b>CONSUMO DE CORRIENTE (24 horas):</b> 2.9 kWh  <b>CAPACIDAD DE ALMACENAMIENTO:</b> 683 litros </p>
---	--	--

Made in U.S.A.

Made in U.S.A.

Made in U.S.A.







Private Picture Copyright : WWW.MBSM.PRO

DOMESTIC SINGLE DOOR FRIDGE				
4 to 5	Cubic Feet	(113-160 Ltr)	=	1\12 H.P.
6 to 7	Cubic Feet	(170 -198 Ltr)	=	1\10 H.P.
8 to 9	Cubic Feet	(226-254 Ltr)	=	1\8 H.P.
9 to 13	Cubic Feet	(283 - 370 Ltr)	=	1\6 H.P.
DOMESTIC DOUBLE DOOR FRIDGE				
9 to 12	Cubic Feet	(226-340 Ltr)	=	1\5 H.P.
13 to 17	Cubic Feet	(370-481 Ltr)	=	1\4 H.P.
17 to 22	Cubic Feet	(509-623Ltr)	=	1\3 H.P.

Private Picture : [www.MBSMGROUP.TN](http://www.MBSMGROUP.TN)


Private Picture Copyright : WWW.MBSM.PRO

جدول قدرة المضاطعة بالنسبة لحجم الثلاجة أو الديب فريزر

المضاطعة بالحجم		1/12	1/10	1/8	1/6	1/5	1/4	1/3	1/2
الثلاجة	قدم	4	6	8	10	12	14	16	
	لتر	113	170	227	283	340	396	453	
الديب فريزر	قدم			6	8	10	12	14	18
	لتر			170	200	283	340	396	510
	العرض بالتقريب بالمتر			50	70	90	120	144	170

Private Picture : [www.MBSMGROUP.TN](http://www.MBSMGROUP.TN)

Private Picture Copyright : WWW.MBSM.PRO

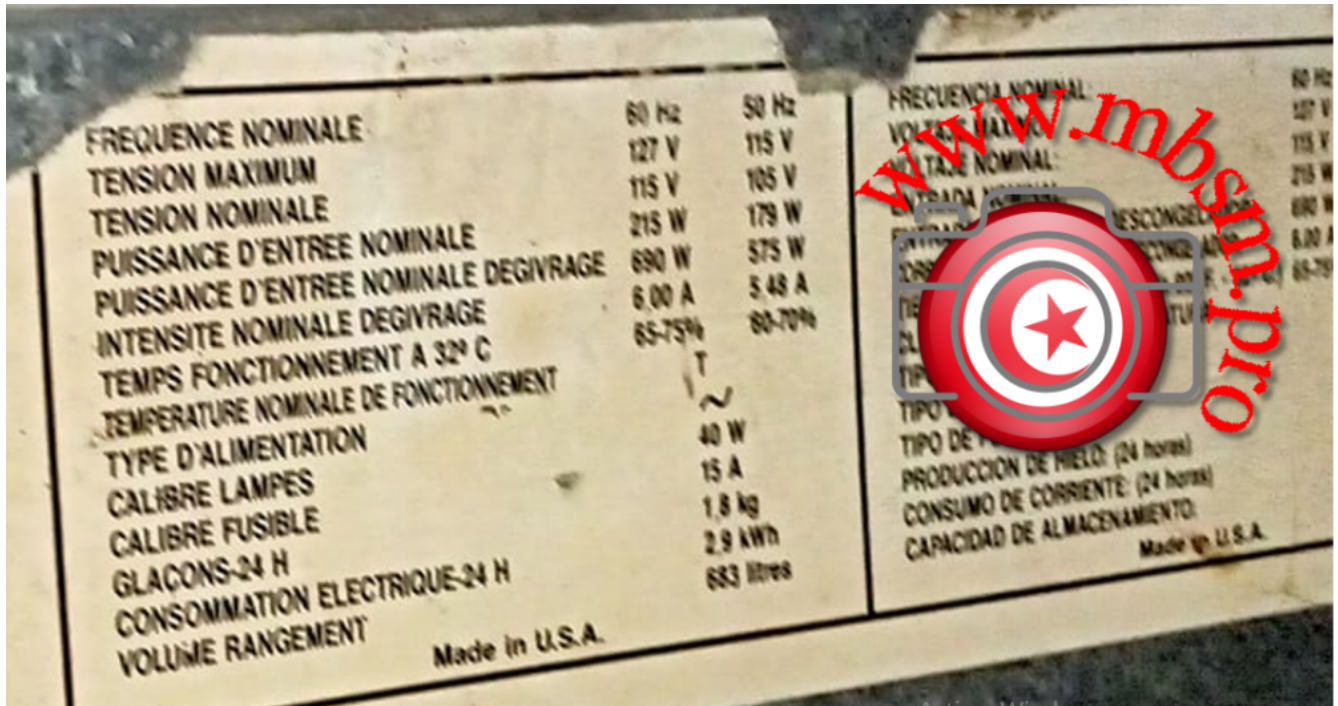


Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Refrigeration, Compressor, GQR12TG, 3/8+ hp (big) ++, HBP, 1168W, 1/2 Hp (LBP), CSIR, R134A, Starting Capacitor 80UF, Displacement 12.0cm<sup>3</sup>

Category: compressor

written by www.mbsm.pro | 29 December 2021

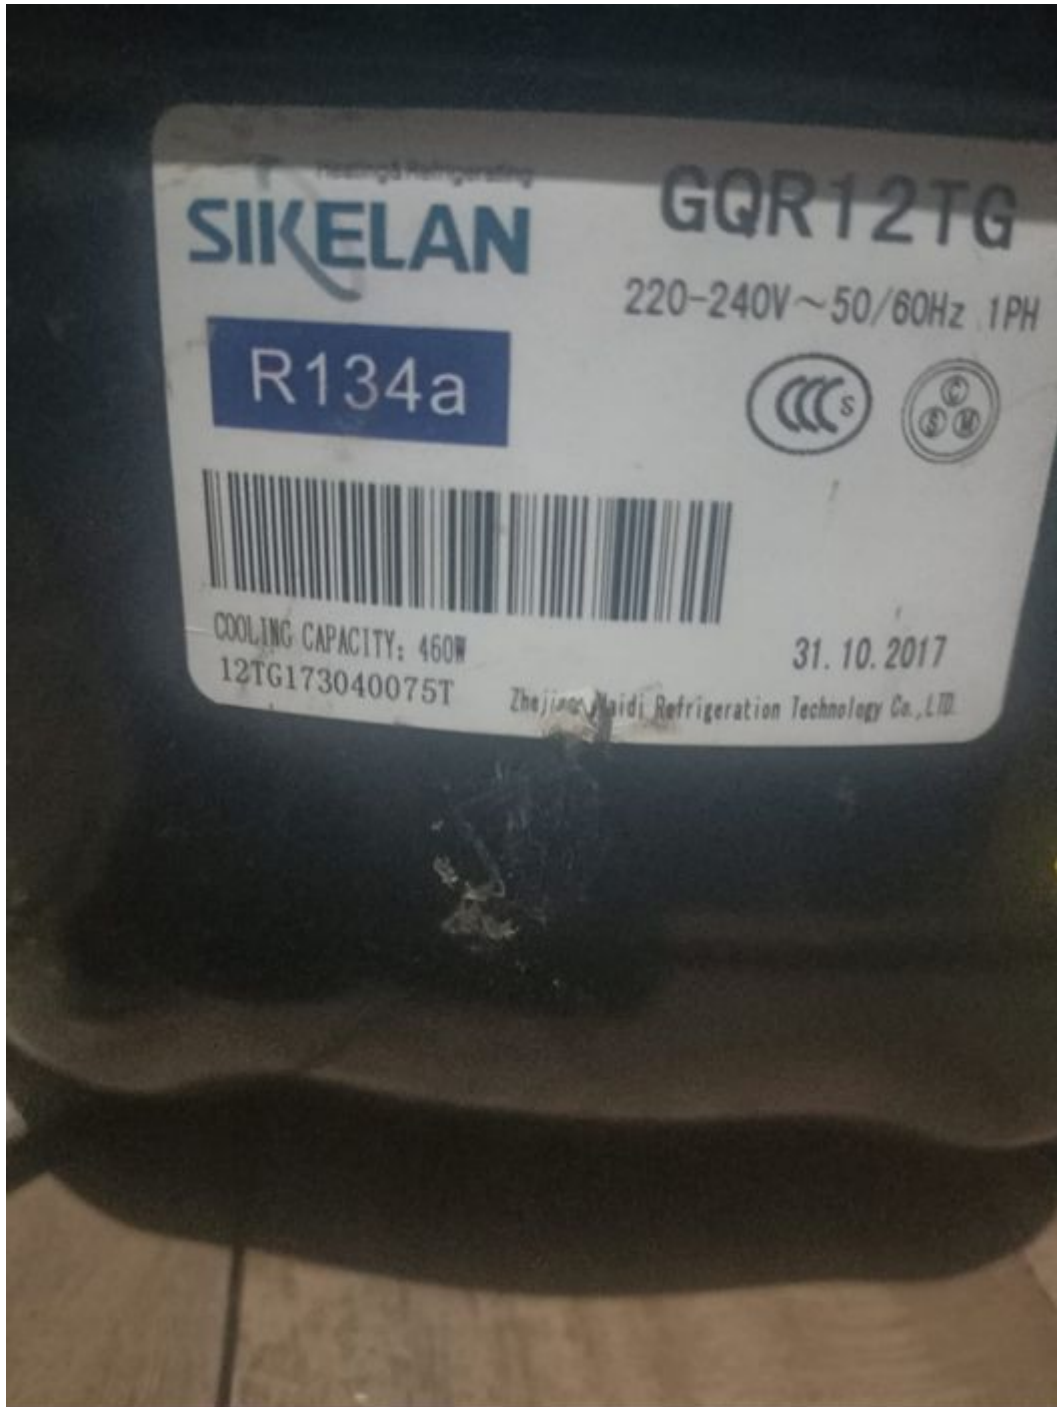

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

**GQR12TG Freezing**



The GQR12TG is a hermetic reciprocating compressor manufactured by Sikelan. It is a 3/8 HP compressor that uses R134a refrigerant. It is designed for use in commercial refrigeration applications, such as water dispensers, ice machines, and small freezers.

The GQR12TG has a displacement of 12.8 cc and a cooling capacity of 1168 W. It has a voltage rating of 220-240 V and a frequency rating of 50-60 Hz. The compressor is also equipped with a current relay for starting.

Here are some of the key features of the GQR12TG compressor:

- 3/8 HP
- R134a refrigerant
- 12.8 cc displacement
- 1168 W cooling capacity
- 220-240 V voltage
- 50-60 Hz frequency
- Current relay for starting
- High back pressure design

Vol./Freq.□	220-240V / 50-60Hz
Cooling Capacity□	1168W
C.O.P□	2.20
Horse Power□	3/8+
Refrigerant□	R134A
Application□	HBP
The Evaporating Temperature (W)□	7.2°C

- 1)GQR12TG, WZ series, use R134A refrigerant;
- 2)Voltage application 220V to 240V;
- 3)Frequency for 50/60HZ;
- 4)Motor type: CSIR;
- 5)Cooling type: Fan;
- 6)Starting device is Current Starting Relay;
- 7)Application: Middle/Hight Back Pressure;
- 8)Nominal power is 3/8+HP;
- 9)COP is 2.3 with the cooling capacity 1168W.

### 1. Product Performance

- 1)GQR12TG, WZ series, use R134A refrigerant;
- 2)Voltage application 220V to 240V;
- 3)Frequency for 50/60HZ;
- 4)Motor type: CSIR;
- 5)Cooling type: Fan;
- 6)Starting device is Current Starting Relay;
- 7)Application: Middle/Hight Back Pressure;
- 8)Nominal power is 3/8+HP;
- 9)COP is 2.2 with the cooling capacity 1168W.

Basing on Test Condition(ASHRAE)

- Evaporating Temperature: -23.3 degree
- Ambient Temperature: 35 degree
- Subcooling Temperature: 46.1 degree
- Condensing Temperature: 54.4 degree
- Suction Temperature: 35 degree

### 2.Compressor Specification

Serial	Model	HP	(V/Hz)		Displacement (cm3)	Cooling Capacity -ASHRAE	Motor Starting type Device	Starting capacitor (uF)	Running capacitor (uF)	Cooling	Test Conditions:+7.2°C(45F) 10°C(50F)														
			-15°C(5F)	-10°C(10F)							-5°C(23F)	0°C(32F)	W	Btu/h	W	Btu/h	W	Btu/h	W	Btu/h	W	Btu/h	W	Btu/h	W
L	GQR30TG	1/10	220V/50Hz	3.0	115	392	145	495	185	631	230	785	310	1050	140	0.9	2.2	7.56	365	1245	RSIR	PTC/Current Starting Relay	/	/	F
	GQR35TG	1/9	220V/50Hz	3.5	135	461	175	597	195	285	972	430	1467	195	1.1	2.2	7.52	475	1621	RSIR	/	/	/	F	
MS	GQR45TG	1/6	220V/50Hz	4.5	176	601	230	785	280	955	350	1194	480	1638	220	1.2	2.2	7.44	525	1791	RSIR	PTC/Current Starting Relay	/	/	F
	GQR55TG	1/6+	220V/50Hz	5.5	188	641	245	836	310	1058	390	1331	525	1791	250	1.3	2.1	7.17	575	1962	RSIR	/	/	F	
MK	GQR60TG	1/4	220V/50Hz	6.5	258	880	335	1143	435	1484	545	1860	665	2269	290	1.7	2.3	7.82	705	2405	RSIR	PTC/Current Starting Relay	/	/	F
	GQR70TG	1/4	220V/50Hz	7.0	285	972	370	1262	480	1638	595	2030	720	2457	340	1.9	2.1	7.23	765	2610	RSIR	/	/	F	
	GQR80TG	1/4+	220V/50Hz	8.0	324	1105	420	1433	550	1877	680	2320	810	2764	370	2.0	2.2	7.47	855	2917	RSIR	/	/	F	
	GQR90TG	1/3-	220V/50Hz	9.1	365	1245	474	1617	621	2119	768	2620	910	3105	420	2.2	2.2	7.39	955	3258	RSIR	/	/	F	
WZ	GQR80TG	1/4+	220V/50Hz	8.0	324	1105	420	1433	550	1877	680	2320	810	2764	370	2.0	2.2	7.47	855	2917	CSIR	Current Starting Relay	/	/	80 / F
	GQR90TG	1/3-	220V/50Hz	9.1	365	1245	474	1617	621	2119	768	2620	910	3105	420	2.2	2.2	7.39	955	3258	CSIR	80	/	F	
	GQR11TG	3/8	220V/50Hz	11.0	412	1406	536	1829	702	2395	868	2962	1034	3528	450	2.7	2.3	7.84	1079	3682	CSIR	80	/	F	
	GQR12TG	3/8+	220V/50Hz	12.8	467	1593	606	2068	793	2706	981	3347	1168	3985	530	3.2	2.2	7.52	1208	4122	CSIR	80	/	F	
	GQR14TG	1/2	220V/50Hz	14.2	527	1798	685	2337	896	3057	1108	3780	1320	4504	580	3.4	2.3	7.77	1365	4657	CSIR	80	/	F	
	GQR16TG	1/2+	220V/50Hz	15.3	580	1979	754	2573	1012	3453	1252	4272	1492	5091	640	3.8	2.3	7.95	1535	5237	CSIR	80	/	F	
	GQR19TG	3/4	220V/50Hz	19.0	755	2576	940	3207	1175	4009	1255	4282	1850	6312	804	4.5	2.3	7.85	1895	6466	CSIR	80	/	F	

KONOR	Displ.	power	Motor type	V/Hz	Cooling capacity	Net Weight	KG
GQR60AA	6	1/6	RSIR	220-240V/50Hz	140	9.4	
GQR70AA	6.6	1/5	RSIR	220-240V/50Hz	165	9.4	
GQR80AA	8.1	1/4	RSIR	220-240V/50Hz	198	9.4	
GQR90AA	9.1	1/4	RSIR	220-240V/50Hz	220	10.1	
GQY99AA	9.9	1/4	RSIR	220-240V/50Hz	270	10.9	

GQY12AF	11.8	1/3	CSIR	220-240V/50Hz	325	10.56
GQY16AF	16.2	3/8	CSIR	220-240V/50Hz	380	12.1
GP16MG	16.2	5/8	CSIR	220-240V/50Hz	870	12.5
GP12MG	11.8	5/8	CSIR	220-240V/50Hz	656	10.9
GP12TG	11.8	3/8	CSIR	220-240V/50Hz	1140	11.8
GQR80TG	8.1	1/4	CSIR	220-240V/50Hz	730	9.8
GQR90TG	9.1	1/4	CSIR	220-240V/50Hz	830	10.5
GQR60TG	6	1/5	CSIR	220-240V/50Hz	520	9.8



Private Picture Copyright: WWW.MBSM.PRO

153	L	QD35HG	1/11	3,5		75	шт	16720	
154	ML	ADW51	1/6	5,1		125	шт	19360	
155	ML	ADW57	1/5-	5,7		135	шт	19800	
156	ML	ADW66	1/4-	6,6		165	шт	0	
157	MX	ADW77	1/4	7,7		185	шт	0	
158	MX	ADW86	1/4+	8,6		200	шт	23760	
159	MX	ADW91	1/3-	9,1		220	шт	0	
160	MQ	ADW110	1/3	11,0		270	шт	0	
161	MQ	ADW128	3/8+	12,8		320	шт	27720	
162	MQ	ADW142	1/2-	14,2		350	шт	28600	
163	MQ	ADW153	1/2	15,3		380	шт	29040	
164	MQ	ADW168	1/2+	16,8		430	шт	29480	
№	Модель	HBP R134a	HP	см3/час	Мотор	Обмотка	Мощность, ватт 7,2/54,4C	Ед. изм.	Цена, тг.
165	MQ	GQR12TG	3/8+	12,7	SIR	медь (Cu)	1300	шт	29480
166	MQ	GQR14TG	1/2	14,3			1450	шт	30800
167	MQ	GQR16TG	1/2+	15,3			1490	шт	32120
№	Модель	LBP R404a	HP	см3/час	Мотор	Обмотка	Мощность, ватт -23,3/54,4C	Ед. изм.	Цена, тг.
168	MQ	GQR80K	1/3+	8,0	CSIR	медь (Cu)	465	шт	30800
169	MQ	GQR90K	1/2-	9,0			515	шт	31680
170	MD	GQR11K	1/2	11,0			565	шт	0
171	MD	GQR12K	3/4	12,1			640	шт	45320
172	MD	GQR14K	3/4	14,3	CSR	750	шт	47080	
173	MD	GQR16K	4/5	16,2		850	шт	47960	
174	MD	GQR19K	7/8	19,0		920	шт	49280	

Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_Gqr12tgTélécharger



RLVH® CBB65-B (RoHS)  
80µF±5% 330V 1min/1.67%  
15µF±5% 450V B S2 SH  
40/85/21



50/60Hz



Ningguo Yuhua



Mbsm.pro, Refrigerator, Compressor,  
Samsung, 1/4 Hp, r134a, 150g,  
MK172HL1UA, MK172H-L1UA,  
MK172HL1UA/TSE, 200/220V-50HZ/ 135W,  
200/220V-60HZ/159W, RSCR

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 29 December 2021



Private Picture Copyright: WWW.MBSM.PRO

[https://www.mbsm.pro/wp-content/uploads/2020/12/Mbsm\\_dot\\_pro\\_private\\_PDF\\_compressor-catalogue-2015-1.pdf](https://www.mbsm.pro/wp-content/uploads/2020/12/Mbsm_dot_pro_private_PDF_compressor-catalogue-2015-1.pdf)

## SPECIFICATION

REFRIGERATOR MODEL NO :	RT41MASW
DIMENSION(WxDxH) :	670mm x 650mm x 1685mm
GROSS CAPACITY :	410 l
RATED VOLTAGE :	220V
RATED FREQUENCY :	60Hz
RATED INPUT :	136W
RATED CURRENT :	0.86A
DEFROSTING INPUT(W/A) :	274W/1.24A
CLIMATIC CLASS OF THE APPLIANCE :	T
RATED MAXIMUM INPUT OF LAMP :	30 W
NAME OF REFRIGERANT :	R-134a
MASS OF REFRIGERANT :	150 g
NET WEIGHT :	67 Kg
NAME OF INSULATION BLOWING GAS :	CYCLOPENTANE
MADE IN THAILAND	

DA68-01618A



Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

			220-60	118	137	468	114	1.04	1.20	4.11	
AC 200-220V~50Hz, 220V~60Hz	NC1A43HLB	RSCR	220-50	102	119	405	91	1.12	1.30	4.45	ST
			220-60	118	137	468	100	1.18	1.37	4.68	
	SD152H-S1UB	RSCR	220-50	120	140	476	113	1.06	1.23	4.21	ST
			220-60	146	170	580	122	1.20	1.39	4.75	
	SD162H-L1UB	RSCR	220-50	146	170	580	139	1.05	1.22	4.17	ST
			220-60	182	212	723	152	1.20	1.39	4.75	
	SK170H-L1UB	RSCR	220-50	168	195	667	153	1.10	1.28	4.36	ST
			220-60	206	240	818	164	1.26	1.46	4.99	
	MSA170H-L1B	RSCR	220-50	173	201	687	141	1.23	1.43	4.87	ST
			220-60	220	256	873	163	1.35	1.57	5.36	
	MK172H-L1U	RSCR	220-50	176	205	699	131	1.34	1.56	5.33	ST/OC
			220-60	224	260	889	159	1.41	1.64	5.59	
	MK172H-L1UA	RSCR	220-50	176	205	699	135	1.30	1.52	5.18	ST/OC
			220-60	224	260	889	159	1.41	1.64	5.59	
	SK182H-L2UA	RSCR	220-50	203	236	806	182	1.12	1.30	4.43	FC/OC
			220-60	239	278	949	191	1.25	1.46	4.97	

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

---

Mbsm.pro, Compressor, cubigel, huayi,

# ACC, Electrolux, HPY14AA, LBP, R600a, 1/5HP, 220-240V/1/50Hz, 166 W

Category: compressor

written by www.mbsm.pro | 29 December 2021

Compressors/Compressors ACC – Electrolux HP14AH, LBP – R600a, Power consumption 1/5HP, 220-240V/1/50Hz, Motor type RSIR, Injection: Capillary operation, Displacement 14.32 cm<sup>3</sup>, Oil type ISO VG10 Mineral oil, Oil quantity 300 cm<sup>3</sup>, Power 147 W at -25 / +55 °C, Power consumption 166 W, Power 0.0 W, Cooling capacity

-10 °C	-15 °C	-20 °C	-25 °C	-30 °C	-35 °C
344	276	216	166	124	92

<b>Shipping Class</b>	Standard
<b>Scope Of Application</b>	LBP
<b>Lieferzeit</b>	2-3 Wochen
<b>Type Of Construction</b>	Piston
<b>Condensation Temperature</b>	55°C
<b>Maker</b>	ACC
<b>Manufacturer No.</b>	HPY14AA
<b>Displacement In Cm<sup>3</sup></b>	14.32
<b>Measuring Requirements</b>	Ashrae
<b>Refrigerants</b>	R600a
<b>Series</b>	HPY
<b>Condensing Units Compressors</b>	Compressors
<b>Suspense</b>	220-240V
<b>Weight In Kg</b>	13

Compressor ACC Cubigel Huayi Electrolux ZEM HPY14AA, LBP -R600a, 220-240V/1/50Hz, 1/5 HP, discharge 14.32 cm<sup>3</sup>, motor type RSIR, oil type ISO VG10 mineral, oil charge 300 cm<sup>3</sup>, 166 W at -25 / +55 °, input power, current 147 W, 0.96 A, expansion device: capillar, cooling: static, weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with “immediately available” and “scarce stock”, usually delivery within 2 days. For “currently not available” delivery time usually 2 weeks or delivery time in urgent cases contact us.

---

Refrigerant:	R600a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	6,5 mm
Suction:	8,1 mm
Working area:	LBP
Design type:	Hermetic
Model series:	HPY
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V

Oil type:	ISO VG 10 Mineral
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions ( length × width × height ):	20,40 × 16,20 × 19,60 cm
customs tariff number:	84143081
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	HPY14AA
Modelname:	HP14AH
Stroke volume (cm3):	14,32
Cooling capacity (W):	147
Power (HP):	0,25
Max. Starting current (A):	11,5
Max. Operating current (A):	0,96
Engine type:	RSIR
Note:	Static cooling
Oil quantity (l):	0,3
Compressor type:	Piston
Power range:	-35 C to -10 C
Alternative:	NBM1118Y , EMX70CLC , NBM1116Y
Pressure line (mm):	6,5
Suction line (mm):	8,1







Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_HPYP14AA-1Télécharger](#)

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_HPYP14AATélécharger](#)