# BONNAMY AUTOMATIC TUBE BENDER

Category: Pictures
written by www.mbsm.pro | 29 December 2021

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

# White whale look machine a laver

Category: Pictures
written by www.mbsm.pro | 29 December 2021

Private Picture Copyright : WWW.MBSM.PRO

# Tambour samsung 5kg

Category: Pictures
written by www.mbsm.pro | 29 December 2021

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

# Chaudiere saunier duval 24kw

Category: Pictures
written by www.mbsm.pro | 29 December 2021
Mbsm_dot_pro_private_picture_chaudiere-saunier-duval-24kwTélécharger

---

# Mbsm.pro, PANASONIC, DA73C12RBU6, A/C

# Compressor, 881 BtuH, 115V. More details: A/C Compressor, BtuH 881, Voltage 115, 1 Phase, Refrigerant Type R-134A, Nominal HP 1/4, 60 Hz, Length 11 In., Width 9-1/2 In., Height 8-1/2 In.

Category: compressor
written by www.mbsm.pro | 29 December 2021
PANASONIC DA73C12RBU6 A/C Compressor, 881 BtuH, 115V. More details: A/C Compressor, BtuH 881, Voltage 115, 1 Phase, Refrigerant Type R-134A, Nominal HP 1/4, 60 Hz, Length 11 In., Width 9-1/2 In., Height 8-1/2 In.
Reference:
DA73C12RBU6
Description:
■ Btu / h: 881
■ Voltage: 115
■ Phase: 1
■ Refrigerant Type: R-134A
■ Nominal HP: 1/4
■ Hz: 60
■ Length: 11 ”
Mark: panasonic

| Item | Performance characteristics |
|---|---|
| Refrigerant | R134a |
| Displacement (cm³) | 7.3 |
| Voltage (V) | 115 |
| Frequency (Hz) | 60 |
| Motor Type | RSCR |
| Capacity@ASHRAE | 258 |
| COP@ASHRAE | 1.57 |

Mbsm_dot_pro_private_PDF_DA73C12RBU6Télécharger

---

Mbsm.pro, Compressor, JIAXIPERA, ND1080Y, 1/8HP, ND1090Y, 1/8+HP, ND1110Y, 1/7HP, ND1111Y, 1/6-HP, ND1112Y, 1/6+HP, NX1080Y, 1/8HP, NX1090Y, 1/8+HP, NX1110Y, 1/7HP, NX1111Y, 1/6HP, NX1112Y, 1/6+HP, NX1113Y, 1/5HP, NX1114Y, 1/5+HP, NX1116Y, 1/4HP, NX1117Y, 1/4HP, NX1119Y, 1/4+HP, NX1120Y, 1/4+HP, TB1080Y, 1/8HP, TB1090Y, 1/8+HP, TB1110Y, 1/7HP, TB1111Y, 1/6HP, TB1112Y, 1/6+HP, TB1113Y, 1/5HP, TB1114Y, 1/5+HP, TX1080Y, 1/8HP, TX1090Y, 1/8+HP, TX1110Y, 1/7HP, TX1111Y, 1/6HP, TX1112Y, 1/6+HP, TX1113Y, 1/5HP, TX1114Y, 1/5+HP,

# VNX1111Y, 1/6HP, VNX1113Y, 1/5HP, VNX1116Y, 1/4HP, ZBX1117CY, 1/4HP, ZBX1119CY, 1/4+HP, ZBX1121CY, 1/4+HP

Category: compressor
written by www.mbsm.pro | 29 December 2021
Mbsm.pro, Compressor, JIAXIPERA, ND1080Y, 1/8HP, ND1090Y, 1/8+HP, ND1110Y, 1/7HP, ND1111Y, 1/6-HP, ND1112Y, 1/6+HP, NX1080Y, 1/8HP, NX1090Y, 1/8+HP, NX1110Y, 1/7HP, NX1111Y, 1/6HP, NX1112Y, 1/6+HP, NX1113Y, 1/5HP, NX1114Y, 1/5+HP, NX1116Y, 1/4HP, NX1117Y, 1/4HP, NX1119Y, 1/4+HP, NX1120Y, 1/4+HP, TB1080Y, 1/8HP, TB1090Y, 1/8+HP, TB1110Y, 1/7HP, TB1111Y, 1/6HP, TB1112Y, 1/6+HP, TB1113Y, 1/5HP, TB1114Y, 1/5+HP, TX1080Y, 1/8HP, TX1090Y, 1/8+HP, TX1110Y, 1/7HP, TX1111Y, 1/6HP, TX1112Y, 1/6+HP, TX1113Y, 1/5HP, TX1114Y, 1/5+HP, VNX1111Y, 1/6HP, VNX1113Y, 1/5HP, VNX1116Y, 1/4HP, ZBX1117CY, 1/4HP, ZBX1119CY, 1/4+HP, ZBX1121CY, 1/4+HP

**ZBX 1119 CY**

**1 / 4 + HP**

**ZBX 1121 CY**

**1 / 4 + HP**

**ZBX 1122 CY**

**1 / 4 + HP**

Private Picture Copyright : WWW.MBSM.PRO

**TX 1110 Y**

**1 / 7 HP**

**TX 1111 Y**

**1 / 6 HP**

**TX 1112 Y**

**1 / 6 + HP**

**TX 1113 Y**

**1 / 5 HP**

**TX 1114 Y**

**1 / 5 + HP**

**VNX 1111 Y**

**1 / 6 HP**

**VNX 1113 Y**

**1 / 5 HP**

**VNX 1116 Y**

**1 / 4 HP**

**ZBX 1117 CY**

**1 / 4 HP**

Private Picture Copyright : WWW.MBSM.PRO

| | | |
|---|---|---|
| **TB 1080 Y**<br>**1 / 8 HP** | **TB 1090 Y**<br>**1 / 8 + HP** | **TB 1110 Y**<br>**1 / 7 HP** |
| <br>**TB 1111 Y**<br>**1 / 6 HP** | <br>**TB 1112 Y**<br>**1 / 6 + HP** | <br>**TB 1113 Y**<br>**1 / 5 HP** |
| <br>**TB 1114 Y**<br>**1 / 5 + HP** | <br>**TX 1080 Y**<br>**1 / 8 HP** | <br>**TX 1090 Y**<br>**1 / 8 + HP** |

Private Picture Copyright : WWW.MBSM.PRO

**NX 1110 Y**

**1 / 7 HP**

**NX 1111 Y**

**1 / 6 HP**

**NX 1112 Y**

**1 / 6 + HP**

**NX 1113 Y**

**1 / 5 HP**

**NX 1114 Y**

**1 / 5 + HP**

**NX 1116 Y**

**1 / 4 HP**

**NX 1117 Y**

**1 / 4 HP**

**NX 1119 Y**

**1 / 4 + HP**

**NX 1120 Y**

**1 / 4 + HP**

Private Picture Copyright : WWW.MBSM.PRO

| | | |
|---|---|---|
| **MH 1110 Y**<br>**1 / 6 - HP** | **ND 1070 Y**<br>**1 / 9 HP** | **ND 1080 Y**<br>**1 / 8 HP** |
| <br>**ND 1090 Y**<br>**1 / 8 + HP** | <br>**ND 1110 Y**<br>**1 / 7 HP** | <br>**ND 1111 Y**<br>**1 / 6 - HP** |
| <br>**ND 1112 Y**<br>**1 / 6 + HP** | <br>**NX 1080 Y**<br>**1 / 8 HP** | <br>**NX 1090 Y**<br>**1 / 8 + HP** |

Private Picture Copyright : WWW.MBSM.PRO

JK 1080 Y
1 / 8 + HP
JK 1090 FY
1 / 6 - HP
JK 1110 Y
1 / 7 HP
JK 1111 HY
1 / 6 - HP
MH 1050 Y
1 / 12 HP
MH 1090 Y
1 / 8 + HP
Private Picture Copyright : WWW.MBSM.PRO

---

# Mbsm.pro, Deep, freezer, congela, 383 Litre, Compressor, R134A, 215W, 1/4 Hp++, 1/3 Hp–, 215W

Category: Chaud&Froid,Freezer
written by www.mbsm.pro | 29 December 2021

> تحويل , *hp*درس , قدرات الضواغط المناسبة في الثلاجات , تحويل اللتر ل
> *hp*القدم للتر , تحويل القدم ل

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

| DOMESTIC SINGLE DOOR FRIDGE | | | | |
|---|---|---|---|---|
| 4 to 5 | Cubic Feet | (113-160 Ltr) | = | 1\12 H.P. |
| 6 to 7 | Cubic Feet | (170 -198 Ltr) | = | 1\10 H.P. |
| 8 to 9 | Cubic Feet | (226-254 Ltr) | = | 1\8 H.P. |
| 9 to 13 | Cubic Feet | (283 - 370 Ltr) | = | 1\6 H.P. |
| DOMESTIC DOUBLE DOOR FRIDGE | | | | |
| 9 to 12 | Cubic Feet | (226-340 Ltr) | = | 1\5 H.P. |
| 13 to 17 | Cubic Feet | (370-481 Ltr) | = | 1\4 H.P. |
| 17 to 22 | Cubic Feet | (509-623Ltr) | = | 1\3 H.P. |

Private Picture : www.MBSMGROUP.TN

Private Picture Copyright : WWW.MBSM.PRO

جدول قدرة الضاغط بالنسبة لحجم الثلاجة أو الديب فريزر

| الضاغط بالحصان | | 1/12 | 1/10 | 1/8 | 1/6 | 1/5 | 1/4 | 1/3 | 1/2 |
|---|---|---|---|---|---|---|---|---|---|
| الثلاجة | قدم | 4 | 6 | 8 | 10 | 12 | 14 | 16 | |
| | لتر | 113 | 170 | 227 | 283 | 340 | 396 | 453 | |
| الديب فريزر | قدم | | | 6 | 8 | 10 | 12 | 14 | 18 |
| | لتر | | | 170 | 200 | 283 | 340 | 396 | 510 |
| | العرض بالتقريب بالسنتيمتر | | | **50** | **70** | **90** | **120** | **144** | **170** |

Private Picture : www.MBSMGROUP.TN

Private Picture Copyright : WWW.MBSM.PRO

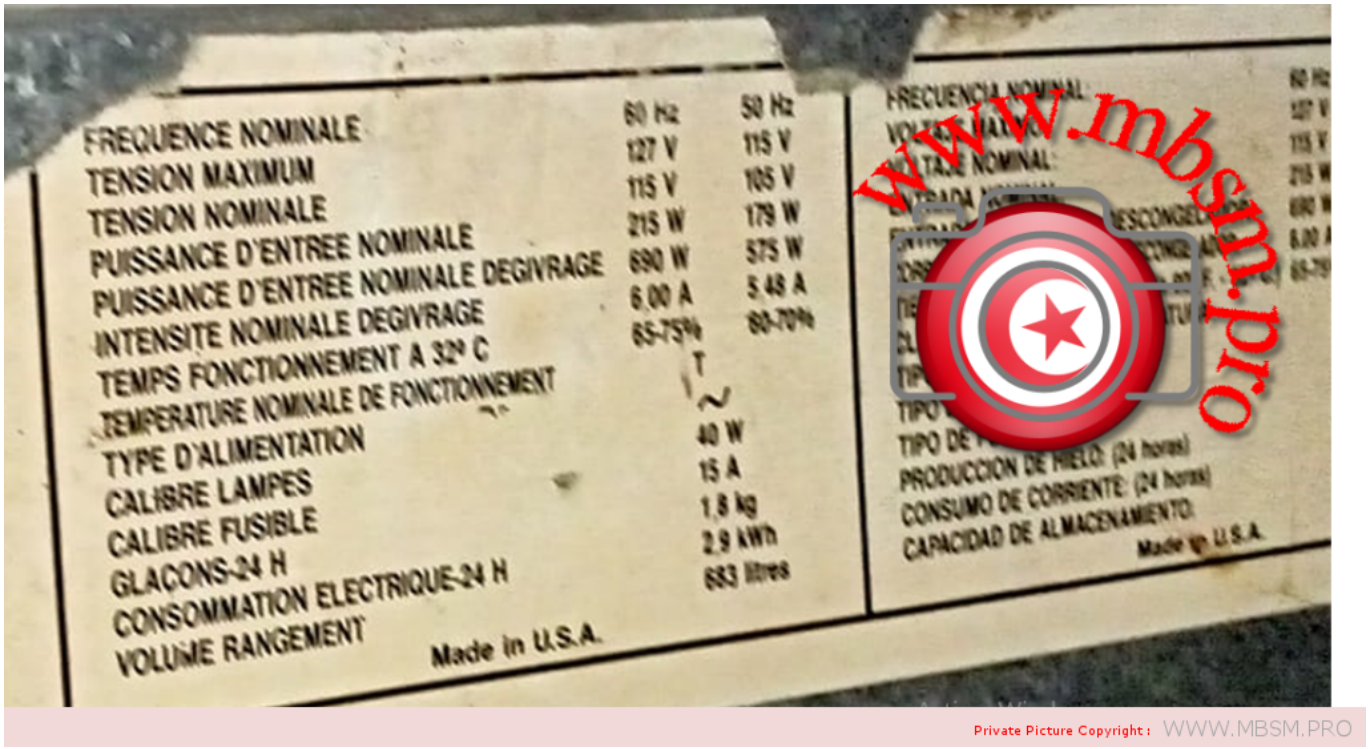


# Mbsm.pro, Refrigeration, Compressor, GQR12TG, 3/8+ hp (big) ++, HBP, 1168W, 1/2 Hp (LBP) , CSIR, R134A, Starting Capacitor 80UF, Displacement 12.0cm3

Category: compressor
written by www.mbsm.pro | 29 December 2021

Private Picture Copyright : WWW.MBSM.PRO

**GQR12TG Freezing**

The GQR12TG is a hermetic reciprocating compressor manufactured by Sikelan. It is a 3/8 HP compressor that uses R134a refrigerant. It is designed for use in commercial refrigeration applications, such as water dispensers, ice machines, and small freezers.

The GQR12TG has a displacement of 12.8 cc and a cooling capacity of 1168 W. It has a voltage rating of 220-240 V and a frequency rating of 50-60 Hz. The compressor is also equipped with a current relay for starting.

Here are some of the key features of the GQR12TG compressor:

- 3/8 HP
- R134a refrigerant
- 12.8 cc displacement
- 1168 W cooling capacity
- 220-240 V voltage
- 50-60 Hz frequency
- Current relay for starting
- High back pressure design

| | |
|---|---|
| Vol./Freq. | 220-240V / 50-60Hz |
| Cooling Capacity | 1168W |
| C.O.P | 2.20 |
| Horse Power | 3/8+ |
| Refrigerant | R134A |
| Application | HBP |
| The Evaporating Temperature (W) | 7.2°C |

1)GQR12TG, WZ series, use R134A refrigerant;
 2)Voltage application 220V to 240V;
 3)Frequency for 50/60HZ;
 4)Motor type: CSIR;
 5)Cooling type: Fan;
 6)Starting device is Current Starting Relay;
 7)Application: Middle/Hight Back Pressure;
 8)Nominal power is 3/8+HP;
 9)COP is 2.3 with the cooling capacity 1168W.

1. Product Performance
 1)GQR12TG, WZ series, use R134A refrigerant;
 2)Voltage application 220V to 240V;
 3)Frequency for 50/60HZ;
 4)Motor type: CSIR;
 5)Cooling type: Fan;
 6)Starting device is Current Starting Relay;
 7)Application: Middle/Hight Back Pressure;
 8)Nominal power is 3/8+HP;
 9)COP is 2.2 with the cooling capacity 1168W.

Basing on Test Condition(ASHRAE)
 Evaporating Temperature: -23.3 degree
 Ambient Temperature: 35 degree
 Subcooling Temperature: 46.1 degree
 Condensing Temperature: 54.4 degree
 Suction Temperature: 35 degree

2.Compressor Specification

| Serial | Model | HP | (V/Hz) | Displacement (cm3) | Cooling Capacity -ASHRAE | Motor type | Starting Device | Starting capacitor (uF) | Running capacitor (uF) | Cooling | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| -15ºC(5F) | -10ºC(10F) | -5ºC(23F) | 0ºC(32F) | Test Conditions:+7.2ºC(45F) | 10ºC(50F) | | | | | | | | | | | | | | | | | |
| W | Btu/h | W | Btu/h | W | Btu/h | W | Btu/h | Capacity (W) | Capacity (Btu/h) | lnput Power(w) | Current (A) | COP (W/W) | COP (Btu/Wh) | W | Btu/h | | | | | | | |
| L | GQR30TG | 1/10 | 220V/50Hz | 3.0 | 115 | 392 | 145 | 495 | 185 | 631 | 230 | 785 | 310 | 1058 | 140 | 0.9 | 2.2 | 7.56 | 365 | 1245 | RSIR | PTC/Current Starting Relay / / F |
| GQR35TG | 1/9 | 220V/50Hz | 3.5 | 135 | 461 | 175 | 597 | 195 | 665 | 285 | 972 | 430 | 1467 | 195 | 1.1 | 2.2 | 7.52 | 475 | 1621 | RSIR | / | / F |
| MS | GQR45TG | 1/6 | 220V/50Hz | 4.5 | 176 | 601 | 230 | 785 | 280 | 955 | 350 | 1194 | 480 | 1638 | 220 | 1.2 | 2.2 | 7.44 | 525 | 1791 | RSIR | PTC/Current Starting Relay / / F |
| GQR55TG | 1/6+ | 220V/50Hz | 5.5 | 188 | 641 | 245 | 836 | 310 | 1058 | 390 | 1331 | 525 | 1791 | 250 | 1.3 | 2.1 | 7.17 | 575 | 1962 | RSIR | / | / F |
| MK | GQR60TG | 1/4 | 220V/50Hz | 6.5 | 258 | 880 | 335 | 1143 | 435 | 1484 | 545 | 1860 | 665 | 2269 | 290 | 1.7 | 2.3 | 7.82 | 705 | 2405 | RSIR | PTC/Current Starting Relay / / F |
| GQR70TG | 1/4 | 220V/50Hz | 7.0 | 285 | 972 | 370 | 1262 | 480 | 1638 | 595 | 2030 | 720 | 2457 | 340 | 1.9 | 2.1 | 7.23 | 765 | 2610 | RSIR | / | / F |
| GQR80TG | 1/4+ | 220V/50Hz | 8.0 | 324 | 1105 | 420 | 1433 | 550 | 1877 | 680 | 2320 | 810 | 2764 | 370 | 2.0 | 2.2 | 7.47 | 855 | 2917 | RSIR | / | / F |
| GQR90TG | 1/3- | 220V/50Hz | 9.1 | 365 | 1245 | 474 | 1617 | 621 | 2119 | 768 | 2620 | 910 | 3105 | 420 | 2.2 | 2.2 | 7.39 | 955 | 3258 | RSIR | / | / F |
| WZ | GQR80TG | 1/4+ | 220V/50Hz | 8.0 | 324 | 1105 | 420 | 1433 | 550 | 1877 | 680 | 2320 | 810 | 2764 | 370 | 2.0 | 2.2 | 7.47 | 855 | 2917 | CSIR | Current Starting Relay 80 / F |
| GQR90TG | 1/3- | 220V/50Hz | 9.1 | 365 | 1245 | 474 | 1617 | 621 | 2119 | 768 | 2620 | 910 | 3105 | 420 | 2.2 | 2.2 | 7.39 | 955 | 3258 | CSIR | 80 | / F |
| GQR11TG | 3/8 | 220V/50Hz | 11.0 | 412 | 1406 | 536 | 1829 | 702 | 2395 | 868 | 2962 | 1034 | 3528 | 450 | 2.7 | 2.3 | 7.84 | 1079 | 3682 | CSIR | 80 | / F |
| GQR12TG | 3/8+ | 220V/50Hz | 12.8 | 467 | 1593 | 606 | 2068 | 793 | 2706 | 981 | 3347 | 1168 | 3985 | 530 | 3.2 | 2.2 | 7.52 | 1208 | 4122 | CSIR | 80 | / F |
| GQR14TG | 1/2 | 220V/50Hz | 14.2 | 527 | 1798 | 685 | 2337 | 896 | 3057 | 1108 | 3780 | 1320 | 4504 | 580 | 3.4 | 2.3 | 7.77 | 1365 | 4657 | CSIR | 80 | / F |
| GQR16TG | 1/2+ | 220V/50Hz | 15.3 | 580 | 1979 | 754 | 2573 | 1012 | 3453 | 1252 | 4272 | 1492 | 5091 | 640 | 3.8 | 2.3 | 7.95 | 1535 | 5237 | CSIR | 80 | / F |
| GQR19TG | 3/4 | 220V/50Hz | 19.0 | 755 | 2576 | 940 | 3207 | 1175 | 4009 | 1255 | 4282 | 1850 | 6312 | 804 | 4.5 | 2.3 | 7.85 | 1895 | 6466 | CSIR | 80 | / F |

| **KONOR** | Displ. | power | Motor type | V/Hz | Cooling capacity | W | Net Weight | KG |
|---|---|---|---|---|---|---|---|---|
| GQR60AA | 6 | 1/6 | RSIR | 220-240V/50Hz | 140 | | 9.4 | |
| GQR70AA | 6.6 | 1/5 | RSIR | 220-240V/50Hz | 165 | | 9.4 | |
| GQR80AA | 8.1 | 1/4 | RSIR | 220-240V/50Hz | 198 | | 9.4 | |
| GQR90AA | 9.1 | 1/4 | RSIR | 220-240V/50Hz | 220 | | 10.1 | |
| GQY99AA | 9.9 | 1/4 | RSIR | 220-240V/50Hz | 270 | | 10.9 | |

| | | | | | | |
|---|---|---|---|---|---|---|
| GQY12AF | 11.8 | 1/3 | CSIR | 220-240V/50Hz | 325 | 10.56 |
| GQY16AF | 16.2 | 3/8 | CSIR | 220-240V/50Hz | 380 | 12.1 |
| GP16MG | 16.2 | 5/8 | CSIR | 220-240V/50Hz | 870 | 12.5 |
| GP12MG | 11.8 | 5/8 | CSIR | 220-240V/50Hz | 656 | 10.9 |
| GP12TG | 11.8 | 3/8 | CSIR | 220-240V/50Hz | 1140 | 11.8 |
| GQR80TG | 8.1 | 1/4 | CSIR | 220-240V/50Hz | 730 | 9.8 |
| GQR90TG | 9.1 | 1/4 | CSIR | 220-240V/50Hz | 830 | 10.5 |
| GQR60TG | 6 | 1/5 | CSIR | 220-240V/50Hz | 520 | 9.8 |

www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 153 | L QD35HG | 1/11 | 3,5 | | | 75 | шт | 16720 |
| 154 | ML ADW51 | 1/6 | 5,1 | | | 125 | шт | 19360 |
| 155 | ML ADW57 | 1/5- | 5,7 | | | 135 | шт | 19800 |
| 156 | ML ADW66 | 1/4- | 6,6 | | | 165 | шт | 0 |
| 157 | MX ADW77 | 1/4 | 7,7 | | | 185 | шт | 0 |
| 158 | MX ADW86 | 1/4+ | 8,6 | | | 200 | шт | 23760 |
| 159 | MX ADW91 | 1/3- | 9,1 | | | 220 | шт | 0 |
| 160 | MQ ADW110 | 1/3 | 11,0 | | | 270 | шт | 0 |
| 161 | MQ ADW128 | 3/8+ | 12,8 | | | 320 | шт | 27720 |
| 162 | MQ ADW142 | 1/2- | 14,2 | | | 350 | шт | 28600 |
| 163 | MQ ADW153 | 1/2 | 15,3 | | | 380 | шт | 29040 |
| 164 | MQ ADW168 | 1/2+ | 16,8 | | | 430 | шт | 29480 |
| **№** | **Модель HBP R134a** | **HP** | **см3/час** | **Мотор** | **Обмотка** | **Мощность, ватт 7,2/54,4C** | **Ед. изм.** | **Цена, тг.** |
| 165 | MQ GQR12TG | 3/8+ | 12,7 | SIR | медь (Cu) | 1300 | шт | 29480 |
| 166 | MQ GQR14TG | 1/2 | 14,3 | | | 1450 | шт | 30800 |
| 167 | MQ GQR16TG | 1/2+ | 15,3 | | | 1490 | шт | 32120 |
| **№** | **Модель LBP R404a** | **HP** | **см3/час** | **Мотор** | **Обмотка** | **Мощность, ватт -23,3/54,4C** | **Ед. изм.** | **Цена, тг.** |
| 168 | MQ GQR80K | 1/3+ | 8,0 | CSIR | медь (Cu) | 465 | шт | 30800 |
| 169 | MQ GQR90K | 1/2- | 9,0 | | | 515 | шт | 31680 |
| 170 | MD GQR11K | 1/2 | 11,0 | | | 565 | шт | 0 |
| 171 | MD GQR12K | 3/4 | 12,1 | | | 640 | шт | 45320 |
| 172 | MD GQR14K | 3/4 | 14,3 | CSR | | 750 | шт | 47080 |
| 173 | MD GQR16K | 4/5 | 16,2 | | | 850 | шт | 47960 |
| 174 | MD GQR19K | 7/8 | 19,0 | | | 920 | шт | 49280 |

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_Gqr12tgTélécharger

Private Picture Copyright : WWW.MBSM.PRO

# Mbsm.pro, Refrigerator, Compressor, Samsung, 1/4 Hp, r134a, 150g, MK172HL1UA, MK172H-L1UA, MK172HL1UA/TSE, 200/220V-50HZ/ 135W, 200/220V-60HZ/159W, RSCR

Category: compressor
written by www.mbsm.pro | 29 December 2021

Private Picture Copyright : WWW.MBSM.PRO

https://www.mbsm.pro/wp-content/uploads/2020/12/Mbsm_dot_pro_private_PDF_compressor-catalogue-2015-1.pdf

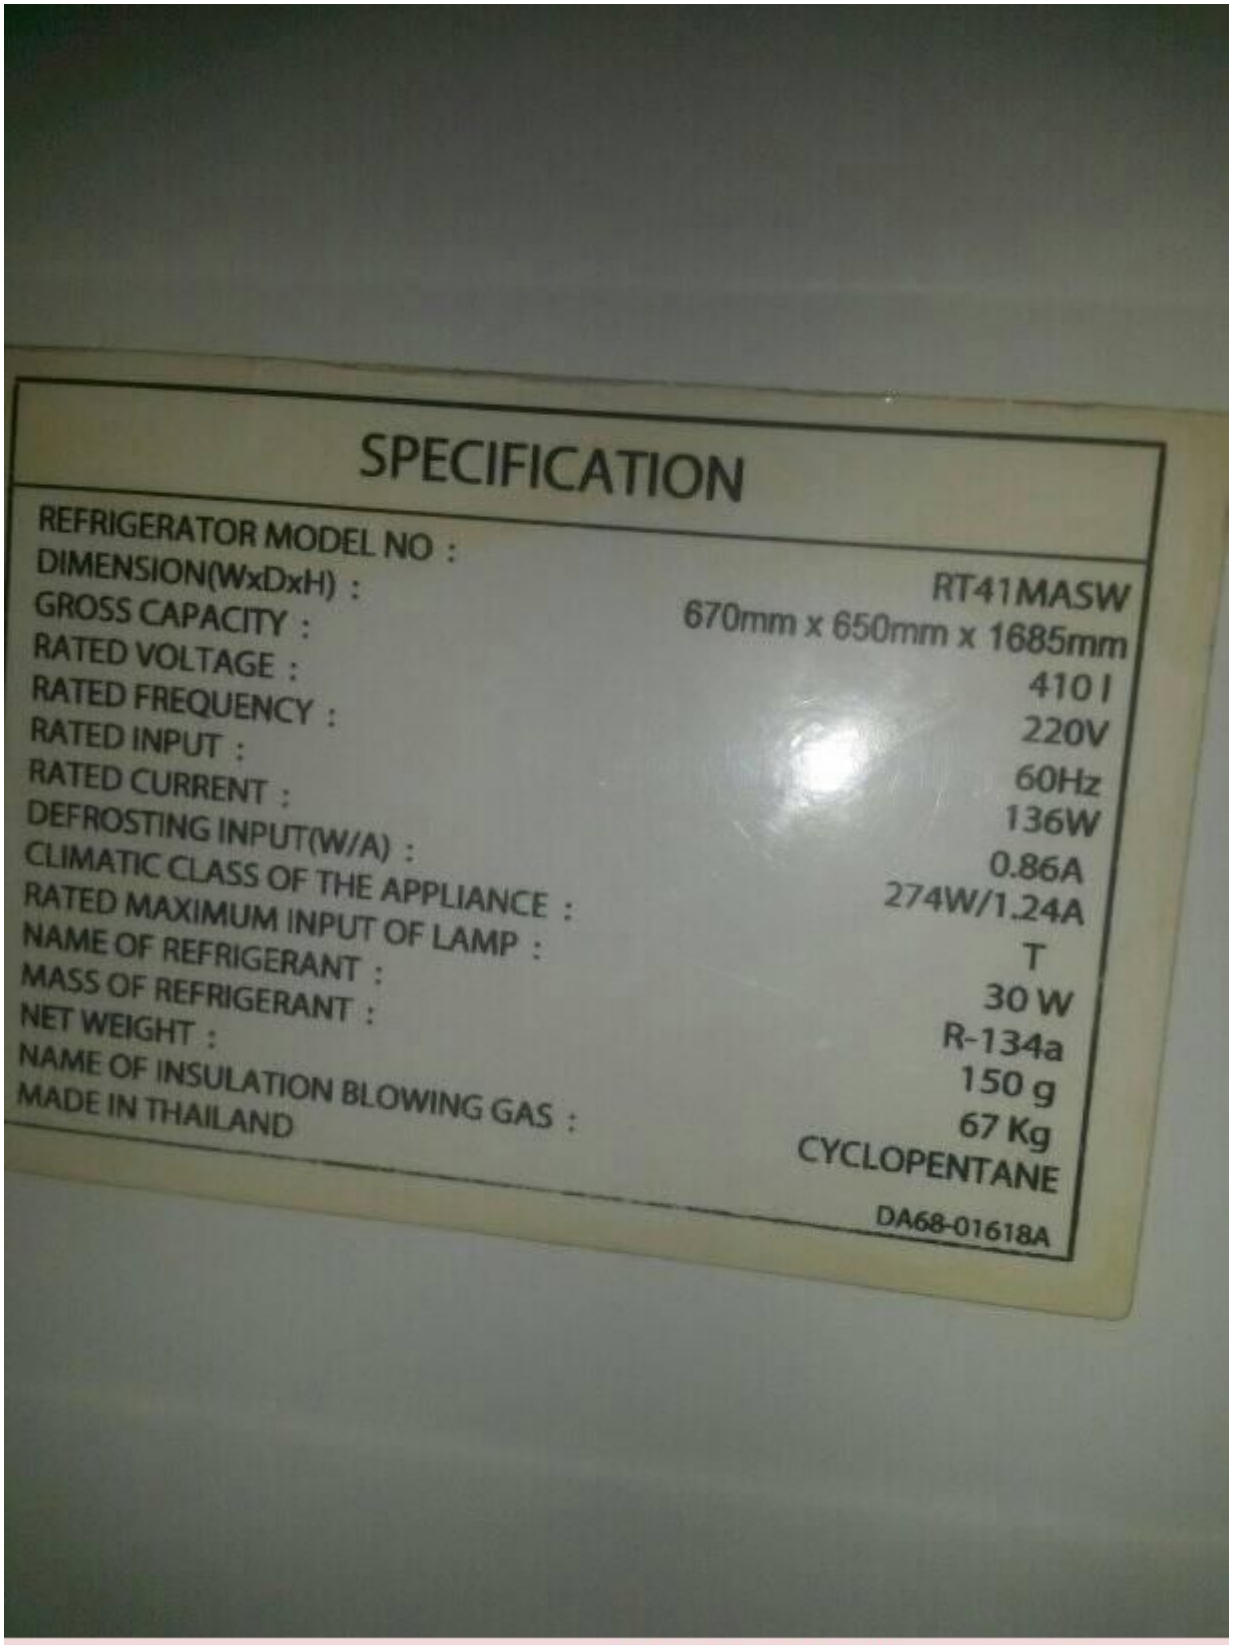

Private Picture Copyright : WWW.MBSM.PRO

ture Copyright : WWW.MBSM.PRO

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | 220-60 | 118 | 137 | 468 | 114 | 1.04 | 1.20 | 4.11 | |
| AC 200-220V~50Hz, 220V~60Hz | NC1A43HLB | RSCR | 220-50 | 102 | 119 | 405 | 91 | 1.12 | 1.30 | 4.45 | ST |
| | | | 220-60 | 118 | 137 | 468 | 100 | 1.18 | 1.37 | 4.68 | |
| | SD152H-S1UB | RSCR | 220-50 | 120 | 140 | 476 | 113 | 1.06 | 1.23 | 4.21 | ST |
| | | | 220-60 | 146 | 170 | 580 | 122 | 1.20 | 1.39 | 4.75 | |
| | SD162H-L1UB | RSCR | 220-50 | 146 | 170 | 580 | 139 | 1.05 | 1.22 | 4.17 | ST |
| | | | 220-60 | 182 | 212 | 723 | 152 | 1.20 | 1.39 | 4.75 | |
| | SK170H-L1UB | RSCR | 220-50 | 168 | 195 | 667 | 153 | 1.10 | 1.28 | 4.36 | ST |
| | | | 220-60 | 206 | 240 | 818 | 164 | 1.26 | 1.46 | 4.99 | |
| | MSA170H-L1B | RSCR | 220-50 | 173 | 201 | 687 | 141 | 1.23 | 1.43 | 4.87 | ST |
| | | | 220-60 | 220 | 256 | 873 | 163 | 1.35 | 1.57 | 5.36 | |
| | MK172H-L1U | RSCR | 220-50 | 176 | 205 | 699 | 131 | 1.34 | 1.56 | 5.33 | ST/OC |
| | | | 220-60 | 224 | 260 | 889 | 159 | 1.41 | 1.64 | 5.59 | |
| | MK172H-L1UA | RSCR | 220-50 | 176 | 205 | 699 | 135 | 1.30 | 1.52 | 5.18 | ST/OC |
| | | | 220-60 | 224 | 260 | 889 | 159 | 1.41 | 1.64 | 5.59 | |
| | SK182H-L2UA | RSCR | 220-50 | 203 | 236 | 806 | 182 | 1.12 | 1.30 | 4.43 | FC/OC |
| | | | 220-60 | 239 | 278 | 949 | 191 | 1.25 | 1.46 | 4.97 | |

Private Picture Copyright : WWW.MBSM.PRO

---

Mbsm.pro, Compressor, cubigel, huayi,

# ACC, Electrolux, HPY14AA, LBP, R600a, 1/5HP, 220-240V/1/50Hz, 166 W

Category: compressor
written by www.mbsm.pro | 29 December 2021
Compressors/Compressors ACC – Electrolux HP14AH, LBP – R600a, Power consumption 1/5HP, 220-240V/1/50Hz, Motor type RSIR, Injection: Capillary operation, Displacement 14.32 cm3, Oil type ISO VG10 Mineral oil, Oil quantity 300 cm3, Power 147 W at -25 / +55 °C, Power consumption 166 W, Power 0.0 W,Cooling capacity

| −10 °C | −15 °C | −20 °C | −25 °C | −30 °C | −35 °C |
|---|---|---|---|---|---|
| 344 | 276 | 216 | 166 | 124 | 92 |

| | |
|---|---|
| **Shipping Class** | Standard |
| **Scope Of Application** | LBP |
| **Lieferzeit** | 2-3 Wochen |
| **Type Of Construction** | Piston |
| **Condensation Temperature** | 55°C |
| **Maker** | ACC |
| **Manufacturer No.** | HPY14AA |
| **Displacement In Cm3** | 14.32 |
| **Measuring Requirements** | Ashrae |
| **Refrigerants** | R600a |
| **Series** | HPY |
| **Condensing Units Compressors** | Compressors |
| **Suspense** | 220-240V |
| **Weight In Kg** | 13 |

Compressor ACC Cubigel Huayi Electrolux ZEM HPY14AA, LBP -R600a, 220-240V/1/50Hz, 1/5 HP, discharge 14.32 cm3, motor type RSIR, oil type ISO VG10 mineral, oil charge 300 cm3, 166 W at -25 / +55 °, input power, current 147 W, 0.96 A, expansion device: capillar, cooling: static, weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with “immediately available” and “scarce stock”, usually delivery within 2 days. For “currently not available” delivery time usually 2 weeks or delivery time in urgent cases contact us.

---

| | |
|---|---|
| Refrigerant: | R600a |
| Power range(W): | 101 – 200 W |
| Performance range (C): | -35 C to -10 C |
| Connecting size: | 6,5 mm |
| Suction: | 8,1 mm |
| Working area: | LBP |
| Design type: | Hermetic |
| Model series: | HPY |
| Use with: | Capillary |
| Power range(HP): | 0-2 |
| Power supply: | 230 V |

| | |
|---|---|
| Oil type: | ISO VG 10 Mineral |
| Engine type: | RSIR |
| Article condition: | New |
| Info: | Oil filled |
| Shipping weight: | 13,00 Kg |
| Dimensions ( length × width × height ): | 20,40 × 16,20 × 19,60 cm |
| customs tariff number: | 84143081 |
| Cooling capacity condition: | T0 -25 C, Tk +55 C |
| Manufacturer: | ACC Cubigel Huayi Electrolux ZEM |
| Model: | HPY14AA |
| Modelname: | HP14AH |
| Stroke volume (cm3): | 14,32 |
| Cooling capacity (W): | 147 |
| Power (HP): | 0,25 |
| Max. Starting current (A): | 11,5 |
| Max. Operating current (A): | 0,96 |
| Engine type: | RSIR |
| Note: | Static cooling |
| Oil quantity (l): | 0,3 |
| Compressor type: | Piston |
| Power range: | -35 C to -10 C |
| Alternative: | NBM1118Y , EMX70CLC , NBM1116Y |
| Pressure line (mm): | 6,5 |
| Suction line (mm): | 8,1 |

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_HPY14AA-1Télécharger
Mbsm_dot_pro_private_PDF_HPY14AATélécharger