

BONNAMY AUTOMATIC TUBE BENDER

Category: Pictures

written by www.mbsm.pro | 29 December 2021







Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



White whale look machine a laver

Category: Pictures

written by www.mbsm.pro | 29 December 2021





Private Picture Copyright : WWW.MBSM.PRO

Tambour samsung 5kg

Category: Pictures

written by www.mbsm.pro | 29 December 2021





Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Chaudiere saunier duval 24kw

Category: Pictures

written by www.mbsm.pro | 29 December 2021

[Mbsm_dot_pro_private_picture_chaudiere-saunier-duval-24kw](#)Télécharger



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, PANASONIC, DA73C12RBU6, A/C

Compressor, 881 BtuH, 115V. More details: A/C Compressor, BtuH 881, Voltage 115, 1 Phase, Refrigerant Type R-134A, Nominal HP 1/4, 60 Hz, Length 11 In., Width 9-1/2 In., Height 8-1/2 In.

Category: compressor

written by www.mbsm.pro | 29 December 2021

PANASONIC DA73C12RBU6 A/C Compressor, 881 BtuH, 115V. More details: A/C Compressor, BtuH 881, Voltage 115, 1 Phase, Refrigerant Type R-134A, Nominal HP 1/4, 60 Hz, Length 11 In., Width 9-1/2 In., Height 8-1/2 In.

Reference:

DA73C12RBU6

Description:

- Btu / h: 881
- Voltage: 115
- Phase: 1
- Refrigerant Type: R-134A
- Nominal HP: 1/4
- Hz: 60
- Length: 11 "

Mark: panasonic

Item	Performance characteristics
Refrigerant	R134a
Displacement (cm ³)	7.3
Voltage (V)	115
Frequency (Hz)	60
Motor Type	RSCR
Capacity@ASHRAE	258
COP@ASHRAE	1.57



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_DA73C12RBU6Télécharger

Mbsm.pro, Compressor, JIAXIPERA,
ND1080Y, 1/8HP, ND1090Y, 1/8+HP,
ND1110Y, 1/7HP, ND1111Y, 1/6-HP,
ND1112Y, 1/6+HP, NX1080Y, 1/8HP,
NX1090Y, 1/8+HP, NX1110Y, 1/7HP,
NX1111Y, 1/6HP, NX1112Y, 1/6+HP,
NX1113Y, 1/5HP, NX1114Y, 1/5+HP,
NX1116Y, 1/4HP, NX1117Y, 1/4HP,
NX1119Y, 1/4+HP, NX1120Y, 1/4+HP,
TB1080Y, 1/8HP, TB1090Y, 1/8+HP,
TB1110Y, 1/7HP, TB1111Y, 1/6HP,
TB1112Y, 1/6+HP, TB1113Y, 1/5HP,
TB1114Y, 1/5+HP, TX1080Y, 1/8HP,
TX1090Y, 1/8+HP, TX1110Y, 1/7HP,
TX1111Y, 1/6HP, TX1112Y, 1/6+HP,
TX1113Y, 1/5HP, TX1114Y, 1/5+HP,

VNX1111Y, 1/6HP, VNX1113Y, 1/5HP,
VNX1116Y, 1/4HP, ZBX1117CY, 1/4HP,
ZBX1119CY, 1/4+HP, ZBX1121CY, 1/4+HP

Category: compressor

written by www.mbsm.pro | 29 December 2021

Mbsm.pro, Compressor, JIAXIPERA, ND1080Y, 1/8HP, ND1090Y, 1/8+HP, ND1110Y, 1/7HP, ND1111Y, 1/6-HP, ND1112Y, 1/6+HP, NX1080Y, 1/8HP, NX1090Y, 1/8+HP, NX1110Y, 1/7HP, NX1111Y, 1/6HP, NX1112Y, 1/6+HP, NX1113Y, 1/5HP, NX1114Y, 1/5+HP, NX1116Y, 1/4HP, NX1117Y, 1/4HP, NX1119Y, 1/4+HP, NX1120Y, 1/4+HP, TB1080Y, 1/8HP, TB1090Y, 1/8+HP, TB1110Y, 1/7HP, TB1111Y, 1/6HP, TB1112Y, 1/6+HP, TB1113Y, 1/5HP, TB1114Y, 1/5+HP, TX1080Y, 1/8HP, TX1090Y, 1/8+HP, TX1110Y, 1/7HP, TX1111Y, 1/6HP, TX1112Y, 1/6+HP, TX1113Y, 1/5HP, TX1114Y, 1/5+HP, VNX1111Y, 1/6HP, VNX1113Y, 1/5HP, VNX1116Y, 1/4HP, ZBX1117CY, 1/4HP, ZBX1119CY, 1/4+HP, ZBX1121CY, 1/4+HP



ZBX 1119 CY

1 / 4 + HP



ZBX 1121 CY

1 / 4 + HP



ZBX 1122 CY

1 / 4 + HP

Private Picture Copyright : WWW.MBSM.PRO

 TX 1110 Y 1 / 7 HP	 TX 1111 Y 1 / 6 HP	 TX 1112 Y 1 / 6 + HP
---	---	--

 TX 1113 Y 1 / 5 HP	 TX 1114 Y 1 / 5 + HP	 VNX 1111 Y 1 / 6 HP
---	---	---

 VNX 1113 Y 1 / 5 HP	 VNX 1116 Y 1 / 4 HP	 ZBX 1117 CY 1 / 4 HP
--	--	--

TB 1080 Y

1 / 8 HP

TB 1090 Y

1 / 8 + HP

TB 1110 Y

1 / 7 HP



TB 1111 Y

1 / 6 HP



TB 1112 Y

1 / 6 + HP



TB 1113 Y

1 / 5 HP



TB 1114 Y

1 / 5 + HP



TX 1080 Y

1 / 8 HP



TX 1090 Y

1 / 8 + HP

		
NX 1110 Y 1 / 7 HP	NX 1111 Y 1 / 6 HP	NX 1112 Y 1 / 6 + HP

		
NX 1113 Y 1 / 5 HP	NX 1114 Y 1 / 5 + HP	NX 1116 Y 1 / 4 HP

		
NX 1117 Y 1 / 4 HP	NX 1119 Y 1 / 4 + HP	NX 1120 Y 1 / 4 + HP

MH 1110 Y

1 / 6 - HP

ND 1070 Y

1 / 9 HP

ND 1080 Y

1 / 8 HP



ND 1090 Y

1 / 8 + HP



ND 1110 Y

1 / 7 HP



ND 1111 Y

1 / 6 - HP



ND 1112 Y

1 / 6 + HP



NX 1080 Y

1 / 8 HP



NX 1090 Y

1 / 8 + HP



JK 1080 Y

1 / 8 + HP



JK 1090 FY

1 / 6 - HP



JK 1110 Y

1 / 7 HP



JK 1111 HY

1 / 6 - HP



MH 1050 Y

1 / 12 HP



MH 1090 Y

1 / 8 + HP

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Deep, freezer, congela, 383 Litre, Compressor, R134A, 215W, 1/4 Hp++, 1/3 Hp-, 215W

Category: Chaud&Froid,Freezer

written by www.mbsm.pro | 29 December 2021

□ □□□□ □□□□ , □□□□□□□ □ □□□□□□ □□□□□ □□□□ , □□□hp , □□□□□
□ □□□□ □□□□, □□□□ □□□□hp



WATER FREQUENCY:	60 Hz	5	FRECUENCIA NOMINAL:	60 Hz	50 Hz	FRECUENCIA NOMINAL:	60 Hz	50 Hz
MAXIMUM VOLTAGE:	127 V	11	TENSION MAXIMUM	127 V	115 V	VOLTAGE MAXIMUM:	127 V	115 V
RATED VOLTAGE:	115 V	105 V	TENSION NOMINALE	115 V	105 V	VOLTAGE NOMINAL:	115 V	105 V
RATED INPUT:	215 W	179 W	PUISSANCE D'ENTREE NOMINALE	215 W	179 W	ENTRADA NOMINAL:	215 W	179 W
RATED DEFROST INPUT:	690 W	575 W	PUISSANCE D'ENTREE NOMINALE DEGIVRAGE	690 W	575 W	ENTRADA NOMINAL DEL DESCONGELADOR	690 W	575 W
RATED DEFROST CURRENT:	6.00 A	5.48 A	INTENSITE NOMINALE DEGIVRAGE	6.00 A	5.48 A	CORRIENTE NOMINAL PARA EL DESCONGELADOR	6.00 A	5.48 A
RUN TIME (90°F):	65-75%	60-70%	TEMPERATURE NOMINALE DE FONCTIONNEMENT	65-75%	60-70%	TIEMPO DE FUNCIONAMIENTO (a 90°F / 32°C)	65-75%	60-70%
TEMPERATURE DESIGN RATING:	T		TEMPERATURE NOMINALE DE FONCTIONNEMENT	T		CLASIFICACION DE LA TEMPERATURA	T	
SUPPLY TYPE:	40 W		TYPE D'ALIMENTATION	40 W		TIPO DE SUMINISTRO:	40 W	
LAMP RATING:	15 A		CALIBRE LAMPES	15 A		TIPO DE BOMBILLA:	15 A	
FUSE RATING:	1.8 kg		CALIBRE FUSIBLE	1.8 kg		PRODUCCION DE HIELO (24 hrs)	1.8 kg	
ICE HARVEST: (24 hrs)	2.9 kWh		GLACONS-24 H	2.9 kWh		CONSUMO DE CORRIENTE (24 hrs)	2.9 kWh	
POWER USAGE: (24 hrs)	683 litres		CONSUMATION ELECTRIQUE-24 H	683 litres		CAPACIDAD DE ALMACENAMIENTO	683 litres	
STORAGE VOLUME:			VOLUME RANGEMENT					

Made in U.S.A.

Made in U.S.A.

Made in U.S.A.

Made in U.S.A.

100-1000-01





Private Picture Copyright : WWW.MBSM.PRO

DOMESTIC SINGLE DOOR FRIDGE				
4 to 5	Cubic Feet	(113-160 Ltr)	=	1\12 H.P.
6 to 7	Cubic Feet	(170 -198 Ltr)	=	1\10 H.P.
8 to 9	Cubic Feet	(226-254 Ltr)	=	1\8 H.P.
9 to 13	Cubic Feet	(283 - 370 Ltr)	=	1\6 H.P.
DOMESTIC DOUBLE DOOR FRIDGE				
9 to 12	Cubic Feet	(226-340 Ltr)	=	1\5 H.P.
13 to 17	Cubic Feet	(370-481 Ltr)	=	1\4 H.P.
17 to 22	Cubic Feet	(509-623Ltr)	=	1\3 H.P.


Private Picture : www.MBSMGROUP.TN

Private Picture Copyright : WWW.MBSM.PRO

جدول قدرة المضخات بالنسبة لحجم الثلاجة أو الديب فريزر									
المضخات بالحصان		1/12	1/10	1/8	1/6	1/5	1/4	1/3	1/2
الثلاجة	قدم	4	6	8	10	12	14	16	
	لتر	113	170	227	283	340	396	453	
الديب فريزر	قدم			6	8	10	12	14	18
	لتر			170	200	283	340	396	510
	العرض بالتقريب بالمليمتر			50	70	90	120	144	170

Private Picture : www.MBSMGROUP.TN

Private Picture Copyright : WWW.MBSM.PRO

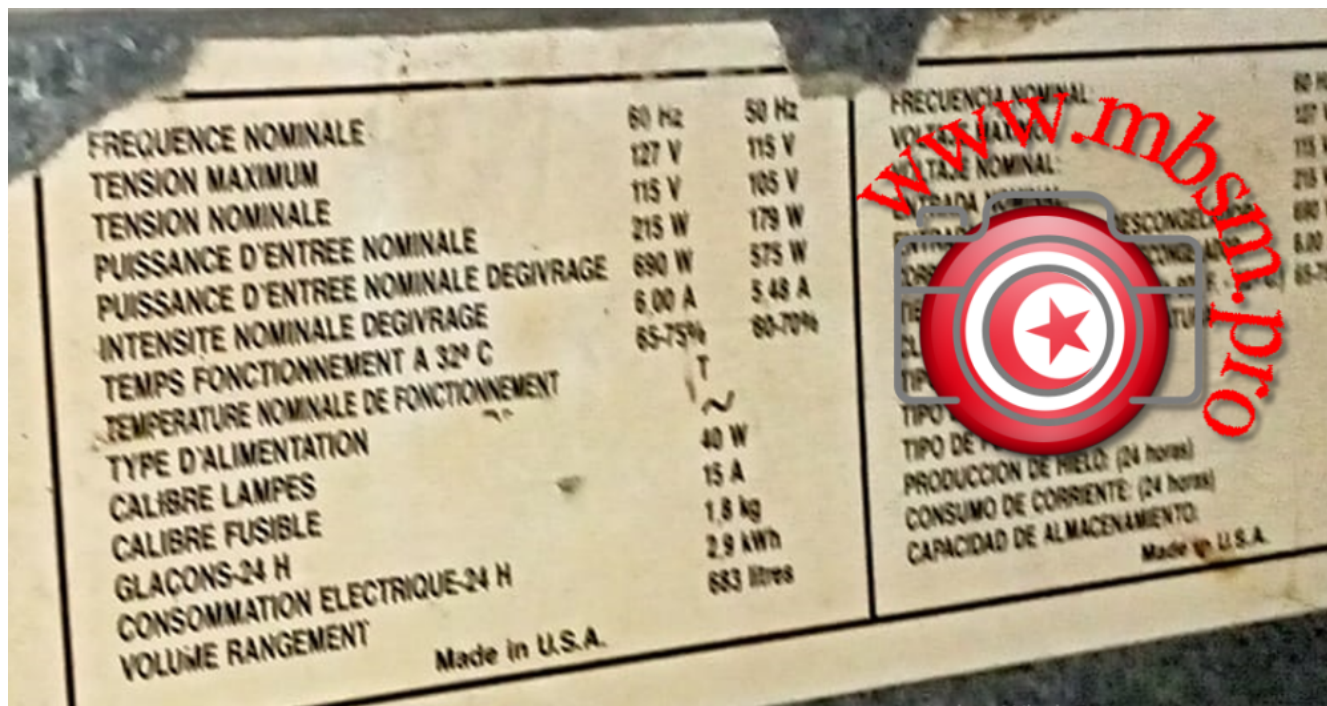

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Refrigeration, Compressor,
GQR12TG, 3/8+ hp (big) ++, HBP,
1168W, 1/2 Hp (LBP) , CSIR, R134A,
Starting Capacitor 80UF, Displacement
12.0cm³

Category: compressor

written by www.mbsm.pro | 29 December 2021



Private Picture Copyright : WWW.MBSM.PRO

GQR12TG Freezing



Private Picture Copyright : WWW.MBSM.PRO

The GQR12TG is a hermetic reciprocating compressor manufactured by Sikelan. It is a 3/8 HP compressor that uses R134a refrigerant. It is designed for use in commercial refrigeration applications, such as water dispensers, ice machines, and small freezers.

The GQR12TG has a displacement of 12.8 cc and a cooling capacity of 1168 W. It has a voltage rating of 220-240 V and a frequency rating of 50-60 Hz. The compressor is also equipped with a current relay for starting.

Here are some of the key features of the GQR12TG compressor:

- 3/8 HP
- R134a refrigerant
- 12.8 cc displacement
- 1168 W cooling capacity
- 220-240 V voltage
- 50-60 Hz frequency
- Current relay for starting
- High back pressure design

Vol./Freq.□	220-240V / 50-60Hz
Cooling Capacity□	1168W
C.O.P□	2.20
Horse Power□	3/8+
Refrigerant□	R134A
Application□	HBP
The Evaporating Temperature (W)□	7.2°C

- 1)GQR12TG, WZ series, use R134A refrigerant;
- 2)Voltage application 220V to 240V;
- 3)Frequency for 50/60HZ;
- 4)Motor type: CSIR;
- 5)Cooling type: Fan;
- 6)Starting device is Current Starting Relay;
- 7)Application: Middle/Hight Back Pressure;
- 8)Nominal power is 3/8+HP;
- 9)COP is 2.3 with the cooling capacity 1168W.

1. Product Performance

- 1)GQR12TG, WZ series, use R134A refrigerant;
- 2)Voltage application 220V to 240V;
- 3)Frequency for 50/60HZ;
- 4)Motor type: CSIR;
- 5)Cooling type: Fan;
- 6)Starting device is Current Starting Relay;
- 7)Application: Middle/Hight Back Pressure;
- 8)Nominal power is 3/8+HP;
- 9)COP is 2.2 with the cooling capacity 1168W.

Basing on Test Condition(ASHRAE)

Evaporating Temperature: -23.3 degree

Ambient Temperature: 35 degree

Subcooling Temperature: 46.1 degree

Condensing Temperature: 54.4 degree

Suction Temperature: 35 degree

2.Compressor Specification

Serial	Model	HP	(V/Hz)	Displacement (cm3)	Cooling Capacity -ASHRAE	Motor Starting type	Starting Device	Starting capacitor (uF)	Running capacitor (uF)	Cooling														
					-15°C(5F) -10°C(10F) -5°C(23F) 0°C(32F)	Test Conditions:+7.2°C(45F)					10°C(50F)													
W	Btu/h	W	Btu/h	W	Btu/h	W	Btu/h	Capacity (W)	Capacity (Btu/h)	Input Power(w)	Current (A)	COP (W/W)	COP (Btu/Wh)	W	Btu/h									
L	GQR30TG	1/10	220V/50Hz	3.0		115	392	145	495	185	631	230	785	310	1058	140	0.9	2.2	7.56	365	1245	RSIR	PTC/Current Starting Relay	/ / F
GQR35TG	1/9		220V/50Hz	3.5	135	461	175	597	195	665	285	972	430	1467	195	1.1	2.2	7.52	475	1621	RSIR	/ /	F	
MS	GQR45TG	1/6		220V/50Hz	4.5	176	601	230	785	280	955	350	1194	480	1638	220	1.2	2.2	7.44	525	1791	RSIR	PTC/Current Starting Relay	/ / F
GQR55TG	1/6+		220V/50Hz	5.5	188	641	245	836	310	1058	390	1331	525	1791	250	1.3	2.1	7.17	575	1962	RSIR	/ /	F	
MK	GQR60TG	1/4		220V/50Hz	6.5	258	880	335	1143	435	1484	545	1860	665	2269	290	1.7	2.3	7.82	705	2405	RSIR	PTC/Current Starting Relay	/ / F
GQR70TG	1/4		220V/50Hz	7.0	285	972	370	1262	480	1638	595	2030	720	2457	340	1.9	2.1	7.23	765	2610	RSIR	/ /	F	
GQR80TG	1/4+		220V/50Hz	8.0	324	1105	420	1433	550	1877	680	2320	810	2764	370	2.0	2.2	7.47	855	2917	RSIR	/ /	F	
GQR90TG	1/3-		220V/50Hz	9.1	365	1245	474	1617	621	2119	768	2620	910	3105	420	2.2	2.2	7.39	955	3258	RSIR	/ /	F	
WZ	GQR80TG	1/4+		220V/50Hz	8.0	324	1105	420	1433	550	1877	680	2320	810	2764	370	2.0	2.2	7.47	855	2917	CSIR	Current Starting Relay	80 / F
GQR90TG	1/3-		220V/50Hz	9.1	365	1245	474	1617	621	2119	768	2620	910	3105	420	2.2	2.2	7.39	955	3258	CSIR	80	/	F
GQR11TG	3/8		220V/50Hz	11.0	412	1406	536	1829	702	2395	868	2962	1034	3528	450	2.7	2.3	7.84	1079	3682	CSIR	80	/	F
GQR12TG	3/8+		220V/50Hz	12.8	467	1593	606	2068	793	2706	981	3347	1168	3985	530	3.2	2.2	7.52	1208	4122	CSIR	80	/	F
GQR14TG	1/2		220V/50Hz	14.2	527	1798	685	2337	896	3057	1108	3780	1320	4504	580	3.4	2.3	7.77	1365	4657	CSIR	80	/	F
GQR16TG	1/2+		220V/50Hz	15.3	580	1979	754	2573	1012	3453	1252	4272	1492	5091	640	3.8	2.3	7.95	1535	5237	CSIR	80	/	F
GQR19TG	3/4		220V/50Hz	19.0	755	2576	940	3207	1175	4009	1255	4282	1850	6312	804	4.5	2.3	7.85	1895	6466	CSIR	80	/	F

KONOR	Displ.	power	Motor type	V/Hz	Cooling capacity	Net Weight	KG
GQR60AA	6	1/6	RSIR	220-240V/50Hz	140	9.4	
GQR70AA	6.6	1/5	RSIR	220-240V/50Hz	165	9.4	
GQR80AA	8.1	1/4	RSIR	220-240V/50Hz	198	9.4	
GQR90AA	9.1	1/4	RSIR	220-240V/50Hz	220	10.1	
GQY99AA	9.9	1/4	RSIR	220-240V/50Hz	270	10.9	

GQY12AF 11.8	1/3	CSIR	220-240V/50Hz 325	10.56
GQY16AF 16.2	3/8	CSIR	220-240V/50Hz 380	12.1
GP16MG 16.2	5/8	CSIR	220-240V/50Hz 870	12.5
GP12MG 11.8	5/8	CSIR	220-240V/50Hz 656	10.9
GP12TG 11.8	3/8	CSIR	220-240V/50Hz 1140	11.8
GQR80TG 8.1	1/4	CSIR	220-240V/50Hz 730	9.8
GQR90TG 9.1	1/4	CSIR	220-240V/50Hz 830	10.5
GQR60TG 6	1/5	CSIR	220-240V/50Hz 520	9.8



Private Picture Copyright: WWW.MBSM.PRO

153	L QD35HG	1/11	3,5			75	шт	16720
154	ML ADW51	1/6	5,1			125	шт	19360
155	ML ADW57	1/5-	5,7			135	шт	19800
156	ML ADW66	1/4-	6,6			165	шт	0
157	MX ADW77	1/4	7,7			185	шт	0
158	MX ADW86	1/4+	8,6			200	шт	23760
159	MX ADW91	1/3-	9,1			220	шт	0
160	MQ ADW110	1/3	11,0			270	шт	0
161	MQ ADW128	3/8+	12,8			320	шт	27720
162	MQ ADW142	1/2-	14,2			350	шт	28600
163	MQ ADW153	1/2	15,3			380	шт	29040
164	MQ ADW168	1/2+	16,8			430	шт	29480
№	Модель HBP R134a	HP	см3/час	Мотор	Обмотка	Мощность, ватт 7,2/54,4C	Ед. изм.	Цена, тг.
165	MQ GQR12TG	3/8+	12,7	SIR	медь (Cu)	1300	шт	29480
166	MQ GQR14TG	1/2	14,3			1450	шт	30800
167	MQ GQR16TG	1/2+	15,3			1490	шт	32120
№	Модель LBP R404a	HP	см3/час	Мотор	Обмотка	Мощность, ватт -23,3/54,4C	Ед. изм.	Цена, тг.
168	MQ GQR80K	1/3+	8,0	CSIR	медь (Cu)	465	шт	30800
169	MQ GQR90K	1/2-	9,0			515	шт	31680
170	MD GQR11K	1/2	11,0			565	шт	0
171	MD GQR12K	3/4	12,1			640	шт	45320
172	MD GQR14K	3/4	14,3	CSR	медь (Cu)	750	шт	47080
173	MD GQR16K	4/5	16,2			850	шт	47960
174	MD GQR19K	7/8	19,0			920	шт	49280

Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_Gqr12tgTélécharger



Mbsm.pro, Refrigerator, Compressor,
Samsung, 1/4 Hp, r134a, 150g,
MK172HL1UA, MK172H-L1UA,
MK172HL1UA/TSE, 200/220V-50HZ/ 135W,
200/220V-60HZ/159W, RSCR

Category: compressor

written by www.mbsm.pro | 29 December 2021



Private Picture Copyright: WWW.MBSM.PRO

https://www.mbsm.pro/wp-content/uploads/2020/12/Mbsm_dot_pro_private_PDF_compressor-catalogue-2015-1.pdf

SPECIFICATION

REFRIGERATOR MODEL NO :	RT41MASW
DIMENSION(WxDxH) :	670mm x 650mm x 1685mm
GROSS CAPACITY :	410 l
RATED VOLTAGE :	220V
RATED FREQUENCY :	60Hz
RATED INPUT :	136W
RATED CURRENT :	0.86A
DEFROSTING INPUT(W/A) :	274W/1.24A
CLIMATIC CLASS OF THE APPLIANCE :	T
RATED MAXIMUM INPUT OF LAMP :	30 W
NAME OF REFRIGERANT :	R-134a
MASS OF REFRIGERANT :	150 g
NET WEIGHT :	67 Kg
NAME OF INSULATION BLOWING GAS :	CYCLOPENTANE
MADE IN THAILAND	DA68-01618A



Picture Copyright : WWW.MBSM.PRO

AC 200-220V~50Hz, 220V~60Hz			220-60	118	137	468	114	1.04	1.20	4.11	
			220-50	102	119	405	91	1.12	1.30	4.45	
	NC1A43HLB	RSCR	220-60	118	137	468	100	1.18	1.37	4.68	ST
			220-50	120	140	476	113	1.06	1.23	4.21	
	SD152H-S1UB	RSCR	220-60	146	170	580	122	1.20	1.39	4.75	ST
			220-50	146	170	580	139	1.05	1.22	4.17	
	SD162H-L1UB	RSCR	220-60	182	212	723	152	1.20	1.39	4.75	ST
			220-50	168	195	667	153	1.10	1.28	4.36	
	SK170H-L1UB	RSCR	220-60	206	240	818	164	1.26	1.46	4.99	ST
			220-50	173	201	687	141	1.23	1.43	4.87	
	MSA170H-L1B	RSCR	220-60	220	256	873	163	1.35	1.57	5.36	ST
			220-50	176	205	699	131	1.34	1.56	5.33	
	MK172H-L1U	RSCR	220-60	224	260	889	159	1.41	1.64	5.59	ST/OC
			220-50	176	205	699	135	1.30	1.52	5.18	
	MK172H-L1UA	RSCR	220-60	224	260	889	159	1.41	1.64	5.59	ST/OC
			220-50	203	236	806	182	1.12	1.30	4.43	
	SK182H-L2UA	RSCR	220-60	239	278	949	191	1.25	1.46	4.97	FC/OC
			220-50	203	236	806	182	1.12	1.30	4.43	

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, cubigel, huayi,

ACC, Electrolux, HPY14AA, LBP, R600a, 1/5HP, 220-240V/1/50Hz, 166 W

Category: compressor

written by www.mbsm.pro | 29 December 2021

Compressors/Compressors ACC – Electrolux HP14AH, LBP – R600a, Power consumption 1/5HP, 220-240V/1/50Hz, Motor type RSIR, Injection: Capillary operation, Displacement 14.32 cm³, Oil type ISO VG10 Mineral oil, Oil quantity 300 cm³, Power 147 W at -25 / +55 °C, Power consumption 166 W, Power 0.0 W, Cooling capacity

-10 °C	-15 °C	-20 °C	-25 °C	-30 °C	-35 °C
344	276	216	166	124	92

Shipping Class	Standard
Scope Of Application	LBP
Lieferzeit	2-3 Wochen
Type Of Construction	Piston
Condensation Temperature	55°C
Maker	ACC
Manufacturer No.	HPY14AA
Displacement In Cm3	14.32
Measuring Requirements	Ashrae
Refrigerants	R600a
Series	HPY
Condensing Units Compressors	Compressors
Suspense	220-240V
Weight In Kg	13

Compressor ACC Cubigel Huayi Electrolux ZEM HPY14AA, LBP -R600a, 220-240V/1/50Hz, 1/5 HP, discharge 14.32 cm³, motor type RSIR, oil type ISO VG10 mineral, oil charge 300 cm³, 166 W at -25 / +55 °, input power, current 147 W, 0.96 A, expansion device: capillar, cooling: static, weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with “immediately available” and “scarce stock”, usually delivery within 2 days. For “currently not available” delivery time usually 2 weeks or delivery time in urgent cases contact us.

Refrigerant:	R600a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	6,5 mm
Suction:	8,1 mm
Working area:	LBP
Design type:	Hermetic
Model series:	HPY
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V

Oil type:	ISO VG 10 Mineral
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions (length × width × height):	20,40 × 16,20 × 19,60 cm
customs tariff number:	84143081
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	HPY14AA
Modelname:	HP14AH
Stroke volume (cm3):	14,32
Cooling capacity (W):	147
Power (HP):	0,25
Max. Starting current (A):	11,5
Max. Operating current (A):	0,96
Engine type:	RSIR
Note:	Static cooling
Oil quantity (l):	0,3
Compressor type:	Piston
Power range:	-35 C to -10 C
Alternative:	NBM1118Y , EMX70CLC , NBM1116Y
Pressure line (mm):	6,5
Suction line (mm):	8,1





Private Picture Copyright : WWW.MBSM.PRO

[Mbsm_dot_pro_private_PDF_HPYP14AA-1Télécharger](#)

[Mbsm_dot_pro_private_PDF_HPYP14AATélécharger](#)