

# Compressor, TEE, TURK ELEKTRIK , R600a, MTS200MT, MTS170MT, MTS185MT

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 12 April 2021



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Compressor, TEE, TURK ELEKTRIK , R600a, MTS200MT, MTS170MT, MTS185MT

---

## Medium and High Back Pressure Compressors, M/HBP, RSIR, TECUMSEH, 1/5++ HP, R134a, 160g, TWB1374YGS, TW146GY, 220v/50-60, kiriazi defrost, 340L, k350, k350/1, Embraco, ff17.5hak, tw146-gy-486, twb1374ygs

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 12 April 2021

Medium and High Back Pressure Compressors, M/HBP, RSIR, TECUMSEH, 1/5++ HP, R134a, 160g, TWB1374YGS, TW146GY, 220v/50-60, kiriazi defrost, 340L, k350,

k350/1, Embraco, ff17.5hak, tw146-gy-486, twb1374ygs

---

LG rotary, compressor, model,  
QJS222PMA, 12700BTU 5.6Amps, EER =  
10.7, air conditioner

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 12 April 2021

LG rotary, compressor, model, QJS222PMA, 12700BTU 5.6Amps, EER = 10.7, air conditioner

---

PH360G2C-4FTS1, 22000BTU, GMCC,  
Compressor rotary, 2 Ton, air  
conditioner, R22, refrigeration  
compressor , 50HZ 220V / 240V

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 12 April 2021



PH360G2C-4FTS1, 22000BTU, GMCC, Compressor rotary, air conditioner, R22, refrigeration compressor , 50HZ 220V / 240V

## Pressure and boiling Temperature list, standing, Refrigerant, suction, discharge

Category: Chaud&Froid

written by [www.mbsm.pro](http://www.mbsm.pro) | 12 April 2021

Some Refrigerant Standing, Suction, Discharge Pressure & Boiling Temperature List.				
Refrigerant Name	Standing Pressure	Suction Pressure	Discharge Pressure	Boiling Temp
R-22	150-155 psi	60-70 psi	250-300 psi	-40.8 C
R-410a	225-230 psi	120-130 psi	450-500 psi	-51.4 C
R-134a	85-95 psi	12-15 psi		-26.2 C
R-600a	40-50 psi	Below 0-1 psi		-11.7 C
R-32	240-245 psi	110-115 psi		-52.0 C
R-290	125-130 psi	65-70 psi	275-300 psi	-42.1 C
R-407c	180-185 psi	75-80 psi	275-300 psi	-45.0 C
R-404a	180-185 psi	80-90 psi		-46.2 C
R-417	140 psi	65 psi	261 psi	



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Pressure and boiling Temperature list, standing, Refrigerant, sustion, discharge

no frost, egl99aa zmc refrigerator, DF40, silver, ideal, zanussi, IDEAL ZANUSSI, EGL99AA ZMC, DF 40 Elgance, Compressor, ACC Cubigel, Huayi, Electrolux, ZEM GL99AA, GL99AA, LBP , R134a, 220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm<sup>3</sup>, motor type RSIR, LRA 14.4A

Category: compressor

written by www.mbsm.pro | 12 April 2021



**Mbsm\_dot\_pro\_private\_PDF\_GL99AA-compresseur-acc-cubigell-gl99aaTélécharger**  
**Mbsm\_dot\_pro\_private\_PDF\_GL99AATélécharger**

Compressor ACC Cubigel Huayi Electrolux ZEM GL99AA, LBP – R134a, 220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm<sup>3</sup>, motor type RSIR, LRA 14.4A, expansion device: capillary, cooling: static, weight 11 kg, the statutory warranty period shall apply (24 months), Delivery time Info: with “immediately available” and “scarce stock”, usually delivery within 2 days. For “currently not available” delivery time usually 2 weeks or delivery time in urgent cases contact us.

---

Refrigerant:	R134a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	4,9 mm
Suction:	6,5 mm
Working area:	LBP
Design type:	Hermetic
Model series:	GL
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 22 Ester
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions ( length × width × height ):	23,10 × 16,20 × 18,60 cm
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	GL99AA
Stroke volume (cm <sup>3</sup> ):	9,93
Cooling capacity (W):	174
Power (HP):	0,25
Max. Starting current (A):	14,4
Max. Operating current (A):	1,31
Engine type:	RSIR
COP:	0,92
Note:	Static cooling
Conveying and suction volume (m <sup>3</sup> ):	1,72
Oil quantity (l):	0,295
Compressor type:	Piston
Cooling:	Static

RPM:	2900
Power range:	-35 C to -10 C
Alternative:	HLY90AA, NL11F
Pressure line (mm):	4,9
Suction line (mm):	6,5



**ZMC** C **GL99AA** 0326  
220-240V~50Hz  
R 134a  
MADE IN EGYPT  
CE  
482  
55-3975 6

**GL99AAa VE09**  
**220-240V 50Hz ~1**

**COMPRESSOR**

Displacement (cm <sup>3</sup> )	9.95
Diameter (mm)	25.4
Stroke (mm)	19.62
Net Weight (Kg)	9.6
Oil type	ISO VG 22 ESTER
Oil charge (cm <sup>3</sup> )	295

**MOTOR**

Approximate Power (CV)	1/4
Voltage/Frequency (V/Hz)	220V 50Hz
Voltage range (V)	187-264
Code	-
Type	RSIR
Phase number	1 PH
Locked rotor current (A)	14.0
Main W. resist. at 25°C (Ω)	9.96
Start W. resist. at 25°C (Ω)	20.39

**APPLICATION**

Application	Low back pressure
Refrigerant	R134a
Evaporating (°C)	-35 to -10
Expansion	Capillar
Comp. cooling	Static
Max. ambient temp. (°C)	43

**NOMINAL PERFORMANCE**

	CYCLE A	CYCLE B
Cooling capacity (W)	175	238
Input power (W)	189	200
EER (kcal/Wh)	0.79	1.02
COP (W/W)	0.92	1.19
Current (A)	1.31	1.34

**TEST CONDITIONS**

Evaporating temp. (°C)	-25.0	-23.3
Condensing temp. (°C)	55.0	55.0
Liq.t. entering expan. (°C)	55.0	32.0
Ambient t. and return (°C)	32.0	32.0
Tens/Freq (V/Hz)	220V 50Hz	220V 50Hz

**ELECTRICAL COMPONENTS**

Relay	PTC 3003 - K100		
Nominal voltage (V)	200 - 240		
Resistance μ	14.00		
Protector	MRP336JZ	T0377	AE11FU



موديل : KGT1

الشركة العالمية لصناعة الأجهزة المنزلية - الاسكندرية

١,٢ امبير

١٩٥ وات

٥٠ هيرتز

٢٢٠ فولت ~

السعة : ١,٣ اقدم

درجة الحماية : IPX2

التصنيف : ST

الشحنة : ١٧٠ جم ف ١٣٤ ا

سنة الانتاج

No.

٢٠٠٥/٣٢٠

صنع في مصر

200

3 2

٢٠٠٥/٣٢٠

Made in Egypt





Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



REDMI NOTE 9 PRO  
AI QUAD CAMERA

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



REDMI NOTE 9 PRO  
AI QUAD CAMERA


Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

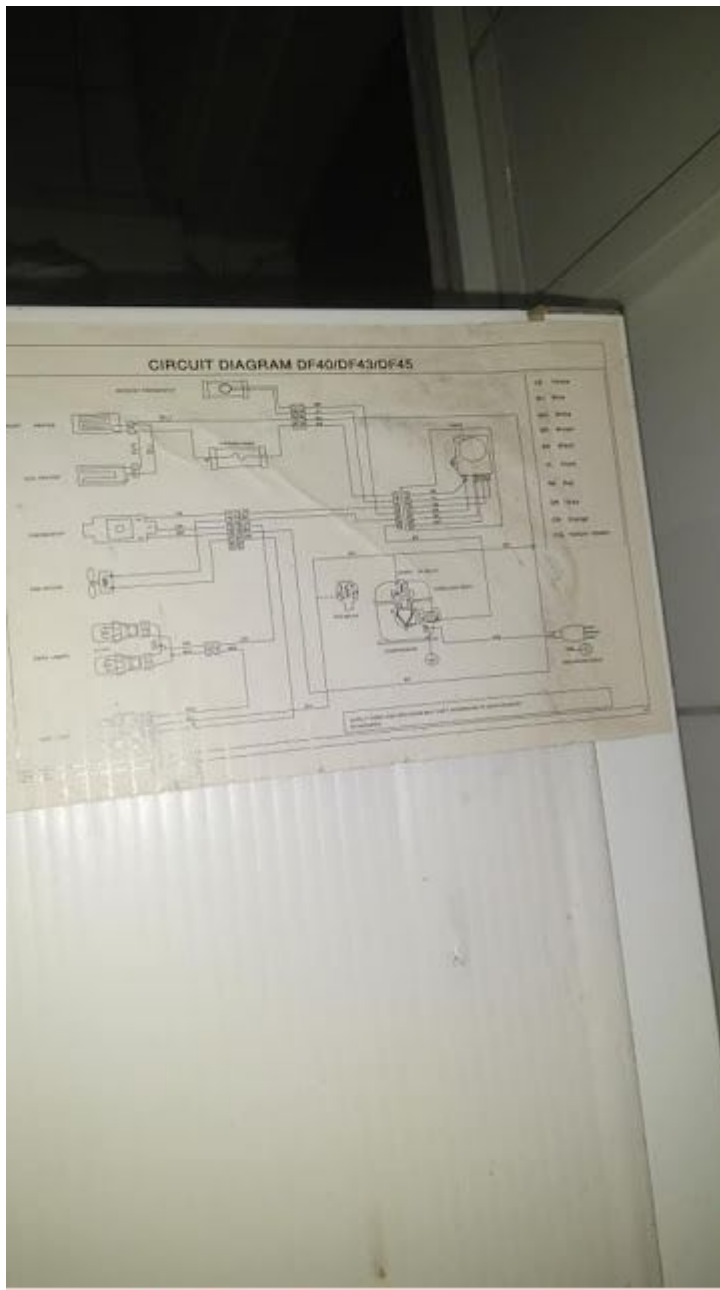

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

**ZMC**

**EGL99AA 1002**

220-240V~50Hz


**R 134 a**

MADE IN EGYPT



3

480

0250659 





Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Tecumseh, Copeland, Compressor,  
Cross, Reference, P12FW, Compressor,  
R-12, 1/3HP, 230V, HMBP, ACC-  
ELECTROLUX, CUBIGEL/HUAYI

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 12 April 2021

Tecumseh, Copeland, Compressor, Cross, Reference, P12FW, Compressor, R-12,  
1/3HP, 230V, HMBP, ACC-ELECTROLUX, CUBIGEL/HUAYI

---

# Types of Electrical Motors, RSIR, CSIR, RSCR, CSR, PTC, NTC, LST, HST, MBP, HBP, LBP

Category: compressor,Files

written by [www.mbsm.pro](http://www.mbsm.pro) | 12 April 2021

Types of Electrical Motors

RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start up. Standard energy efficiency.

CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor.

Auxiliary winding is disconnected after start up. Standard efficiency.

RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up.

Used for high efficiency in small capacity compressors (particularly in household refrigeration)

CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running).

Auxiliary winding remains connected after start up.

Used for high efficiency in small compressors and for size reduced size motors in compressors with comparatively large displacements

## Types of Electrical Motors

### RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start up. Standard energy efficiency.

### CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor. Auxiliary winding is disconnected after start up. Standard efficiency.

### RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up. Used for high efficiency in small capacity compressors (particularly in household refrigeration)

### CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running). Auxiliary winding remains connected after start up. Used for high efficiency in small compressors and for size reduced size motors in compressors with comparatively large displacements.



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Type of starting device

Current relay – (electromechanical). RSIR/CSIR motors and CSR low/medium-power motors with NTC (the NTC is connected in series with the starting capacitor and the main purpose is to reduce the current peaks in the relay contacts)

Potential relay – (electromechanical). CSR high-power motors.

PTC – (Positive Temperature Coefficient), the resistance increases with the temperature. Device only with RSIR or RSCR motors in the (Small L, B), L and P ranges.

NTC – (Negative Temperature Coefficient), the resistance decreases with the temperature. Used in some CSR in order to reduce dimensions and components.


### Type of starting device

**Current relay** – (electromechanical). RSIR/CSIR motors and CSR low/medium-power motors with NTC (the NTC is connected in series with the starting capacitor and the main purpose is to reduce the current peaks in the relay contacts)

**Potential relay** – (electromechanical). CSR high-power motors.

**PTC** – (Positive Temperature Coefficient), the resistance increases with the temperature. Device only with RSIR or RSCR motors in the (Small L, B), L and P ranges.

**NTC** – (Negative Temperature Coefficient), the resistance decreases with the temperature. Used in some CSR in order to reduce dimensions and components.

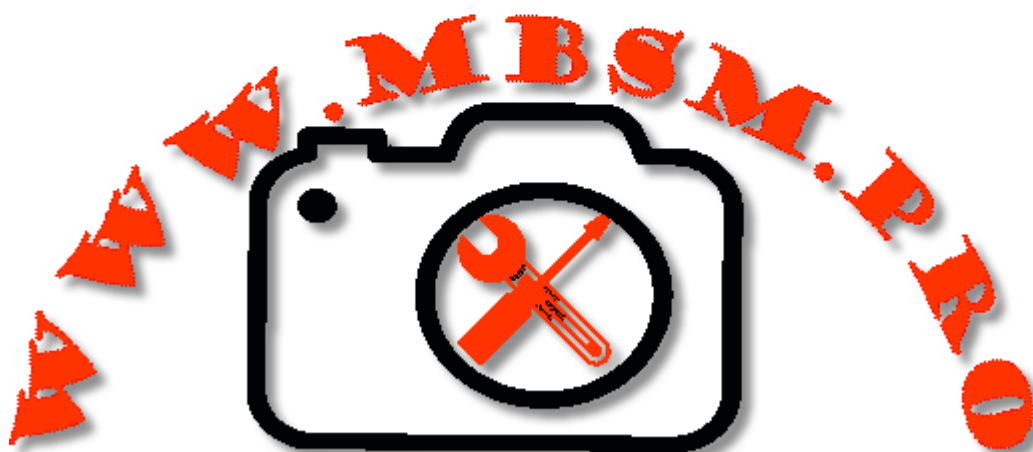

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Type of torque

LST – Low Starting Torque – Systems with capillary tube or balanced pressures at start up.

HST – High Starting Torque – Systems with expansion valve or capillary tube, with unbalanced pressures at start up.


### Type of torque

**LST** – Low Starting Torque – Systems with capillary tube or balanced pressures at start up.

**HST** – High Starting Torque – Systems with expansion valve or capillary tube, with unbalanced pressures at start up.




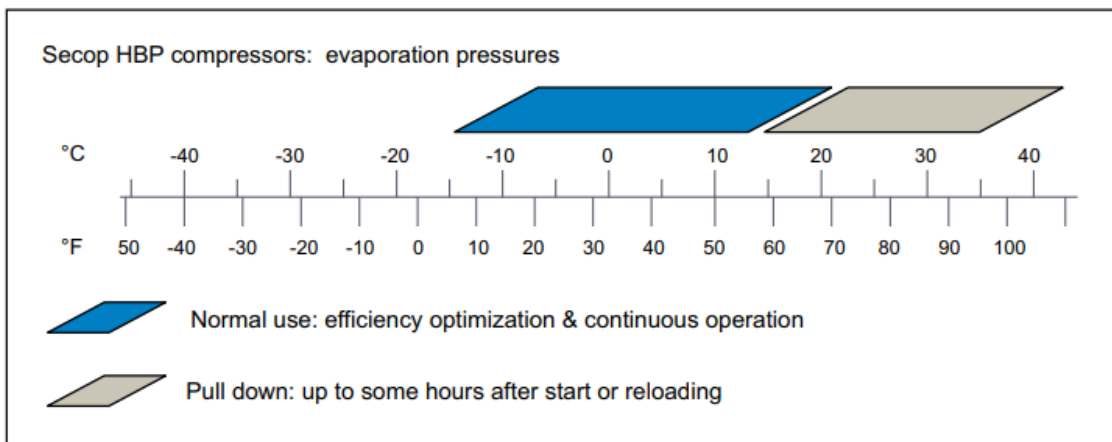


Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

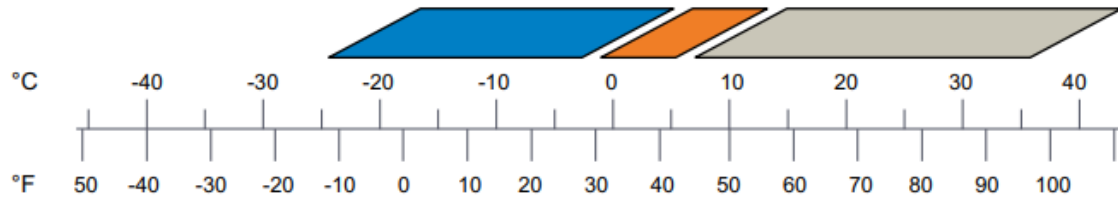Secop MBP compressors: evaporation pressures







-  Normal use: efficiency optimization & continuous operation
-  High load: continuous operation
-  Pull down: up to some hours after start or reloading



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

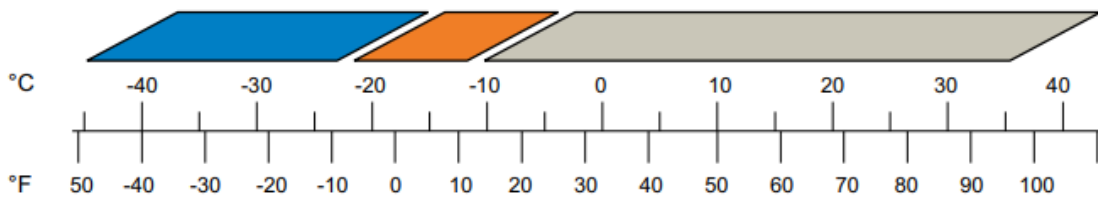Secop LBP compressors: evaporation pressures



-  Normal use: efficiency optimization & continuous operation
-  High load: continuous operation
-  Pull down: short time operation (<60min.) after start or defrost



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



# Catalogue, DANFOSS, All Compressor, PDF Catalogs, Documentation

Category: compressor,Files

written by [www.mbsm.pro](http://www.mbsm.pro) | 12 April 2021

Catalogue, DANFOSS, All Compressor, PDF Catalogs, Documentation

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_DANFOSS-FRCC.PK\\_.046.A1.02Télécharger](#)

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_Danfoss\\_scroll\\_compressors\\_HXX\\_R410ATélécharger](#)

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_DANFOSS-1Télécharger](#)

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_DANFOSSTélécharger](#)



Compressor Embraco Aspera NEK6210GK, MBP – R404A, R507, 220 – 240V/1/50Hz, 1/2 HP, discharge 8.77 cm<sup>3</sup>, motor type CSIR, lubricant type POE 22, lubricant charge 350 ml.1318 W at +7.2 / +54.4 °, expansion device: capillary or valve, cooling: fan cooling, weight 11 kg

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 12 April 2021

**Compressor ASPERA NEK6210GK | NEK 6210 GK**

Compressor Embraco Aspera NEK6210GK, MBP – R404A, R507, 220 – 240V/1/50Hz, 1/2 HP, discharge 8.77 cm<sup>3</sup>, motor type CSIR, lubricant type POE 22, lubricant charge 350 ml.1318 W at +7.2 / +54.4 °, expansion device: capillary or valve, cooling: fan cooling, weight 11 kg

Refrigerant	R404A/R507
Working range[stC] <b>MBP</b>	-20 do +10
Nominal capacity [W] (evaporating temperature +7,2C, Condensing temperatur +54,4C)	1303
Power supply	220-240V 50Hz
Engine type	CSIR
Displacement [cm <sup>3</sup> ]	8,77
Weight [kg]	11

Evaporating temperature +55 C

Evaporating Temperature	Cooling Capacity +/-5%	Power Consumption +/-5%	Current Consumption +/-5%	Gas Flow Rate +/-5%	Efficiency +/-7%			
°C	(kcal/h)	(W)	(Btu/h)	(W)	(A)	(kg/h)	(kcal/Wh)	(W/W)
-20	384	447	1.525	365	2,36	11,99	1,05	1,22
-15	467	544	1.855	419	2,58	14,69	1,12	1,30
-10	574	668	2.278	470	2,79	18,18	1,22	1,42
-5	704	819	2.795	519	3,00	22,51	1,36	1,58
0	858	998	3.405	565	3,20	27,73	1,52	1,77
5	1.036	1.204	4.109	609	3,40	33,90	1,70	1,98
10	1.237	1.438	4.907	650	3,59	41,06	1,90	2,21

**Substitutes for this compressor are:** Electrolux ML90TB , L'Unite

Hermetique/Tecumseh AE4450Z

Refrigerant: R404A, R507

Embraco aspera

NEK6210GK



THERMALLY PROTECTED

R 404A

220 - 240V ~ 50Hz

POE OIL 350CF

1 PH

SUCTION

MADE IN SLOVAKIA NO START WITHOUT STARTING DEVICE



958CA51

LX

N10ZGP43

Mbsm\_dot\_pro\_private\_PDF\_NEK6210GKTélécharger