

# ZMC, zanussi, Made in Egypt, Compressors

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 8 April 2021

## ☛ R134a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ <input type="checkbox"/> <a href="#">GL45AA</a>	LBP::R134a	1/8	43	A	96	82	1.06	0.82		
▶ <input type="checkbox"/> <a href="#">GL45AN</a>	LBP::R134a	1/8	50	C	96	81	1.05	0.8		
▶ <input type="checkbox"/> <a href="#">GL60AA</a>	LBP::R134a	1/6	43	A	132	114	1.14	0.89		
▶ <input type="checkbox"/> <a href="#">GL60AF</a>	LBP::R134a	1/6	43	D	132	113	1.07	0.82		
▶ <input type="checkbox"/> <a href="#">GL60AH</a>	LBP::R134a	1/6	43	A	133	114	1.31	1.01		
▶ <input type="checkbox"/> <a href="#">GL60AN</a>	LBP::R134a	1/6	50	C	132	114	1.07	0.83		
▶ <input type="checkbox"/> <a href="#">GL70AA</a>	LBP::R134a	1/5	43	A	149	128	1.18	0.92		
▶ <input type="checkbox"/> <a href="#">GL70AN</a>	LBP::R134a	1/5	50	D	150	129	1.08	0.83		
▶ <input type="checkbox"/> <a href="#">GL70AT</a>	LBP::R134a	1/5	43	E	144	122	1.09	0.84		
▶ <input type="checkbox"/> <a href="#">GL75AA</a>	LBP::R134a	1/5	43	A	155	133	1.18	0.92		
▶ <input type="checkbox"/> <a href="#">GL80AA</a>	LBP::R134a	1/5	43	A	173	148	1.19	0.93		
▶ <input type="checkbox"/> <a href="#">GL80AF</a>	LBP::R134a	1/5	43	D	166	141	1.14	0.88		
▶ <input type="checkbox"/> <a href="#">GL80AH</a>	LBP::R134a	1/5	43	A	175	150	1.35	1.06		
▶ <input type="checkbox"/> <a href="#">GL80AN</a>	LBP::R134a	1/4	43	A	196	168	1.36	1.06		
▶ <input type="checkbox"/> <a href="#">GL90AA</a>	LBP::R134a	1/4	43	A	195	167	1.19	0.93		
▶ <input type="checkbox"/> <a href="#">GL90AH</a>	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
▶ <input type="checkbox"/> <a href="#">GL90AN</a>	LBP::R134a	1/4	50	D	190	163	1.1	0.85		
▶ <input type="checkbox"/> <a href="#">GL90AT</a>	LBP::R134a	1/4	43	E	190	161	1.19	0.92		
▶ <input type="checkbox"/> <a href="#">GL99AA</a>	LBP::R134a	1/4	43	A	214	182	1.24	0.96		
▶ <input type="checkbox"/> <a href="#">GL99AH</a>	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
▶ <input type="checkbox"/> <a href="#">GL80AD</a>	LBP::R134a	1/5	43	W	0	0	0	0		
▶ <input type="checkbox"/> <a href="#">GL90AD</a>	LBP::R134a	1/4	43	W	0	0	0	0		

## R134a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ <input type="checkbox"/> <a href="#">GL45AA</a>	LBP::R134a	1/8	43	A	96	82	1.06	0.82		
▶ <input type="checkbox"/> <a href="#">GL45AN</a>	LBP::R134a	1/8	50	C	96	81	1.05	0.8		
▶ <input type="checkbox"/> <a href="#">GL60AA</a>	LBP::R134a	1/6	43	A	132	114	1.14	0.89		
▶ <input type="checkbox"/> <a href="#">GL60AF</a>	LBP::R134a	1/6	43	D	132	113	1.07	0.82		
▶ <input type="checkbox"/> <a href="#">GL60AH</a>	LBP::R134a	1/6	43	A	133	114	1.31	1.01		
▶ <input type="checkbox"/> <a href="#">GL60AN</a>	LBP::R134a	1/6	50	C	132	114	1.07	0.83		
▶ <input type="checkbox"/> <a href="#">GL70AA</a>	LBP::R134a	1/5	43	A	149	128	1.18	0.92		
▶ <input type="checkbox"/> <a href="#">GL70AN</a>	LBP::R134a	1/5	50	D	150	129	1.08	0.83		
▶ <input type="checkbox"/> <a href="#">GL70AT</a>	LBP::R134a	1/5	43	E	144	122	1.09	0.84		
▶ <input type="checkbox"/> <a href="#">GL75AA</a>	LBP::R134a	1/5	43	A	155	133	1.18	0.92		
▶ <input type="checkbox"/> <a href="#">GL80AA</a>	LBP::R134a	1/5	43	A	173	148	1.19	0.93		
▶ <input type="checkbox"/> <a href="#">GL80AF</a>	LBP::R134a	1/5	43	D	166	141	1.14	0.88		
▶ <input type="checkbox"/> <a href="#">GL80AH</a>	LBP::R134a	1/5	43	A	175	150	1.35	1.06		
▶ <input type="checkbox"/> <a href="#">GL80AN</a>	LBP::R134a	1/4	43	A	196	168	1.36	1.06		
▶ <input type="checkbox"/> <a href="#">GL90AA</a>	LBP::R134a	1/4	43	A	195	167	1.19	0.93		
▶ <input type="checkbox"/> <a href="#">GL90AH</a>	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
▶ <input type="checkbox"/> <a href="#">GL90AN</a>	LBP::R134a	1/4	50	D	190	163	1.1	0.85		
▶ <input type="checkbox"/> <a href="#">GL90AT</a>	LBP::R134a	1/4	43	E	190	161	1.19	0.92		
▶ <input type="checkbox"/> <a href="#">GL99AA</a>	LBP::R134a	1/4	43	A	214	182	1.24	0.96		
▶ <input type="checkbox"/> <a href="#">GL99AH</a>	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
▶ <input type="checkbox"/> <a href="#">GL80AD</a>	LBP::R134a	1/5	43	W	0	0	0	0		
▶ <input type="checkbox"/> <a href="#">GL90AD</a>	LBP::R134a	1/4	43	W	0	0	0	0		

## R12

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ <input type="checkbox"/> <a href="#">L45AV</a>	LBP::R12	1/8	43	B	221	192	0.91	0.71		
▶ <input type="checkbox"/> <a href="#">L55AV</a>	LBP::R12	1/6	43	B	115	101	0.99	0.78		
▶ <input type="checkbox"/> <a href="#">L55BV</a>	LBP::R12	1/6	43	B	115	101	0.99	0.78		
▶ <input type="checkbox"/> <a href="#">L76AV</a>	LBP::R12	1/5	43	B	145	127	1.05	0.84		
▶ <input type="checkbox"/> <a href="#">L76BV</a>	LBP::R12	1/5	43	B	145	127	1.05	0.84		
▶ <input type="checkbox"/> <a href="#">L88AV</a>	LBP::R12	1/4	43	B	171	150	1.02	0.81		
▶ <input type="checkbox"/> <a href="#">L88BV</a>	LBP::R12	1/4	43	B	171	150	1.02	0.81		
▶ <input type="checkbox"/> <a href="#">LT45AV</a>	LBP::R12	1/8	50	B	94	83	1.04	0.83		
▶ <input type="checkbox"/> <a href="#">LT55AV</a>	LBP::R12	1/6	50	B	115	102	1.06	0.85		
▶ <input type="checkbox"/> <a href="#">LT55BV</a>	LBP::R12	1/6	50	B	115	102	1.06	0.85		
▶ <input type="checkbox"/> <a href="#">LT76BV</a>	LBP::R12	1/5	50	B	155	137	1.14	0.91		
▶ <input type="checkbox"/> <a href="#">LT88BV</a>	LBP::R12	1/4	50	B	190	169	1.16	0.93		
▶ <input type="checkbox"/> <a href="#">P12BW</a>	LBP::R12	1/3	43	A	221	192	0.91	0.71		

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_catalogo\_cubigel\_R134aTélécharger

## R600a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ <input type="checkbox"/> <a href="#">HL80AH</a>	LBP::R600a	1/7	43	A	104	89	1.37	1.06		
▶ <input type="checkbox"/> <a href="#">HL90AH</a>	LBP::R600a	1/7	43	A	115	99	1.38	1.08		
▶ <input type="checkbox"/> <a href="#">HL99AH</a>	LBP::R600a	1/6	43	A	120	103	1.34	1.03		

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP <sub>a</sub> 7.2 <sub>a</sub>
					CECOMAF 5°C W	ASHRAE 7.2°C kcal/h	
					<input type="checkbox"/> <a href="#">GL45PB</a>	HMBP::R134a	
<input type="checkbox"/> <a href="#">GL45PB</a>	HMBP::R134a	1/6	0	300			
<input type="checkbox"/> <a href="#">GL45TB</a>	HMBP::R134a	1/6	43	A			
<input type="checkbox"/> <a href="#">GL60PB</a>	HMBP::R134a	1/5	43	A			
<input type="checkbox"/> <a href="#">GL60TB</a>	HMBP::R134a	1/5	43	A			
<input type="checkbox"/> <a href="#">GL80PB</a>	HMBP::R134a	1/5	43	A			
<input type="checkbox"/> <a href="#">GL80TB</a>	HMBP::R134a	F	0	300			
<input type="checkbox"/> <a href="#">GL90TB</a>	HMBP::R134a	1/4	43	A			
<input type="checkbox"/> <a href="#">GP12TB</a>	HMBP::R134a	3/8	43	A			

Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

## ALL COMPRESSOR HERMÉTIC EMBRACO IN ONE FILE

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 8 April 2021

### COMPRESORES R404A/ R452A BAJA TEMPERATURA. MONOFÁSICAS 220V

MODELO	CM3	EXP	C.V	INT (A)	REFR COMP	MOTOR	TEMP. DE EVAPORACIÓN			PRECIO
							-10°C	-25°C	-30°C	
EMT2117GK	4,50	C	1/4	1,15	F	CSIR	408	210	164	143,00
EMT2121GK	5,20	C	1/3	1,33	F	CSIR	487	258	204	146,00
EMT2125GK	5,96	C-V	1/3	1,57	F	CSIR	562	301	238	158,00
EMT2130GK	6,76	C-V	1/2	1,70	F	CSIR	605	326	257	165,00
NEU2140GK	8,78	C-V	1/2	2,63	F	CSIR	801	421	326	182,00
NEU2155GK	12,11	C-V	3/4	3,79	F	CSIR	1067	557	432	201,00
NEU2168GJ	14,28	C-V	3/4	3,48	F	CSIR	1213	642	496	240,00
NEU2178GK	16,80	C-V	1	4,27	F	CSIR	1416	753	586	287,00
NT2180GK	20,44	C-V	1	3,12	F	CSIR	1573	814	625	330,00
NT2192GK	22,40	C-V	1	4,92	F	CSIR	1693	865	669	365,00
NT2192GK(r)	22,40	C-V	1	4,92	F	CSIR	1693	865	669	345,00
NT2210GK	26,20	C-V	1 1/2	6,43	F	CSIR	2041	1052	804	375,00
NT2210GK(r)	26,20	C-V	1 1/2	6,43	F	CSIR	2041	1052	804	355,00
NT2212GK	27,78	C-V	1 1/2	5,30	F	CSIR	2174	1125	876	380,00
NJ2212GK	34,37	C-V	1 1/2	5,80	F	CSIR	2487	1276	961	419,00
NJ2212GK(r)	34,37	C-V	1 1/2	5,80	F	CSIR	2487	1276	961	394,00



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

EMT22HLP 3,00 C 1/12 0,44 S RSIR 151 69 50 98,00  
 EMT36HLP 3,97 C 1/10 0,56 S RSIR 203 94 71 102,00  
 EMY3111Z 4,85 C 1/8 0,71 S RSIR 247 117 86 105,00  
 EMT49HLP 5,56 C 1/6 0,76 S RSIR 274 131 98 111,00  
 EMY3115Z 6,76 C 1/6 0,99 S RSIR 341 158 117 112,00  
 NEK1116Z 7,37 C 1/5 0,60 S RSIR 367 172 126 129,00  
 NEK1118Z 8,39 C 1/4 0,74 S RSIR 417 195 144 133,00  
 NE2121Z 9,26 C/V 1/4 1,41 F CSIR 465 217 163 172,00  
 NE2130Z 12,11 C/V 1/3 2,07 F CSIR 613 298 227 186,00  
 NE2134Z 14,28 C/V 1/3 2,30 F CSIR 662 313 234 190,00  
 NEK2140Z 16,80 C/V 1/2 2,35 F CSIR 801 377 284 207,00  
 MODELO CM3 EXP C.V INT

(A)

REFR

COMP MOTOR TEMP. DE EVAPORACIÓN PRECIO +5°C 0°C -5°C -10°C

EMT37HDP 3,40 C 1/8 0,85 S RSIR 343 245 228 181 113,00  
 EMT45HDR 3,97 C 1/8 0,95 S CSIR 402 284 229 184 121,00  
 EMT50HDP 4,50 C 1/6 1,05 S RSIR 456 374 303 242 120,00  
 EMT6144Z 5,20 C/V 1/5 1,38 F RSIR 549 395 367 294 123,00  
 EMT6160Z 6,76 C/V 1/4 1,74 F RSIR 696 504 469 377 127,00  
 EMT6170Z 7,69 C/V 1/4 2,03 F RSIR 771 559 522 418 134,00  
 NEU6187Z 10,00 C/V 1/3 2,61 F RSIR 918 654 600 477 151,00  
 NEU6210Z 12,12 C/V 1/3 3,15 F RSIR 1170 955 770 615 163,00  
 NEU6212Z 14,30 C/V 1/2 3,90 F RSIR 1365 1114 894 707 174,00  
 NEU6214Z 16,80 C/V 1/2 4,21 F RSIR 1569 1292 1047 836 199,00  
 NT6217Z 20,44 C/V 3/4 4,73 F RSIR 1795 1256 1173 938 292,00  
 NT6220Z 22,37 C/V 3/4 5,24 F RSIR 1897 1554 1260 1010 323,00  
 NJ6220Z 26,11 C/V 3/4 5,71 F RSIR 2202 1780 1419 1104 386,00  
 NJ6220Z ( ) 26,11 C/V 3/4 5,71 F RSIR 2202 1780 1419 1104 379,00 NJ6226Z 34,38  
 C/V 1 5,95 F CSR 2852 2340 1892 1497 439,00 NJ6226Z ( ) 34,38 C/V 1 5,95 F CSR  
 2852 2340 1892 1497 410,00

COMPRESORES R404A/ R452A BAJA TEMPERATURA. MONOFÁSICAS 220V

MODELO	CM3	EXP	C.V	INT (A)	REFR COMP	MOTOR	TEMP. DE EVAPORACIÓN			PRECIO
							-10°C	-25°C	-30°C	
EMT2117GK	4,50	C	1/4	1,15	F	CSIR	408	210	164	143,00
EMT2121GK	5,20	C	1/3	1,33	F	CSIR	487	258	204	146,00
EMT2125GK	5,96	C-V	1/3	1,57	F	CSIR	562	301	238	158,00
EMT2130GK	6,76	C-V	1/2	1,70	F	CSIR	605	326	257	165,00
NEU2140GK	8,78	C-V	1/2	2,63	F	CSIR	801	421	326	182,00
NEU2155GK	12,11	C-V	3/4	3,79	F	CSIR	1067	557	432	201,00
NEU2168GJ	14,28	C-V	3/4	3,48	F	CSIR	1213	642	496	240,00
NEU2178GK	16,80	C-V	1	4,27	F	CSIR	1416	753	586	287,00
NT2180GK	20,44	C-V	1	3,12	F	CSIR	1573	814	625	330,00
NT2192GK	22,40	C-V	1	4,92	F	CSIR	1693	865	669	365,00
NT2192GK(*)	22,40	C-V	1	4,92	F	CSIR	1693	865	669	345,00
NT2210GK	26,20	C-V	1 1/2	6,43	F	CSIR	2041	1052	804	375,00
NT2210GK(*)	26,20	C-V	1 1/2	6,43	F	CSIR	2041	1052	804	355,00
NT2212GK	27,78	C-V	1 1/2	5,30	F	CSIR	2174	1125	876	380,00
NJ2212GK	34,37	C-V	1 1/2	5,80	F	CSIR	2487	1276	961	419,00
NJ2212GK(*)	34,37	C-V	1 1/2	5,80	F	CSIR	2487	1276	961	394,00



Private Picture Copyright: WWW.MBSM.PRO

Mbsm\_dot\_pro\_private\_PDF8compresores\_hermeticos\_embraco\_2019Télécharger

# Refrigerator, compressor, E1134CZA, 1/2 hp, E1130CZA, E1121CZA, 3/8HP, commercial, freezer, R134a

Category: compressor

written by www.mbsm.pro | 8 April 2021

 **E1121CZA**   
220-240V-50Hz 1PH  
THERMALLY PROTECTED  
     
<http://www.dongger.com> A000583 **R134a**  
  
D123810213206602016

Refrigerator, compressor, E1134CZA, E1130CZA, E1121CZA, 3/8HP, commercial, freezer, R134a

## COMPRESSOR, MX21TBa, R404A, 1HP, CUBIGEL, HMBP, 220/240V, 50Hz, 20,72 cm<sup>3</sup>

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 8 April 2021



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

### *Détails techniques*

220/240V 50Hz

puissance 1 HP – cylindrée 21,75 cc

gaz R404a/R507 HMBP

...et d'autres dispositifs

MX21TB – ACC – CELLI

MX21TB – CUBIGEL – ELECTROLUX

605093 – GEV – ITV



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_danfoss\_MX21TBa\_R404A\_220\_50Télécharger

<b>Brand:</b>	Cubigel
<b>UPC:</b>	3070063
<b>Manufacturer reference:</b>	MX21TBa
<b>Application:</b>	HMBP
<b>Power supply:</b>	220/240V 50Hz
<b>Cooling capacity:</b>	3047 W
<b>Horsepower:</b>	1 Hp
<b>Displacement:</b>	21.7 cm <sup>3</sup>
<b>Refrigerant:</b>	R404a/R507
<b>Weight:</b>	17.5 kg
<b>Motor type:</b>	CSR
<b>Type:</b>	Hermetic reciprocating compressor

---

## MBSM.PRO, All Compressor in One File , Pdf and Print

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 8 April 2021



Private Picture Copyright: WWW.MBSM.PRO

MBSM.PRO, All Compressor in One File , Pdf and Print

RÉFRIGÉRATEUR NIKAI, nrf480fn4, 165W,  
Compressor, ATD60L, Wanbao Huaguang  
Refrigerator, 1/5Hp, R134A, 120G,  
1.25A, 220V/50HZ

Category: compressor

written by www.mbsm.pro | 8 April 2021

# NIKAI®

## REFRIGERATOR MODEL: NRF480FN4


Rated Voltage	220-240V~
Rated Frequency	50Hz
Rated Current	1.25A
Rated Input Power	165W
Defrosting Power	150W
Electricity Consumption	1.385kw.h/24h
Climate Classification	T
Classification of Protection Against Electric Shock	Class I
Lamp Power	≤15W
Foaming Agent	CsH10(CP)
Refrigerant and Inject Amount	R134a/120g
Freeze Capacity	5.0kg/24h
Weight	65kg

MADE IN CHINA

صنع في الصين

CB

### ELECTRIC DIAGRAM



NIKAI GULF FZCO

PO BOX 9200 DUBAI UAE

نيكاي جلف فزكو

مستودع بريد 9200 دبي دولة الإمارات العربية المتحدة

REDMI NOTE 8 PRO  
AI QUAD CAMERA



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

RÉFRIGÉRATEUR NIKAI, nrf480fn4, 165W, Compressor, ATD60L, Wanbao Huaguang Refrigerator, 1/6Hp, R134A, 120G, 1.25A, 220V/50HZ

Compressor, 1/3HP, FR10S, 103U2930, SECOP, 103U, 2930, Compressor Danfoss, R12, 220-240V, 50Hz

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 8 April 2021



• DESCRIPTION

# DESCRIPTION



FR10S

220-240V-60Hz

LBP LST/HST

220-240V-50Hz

LBP/HBP LST/HST

SECOP

Formerly Danfoss Compressors



8B8K1025

103U

2930

MADE IN SLOVENIA

CE

		R404a / R507a		
13	104L2523	Danfoss Compressor SC 10CL	1/3 HP	352 W
14	104L2623	Danfoss Compressor SC 12CL	3/8 HP	445 W
15	104L2853	Danfoss Compressor SC 15CL	1/2 HP	560 W
16	104L2123	Danfoss Compressor SC 18CL	5/8 HP	615 W
17	104L2322	Danfoss Compressor SC 21CL	7/8 HP	702 W

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

		R134a		
9	104G8240	Danfoss compressor SC 12G	3/8 HP	298 W
10	104G8520	Danfoss compressor SC 15G	1/2 HP	356 W
11	104G8820	Danfoss compressor SC 18G	5/8 HP	615 W
12	104G8140	Danfoss compressor SC 21G	7/8 HP	702 W

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

		R12a		
5	103G2630	Danfoss compressor FR 6S	1/6 HP	119 W
6	103U2730	Danfoss compressor FR 7.5S	1/5 HP	138 W
7	103U2830	Danfoss compressor FR 8.5S	1/4 HP	164 W
8	103U2930	Danfoss compressor FR 10S	1/3 HP	194 W

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

		R134a		
1	103G6660	Danfoss Compressor FR 6G	1/6 HP	119 W
2	103G6680	Danfoss compressor FR 7.5G	1/5 HP	138 W
3	103G6780	Danfoss compressor FR 8.5G	1/4 HP	164 W
4	103G6880	Danfoss compressor FR 10G	1/3 HP	194 W

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Sr Material Material Description Capacity Cons. Watts -25

**R134a**

1	103G6660	Danfoss	Compressor	FR 6G	1/6 HP	119 W
2	103G6680	Danfoss	compressor	FR 7.5G	1/5 HP	138 W
3	103G6780	Danfoss	compressor	FR 8.5G	1/4 HP	164 W
4	103G6880	Danfoss	compressor	FR 10G	1/3 HP	194 W

**R12a**

5	103G2630	Danfoss	compressor	FR 6S	1/6 HP	119 W
6	103U2730	Danfoss	compressor	FR 7.5S	1/5 HP	138 W
7	103U2830	Danfoss	compressor	FR 8.5S	1/4 HP	164 W
8	103U2930	Danfoss	compressor	FR 10S	1/3 HP	194 W

**R134a**

9	104G8240	Danfoss	compressor	SC 12G	3/8 HP	298 W
10	104G8520	Danfoss	compressor	SC 15G	1/2 HP	356 W
11	104G8820	Danfoss	compressor	SC 18G	5/8 HP	615 W
12	104G8140	Danfoss	compressor	SC 21G	7/8 HP	702 W

**R404a / R507a**

13	104L2523	Danfoss	Compressor	SC 10CL	1/3 HP	352 W
14	104L2623	Danfoss	Compressor	SC 12CL	3/8 HP	445 W
15	104L2853	Danfoss	Compressor	SC 15CL	1/2 HP	560 W
16	104L2123	Danfoss	Compressor	SC 18CL	5/8 HP	615 W
17	104L2322	Danfoss	Compressor	SC 21CL	7/8 HP	702 W

---

## COMPRESSOR, DONPER, NE6213CK, 1/2hp, R404a

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 8 April 2021



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Ne6213Ck Compressor R404A Med Temp 12 Disp 1080W @ -5 1/2Hp 240V 50Hz



Private Picture Copyright : WWW.MBSM.PRO



**NE6213CK**  
220-240V-50Hz 1PH  
THERMALLY PROTECTED  
RoHS CE ACC0083 2  
R404A  
0126741729011801180

# NE6213CK COMPRESSOR R404A MED TEMP 12 DISP 1080W @ -5 1/2HP 240V 50HZ

**Displacement: 12 cm<sup>3</sup>**

**Power: 1/2 HP**

**Oil Charge: 450 +/- 10 mL**

**Cooling capacity: 1080W @-5 SST**

**COP: ASHRAE 1.80**

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Testing condition:

Test conditions	H.B.P	
	ASHRAE	CECOMAF
Evaporating Temp.	+7.2°C	+5°C
Ambient Temp.	+35.0°C	+32°C
Condensing Temp.	+54.4°C	+55°C
Suction Temp.	+35.0°C	+32°C
Subcooling Temp.	+46.1°C	+55°C

### 3. Running Condition

Ambient temp.	0~43°C
Evaporating temp.	-15~10°C
Voltage range	187~264V
Max. condensing temp.	65°C
Max. winding temp.	130°C
Max. shell temp.	95°C
Max. discharge temp.	120°C
Start voltage	187V [5/5bar(abs)]
Shell min. resistance to pressure	35bar

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

## 1. Compressor Type

Compressor model	NE6213CK
Rated voltage/frequency	220-240V~50Hz
Refrigerant	R404A
Application	High back pressure (H.B.P)
Cooling method	Fan Cooling
Start torque	High starting torque (HST)
Control device	Capillary tube
Motor type	CSIR


Private Picture Copyright : WWW.MBSM.PRO

Mbsm\_dot\_pro\_private\_PDF\_ne6213ck-compressorTélécharger

# Compressor, QD110, 3/10 HP, LBP, R12/R406, 276w, R12, R406

Category: compressor

written by www.mbsm.pro | 8 April 2021

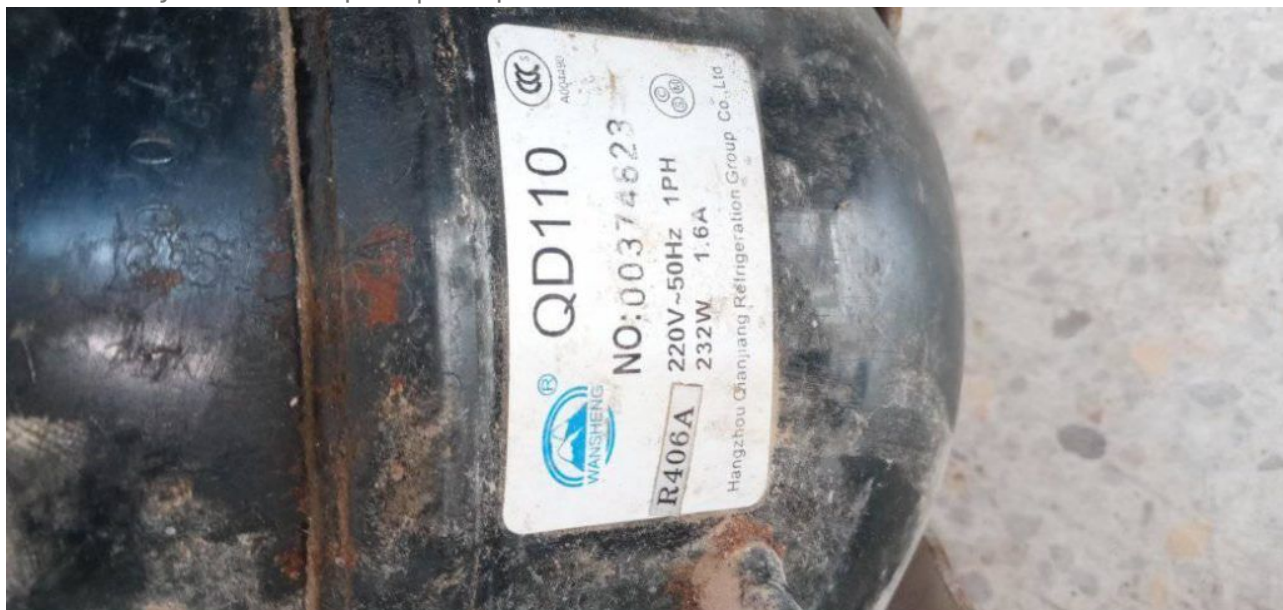

Private Picture Copyright : WWW.MBSM.PRO

Quantité(Pièce)      1 – 30 31 – 70 71 – 150 >150  
 Durée estimée (jours) 5      10      15      À négocier  
 Tension: 220 V-240 V  
 50 HZ  
 Compresseur LBP R12/R406

Modèle	Valage	Fréquence	Déplacement	Capacité	Puissance d'entrée	Type de moteur	De charge d'huile	Type de refroidissement	Poids
	(V)	(Hz)	(CC)	(W)	(W)		(CC)		(Kg)
QD30	220-240	50	3.0	62	81	RSIR	180	ST	6.3
QD36	220-240	50	3.6	75	93	RSIR	180	ST	6.4

QD55	220-240	50	5.5	133	110	RSIR	240	ST	8.4
QD65	220-240	50	6.5	155	130	RSIR	240	ST	8.4
QD75	220-240	50	7.5	176	146	RSIR	240	ST	8.6
QD85	220-240	50	8.5	202	168	RSIR	240	ST	8.9
QD110	220-240	50	11.0	276	236	RSIR	240	ST	9.9
QD125	220-240	50	12.5	305	254	RSCR	280	ST	11.2



Private Picture Copyright: WWW.MBSM.PRO

Mbsm\_dot\_pro\_private\_PDF\_QD110-1Télécharger

## R406a 220~240V/50Hz

LBP  
低背压

序号 No.	应用类型 Application	产品系列 Serial	产品型号 type	马力 Hp	电压/频率 Power Supply (V/Hz)	电机类型 Motor type	制冷量 Capacity		COP Power Efficiency		启动器 Starting Device	启动电容 Starting Capacitor (μF)	运行电容 Running Capacitor (μF)	冷却方式 Cool
							ASHRAE (-23.3°C)	CECOMAF (-25°C)	ASHRAE (-23.3°C)	CECOMAF (-25°C)				
1	LBP 低背压	WT	QD55	1/6	220~240V ~50Hz	RSIR	130	98	1.04	0.81	PTC	/	/	S
2			QD65	1/5		RSIR	158	119	1.08	0.84		/	/	S
3			QD75	1/4		RSIR	176	132	1.09	0.85		/	/	S
4			QD85	1/4		RSIR	202	152	1.10	0.86		/	/	S
5			QD91	1/4		RSIR	216	162	1.12	0.87		/	/	S
6	LBP 低背压	WQ	QD110	3/10	220~240V ~50Hz	RSIR	271	203	1.17	0.91	重锤 Starting Relay	/	/	F
7			QD128	1/3		RSIR	306	230	1.18	0.92		/	/	F
8			QD142	2/5		CSIR	333	250	1.19	0.93		80	/	F
9	LBP 低背压	SC	QD168	1/2	220~240V ~50Hz	CSIR	380	330	1.15	1.06	电流式 Current	80	/	F2
10			QD180	1/2		CSIR	440	382	1.15	1.07		80	/	F2
11			QD210	3/5		CSIR	510	443	1.17	1.08		80	/	F2

Private Picture Copyright: WWW.MBSM.PRO

Cubigel Compressors, Compressor,  
GQY80AT, 1/4Hp, LBP, R134a,  
8.1cmc,165 W, REFRIGERATEUR INDESIT

Category: compressor

written by www.mbsm.pro | 8 April 2021



BAJA presión					serie LBP														
CÓDIGO REMLE	MODELO	Potencia	Enfriam.	Cilind.	Producción Frigorífica en Vatios.								Expans.	Acelle cm3	Peso Kg.	Motor	Arranq.	Modelos MIX Sustitutos R-12 / R134a	
• Últimas existencias					-35	-30	-25	-23,3	-20	-15	-10	Sustitutos R-12 / R134a							
451.00.0202	D40AS	1/10	S	4.00	40	56	74	81	96	121	149	C	240	6.7	RSIR	P	GD40AAa	451.00.3301	
451.00.0002	L45AV	1/8	S	4.50	39	57	79	87	105	136	171	C	300	8.4	RSIR	R	GL45AA	451.00.3302	
451.00.0003	L55AV	1/6	S	5.47	49	73	101	112	134	171	211	C	470	9.5	RSIR	R	GL60AA	451.00.3303	
451.00.0004	L76AV	1/5	S	7.57	58	89	125	139	168	217	271	C	530	10.5	RSIR	R	GL75AA	451.00.3304	
451.00.0104	L76BV	1/5	OC	7.57	58	89	125	139	168	217	271	C	530	10.5	RSIR	R			
451.00.0005	L88AV	1/4	S	8.85	69	107	150	167	200	255	317	C	530	11.0	RSIR	R	GL80AA	451.00.3305	
451.00.0105	L88BV	1/4	OC	8.85	69	107	150	167	200	255	317	C	530	11.0	RSIR	R	GL90AAa OC	451.00.3325	
451.00.0205	L88FW	1/4	F	8.85	69	107	150	167	200	255	317	C-V	530	10.0	RSIR	R	GL90AAb	451.00.3205	
451.00.0106	P12BW	1/3	OC	12.00	79	132	192	215	261	337	422	C	530	11.5	RSIR	R	GP12BB OC	451.00.3326	
451.00.0206	P12FW	1/3	F	12.00	79	132	192	215	261	337	422	C-V	530	11.5	RSIR	R	GP12FB	451.00.3206	

Private Picture Copyright : WWW.MBSM.PRO

Compresor GQY80AT, freon R134a, capacitate 8.1 cmc, capacitate frigorifica ASHRAE 222 W, capacitate frigorifica CECOMAF 165 W, racire statica #GQY80AT

Model: GQY80AT

Freon: R134a

Capacitate: 8.1 cmc

Capacitate frigorifica ASHRAE: 222 W

Capacitate frigorifica CECOMAF: 165 W

35 -30 -25 -10 w COP

- 451.00.3301 GD40AAa / GQY80AT 1/10 S 4.03 34 49 70 0.77 154 C 200 6.7 RSIR P •
- 451.00.3202 GD40AA 1/10 S 4.03 34 49 70 0.77 154 C 200 6.7 RSIR P •
- 451.00.3302 GL45AA / GQY80AT 1/8 S 4.55 37 56 81 0.81 183 C 265 8.3 RSIR P •
- 451.00.3303 GL60AA / GQY80AT 1/6 S 5.99 50 75 107 0.85 238 C 265 9.1 RSIR P •
- 451.00.3304 GL75AA / GQY80AT 1/5 S 6.65 57 85 121 0.87 267 C 345 9.6 RSIR P •
- 451.00.3305 GL80AA / GQY80AT 1/5 S 7.52 68 101 144 0.89 326 C 345 9.9 RSIR P •
- 451.00.3104 GL80AAb 1/5 OC 8.10 68 101 144 0.89 326 C-V 345 9.9 CSIR R •
- 451.00.3005 GL90AA 1/4 S 9.08 82 119 165 0.90 350 C 345 10.2 RSIR P •
- 451.00.3306 GL90AAa / GQY80AT 1/4 S 9.08 82 119 165 0.90 350 C 345 10.2 RSIR P •
- 
- 451.00.3105 GL90AAb 1/4 OC 9.08 82 119 165 0.90 350 C-V 345 10.2 CSIR R •
- 451.00.3205 GL90AAb 1/4 F 9.08 82 119 165 0.90 350 C-V 345 10.2 CSIR R •
- 451.00.3325 GL90AAa 1/4 OC 9.08 82 119 165 0.90 350 C-V 345 10.2 CSIR R •
- 451.00.3106 GP12BB 1/3 OC 12.00 83 131 190 0.88 424 C 400 11.5 RSIR R •
- 451.00.3206 GP12FB 1/3 F 12.00 83 131 190 0.88 424 C 400 11.5 RSIR R •
- 451.00.3326 GP12BB 1/3 OC 12.00 83 131 190 0.88 424 C 400 11.5 RSIR R •
- 451.00.3218 GP14CB 3/8 F 14.17 99 158 228 0.90 509 C 400 11.5 RSIR R •
- 451.00.3223 GP16FB 3/8 F 16.15 109 182 266 0.89 585 C-V 530 12.0 CSIR R •
- 451.00.3224 GX18FB 3/7 F 18.40 123 199 291 0.91 660 C-V 500 15.1 CSIR R •
- 451.00.3225 GX21FB 2/3 F 20.72 151 243 351 0.93 778 C-V 500 15.5 CSIR R •
- 451.00.3403 GL45TB 1/6 F 4.50 76 134 342 1.62 412 C-V 300 8.4 CSIR R •
- 451.00.3503 GL45PB 1/6 F 4.50 76 134 342 1.62 412 C-V 300 8.4 CSIR R •
- 451.00.3404 GL60TB 1/5 F 5.67 95 170 437 1.82 527 C-V 300 9.5 CSIR R •
- 451.00.3504 GL60PB 1/5 F 5.67 95 170 437 1.82 527 C-V 300 9.5 CSIR R •
- 451.00.3406 GL80TB 1/5 F 7.57 111 212 554 1.83 667 C-V 300 9.5 CSIR R •

- 451.00.3505 GL90TB 1/4 F 8.85 142 259 661 1.91 796 C-V 300 10.8 CSIR R •
- 451.00.3506 GP12TB 3/8 F 12.05 169 338 893 1.80 1077 C-V 350 11.2 CSIR R •
- 451.00.3418 GP14TB 3/8 F 14.00 190 373 999 1.77 1208 C-V 400 11.5 CSIR R •
- 451.00.3513 GP14TB 3/8 F 14.00 190 373 999 1.77 1208 C-V 400 11.5 CSIR R •
- 451.00.3419 GX18TB 1/2 F 18.40 285 539 1390 1.91 1673 C-V 500 16.0 CSIR R •
- 451.00.3420 GX21TB 5/8 F 20.72 332 603 1550 1.90 1866 C-V 500 17.0 CSIR R •
- 451.00.3421 GX23TB 5/8 F 23.20 368 677 1730 1.89 2083 C-V 500 17.0 CSIR R •
- 451.00.3422 GS26TB 3/4 F 25.93 392 771 2071 2.09 1011 C-V 887 22.7 CSIR R •
- 451.00.3423 GS30TB 7/8 F 29.95 317 785 2452 2.33 3020 C-V 887 22.7 CSR R •
- 451.00.3424 GS34TB 1 F 34.42 476 1068 2852 2.28 3421 C-V 887 22.7 CSR R •



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

BAJA presión					serie LBP										R-134a				
CÓDIGO REMLE	MODELO	Potencia	Enfri.	Cilindr.	Producción Frigorífica en Watts.								Expansión	Acelte cm3	Peso Kg.	Motor	Arranque	220-240V/50Hz	
• Gases sustitutos del R-12 y R-134a.					CECOMAF (W)														
• Últimas existencias					-35	-30	-25				-10								
					w	COP													
• 451.00.3301	GD40AAa / GY40AA	1/10	S	4.03	34	49	70	0.77	154	C	200	6.7	RSIR	P	•				
• 451.00.3202	GD40AA	1/10	S	4.03	34	49	70	0.77	154	C	200	6.7	RSIR	P	•				
• 451.00.3302	GL45AA / GY44AA	1/8	S	4.55	37	56	81	0.81	183	C	265	8.3	RSIR	P	•				
• 451.00.3303	GL60AA / GY57AA	1/6	S	5.99	50	75	107	0.85	238	C	265	9.1	RSIR	P	•				
• 451.00.3304	GL75AA / GY66AA	1/5	S	6.65	57	85	121	0.87	267	C	345	9.6	RSIR	P	•				
• 451.00.3305	GL80AA / GY75AA	1/5	S	7.52	68	101	144	0.89	326	C	345	9.9	RSIR	P	•				
• 451.00.3104	GL80AAb	1/5	OC	8.10	68	101	144	0.89	326	C-V	345	9.9	CSIR	R	•				
• 451.00.3005	GL90AA	1/4	S	9.08	82	119	165	0.90	350	C	345	10.2	RSIR	P	•				
• 451.00.3306	GL90AAa / GQY80AT	1/4	S	9.08	82	119	165	0.90	350	C	345	10.2	RSIR	P	•				
• 451.00.3105	GL90AAb	1/4	OC	9.08	82	119	165	0.90	350	C-V	345	10.2	CSIR	R	•				
• 451.00.3205	GL90AAb	1/4	F	9.08	82	119	165	0.90	350	C-V	345	10.2	CSIR	R	•				
• 451.00.3325	GL90AAa	1/4	OC	9.08	82	119	165	0.90	350	C-V	345	10.2	CSIR	R	•				
• 451.00.3106	GP12BB	1/3	OC	12.00	83	131	190	0.88	424	C	400	11.5	RSIR	R	•				
• 451.00.3206	GP12FB	1/3	F	12.00	83	131	190	0.88	424	C	400	11.5	RSIR	R	•				
• 451.00.3326	GP12BB	1/3	OC	12.00	83	131	190	0.88	424	C	400	11.5	RSIR	R	•				
451.00.3218	GP14CB	3/8	F	14.17	99	158	228	0.90	509	C	400	11.5	RSIR	R	•				
451.00.3223	GP16FB	3/8	F	16.15	109	182	266	0.89	585	C-V	530	12.0	CSIR	R	•				
451.00.3224	GX18FB	3/7	F	18.40	123	199	291	0.91	660	C-V	500	15.1	CSIR	R	•				
451.00.3225	GX21FB	2/3	F	20.72	151	243	351	0.93	778	C-V	500	15.5	CSIR	R	•				

Private Picture Copyright: WWW.MBSM.PRO

ALTA - MEDIA presión					serie HMBP										R-134a				
CÓDIGO REMLE	MODELO	Potencia	Enfriamiento	Cilindrada	Producción Frigorífica en Watts.								Expansión	Acelte cm3	Peso Kg.	Motor	Arranque	220-240V/50Hz	
• Gases sustitutos de R-12 y R-134a.					CECOMAF (W)														
• Últimas existencias					-25	-15	5				10								
					w	COP													
• 451.00.3403	GL45TB	1/6	F	4.50	76	134	342	1.62	412	C-V	300	8.4	CSIR	R	•				
• 451.00.3503	GL45PB	1/6	F	4.50	76	134	342	1.62	412	C-V	300	8.4	CSIR	R	•				
• 451.00.3404	GL60TB	1/5	F	5.67	95	170	437	1.82	527	C-V	300	9.5	CSIR	R	•				
• 451.00.3504	GL60PB	1/5	F	5.67	95	170	437	1.82	527	C-V	300	9.5	CSIR	R	•				
451.00.3406	GL80TB	1/5	F	7.57	111	212	554	1.83	667	C-V	300	9.5	CSIR	R	•				
• 451.00.3505	GL90TB	1/4	F	8.85	142	259	661	1.91	796	C-V	300	10.8	CSIR	R	•				
• 451.00.3506	GP12TB	3/8	F	12.05	169	338	893	1.80	1077	C-V	350	11.2	CSIR	R	•				
• 451.00.3418	GP14TB	3/8	F	14.00	190	373	999	1.77	1208	C-V	400	11.5	CSIR	R	•				
• 451.00.3513	GP14TB	3/8	F	14.00	190	373	999	1.77	1208	C-V	400	11.5	CSIR	R	•				
451.00.3419	GX18TB	1/2	F	18.40	285	539	1390	1.91	1673	C-V	500	16.0	CSIR	R	•				
451.00.3420	GX21TB	5/8	F	20.72	332	603	1550	1.90	1866	C-V	500	17.0	CSIR	R	•				
451.00.3421	GX23TB	5/8	F	23.20	368	677	1730	1.89	2083	C-V	500	17.0	CSIR	R	•				
• 451.00.3422	GS26TB	3/4	F	25.93	392	771	2071	2.09	1011	C-V	887	22.7	CSIR	R	•				
451.00.3423	GS30TB	7/8	F	29.95	317	785	2452	2.33	3020	C-V	887	22.7	CSR	R	•				
• 451.00.3424	GS34TB	1	F	34.42	476	1068	2852	2.28	3421	C-V	887	22.7	CSR	R	•				

Private Picture Copyright: WWW.MBSM.PRO

BAJA presión					serie LBP										R-600a			
CÓDIGO REMLE	MODELO	Potencia	Enfriamiento	Cilindrada	Producción Frigorífica en Watts.								Expansión	Acelte cm3	Peso Kg.	Motor	Arranque	220-240V/50Hz
					-35	-30	-25	-23.3	-20	-15	-10							
451.00.0605	HQY55AA	1/9	S	5.46	28	44	62	69	83	105	130	C	210	8.9	RSIR/RSCR	P	•	
451.00.0610	HQY70AA	1/8	S	6.64	42	59	80	88	104	131	161	C	210	9.0	RSIR/RSCR	P	•	
451.00.0615	HLY99AA	1/6	S	9.93	69	90	119	130	155	198	248	C	345	9.6	RSIR/RSCR	P	•	
451.00.0620	HPY12AA	1/5	S	12.10	79	107	143	157	187	239	299	C	300	10.7	RSIR/RSCR	P	•	
451.00.0625	HPY14AA	1/5	S	14.31	92	124	165	181	215	274	342	C	300	11.0	RSIR/RSCR	P	•	
451.00.0630	HPY16AA	1/4	S	16.14	102	136	180	198	236	302	379	C	300	11.2	RSIR/RSCR	P	•	

Private Picture Copyright: WWW.MBSM.PRO

**ALTA - MEDIA presión** **serie HMBP** **R-22**

CÓDIGO REMLE	MODELO	Potencia	Enfriamiento	Cilindrada	Producción Frigorífica en Vatios.								Expansión	Aceite cm3	Peso Kg.	Motor	Arranque	220-240V/50Hz
					-20	-15	-10	-5	0	5	7.2	10						
451.00.1404	L45TN	1/5	F	4.50	157	206	265	333	410	496	537	592	C-V	400	9.5	CSIR	P	•
451.00.1405	L57TN	1/4	F	5.67	194	255	327	410	505	610	660	727	C-V	300	9.5	CSIR	R	•
451.00.1428	L76TN	3/8	F	7.57	268	347	441	550	675	814	881	969	C-V	470	10.0	CSIR	R	•
451.00.1408	L88TN	3/8	F	8.85	523	416	527	658	806	973	1052	1159	C-V	400	10.6	CSIR	R	•
451.00.1409	P12TN	1/2	F	12.00	412	537	689	868	1075	1309	1421	1570	C-V	400	12.3	CSR	R	•
451.00.1416	S22TN	7/8	F	21.77	645	890						3000	C-V	887	22.7	CSR	R	•
451.00.1418	S26TN	1 1/4	F	25.93	857	1182	1561	1993	2480	3021	3275	3615	C-V	887	22.7	CSR	R	•

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

**ALTA - MEDIA presión** **serie HMBP** **sustituto del R-404a - R507 (\*)**

220-240V 50Hz

CÓDIGO REMLE	MODELO	CV	Enfr.	Cil. cm3	Int. A	Conex.		Conex. aspir. Rotalock	Rendimientos (Wattios)*				Aplic.
						ODF	Rotalock		+7,2	-0°C	-5°C	-10°C	
451.00.0299	ML40TB	1/6	F	4.04	2,03	1/4"	-	3/16"	516	387	320	260	C-V
451.00.0300	ML45TB	1/5	F	4.50	2,19	1/4"	-	3/16"	559	432	356	289	C-V
451.00.0305	ML60TB	1/4	F	5.67	2,77	1/4"	-	3/16"	686	525	428	343	C-V
451.00.0310	ML80TB	3/8	F	7.57	3,27	1/4"	-	3/16"	931	720	590	475	C-V
451.00.0315	ML90TB	3/8	F	8.85	3,98	1/4"	-	3/16"	1118	861	705	569	C-V
451.00.0321	MP12RB	1/2	F	12.00	3,80	5/16"	-	1/4"	1765	1379	1142	931	C-V
451.00.0323	MP14RB	1/2	F	14.00	4,86	5/16"	-	1/4"	1765	1379	1142	931	C-V
451.00.0325	MX18TB	7/8	F	18.12	6,50	3/8"	-	1/4"	2275	1719	1379	1078	C-V
451.00.0326	MX21TB	1	F	21,74	6,28	3/8"	-	1/4"	2745	2063	1645	1275	C-V
451.00.0327	MS26TB-V	1 3/8	F	25.95	8,97	5/8"	1" 5/8"R	5/16"	3382	2578	2085	1647	C-V
451.00.0328	MA34TB-V	1 5/8	F	34,42	11,50	5/8"	1" 5/8"R	5/16"	4450	3480	2870	2310	C-V

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

**BAJA presión** **serie LBP** **sustituto del R-404a - R507 (\*)**

220-240V 50Hz

CÓDIGO REMLE	MODELO	CV	Enfr.	Cilindr. cm3	Int. A	Conex. aspir.		Conex. descar. ODF	Rendimientos (Wattios)*			Aplic.
						ODF	Rotalock		-35°C	-25°C	-10°C	
451.00.0450	ML45FB	1/6	F	4,60	1,58	1/4"	-	3,16"	70	130	270	C-V
451.00.0455	ML60FB	1/5	F	6,00	1,77	1/4"	-	3,16"	100	180	340	C-V
451.00.0460	ML80FB	1/4	F	8,10	2,21	1/4"	-	3,16"	140	250	490	C-V
451.00.0465	ML90FB	1/3	F	8,85	2,24	1/4"	-	3/16"	150	280	530	C-V
451.00.0470	MP12FB	3/8	F	12,00	2,88	3/8"	-	1/4"	170	350	720	C-V
451.00.0471	MP14FB	1/2	F	14,00	3,38	3/8"	-	1/4"	200	400	850	C-V
451.00.0472	MPT14LA®	1/2	F	14,32	2,70	3/8"	-	1/4"	360	550	1000	C-V
451.00.0473	MX18FBa	5/8	F	18,20	2,97	3/8"	-	1/4"	210	510	1160	C-V
451.00.0474	MX23FB	7/8	F	23,20	3,78	3/8"	-	1/4"	380	720	1450	C-V
451.00.0475	MS26FB-V	3/4	F	26,15	4,72	5/8"	1" 5/8"R	5/16"	360	820	1570	C-V
451.00.0476	MS30FB-V	7/8	F	30,00	5,60	5/8"	1" 5/8"R	5/16"	420	940	1900	C-V
451.00.0477	MS34FB-V	1	F	34,25	6,68	5/8"	1" 5/8"R	5/16"	480	1090	2230	C-V

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

FRÍO DOMÉSTICO / COMERCIO

**ALTA - MEDIA presión**

**serie HMBP**

CÓDIGO REMLE	MODELO	Potencia	Enfriam.	Cilind.	Producción Frigorífic en Watts.										Expans.	Aceite cm3	Peso Kg.	Motor	Arranq.	Modelos MIX Sustitutos R-12 / 134a	
					-25	-20	-15	-10	-5	0	5	7.2	10	Sustitutos R-12 / R134a							
◦ Últimas existencias					-25	-20	-15	-10	-5	0	5	7.2	10								
◦ 451.00.0403	L45PX	1/6	F	4.50	77	101	132	169	214	266	325	353	390	C	300	8.4	RSIR	R	GL45PB	451.00.3503	
◦ 451.00.0404	L57PX	1/5	F	5.67	98	130	171	221	279	346	421	457	505	C	300	9.5	RSIR	R	GL60PB	451.00.3504	
◦ 451.00.0405	L88TY	1/4	F	8.85	165	215	277	351	437	535	645	697	767	C-V	400	11.2	CSIR	R	GL90TB	451.00.3505	
◦ 451.00.0406	P12TY	3/8	F	12.00	209	274	357	458	577	714	869	943	1043	C-V	400	11.2	CSIR	R	GP12TB	451.00.3506	
◦ 451.00.0412	S26TY	7/8	F	25.93	392	565	771	1011	1284	1591	1930	2090	2303	C-V	887	22.7	CSIR	R	GS26TB-V	451.00.3422	
◦ 451.00.0413	P14TY	7/16	F	14.00	243	318	412	526	659	812	983	1065	1174	C-V	400	11.5	CSIR	R	GP14TB	451.00.3513	
◦ 451.00.0417	S34TY	1 1/5	F	34.42	644	886	1172	1501	1873	2289	2748	2963	3249	C-V	887	22.7	CSIR	R	GS34TB-V	451.00.3424	

Private Picture Copyright : WWW.MBSM.PRO



**BAJA presión**

**serie LBP**

CÓDIGO REMLE	MODELO	Potencia	Enfriam.	Cilind.	Producción Frigorífic en Watts.								Expans.	Aceite cm3	Peso Kg.	Motor	Arranq.	Modelos MIX Sustitutos R-12 / 134a	
					-35	-30	-25	-23.3	-20	-15	-10	Sustitutos R-12 / R134a							
◦ Últimas existencias					-35	-30	-25	-23.3	-20	-15	-10								
◦ 451.00.0202	D40AS	1/10	S	4.00	40	56	74	81	96	121	149	C	240	6.7	RSIR	P	GD40AAa	451.00.3301	
◦ 451.00.0002	L45AV	1/8	S	4.50	39	57	79	87	105	136	171	C	300	8.4	RSIR	R	GL45AA	451.00.3302	
◦ 451.00.0003	L55AV	1/6	S	5.47	49	73	101	112	134	171	211	C	470	9.5	RSIR	R	GL60AA	451.00.3303	
◦ 451.00.0004	L76AV	1/5	S	7.57	58	89	125	139	168	217	271	C	530	10.5	RSIR	R	GL75AA	451.00.3304	
◦ 451.00.0104	L76BV	1/5	OC	7.57	58	89	125	139	168	217	271	C	530	10.5	RSIR	R			
◦ 451.00.0005	L88AV	1/4	S	8.85	69	107	150	167	200	255	317	C	530	11.0	RSIR	R	GL80AA	451.00.3305	
◦ 451.00.0105	L88BV	1/4	OC	8.85	69	107	150	167	200	255	317	C	530	11.0	RSIR	R	GL90AAa OC	451.00.3325	
◦ 451.00.0205	L88FW	1/4	F	8.85	69	107	150	167	200	255	317	C-V	530	10.0	RSIR	R	GL90AAb	451.00.3205	
◦ 451.00.0106	P12BW	1/3	OC	12.00	79	132	192	215	261	337	422	C	530	11.5	RSIR	R	GP12BB OC	451.00.3326	
◦ 451.00.0206	P12FW	1/3	F	12.00	79	132	192	215	261	337	422	C-V	530	11.5	RSIR	R	GP12FB	451.00.3206	

Private Picture Copyright : WWW.MBSM.PRO

Compresor GQY80AT, freon R134a, capacitate 8.1 cmc, capacitate frigorifica ASHRAE 222 W, capacitate frigorifica CECOMAF 165 W, racire statica #GQY80AT

Model: GQY80AT

Freon: R134a

Capacitate: 8.1 cmc

Capacitate frigorifica ASHRAE: 222 W

Capacitate frigorifica CECOMAF: 165 W

Racire : statica



Private Picture Copyright : WWW.MBSM.PRO