

Tecumseh, Compressor, 5/8HP, HMBP – R404A , R448A , R449A, MBP, CAJ9480Z, 230V

Category: compressor

written by www.mbsm.pro | 18 March 2021



Private Picture Copyright : WWW.MBSM.PRO

Caractéristiques techniques

- Marque : TECUMSEH UNITÉ HERMÉTIQUE
- Modèle : CAJ9480Z-R
- CYLINDRÉE (CM³)15,2
- FLUIDER404A , R448A , R449A
- APPLICATIONHMBP
- PLAGÉ D'APPLICATION-25/+15
- PUISSANCE (W)1159
- PUISSANCE FRIGORIFIQUE (TK+40°C)15/3350 5/2355 -10/1294 -25/609
- TENSION (V)240/1/50
- DÉMARRAGECSR
- I.MAX (A)6,7
- Ø ASPIRATION1/2
- Ø REFOULEMENT5/16
- DIMENSIONS (MM)235x178x280
- Gaz: **R-404a**
- Température/Pression: **Haute Pression**
- Puissance: **5/8 HP**

- Voltage: **230 V**
- Type De Courant: **Monophasé**
- Fréquence: **50 Hz**
- Type De Compresseur: **Hermétique**
- Décalage: **15.2 cm³**
- Cons.Énergie -25°C: **496 W**
- Cons.Énergie -10°C: **669 W**
- Cons.Énergie -5°C: **718 W**
- Cons.Énergie 0°C: **762 W**
- Cons.Énergie +5°C: **798 W**
- Cons.Énergie +10°C: **828 W**
- T° De Condensation: **40 °C**
- Capacité Frigorifique -25°C: **524 Kcal/h**
- Capacité Frigorifique -20°C: **692 Kcal/h**
- Capacité Frigorifique -15°C: **887 Kcal/h**
- Capacité Frigorifique -10°C: **1113 Kcal/h**
- Capacité Frigorifique -5°C: **1374 Kcal/h**
- Capacité Frigorifique 0°C: **1677 Kcal/h**
- Capacité Frigorifique 5°C: **2025 Kcal/h**
- Capacité Frigorifique 10°C: **2425 Kcal/h**
- Tipo Test: **EN.12900**

Compresseur L'unité Hermetique – Tecumseh CAJ9480Z – R404A, R449A, R407A, R452A
220 – 240V 1~ 50 Hz

Cylindrée = 15.2 CM3

APPLICATIONS = HBP / MHBP

Moteur type: CSR





Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO





● ○ REDMI NOTE 9 PRO
∞ AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO



● ○ REDMI NOTE 9 PRO
∞ AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO



● ○ REDMI NOTE 9 PRO
∞ AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_caj9480Z_2494-spec Télécharger

Compresseur AJ = Le produit de référence associant silence, fiabilité et


efficacité du froid commercial.

Product Code	Model Number	Compressor Horsepower	Compressor Displacement	Cooling Oil Charge
	CAJ9480Z-FZ	5/8 HP	15.2 cm ³ /rev	Fan 475 ml
	CAJ9510Z-FZ	1 HP	18.3 cm ³ /rev	Fan 475 ml
	CAJ9513Z-FZ	1 1/8 HP	24.2 cm ³ /rev	Fan 475 ml
	CAJ4517Z-FZ	1.25 HP	25.95 cm ³ /rev	Fan 475 ml
	TAJ4517Z-TZ	1.25 HP	25.95 cm ³ /rev	Fan 475 ml
	CAJ4519Z-FZ	1.5 HP	34.45 cm ³ /rev	Fan 475 ml
	TAJ4519Z-TZ	1.5 HP	34.45 cm ³ /rev	Fan 475 ml

Whirlpool, Aspera, NE2125E, LBP, capacitive, start inductive run, hermetic compressor, R22, 1/4Hp++ or 1/3Hp-

Category: compressor

written by www.mbsm.pro | 18 March 2021

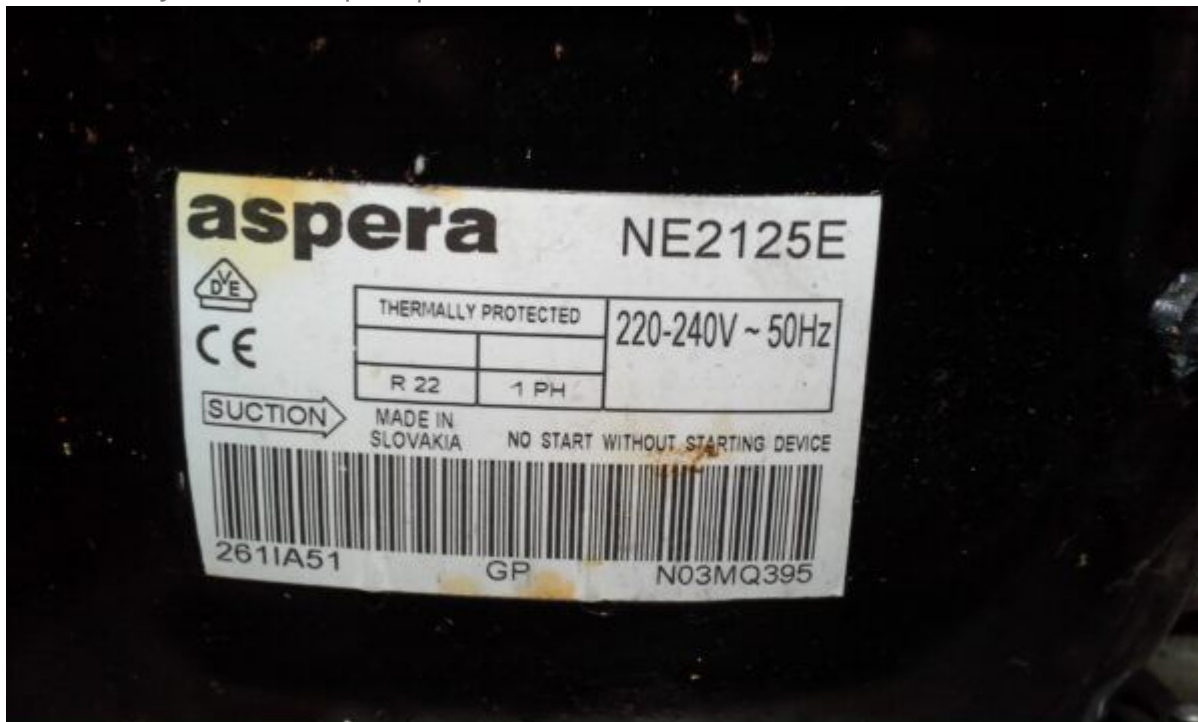

Private Picture Copyright: WWW.MBSM.PRO

compressor Aspera NE2125E, LBP – R22, 220-240V / 1 / 50Hz, stroke volume 8.78 cm³, LRA 11.0A, motor type CSIR, capillary tube / expansion valve operation, oil AB 46.Cooling


capacity measured for condensation temperature of: 45 ° C, Measurement conditions: ASHRAE

Unfortunately the compressor is no longer available.

If you would like an offer for an identical alternative, please email us or give

us a short call, we will prepare an offer for you. Cooling capacity (W) at To
 - 10 ° C - 15 ° C - 20 ° C - 25 ° C - 30 ° C

651 517 401 304 226

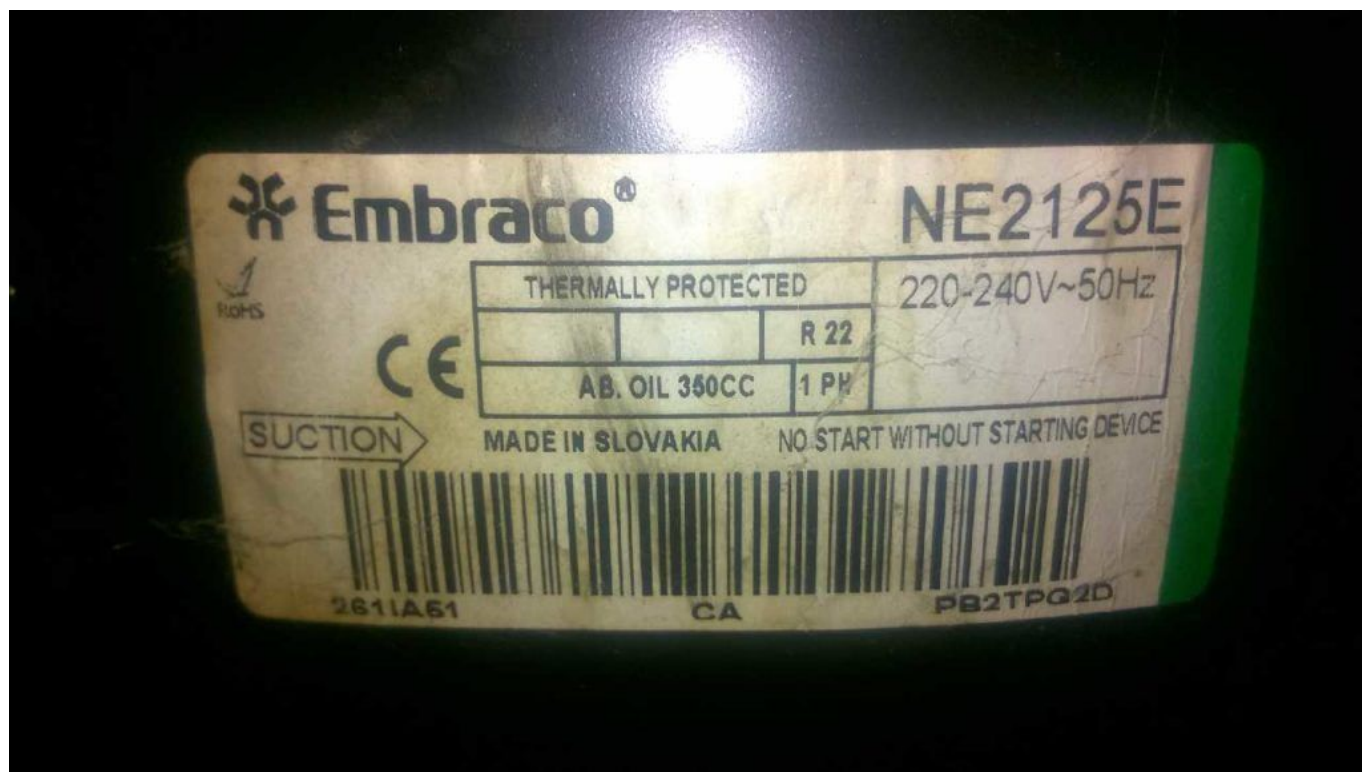

Private Picture Copyright: WWW.MBSM.PRO

R22 - LBP Applications

COMPRESSOR	FREQUENCY	DIMENSION	
		(from -30°C to -5°C evap. temp.)	-
NE2125E	50 Hz	0.91 mm I.D. x 3.2 m	-
	60 Hz	0.91 mm I.D. x 2.85 m	-
NE2134E	50 Hz	0.91 mm I.D. x 2.8 m	-
	60 Hz	0.91 mm I.D. x 2.5 m	-
T2140E	50 Hz	0.91 mm I.D. x 2.6 m	-
	60 Hz	0.91 mm I.D. x 2.3 m	-
T2155E	50 Hz	1.20 mm I.D. x 3.9 m	-
	60 Hz	1.20 mm I.D. x 3.5 m	-
T2168E	50 Hz	1.20 mm I.D. x 3.3 m	-
	60 Hz	1.20 mm I.D. x 2.8 m	-
NJ2178E	50 Hz	1.20 mm I.D. x 3.0 m	-

PictureS Mbsm Dot Pro : www.mbsm.pro

Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO









Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_ne2125e-Embraco_VerdichterTélécharger

Shipping Class	Default
Scope Of Application	LBP
Delivery Time	2-3 Weeks
Stock Availability	In Stock
Type	Reciprocating Piston
Condensation Temperature	45 ° C
Manufacturer	Aspera
Manufacturer No.	NE2125E
Power In Hp	1/4 +
Starting Torque	HST
Stroke Volume In Cm3	8.78
Measurement Conditions	Ashrae
Refrigerant	R22
Oil Type	IS046
Series	NE
Condensing Units Compressors	Compressor

Tension	220-240V
Weight In Kg	10.4

Compressor, ACC, Cubigel, GL60AN, R134a, 220-240V, HMBP, 1/6HP

Category: Non classé

written by www.mbsm.pro | 18 March 2021



Private Picture Copyright : WWW.MBSM.PRO

Type: Hermetic piston compressors Producer: ACC Series: HMBP

Model: GL60AN

General data

Refrigerant: R134a

Discharge element: C

Cooling: S
Maximum ambient temperature [°C]: 50

Compressor's data

Cylinder capacity [cm³]: 6
Displacement [m³/h]: 1
Weight [kg]: 9,9
Oil charge [cm³]: 345
Oil type: ISO VG 19 ESTER

Engine's data

Engine type: RSIR
Power [KM]: 1/6
Starting element: LST
Power supply: 220V 50Hz
Voltage range: 170-264
Locked rotor current [A]: 14,6
Running winding resistance (25°C) [Ω]: 9,33
Starting winding resistance (25°C) [Ω]: 10,81

Electrical data

Relays: 3003
Shielding element: MRA38085, T0515, AF11BJ
Starting capacitor volume [μF]:

Connections

	milimeters	inches
Suction tube:	6,5	
Service tube:	6,5	
Discharge tube:	4,9	



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_GL60ANTélécharger

Copeland, Piston Type, Maneurop, Scroll type, Compressor

Category: compressor

written by www.mbsm.pro | 18 March 2021

Copeland - Piston Type



CRFD-0250TFD	2.5HP	220	30
CRFD-02750TFD	<3HP	220	30
CRFD-02750TFD	<3HP	380	30
CRFD-0300TFD	3HP	220	30
CRFD-0300TFD	3HP	380	30
CRFD-0400TFD	4HP	380	30
CRFD-0450TFD	4.5HP	380	30
CRFD-0500TFD	5HP	380	30

Copeland - Scroll Type



ZR22KC	2HP	220	16
ZR28KC	2.5HP	220	16
ZR34K1	3HP	220	16
ZR34K3	3HP	380	16
ZR36K1	>3HP	220	16
ZR36K3	>3HP	380	16
ZR47K3	4HP	380	16
ZR57K3	5HP	380	16
ZR61K3	>5HP	380	16
ZR72K3	6HP	380	16
ZR81K3	7HP	380	16
ZR94K3	8HP	380	16
ZR125K3	10HP	380	12
ZR144K3	12HP	380	12

Copeland - Piston type



QR90K1	7.5HP	380	4
QR12M1	10HP	380	4
QR15M1	12HP	380	4

Maneurop - Piston Type



MT28	7378BTU	220	8
MT36	9272BTU	380	8
MT40	10475BTU	380	8
MT50	12324BTU	380	8
MT64	15820BTU	380	8
MT80	19534BTU	380	8
MT100	23403BTU	380	4
MT125	30429BTU	380	4
MT160	38273BTU	380	4

Bristol - Piston type



H2NG104FRDF	8HP	380	8
H2NG124FRDF	10HP	380	8
H25G144DBEE	10HP	380	8
H2NG184FRDF	15HP	380	4
H2NG204FRDF	17HP	380	4
H2NG244FRDF	20HP	380	4
H2NG294FRDF	25HP	380	4
H24B25QDBEA	2HP	380	20
H24B28QDBEA	2.5HP	380	20
H24B31QDBEA	3HP	380	20
H24A62QDBEA	5HP	380	20

Copeland, Piston Type, Maneurop, Scroll type, Compressor

Copeland - Piston Type



CRFD-0250TFD	2.5HP	220	30
CRFD-02750TFD	<3HP	220	30
CRFD-02750TFD	<3HP	380	30
CRFD-0300TFD	3HP	220	30
CRFD-0300TFD	3HP	380	30
CRFD-0400TFD	4HP	380	30
CRFD-0450TFD	4.5HP	380	30
CRFD-0500TFD	5HP	380	30

Copeland - Scroll Type



ZR22KC	2HP	220	16
ZR28KC	2.5HP	220	16
ZR34K1	3HP	220	16
ZR34K3	3HP	380	16
ZR36K1	>3HP	220	16
ZR36K3	>3HP	380	16
ZR47K3	4HP	380	16
ZR57K3	5HP	380	16
ZR61K3	>5HP	380	16
ZR72K3	6HP	380	16
ZR81K3	7HP	380	16
ZR94K3	8HP	380	16
ZR125K3	10HP	380	12
ZR144K3	12HP	380	12

Copeland - Piston type



QR90K1	7.5HP	380	4
QR12M1	10HP	380	4
QR15M1	12HP	380	4

Maneurop - Piston Type



MT28	7378BTU	220	8
MT36	9272BTU	380	8
MT40	10475BTU	380	8
MT50	12324BTU	380	8
MT64	15820BTU	380	8
MT80	19534BTU	380	8
MT100	23403BTU	380	4
MT125	30429BTU	380	4
MT160	38273BTU	380	4

Bristol - Piston type



H2NG104FRDF	8HP	380	8
H2NG124FRDF	10HP	380	8
H25G144DBEE	10HP	380	8
H2NG184FRDF	15HP	380	4
H2NG204FRDF	17HP	380	4
H2NG244FRDF	20HP	380	4
H2NG294FRDF	25HP	380	4
H24B25QDBEA	2HP	380	20
H24B28QDBEA	2.5HP	380	20
H24B31QDBEA	3HP	380	20
H24A62QDBEA	5HP	380	20

Compressor, R0HS, 1/3HP, R134A, Tecumseh, CAE4448Y, HBP, 208V/50HZ 230V/60HZ

Category: compressor

written by www.mbsm.pro | 18 March 2021

Compressors	Displacement CC	Motor	Cooling capacity (Watt) EN12900 condensing T° +45°C , subcooling 0K, Return Gas 20°C							EN12900 evaporating T° -10°C		Weight Kg
			evaporating T°							Power input(Watt)	COP (W/W)	
			-15	-10	-5	0	5	10	15			
AE4425Y	6,69	CSIR	266	342	424	519	633	770	938	199	1,72	9,1
AEZ4425Y	7,6	CSIR	239	320	414	522	641	771	912	205	1,56	9,7
											9%	
AE4430Y	8,02	CSIR	294	382	488	613	760	930	1127	237	1,61	9,4
AEZ4430Y	8,8	CSIR	316	404	512	639	784	946	1122	258	1,57	10,2
											3%	
AE4440Y	10,33	CSIR	399	508	637	790	968	1176	1417	302	1,68	9,6
CAE4440Y	12	CSIR	399	519	666	837	1033	1250	1489	342	1,52	10,8
											10%	
AE4450Y	13,24	CSIR	526	672	843	1042	1273	1540	1847	370	1,82	10,5
CAE4448Y	14,2	CSIR	519	654	822	1023	1253	1512	1797	400	1,64	11,9
											10%	
AE4456Y	14,51	CSIR	579	737	921	1133	1380	1664	1990	424	1,74	11
CAE4456Y	16	CSIR	590	744	933	1156	1411	1695	2006	486	1,53	12,5
											12%	
AE4460Y	15,09	CSR	597	766	958	1181	1437	1732	2070	409	1,87	11,3



Private Picture Copyright: WWW.MBSM.PRO

Basic Info.

Model NO.

CAE4448Y

Refrigerant Type

Ammonia

Refrigerant

R134A

Voltage

208V/50Hz 230V/60Hz

Horsepower

1/3HP

Capacity(W)

519W

Input Power(Kw)

400W

Oil Charge (Cm3)

450

Net Weight(Kg)

12kg

Cop(W/W)

1.64

Trademark

tecumseh

Transport Package

Wooden Box

Specification

208V/50HZ 230V/60HZ

Origin

France

HS Code

8414309010

**1/3HP HBP Original Made in France R134A Tecumseh Compressor CAE4448Y
Refrigerator Compressor For Refrigerator/Showcase/Cold Room**

Product Description

Model: CAE4448Y

Brand : Tecumseh

Type: hermetic

Refrigerant: R134A

Voltage: 208V/50HZ 230V/60HZ

Cooling capacity: 519W

Input Power Watts: 400 W

Power: 1/3 HP

Description rapide

Condition: Nouveau

Configuration: Stationnaire

Modèle de lubrifica... Lubrifié

Point d'origine: Guangdong, China

Numéro de Type: CAE4448Y

Dimension (L*W*H): 1 unité

Certification: ROHS

Service après-vente...Aucun service d'outre-mer fourni

Chevaux: 1/3HP

Type: Piston

Source d'énergie: Alimentation AC

Muet: Oui

Marque nom: tecumseh

Tension: 208 ~ 220V/1PH/50HZ

Poids: 20kg

Garantie: 1 année

Gaz: R134a

Compressors	Displacement CC	Motor	Cooling capacity (Watt) EN12900 condensing T° +45°C , subcooling 0K, Return Gas 20°C							EN12900 evaporating T° -10°C		Weight Kg
			evaporating T°							Power input(Watt)	COP (W/W)	
			-15	-10	-5	0	5	10	15			
AE4425Y	6,69	CSIR	266	342	424	519	633	770	938	199	1,72	9,1
AEZ4425Y	7,6	CSIR	239	320	414	522	641	771	912	205	1,56	9,7
											9%	
AE4430Y	8,02	CSIR	254	382	488	613	760	930	1127	237	1,61	9,4
AEZ4430Y	8,8	CSIR	316	404	512	639	784	946	1122	258	1,57	10,2
											3%	
AE4440Y	10,33	CSIR	399	508	637	790	968	1176	1417	302	1,68	9,6
CAE4440Y	12	CSIR	399	519	666	837	1033	1250	1489	342	1,52	10,8
											10%	
AE4450Y	13,24	CSIR	526	672	843	1042	1273	1540	1847	370	1,82	10,5
CAE4448Y	14,2	CSIR	519	654	822	1023	1253	1512	1797	400	1,64	11,9
											10%	
AE4456Y	14,51	CSIR	579	737	921	1133	1380	1664	1990	424	1,74	11
CAE4456Y	16	CSIR	590	744	933	1156	1411	1695	2006	486	1,53	12,5
											12%	
AE4460Y	15,09	CSR	597	766	958	1181	1437	1732	2070	409	1,87	11,3

Private Picture Copyright : WWW.MBSM.PRO

Basic Info.

Model NO.	CAE4448Y
Refrigerant	R134A
Horsepower	1/3HP
Input Power(Kw)	400W
Net Weight(Kg)	12kg
Trademark	tecumseh
Specification	208V/50HZ 230V/60HZ
HS Code	8414309010

Refrigerant Type	Ammonia
Voltage	208V/50Hz 230V/60Hz
Capacity(W)	519W
Oil Charge (Cm3)	450
Cop(W/W)	1.64
Transport Package	Wooden Box
Origin	France

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_cae4448yTélécharger

Mbsm.pro, Donper, Hermetic, Compressor , R600a, Lj126Cy, lu126cy1, 1/3 Hp, R600a

Category: compressor

written by www.mbsm.pro | 18 March 2021




Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Donper, Hermetic, Compressor , R600a, Lj126Cy, lu126cy1, 1/3 Hp, R600a

Panasonic, refrigerator, compressor, SB48C95GAW5, 110w, White-Westinghouse refrigerator, 220v, 50 Hz, 85L, R134A/80G, 1/6 Hp

Category: compressor

written by www.mbsm.pro | 18 March 2021

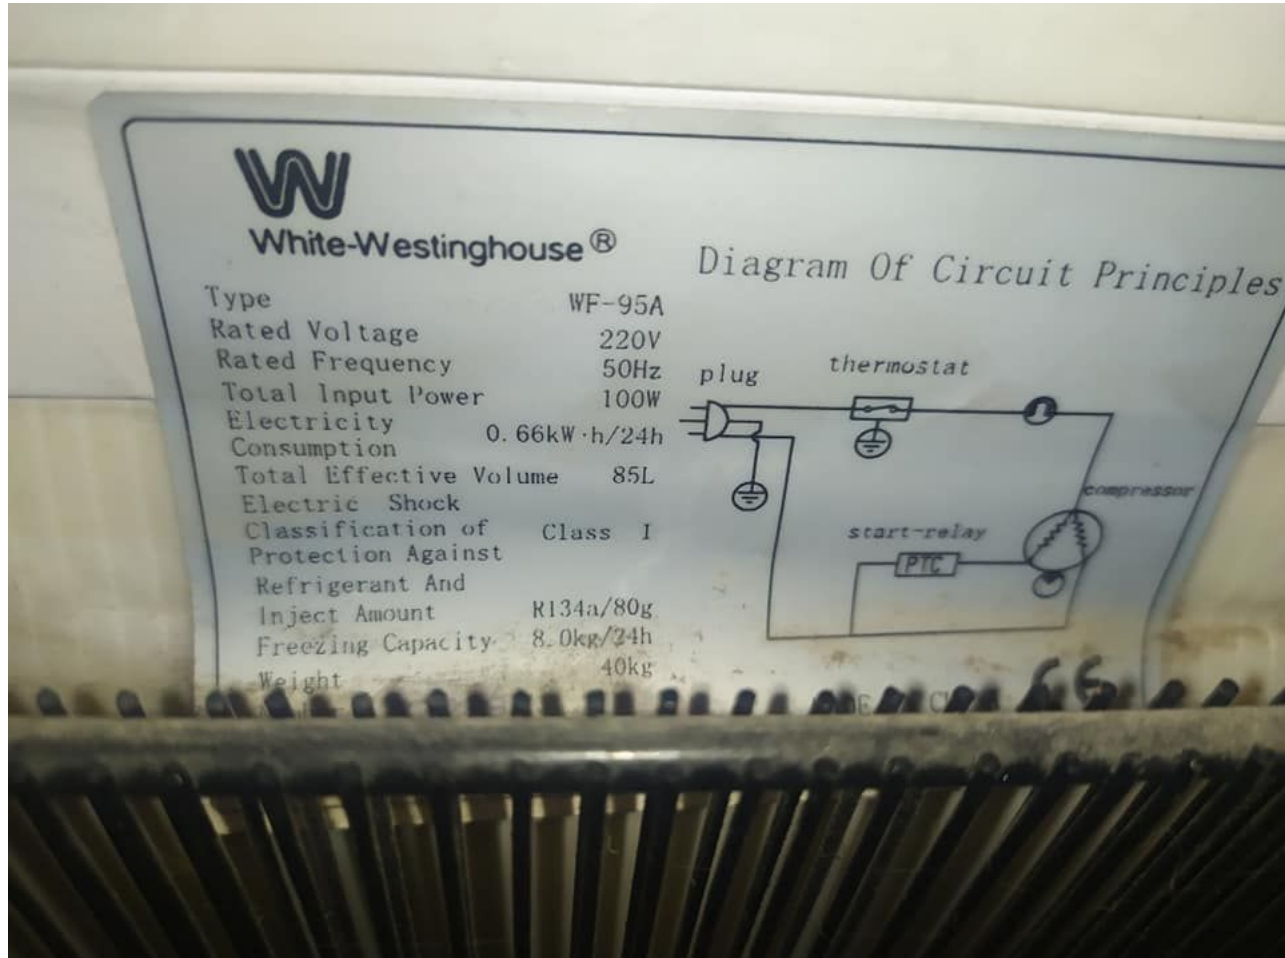


Private Picture Copyright : WWW.MBSM.PRO

Specification

Item	Performance characteristics
Refrigerant	R134a
Displacement (cm ³)	4.8
Voltage (V)	220/240
Frequency (Hz)	50
Motor Type	RSIR
Capacity@ASHRAE	110
COP@ASHRAE	1.03/0.99
Capacity@CECOMAF	–
COP@CECOMAF	–



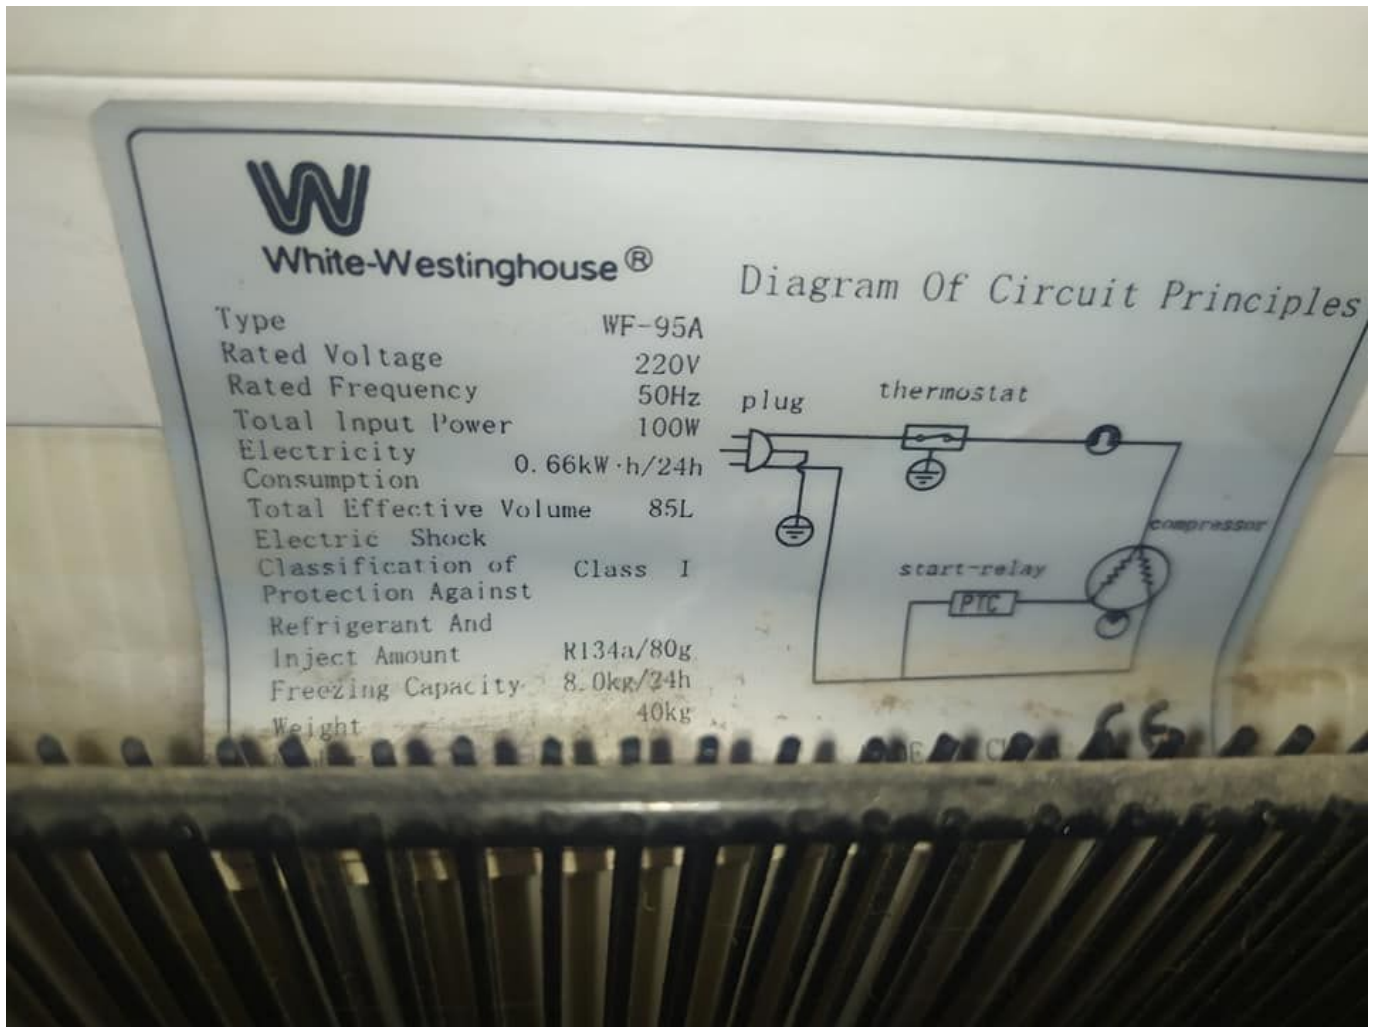

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_SB48C95GAW5Télécharger

Maintenance et réparation MG rouleuse de pate cc900

Category: Mécanique

written by www.mbsm.pro | 18 March 2021



REDMI NOTE 9
AWLED MILED MAHDIA

2021/2/23 12:14

Private Picture Copyright: WWW.MBSM.PRO









Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO







Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



REDMI NOTE 9
AWLED MILED MAHDIA

2021/2/23 12:14

Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 9
AWLED MILED MAHDIA

2021/2/23 12:14

Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 9
AWLED MILED MAHDIA

2021/2/23 12:14

Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 9
AWLED MILED MAHDIA

2021/2/23 12:15

Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 9
AWLED MILED MAHDIA

2021/2/23 12:15

Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 9
AWLED MILED MAHDIA

2021/2/23 12:18

Private Picture Copyright : WWW.MBSM.PRO



● ○ REDMI NOTE 9
∞ AWLED MILED MAHDIA

2021/2/23 12:19



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Moteur, bolt f180E, motorisé,
télécommandé, Moteur central, Porte
Rideau 180Kg, installation, Réglage,
carte de commande Somefy Double
commande

Category: electricity

written by www.mbsm.pro | 18 March 2021



● ○ REDMI NOTE 9
AWLED MILED MAHDIA

2021/2/20 11:37



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 9
AWLED MILED MAHDIA

2021/2/20 10:41



REDMI NOTE 9
AWLED MILED MAHDIA

2021/2/20 11:36



● ○ REDMI NOTE 9
AWLED MILED MAHDIA

2021/2/20 11:37




Private Picture Copyright: WWW.MBSM.PRO



● ○ REDMI NOTE 9
∞ AWLED MILED MAHDIA

2021/2/20 09:45

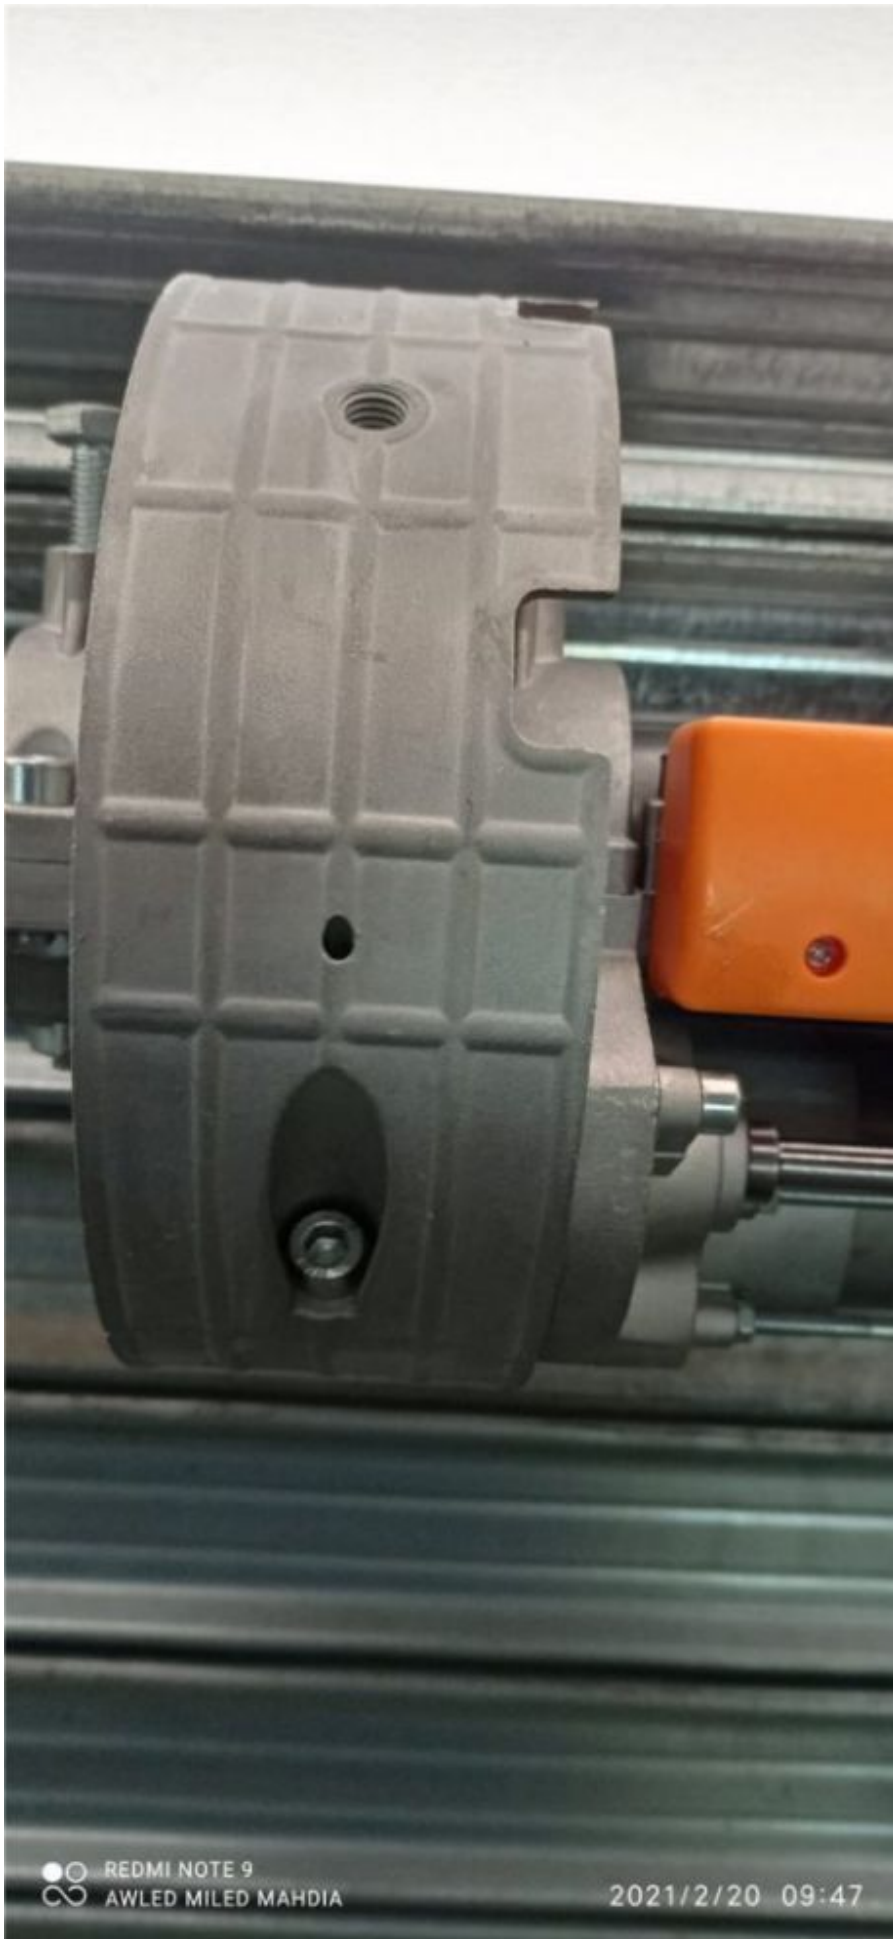

● ○ REDMI NOTE 9
∞ AWLED MILED MAHDIA

2021/2/20 09:47



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Description rapide

Garantie:

Plus de 5 Ans

Service après – vente:

Support technique en ligne

Solution de projet Capacité:

Conception graphique

Application:

Entrepôt

Style de conception:

Traditionnel

Point d'origine:

China

Marque nom:

Simple

Numéro de Type:

BOLT F180E

Type:

door motor, Door & Window Rollers

usage:

rolling door

Model:

automatic gate roller

Rated torque:
120N.m

R.P.M:
10

Limit switch:
6m

Cut out temperture:
4min

Power:
670w

Consumption:
2.9A

Weight:
8~9kg

Capacité d'approvisionnement


Capacité d'approvisionnement:
8000 Set/Sets per Month we will delivery roller shutter gear within 25days

Emballage et livraison

Détails d'emballage
Détails d'emballage: carton d'exportation navigable et palette

Port
Ningbo/Shanghai

Délai : :
Quantité(Sets) 1 - 12 - 200 >200
Durée estimée (jours) 7 15 À négociier

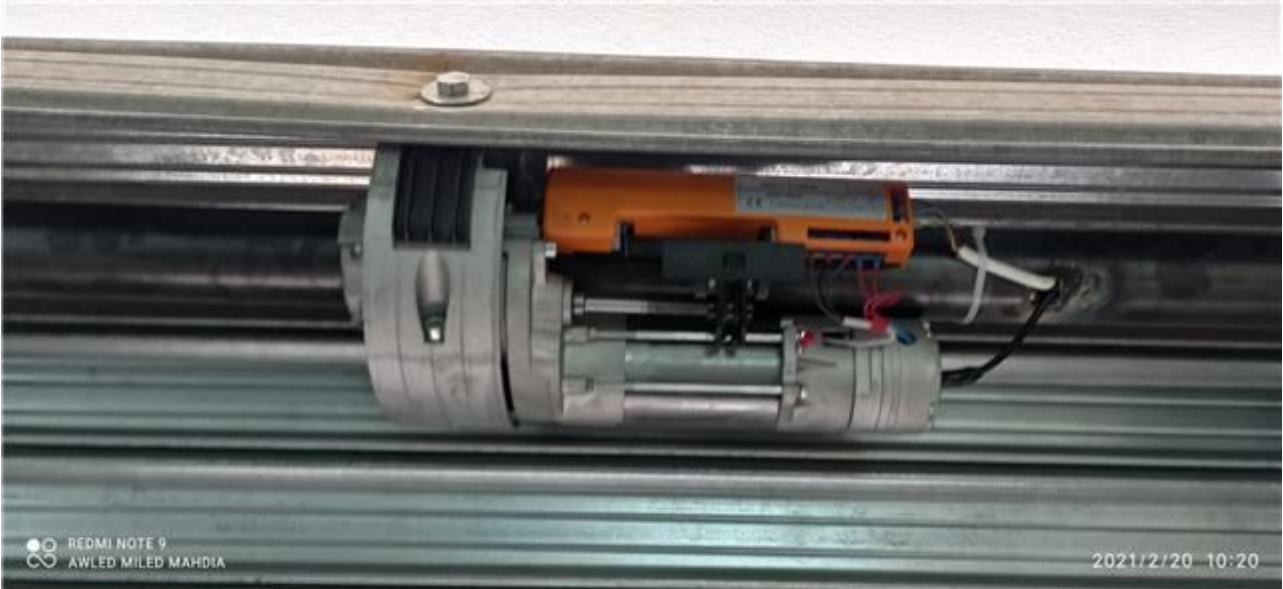

Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

Réservoirs encastrés Geberit, installation, Photos

Category: Plomberie

written by www.mbsm.pro | 18 March 2021



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Geberit International Sales AG est une société du groupe Geberit chargée du secteur Moyen-Orient / Afrique, nouveaux marchés et marchés en expansion. Son siège principal se situe à Rapperswil, en Suisse.