Installation de mitigeur de douche Jacousie encastré

Category: Plomberie
written by www.mbsm.pro | 27 April 2020
Les artistes de plomberie et chauffage central

ZEL , Refrigeration ,Compressor ,Gml200a ,152w , 1/5 Hp ,220/240V/50Hz ,R134a

Category: Technologie,Tester ok
written by www.mbsm.pro | 27 April 2020

Private Picture Copyright : WWW.MBSM.PRO

ZEL , Refrigeration ,Compressor ,Gml200a ,152w , 1/5 Hp ,220/240V/50Hz ,R134a

HFC refrigerant , hydrofluorocarbons , is the third generation, of fluorinated refrigerants

Category: Technologie
written by www.mbsm.pro | 27 April 2020
HFC refrigerant (hydrofluorocarbons) is the third generation of fluorinated refrigerants. Recognized as Ozone Depleting Potential (ODP) and Global Warming Potential (GWP), they represent a greener alternative to CFC and HCFC.
Refrigerants in this group are applicable to refrigeration plants and air conditioning units designed specifically for their use. In addition, they can serve as drop-in replacements for older CFCs and HCFCs.
The HFC group includes the following products:
R23
R32
R134a
R404A
R407A
R407C
R407F (PERFORMAX LT)
R410A
R417A (ISCEON MO59)
R422A (ISCEON MO79)
R422D (ISCEON MO29)
R423A (ISCEON 39TC)
R424A (RS-44)
R427A (Forane 427A)
R428A (RS-52)
R434A (RS-45)
R437A (ISCEON MO49Plus)
R438A (ISCEON MO99)
R442A (RS-50)
R449A (OPTEON XP40)
R507A
R508B (SUVA 95)
ISCEON MO89
R1234yf
HFC (مركبات الهيدروفلوروكربون) هي الجيل الثالث من المبردات المفلورة
. وإمكانية الاحترار العالمي (GWP) معترف بها على أنها إمكانات استنفاد الأوزون (ODP)
فهي تمثل بديلاً أكثر خضرة لمركبات الكربون الكلورية فلورية ومركبات الكربون ،
الهيدروكلورية فلورية. تنطبق المبردات في هذه المجموعة على محطات التبريد ووحدات
تكييف الهواء المصممة خصيصًا لاستخدامها. بالإضافة إلى ذلك ، يمكن أن تكون بمثابة
بدائل منسدلة لمركبات الكربون الكلورية فلورية ومركبات الكربون الهيدروكلورية
فلورية القديمة.
المنتجات التالية HFC تتضمن مجموعة:
R23
R32
R134a

R404A
R407A
R407C
R407F (PERFORMAX LT)
R410A
R417A (ISCEON MO59)
R422A (ISCEON MO79)
R422D (ISCEON MO29)
R423A (ISCEON 39TC)
R424A (RS-44)
R427A (Forane 427A)
R428A (RS-52)
R434A (RS-45)
R437A (ISCEON MO49Plus)
R438A (ISCEON MO99)
R442A (RS-50)
R449A (OPTEON XP40)
R507A
R508B (SUVA 95)
ISCEON MO89
R1234yf
Le réfrigérant HFC (hydrofluorocarbures) est la troisième génération de réfrigérants fluorés. Reconnus comme potentiel d’appauvrissement de la couche d’ozone (ODP) et potentiel de réchauffement planétaire (GWP), ils représentent une alternative plus verte au CFC et au HCFC. Les réfrigérants de ce groupe sont applicables aux installations de réfrigération et aux unités de climatisation conçues spécifiquement pour leur utilisation. De plus, ils peuvent servir de remplacements directs pour les CFC et HCFC plus anciens.
Le groupe HFC comprend les produits suivants:
R23
R32
R134a
R404A
R407A
R407C
R407F (PERFORMAX LT)
R410A
R417A (ISCEON MO59)
R422A (ISCEON MO79)
R422D (ISCEON MO29)
R423A (ISCEON 39TC)
R424A (RS-44)
R427A (Forane 427A)
R428A (RS-52)
R434A (RS-45)
R437A (ISCEON MO49Plus)
R438A (ISCEON MO99)
R442A (RS-50)
R449A (OPTEON XP40)
R507A

R508B (SUVA 95)
ISCEON MO89
R1234yf

PictureS Mbsm Dot Pro : www.mbsm.pro

HERMETIC ,AW5524EK ,Compressor , 20,950 BTU ,230/1/60 R-22 ,: 220-240 V/50 Hz., 1 Phase , 1.7458333333 TON

Category: Technologie,Tester ok
written by www.mbsm.pro | 27 April 2020
Electrical : 220-240 V/50 Hz. 1 Phase
Nominal Performance
Capacity 6,140 / – Watts
20,950 / – BTU/Hr
5,280 / – Kcal/Hr
Power Input 2,089 / – Watts
Locked Rotor Amps 51.30 / – Amps
Max Continuous Current – / – Amps
Rated Load Amps 9.64 / – Amps
COP 2.94 / – Watts / Watts
EER 10.03 / – BTU/W-Hr
Testing Conditions
Condensing Temperature 54.40 °C 129.9 °F
Evaporating Temperature 7.20 / – °C 45.0 / – °F

Liquid Temperature 46.10 °C 115.0 °F
Return Gas Temperature 35.00 °C 95.0 °F
Ambient Temperature 35.00 °C 95.0 °F
Application
Evaporating Temp. Range HBP, A/C @ 0.00 ° C to 13.00 ° C
(32.0° F to 55.4° F)
Heat Pump -23.30 ° C to 13.00 ° C
(-9.9° F to 55.4° F)
Refrigerant R22
Refrigerant Flow Control Capillary Tube
Compressor Cooling Fan
Compressor and Motor data
Compressor Type Reciprocating
Displacement 43.10 cc.
Oil Type Mineral Oil
Oil Charge 964 cc.
Motor Type P.S.C ; 2 Pole 2,850 / — r/m
Voltage Range 198-264/- Volts 50/- Hz.
Winding Resistance at 25 ° C
Start 2.52 Ohms
Run 1.24 Ohms
Weight with Oil 27.72 Kg.
Weight with Oil and Accessories 28.05 Kg.
Electrical Components
Motor Protector
Type Internal Overload
Model Number 4042KGE661-2
Open / Close 125-135 / 50-70 ° C
1st Cycle trip at 25 ° C 50.00 Amps(main) 30.00 Amps(start)
Motor Starter
Type Potential Relay
Model Number 4043KGE681-4(RVA3G6D)
Pick Up (max.) 180.00-195.00 Volts
Drop Out (min.) 40.00-90.00 Volts
Terminal Cover KGM 901-3
Start Capacitor 88-106 µF 330 VAC.
Disch Resistor for Start Cap —
Run Capacitor 45 µF 370/440 VAC.
Mounting Kit
Rubber Grommet 4007KGM905-2
Sleeve Grommet 4023KGM903-2
Washer —
Since we are constantly improving our product , the
specification are subject to change without notice.
REV. DATE C / N No.
ECN 01-04-14 ECN 0515/13

PictureS Mbsm Dot Pro : www.mbsm.pro

DOCUMENTATION PDF
Mbsm_dot_pro_private_pictureAW5524EKTélécharger

D110C24GAX5 , PANASONIC ,RSIR, Serie D, Reciprocating ,Compressors , 298 w , 1/3 HP , R134a ,220v 50Hz

Category: Technologie,Tester ok
written by www.mbsm.pro | 27 April 2020

displacement cm3	W (cooling)	BTU/HR	K Cal/hr	HP	Model	number
5.1	135	461	116	1/6	D51C10RAW5	1
5.1	135	461	116	1/6	D51C90RAW5	2
5.7	141	481	121	1/6	D57C10RAW5	3
5.7	141	481	121	1/6	D57C13RAX5	4
6.6	160	546	138	1/5	D66C10RAW5	5
6.6	151	515	130	1/5	D66C10RAX5	6
7.7	186	635	160	1/5	D77C10RAW5	7
7.7	186	635	160	1/5	D77C10RAX5	8
9.1	227	774	195	1/4	D91C10RAW5	9
9.1	227	774	195	1/4	D91C10RAX5	10
11.0	298	1017	256	1/3	D51C21RAX5	11
11.0	298	1017	256	1/3	D110C21RA25	12
11.0	298	1017	256	1/3	D110C21RBX5	13
11.0	298	1017	256	1/3	D110C24GAX5	14

Private Picture Copyright : WWW.MBSM.PRO

D110C24GAX5 , PANASONIC ,RSIR, Serie D, Reciprocating ,Compressors , 298 w , 1/3 HP , R134a ,220v 50Hz

---

Compresseurs Embraco, ,EMU70HLC , R134a, 220 V, 50Hz, 1/5 HP, 149 watts , 180 mL

Category: Technologie,Tester ok
written by www.mbsm.pro | 27 April 2020
Compresseurs Embraco, ,EMU70HLC , R134a, 220 V, 50Hz, 1/5 HP, 149 watts , 0.17 kW (0.2214 BHP) ,180 mL

Austria ,RECIPROCATING ,COMPRESSOR ,SECOP ,HXD30AA ,0.04 1/25 HP ,R600a , 220v 50Hz

Category: Technologie,Tester ok
written by www.mbsm.pro | 27 April 2020
Austria ,RECIPROCATING ,COMPRESSOR ,SECOP ,0.04 HP ,HXD30AA , 1/25 HP ,R600a , 220v 50Hz

---

Tableau de conversion d’unités

Category: Technologie
written by www.mbsm.pro | 27 April 2020

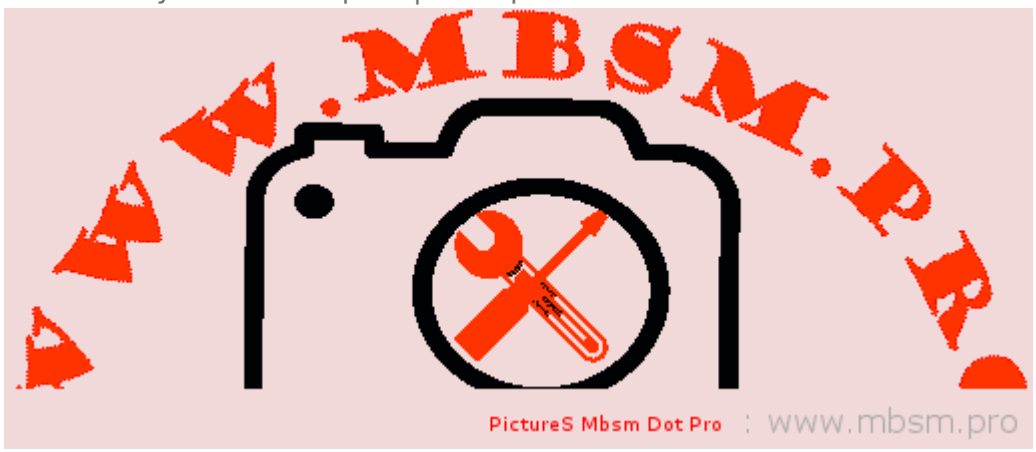

Tableau de conversion d’unités

PREFIXES , CONVERSION ,FACTORS

Category: Technologie
written by www.mbsm.pro | 27 April 2020

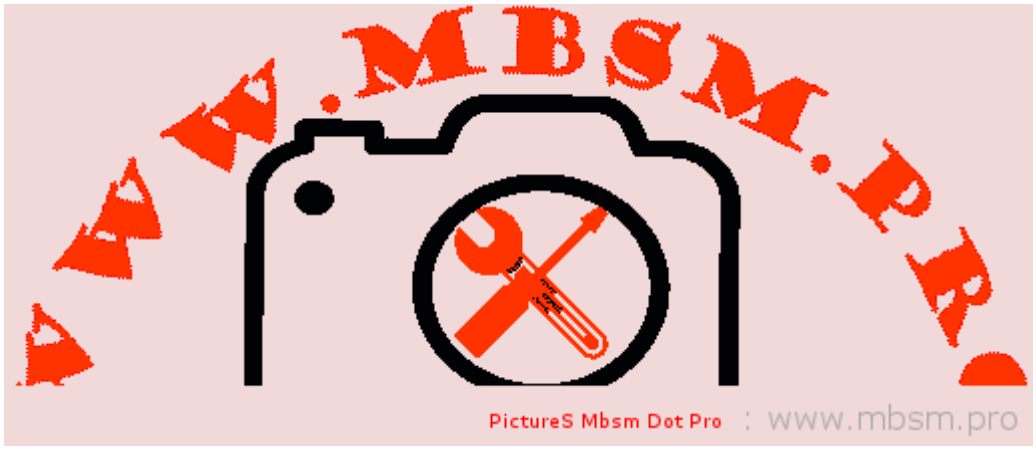

PREFIXES , CONVERSION ,FACTORS

HUAYI ,COMPRESSOR , HYE55YL63 ,1/6 Hp , 129Kcal ,R134a, 220V ,LBP

Category: Technologie,Tester ok
written by www.mbsm.pro | 27 April 2020
HUAYI ,COMPRESSOR , HYE55YL63 ,1/6 Hp , 129Kcal ,R134a, 220V ,LBP