MBSM.PRO ,Copeland ,KCE432HAG ,Compresseur Hermétique, 1/4HP, R134, 1ph , Afcon Industrial Equipment,High / Medium temperature (HBP / CBP)

Category: Solutions,Tester ok
written by Jamila | 10 October 2018

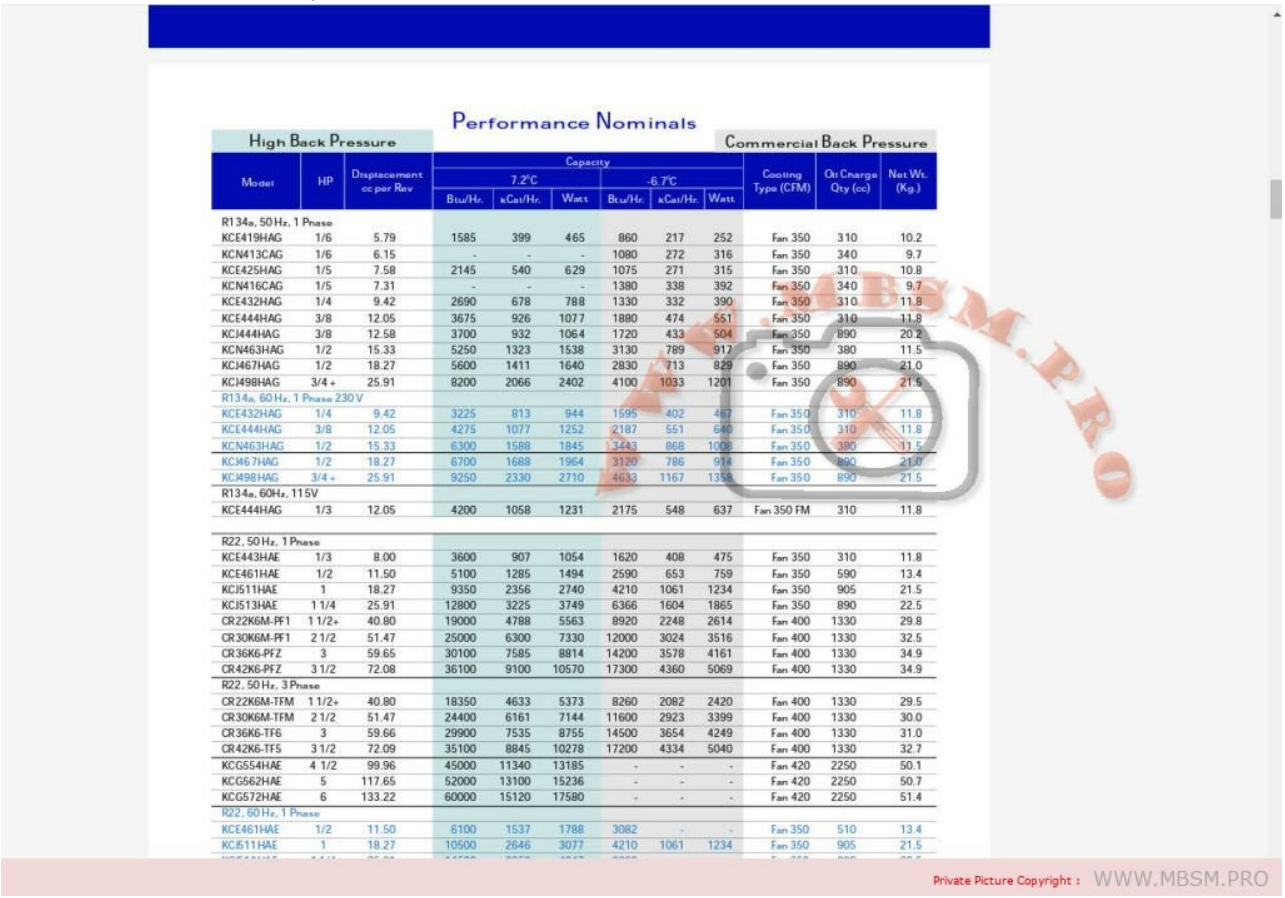

Performance Nominals

Model	HP	Displacement cc per Rev	Capacity 7.2°C Btu/Hr.	7.2°C kCal/Hr.	7.2°C Watt	-6.7°C Btu/Hr.	-6.7°C kCal/Hr.	-6.7°C Watt	Cooling Type (CFM)	Oil Charge Qty (cc)	Net Wt. (Kg.)
High Back Pressure									**Commercial Back Pressure**		
R134a, 50 Hz, 1 Phase											
KCE419HAG	1/6	5.79	1585	399	465	860	217	252	Fan 350	310	10.2
KCN413CAG	1/6	6.15	-	-	-	1080	272	316	Fan 350	340	9.7
KCE425HAG	1/5	7.58	2145	540	629	1075	271	315	Fan 350	310	10.8
KCN416CAG	1/5	7.31	-	-	-	1380	338	392	Fan 350	340	9.7
KCE432HAG	1/4	9.42	2690	678	788	1330	332	390	Fan 350	310	11.8
KCE444HAG	3/8	12.05	3675	926	1077	1880	474	551	Fan 350	310	11.8
KCJ444HAG	3/8	12.58	3700	932	1064	1720	433	504	Fan 350	890	20.2
KCN463HAG	1/2	15.33	5250	1323	1538	3130	789	917	Fan 350	380	11.5
KCJ467HAG	1/2	18.27	5600	1411	1640	2830	713	829	Fan 350	890	21.0
KCJ498HAG	3/4 +	25.91	8200	2066	2402	4100	1033	1201	Fan 350	890	21.5
R134a, 60 Hz, 1 Phase 230 V											
KCE432HAG	1/4	9.42	3225	813	944	1595	402	467	Fan 350	310	11.8
KCE444HAG	3/8	12.05	4275	1077	1252	2187	551	640	Fan 350	310	11.8
KCN463HAG	1/2	15.33	6300	1588	1845	3443	868	1008	Fan 350	380	11.5
KCJ467HAG	1/2	18.27	6700	1688	1964	3120	786	914	Fan 350	890	21.0
KCJ498HAG	3/4 +	25.91	9250	2330	2710	4633	1167	1358	Fan 350	890	21.5
R134a, 60Hz, 115V											
KCE444HAG	1/3	12.05	4200	1058	1231	2175	548	637	Fan 350 FM	310	11.8
R22, 50 Hz, 1 Phase											
KCE443HAE	1/3	8.00	3600	907	1054	1620	408	475	Fan 350	310	11.8
KCE461HAE	1/2	11.50	5100	1285	1494	2590	653	759	Fan 350	590	13.4
KCJ511HAE	1	18.27	9350	2356	2740	4210	1061	1234	Fan 350	905	21.5
KCJ513HAE	1 1/4	25.91	12800	3225	3749	6366	1604	1865	Fan 350	890	22.5
CR22K6M-PFJ	1 1/2+	40.80	19000	4788	5563	8920	2248	2614	Fan 400	1330	29.8
CR30K6M-PFJ	2 1/2	51.47	25000	6300	7330	12000	3024	3516	Fan 400	1330	32.5
CR36K6-PFZ	3	59.65	30100	7585	8814	14200	3578	4161	Fan 400	1330	34.9
CR42K6-PFZ	3 1/2	72.08	36100	9100	10570	17300	4360	5069	Fan 400	1330	34.9
R22, 50 Hz, 3 Phase											
CR22K6M-TFM	1 1/2+	40.80	18350	4633	5373	8260	2082	2420	Fan 400	1330	29.5
CR30K6M-TFM	2 1/2	51.47	24400	6161	7144	11600	2923	3399	Fan 400	1330	30.0
CR36K6-TF6	3	59.66	29900	7535	8755	14500	3654	4249	Fan 400	1330	31.0
CR42K6-TF5	3 1/2	72.09	35100	8845	10278	17200	4334	5040	Fan 400	1330	32.7
KCG554HAE	4 1/2	99.96	45000	11340	13185	-	-	-	Fan 420	2250	50.1
KCG562HAE	5	117.65	52000	13100	15236	-	-	-	Fan 420	2250	50.7
KCG572HAE	6	133.22	60000	15120	17580	-	-	-	Fan 420	2250	51.4
R22, 60 Hz, 1 Phase											
KCE461HAE	1/2	11.50	6100	1537	1788	3082	-	-	Fan 350	510	13.4
KCJ511HAE	1	18.27	10500	2646	3077	4210	1061	1234	Fan 350	905	21.5

Private Picture Copyright : WWW.MBSM.PRO

MBSM.PRO ,Copeland ,KCE432HAG ,Compresseur Hermétique, 1/4HP, R134, 1ph , Afcon Industrial Equipment,High / Medium temperature (HBP / CBP)

MBSM.PRO , Zel Compressors ,Low back pressure, gml200a 152W , gml200a 152W, GML180A 144W, gml160g 129W, gml140a 108W, GML110A 90W, R134a , 220-240V 50HZ

Category: Solutions,Tester ok
written by Jamila | 10 October 2018

MBSM.PRO , Zel Compressors ,Low back pressure, gml200a 152W , gml200a 152W, GML180A 144W, gml160g 129W, gml140a 108W, GML110A 90W, R134a , 220-240V 50HZ

Zel gml200a gml180a gml160g gml140a gml110a r134a Compressors

- **gml200a 152W**
- **GML180A 144W**
- **gml160g 129W**
- **gml140a 108W**
- **GML110A 90W**

Place of purchase:
Mainland China

Brand:
West of Monza

Color classification:
gml200a 152wgml180a 144wgml160g 129wgml140a 108wgml110a 90W

Refrigeration Agent:
R134a

Voltage:
220-240V 50HZ

Working conditions:
Low back pressure

PictureS Mbsm Dot Pro : www.mbsm.pro

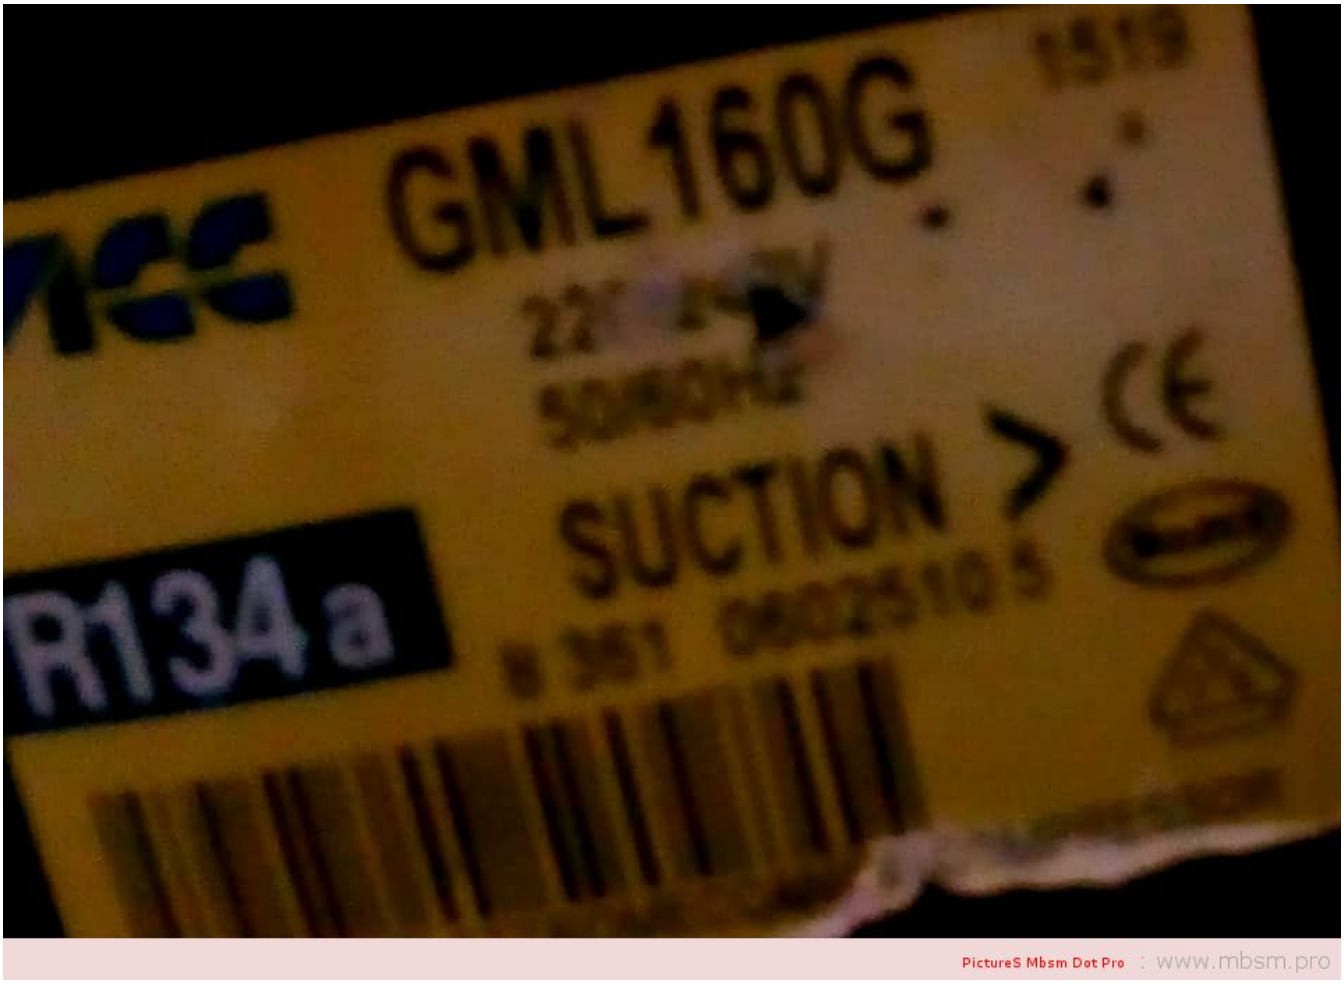

Mbsm.pro, GTH93AA , compressor coolant R134a , 220-240V 50Hz MBP 9,8kg, 1/4HP++, 1/3 hp– cylinder capacity 9,3cm³, 260 W,

Category: Solutions,Tester ok
written by Jamila | 10 October 2018
Mbsm.pro, GTH93AA , compressor coolant R134a , 220-240V 50Hz MBP 9,8kg 1/4HP cylinder capacity 9,3cm³

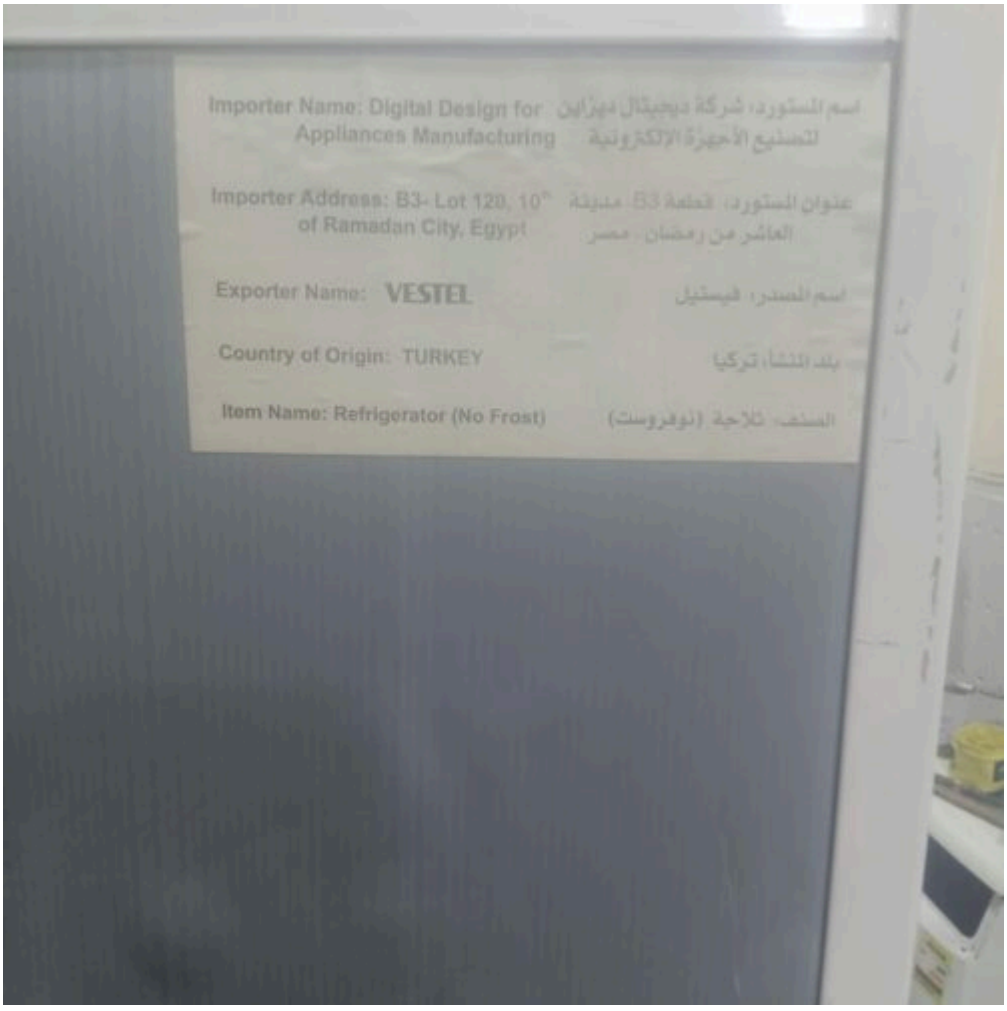
Importer Name: Digital Design for Appliances Manufacturing
اسم المستورد: شركة ديجيتال ديزاين للتصنيع الأجهزة الالكترونية
Importer Address: B3- Lot 120, 10th of Ramadan City, Egypt
عنوان المستورد: قطعة B3 مدينة العاشر من رمضان - مصر
Exporter Name: VESTEL
اسم المصدر: فيستيل
Country of Origin: TURKEY
بلد المنشأ: تركيا
Item Name: Refrigerator (No Frost)
الصنف: ثلاجة (نوفروست)

refrigerant	R134a
type	GTH93AA
voltage	220-240 V

frequency	50 Hz
application	MBP
weight	9,8 kg
power	1/4 HP
cylinder capacity	9,3 cm³
motor system	RSIR/RSCR
height	184 mm
power at -20°C	– W
power at -15°C	– W
power at -10°C	– W
power at -5°C	– W
power at 0°C	– W
power at +5°C	– W

Mbsm_dot_pro_private_PDF_GTH93AA-compresseur-acc-cubigell-gl99aaTélécharger
Mbsm_dot_pro_private_PDF_catalog_zelTélécharger

Mbsm.pro, ATA72XL,Lbp compressor, HuaGuang coolant, R134a, 220-240V 50/60Hz, 1/4HP, 1PH, 205 w, Lbp

Category: Solutions,Tester ok
written by Jamila | 10 October 2018
Mbsm.pro , ATA72XL , compressor , HuaGuang coolant , R134a , 220-240V 50/60Hz , 1/4HP , 1PH
Détails rapides

Lieu d’origine:
Guangdong, Chine

Marque:
Wanbao

Type:
Compresseur de réfrigération

Application:
Pièces de réfrigération

Certification:
ce, CCC / CB / VDE

Réfrigérant:
R134A

Marque:
Wanbao

Tension:
220-240V 50HZ

Déplacement:
72 cm3

Refroidissement:
ST / OC

Type de moteur:
RSIR

Capacité de refroidissement:
185 W

Capacité:
631 BTU

Max. Hauteur “A”:
188

Wanbao Group Compressor Co., Ltd (anciennement connue sous le nom de Guangzhou Refrigeration Company Ltd, ci-après dénommée The Co.), a commencé sa production en 1987, est le premier fabricant à introduire une technologie et des équipements étrangers pour la production à grande échelle de compresseurs de réfrigérateurs en Chine . En 2014, The Co. a acquis le fabricant de compresseurs de réfrigérateurs à l’étranger-Italie ACC, puis a fondé l’italien Wanbao-ACC Co., Ltd. Cette action améliore le compresseur Wanbao de l’internationalisation du marché à l’internationalisation de la fabrication et jette des bases solides à l’internationalisation de la marque pour la prochaine étape.
La Co.a quatre bases de production à Guangzhou, Qingdao, Hefei et en Italie, avec une capacité de production annuelle de 26 millions d’unités, forgeant ainsi une configuration mondiale stratégique couvrant les principaux clients nationaux et étrangers. Wanbao Chine approvisionne principalement les grands fabricants de réfrigérateurs nationaux, y compris Haier, Hisense, Midea, Meiling, etc., ainsi que les fabricants d’appareils électroménagers de renommée internationale, y compris Electrolux Whirlpool, etc., en tant que fournisseur mondial. Wanbao-ACC Italy est un fournisseur majeur de fabricants européens d’appareils électroménagers haut de gamme.

Modèle	Réfrigérant	Tension	Capacité de refroidissement (w)	Application	COP (w / w)
AS43	R134a	220V / 50Hz	84	LBP	0,94
AS51	R134a	220V / 50Hz	107	LBP	1,01

ASD43K R134a	220V / 50Hz117	LBP	1.13
ASD53K R134a	220V / 50Hz144	LBP	1.2
ASD65 R134a	220V / 50Hz173	LBP	1,23
ATA72X R134a	220V / 50Hz205	LBP	1,35
ATA80X R134a	220V / 50Hz230 1/4 hp++	LBP	1,35
ANA90 R134a	220V / 50Hz255	LBP	1,35
AQAW110R134a	220V / 50Hz260	LBP	1,15
ANA120 R134a	220V / 50Hz345	LBP	1,3

Autre compresseur de congélateur wanbao que nous avons:

Pas	HP	Modèle	Réfrigérant	Qté/Une Palette
1	1/10HP	ASD35K	R134a	100
2	1/6HP	ASD53K	R134a	80
3	1/5HP	AQAW66X	R134a	80
4	1/4HP	AQAW77X	R134a	80
5	1/4HP Gros	AQAW91	R134a	80
6	1/3HP	AQAW110	R134a	80
7	3/8HP	AL120	R134a	80
8	1/2HP	AL150	R134a	80
9	1/2HP, grand	AL180	R134a	80

型号 Model	气缸容积 Displacement	冷却方式 Cooling	电机类型 Motor Type	制冷量 Cooling Capacity			COP			认证 Certification	最大高度"A" Max. Height "A"
				ASHRAE		CECOMAF	ASHRAE		CECOMAF		
				-23.3℃		-25℃	-23.3℃		-25℃		
	cm³			W	Btu	W	W/W	EER	W/W		
LBP											
220-240V 50HZ R134a											
T系列 T Series											
ATA72X	7.2	ST/OC	RSIR	205	699	155.3	1.35	4.6	1.05	CCC/CB/VDE	185/188
ATA80X	8.1	ST/OC	RSIR	230	785	174.2	1.35	4.6	1.05	CCC/CB	185/188
ATK72X	7.2	ST/OC	RSCR	205	699	154.0	1.40	4.8	1.09	CCC/CB/VDE/CE	185/188
ATK80X	8.1	ST/OC	RSCR	230	785	174.0	1.40	4.8	1.09	CCC/CB	185/188
▲ATD50V	5.0	ST	RSIR	140	478	105.2	1.25	4.3	0.98	CCC/CB	182
ATD66X	6.6	ST/OC	RSIR	190	648	142.8	1.25	4.3	0.98	CCC/CB	182
△ATA50K	5.0	ST	RSIR	144	491	108.9	1.35	4.6	1.05	CCC/CB	182/185
△ATA66K	6.6	ST	RSIR	190	648	142.8	1.25	4.3	0.98	CCC/CB	182
ATA66K(OC)	6.6	OC	RSIR	190	648	143.7	1.35	4.6	1.05	CCC/CB	188
ATA72K(OC)	7.2	OC	RSIR	205	699	154.0	1.35	4.6	1.05	CCC/CB	188
ATK55	5.5	ST	RSCR	160	546	121.0	1.35	4.6	1.05	CCC/CB	185
ATK60	6.0	ST	RSCR	180	614	135.0	1.51	5.2	1.18	CCC/CB/CE	185
ATK66	6.6	ST	RSCR	192	655	144.0	1.55	5.3	1.21	CCC/CB/CE	185

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_ATA72X-220-240V_50HZ_R134A-1Télécharger

PictureS Mbsm Dot Pro : www.mbsm.pro
Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro , GL80AF ,ZEM, EGL80AF, Compressors , Hermetic compressors, 220-230V 50/60Hz , 1/5HP ,1PH , HBP, R134A

Category: Solutions,Tester ok
written by Jamila | 10 October 2018
Mbsm.pro , GL80AF ,ZEM Compressors , Hermetic compressors, 220-230V 50/60Hz , 1/5HP ,1PH , HBP, R134A
GD40AF 1/9 , GL45AF 1/8 , GL60AF. GL60AF, GL70AF , GL70ANa 1/5.,GL70AND. , *GL80AF* 1/5.

LBP

R134a 60 Hz				CECOMAF (W) -35	-30	-25 W	-25 COP	-10	ASHRAE -23.3 kcal/h	ASHRAE -23.3 COP	R134a 60 Hz				
200-220/220-230V 50/60Hz ~1															
GD30AG	1/12	S	3.08	25	39	57	0.67	130	68	0.88	C	200	5.8	RSIR	P
GD40AF	1/10	S	4.03	35	54	77	0.70	171	91	0.91	C	200	6.8	RSIR	P
GL99BL	1/4	OC	9.93	102	148	204	0.93	434	239	1.21	C	470	11.3	RSCR	P
GL45AF	1/8	S	4.55	41	64	94	0.76	214	111	0.99	C	270	9.0	RSIR	P
GL60AF	1/6	S	5.99	66	94	131	0.81	286	154	1.05	C	270	9.1	RSIR	P
GL70AF	1/5	S	6.65	80	110	150	0.90	323	175	1.17	C	345	10.1	RSIR	P
GL70ANa	1/5	S	6.65	80	110	150	0.90	323	175	1.17	C	345	10.1	RSIR	P
GL70ANb	1/5	OC	6.65	80	110	150	0.90	323	175	1.17	C	445	10.4	RSIR	P
GL80AF	1/5	S	8.10	87	123	172	0.92	384	202	1.19	C	445	10.6	RSIR	P
GL80ANa	1/5	S	8.10	87	123	172	0.92	384	202	1.19	C	445	10.6	RSIR	P
GL80ANb	1/5	OC	8.10	87	123	172	0.92	384	202	1.19	C	445	10.7	RSIR	P
GL90AF	1/4	S	9.08	96	134	185	0.93	421	218	1.20	C	445	10.8	RSIR	P
GL90ANa	1/4	S	9.08	96	134	185	0.93	421	218	1.20	C	445	10.8	RSIR	P
GL90ANb	1/4	OC	9.08	96	134	185	0.93	420	218	1.20	C	445	10.9	RSIR	P
115V 60Hz ~1															
GD24AD	1/20	S	2.42	14	25	40	0.52	99	48	0.70	C	200	5.1	RSIR	P
GD36AD	1/12	S	3.62	30	47	68	0.65	149	80	0.85	C	240	6.1	RSIR	P
GL45ADa	1/8	S	4.55	41	65	95	0.80	214	112	1.05	C	265	8.1	RSIR	P
GL45ADb	1/8	S	4.55	41	65	95	0.80	214	112	1.05	C-V	265	8.1	CSIR	R
GL60ADa	1/6	S	5.99	64	94	132	0.85	290	155	1.10	C	265	9.1	RSIR	P
GL60ADb	1/6	S	5.99	64	94	132	0.85	290	155	1.10	C	210	9.1	CSIR	R
GL60BK	1/6	OC	5.99	66	95	132	0.84	290	155	1.10	C	400	10.0	RSCR	P
GL70ADa	1/5	S	6.65	79	108	148	0.86	322	173	1.12	C	345	9.6	RSIR	P
GL70ADb	1/5	S	6.65	79	108	148	0.86	322	173	1.12	C	345	9.6	CSIR	R
GL80ADa	1/5	S	8.10	84	121	171	0.87	383	201	1.13	C	345	9.8	RSIR	P
GL80ADb	1/5	S	8.10	84	122	171	0.87	384	201	1.13	C-V	345	9.8	CSIR	R
GL80BK	1/5	OC	8.10	79	119	169	0.85	381	200	1.11	C	470	11.1	RSCR	P
GL90ADa	1/4	S	9.08	97	138	191	0.88	420	224	1.14	C	445	10.5	RSIR	P
GL90ADb	1/4	S	9.08	97	138	191	0.88	420	224	1.14	C	445	10.5	CSIR	R

PictureS Mbsm Dot Pro : www.mbsm.pro

PictureS Mbsm Dot Pro : www.mbsm.pro

						kcal/h	W	W/W	W/W	W/W	W/W
GL45AA	LBP-R134a	1/8	43	A	96	82	1.06	0.82		
GL45AN	LBP-R134a	1/8	50	C	96	81	1.05	0.8		
GL60AA	LBP-R134a	1/6	43	A	132	114	1.14	0.89		
GL60AF	LBP-R134a	1/6	43	D	132	113	1.07	0.82		
GL60AH	LBP-R134a	1/6	43	A	133	114	1.31	1.01		
GL60AN	LBP-R134a	1/6	50	C	132	114	1.07	0.83		
GL70AA	LBP-R134a	1/5	43	A	149	128	1.18	0.9		
GL70AN	LBP-R134a	1/5	50	D	150	129	1.08	0.83		
GL70AT	LBP-R134a	1/5	43	E	144	122	1.09	0.84		
GL75AA	LBP-R134a	1/5	43	A	155	133	1.18	0.92		
GL80AA	LBP-R134a	1/5	43	A	173	148	1.19	0.93		
GL80AF	LBP-R134a	1/5	43	D	166	141	1.14	0.88		
GL80AH	LBP-R134a	1/5	43	A	175	150	1.35	1.06		
GL80AN	LBP-R134a	1/4	43	A	196	168	1.36	1.06		
GL90AA	LBP-R134a	1/4	43	A	195	167	1.19	0.93		
GL90AH	LBP-R134a	1/4	43	A	215	182	1.39	1.08		
GL90AN	LBP-R134a	1/4	50	D	190	163	1.1	0.85		
GL90AT	LBP-R134a	1/4	43	E	190	161	1.19	0.92		

www.mbsm.pro
PictureS Mbsm Dot Pro : www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO

Données techniques

- Modèle: **GL80AA**
- Gaz réfrigérant: **R-134a**
- Pression / température: **LBP**
- Puissance: **1/5 HP**
- Type de courant: **monophasé**
- Fréquence: **50 Hz**
- Type de compresseur: **hermétique**
- Déplacement: **8,10 cm³**
- Consommation d’énergie. Énergie -35 ° C: **117 W**
- Consommation d’énergie. Énergie -25oC: **158 W**
- Consommation d’énergie. Énergie -10 ° C: **237 W**
- T ° Condensation: **40 ° C**
- Capuchon de refroidissement. -35 ° C: **95 Kcal / h**
- Capuchon de refroidissement. -30 ° C: **132 Kcal / h**
- Capuchon de refroidissement. Énergie -25 ° C: **178 Kcal / h**
- Capuchon de refroidissement. -20 ° C: **234 Kcal / h**

• Capuchon de refroidissement. -15 ° C: **300 Kcal / h**
• Capuchon de refroidissement. Énergie -10 ° C: **375 Kcal / h**
• Type de test: **Ashare 32**

Mbsm_dot_pro_private_PDF_GLy60aaTélécharger
Mbsm_dot_pro_private_PDF_GLy60aa-1Télécharger

Mbsm.pro, GL 45 TB, GL 60 TB, GL 80 TB, GL 90 TB, GP 12 TB, GP 14 TB, GX 18 TB, GX 23 TB , Corps équerre, entrée 3/8” – sortie 1/2”, longueur de tube capillaire 1.5m

Category: Solutions,Tester ok
written by Jamila | 10 October 2018
Mbsm.pro, GL 45 TB, GL 60 TB, GL 80 TB, GL 90 TB, GP 12 TB, GP 14 TB, GX 18 TB, GX 23 TB , Corps équerre, entrée 3/8” – sortie 1/2”, longueur de tube capillaire 1.5m

PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro, GL90TB , COMPRESSEUR ACC CUBIGEL ELECTROLUX, R134A ,1/4HP 230V

Category: Solutions,Tester ok
written by Jamila | 10 October 2018

Mbsm.pro, GL90TB , COMPRESSEUR ACC CUBIGEL ELECTROLUX, R134A ,1/4HP 230V

- Puissance en cheval 1/4 CV
- Alimentation 220-240 V 50 Hz
- Gaz R134a HMBP
- Cylindrée du compresseur 8,8 cm³
- Température d’utilisation max. 32°C
- Complet avec starter, condensateur, boitier et système de fixation

La photo montre l’aspect du compresseur, pas son étiquette réelle

Codes fabricants

- ACC-GL90TB
- ALPENINOX-83718
- ANGELO PO-34D6510
- CEM-340
- CUBIGEL-GL90TB
- DEXION-022260-00

- ELECTROLUX-83718
- FRIULINOX-995783
- ICEMATIC-19165548
- MARENO-25016599
- MONDIAL ELITE-4106073
- MONDIAL ELITE-4106073+1147212
- NECTA VENDING-986934
- ZANUSSI-83718

Documentation technique du compresseur frigorifique Cubigel ***regarder en dessous***

Mbsm.pro , Compressors ZMC, EGL90AA, R-134a ,1/4 HP LBP, 220 – 240 V

Category: Solutions,Tester ok
written by www.mbsm.pro | 10 October 2018
Mbsm.pro , Compressors ZMC, EGL90AA, R-134a ,1/4 HP LBP, 220 – 240 V

BRAND

- **– ZMC**

TECHNICAL SPECIFICATIONS :

– MODEL: **EGL 90 AA**
– POWER: 1/4 **Hp**
– VOLTAGE: **220 – 240 V**
– WATT: **227.00 W**
– REFRIGERANT GAS: **R 134**
– K.CAL: **195.00 Cal.**
Features : The compressors form the basis of the refrigerant system and function to compress the gas from the evaporation to the condensation pressure.

USAGE PLACES :

It is used in Refrigerator devices belonging to all brands and models.

INSTRUCTIONS FOR USE:

Zmc EGL90AA;It is recommended to be used by a specialist authorized or authorized service.

Mbsm_dot_pro_private_PDF_catalogo_cubigel_R134aTélécharger
Mbsm_dot_pro_private_PDF_cubigel-katalogTélécharger

Mbsm.pro, DAEWOO Compressor , HSL27YE-5, 1/4HP , 1PH, R134a ,220-240V 50Hz,Puissance frigorifique 244 W, 833 Btu / h

Category: Solutions,Tester ok
written by Jamila | 10 October 2018

Mbsm.pro, DAEWOO Compressor , HSL27YE-5, 1/4HP , 1PH, R134a ,220-240V 50Hz,Puissance frigorifique 244 W, 833 Btu / h

---

Mbsm.pro, QA57C12GAX5 , 1PH , 1/6 HP ,Panasonic ,Matsushita Electric, Company, Malaysia , R134a , 220/240V 50Hz

Category: Solutions,Tester ok
written by Jamila | 10 October 2018
Mbsm.pro, QA57C12GAX5 , 1PH , 1/6 HP ,Panasonic ,Matsushita Electric, Company, Malaysia , R134a , 220/240V 50Hz

PictureS Mbsm Dot Pro : www.mbsm.pro