

www.mbsm.pro , TLES7FT.4 ,
COMPRESSORE SECOP ,TLES7FT.4 4707,
R134a , LBP ,1/4 hp/60hz, 1/5 hp/50hz
, 1ph ,Danfoss,4707, compressors
,medium temperature, Kiriazi 335l

Category: Technologie,Tester ok
written by www.mbsm.pro | 28 December 2018



Private Picture Copyright : WWW.MBSM.PRO

www.mbsm.pro , TLES7FT.4 , COMPRESSORE SECOP ,TLES7FT.4 , R134a , LBP ,Danfoss
compressors ,medium temperature, HMBP

الشاعر التونسي امرأة تاريخية , قصيدة
, Mbsm.pro , Poète Tunisien , Mounir
Ben Salah Miled , منير بن صالح ميلاد

Category: News
written by Jamila | 28 December 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

يا امرأة
أدخلتني التاريخ
على يديها
وأشعلت ذُبالي
وباركت وَمَقْرِي
ووضعتني
تحت هُدَّاب الدِّمِ قَسِ
بين ذراعيها
وأوقفت خَلَّجَ عيني
ومنعت عَنِّي حَقَائِبي
وحرَّرت أثيثها
من العقاص
لتأسرني به
بين نهديها

للشاعر التونسي [مرئيات في فلسفة عينيك
Mbsm.pro , Poète Tunisien Mounir Ben
Salah Miled منير بن صالح ميلاد

Category: News

written by www.mbsm.pro | 28 December 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

في عينيك
رقّة الفجر
تتدرّج كؤوس الندى
عطرا
وروح الربيع
تختال في شعابي
في صمت
تؤنق الأرض
رائعات ورد وزهرا
وحياة في حقل العمر
في سحرها القدسي
تماطلت سكرًا

www.mbsm.pro , Liste des codes secrets sur Android

Category: Non classé,Technologie
written by mahdi miled | 28 December 2018



Add to contacts



##4636#*#*




1 OO	2 ABC	3 DEF
4 GHI	5 JKL	6 MNO
7 PQRS	8 TUV	9 WXYZ
*	0 +	#



*#06# – IMEI du téléphone
#0# – Menu d'informations (ne fonctionne pas sur tous les téléphones)
##4636## – Menu d'informations
##34971539## – Menu d'informations sur l'appareil photo
##1111## – Version software FTA
*#12580*369# – Infos sur le logiciel et sur le hardware
*#7465625# – Statut de verrouillage de l'appareil
##232338## – Montre l'adresse MAC de l'appareil

Mbsm.pro, cheville papillon pour plafond , ou La cheville ou l'ancrage sert à fixer un objet sur une surface

Category: Technologie, Tester ok
written by www.mbsm.pro | 28 December 2018

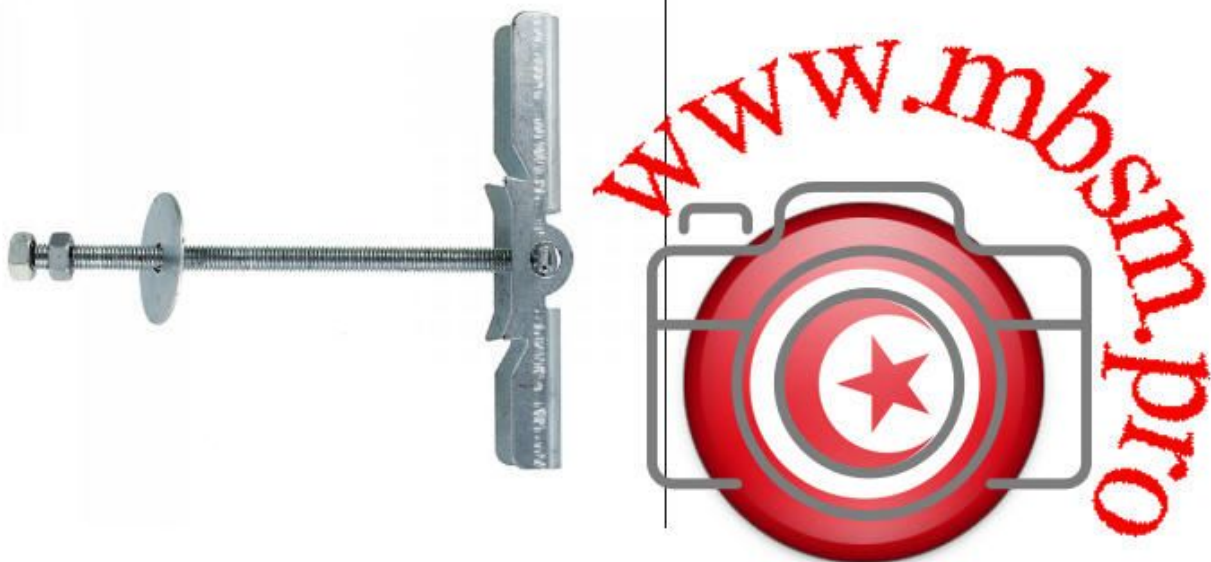

PictureS Mbsm Dot Pro : www.mbsm.pro

Les ancrages sont beaucoup utilisés en construction, mais on en utilise aussi régulièrement pour des choses simples comme faire la pose d'un portrait sur un mur.

L'ancrage est beaucoup utilisé pour visser dans un mur de gypse, car celui-ci n'est pas assez rigide pour maintenir un clou ou une vis fermement. Il faut donc utiliser un moyen afin pouvoir visser quelque chose solidement, malgré la fragilité du revêtement de mur.

Mbsm.pro , Compressor ESC 8.5, R134a, Necchi (530591) , 1/5 Hp ,159 w

Category: Solutions,Tester ok
written by Jamila | 28 December 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Compressor ESC 8.5, R134a, Necchi (530591) , 1/5 Hp ,159 w

	Motore	cm ³	Volt	Watt -10°C	Watt -30°C	
RIB5150	A9EV – R22 – 3/8 – LBP	CSR	9,29	220	642	
RIB5160	A11EV – R22 – 1/2 Hp – LBP	CSR	11,11	220	781	
RIB5350	A13EV – R22 – 5/8 Hp – LBP	CSR	13,35	220	967	
RIB5450	N17EV – R22 – 3/4 Hp – LBP	CSR	17,52	220	1221	
RIB5550	N21EV – R22 -1- Hp LBP	CSR	20,68	220	1464	
RIB5650	N23EV – R22 – 1,2 Hp – LBP	CSR	23,18	230	1616	
RIB7104	NB4 COMPRESS. R12 24V. FRAMEC 1/8 =					
RIB7108	NB8 COMPRESS. R12 24V.FRAMEC 175w.=					
RIB7113	NB13HP COMPRESS.R12 24V.FRAMEC 1/3=					
RIBB010	ETR 3 – R134A – 1/12 Hp – LBP	RSIR	3,00	220	127	
RIBB020	ETR 3,5 HP 1/10 R134A – LBP	RSIR	3,50	220	156	
RIBB030	ETR 4 HP 1/8 R134A – LBP	RSIR	4,10	220	179	
RIBB040	ETR 5 – R134a – HP 1/6 – LBP	RSIR	5,12	220	231	
RIBB050	ETR5,5 – R134a – 1/6 Hp – LBP	RSIR	5,55	220	257	
RIBB080	ESC5 – R134a – 1/6 Hp – LBP	RSIR	5,12	220	222	
RIBB100	ESC7 – R134a – 1/5 Hp – LBP	RSIR	7,00	220	307	
RIBB110	ESC8 – R134a – 1/5 Hp – LBP	RSIR	7,75	220	358	
RIBB130	ESC9 – R134a – 1/4 Hp – LBP	RSIR	9,07	220	424	
RIBB140	ESC11 – R134a – 1/3 Hp – LBP	RSIR	10,63	220	501	
RIBB200	ESC4H – R134a – 1/8 Hp – LBP	RSIR	4,10	220	177	
RIBB400	ESR 7 – R134a – 1/5 Hp – LBP	RSIR	7,00	220	307	
RIBB410	ESR 8 – R134a – 1/5 Hp – LBP	RSIR	7,75	220	358	
RIBB430	ESR 9 – R134a – 1/4 Hp – LBP	RSIR	9,07	220	424	
RIBB440	ESR11 – R134a – 1/3 Hp – LBP	RSIR	10,63	220	501	
RIBE040	TN17EV – R404 – 3/4 Hp – LBP	CSR	17,52	220		565
RIBE050	TN21EV – R404 – 1 Hp – LBP	CSR	20,68	220		644
RIBE060	TN23EV – R404 – 1,2 Hp – LBP	CSR	23,18	220		726
RIBT999	COMPRESSORE ELECTROLUX DESCR.BOLLA					



neue Type	Verdichter Type		Kältemittel	Bereich	Betrieb	Leistungsaufnahme		Ölfüllung cm ³	Bestell-Nr.
	Vorbüßer Type					Watt	A		
mit Esterölfüllung									
*ETR 3	-	-	R134a	LBP	K	68	0,55	185	*230.051
*ETR 3,5	-	-	R134a	LBP	K	81	0,58	185	*230.053
*ETR 4	-	-	R134a	LBP	K	89	0,64	185	*230.055
*ETR 5	-	-	R134a	LBP	K	109	0,76	185	*230.057
*ETR 5,5	-	-	R134a	LBP	K	118	0,80	185	*230.059
*ESR 7	ESC 7	-	R134a	LBP	K	127	0,83	220	*230.073
*ESR 8	ESC 8	-	R134a	LBP	K	149	1,00	220	*230.075
*ESR 8,5	ESC 8,5	-	R134a	LBP	K	159	1,07	220	*230.077
*ESR 9	ESC 9	-	R134a	LBP	K	177	1,20	220	*230.079
*ESR 11	ESC 11	-	R134a	LBP	K	215	1,62	220	*230.081
ETR 4H	ES(C)R4H	-	R134a	HBP	K	187	1,13	185	-
ETR 5H	ES(C)R5H	-	R134a	HBP	K	231	1,30	185	-
ETR 7H	ESC 7H	-	R134a	HBP	K	288	1,61	220	-
ETR 9H	ESC 9H	-	R134a	HBP	K	396	2,31	220	-
ETR 11H	ESC 11H	-	R134a	HBP	K	472	2,64	220	-
TA 13 EV	-	-	R404 A	LBP	K/E	463	2,15	950	230.096
TN 17 EV	-	-	R404 A	LBP	K/E	627	2,93	950	230.097
TN 21 EV	-	-	R404 A	LBP	K/E	727	3,61	950	230.099

PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a , power 3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

Category: Solutions, Tester ok
written by www.mbsm.pro | 28 December 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a ,power 3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

Compresseur hermetique de Aspera – Embraco NT6220Z – R134a

3/4 HP

220V 50Hz 1~

Cylindrée = 22.37 CM3

APPLICATIONS = HBP

Moteur type: CSIR

EMBRACO Asprea Compressor NT6220Z

Technical Details

- 220/240V
- 50Hz
- power 3/4 Hp, displacement 22.40 cc
- gas R134a HMBP
- ASPERA

SKU: 3070180

Suitable For/Compatible With

- NT6220Z ASPERA
- NT6220Z-CSIR ASPERA
- NT6220Z EMBRACO
- NT6220Z-CSIR EMBRACO




embraco NT



R134a

HBP

EM/NE/NT/NJ

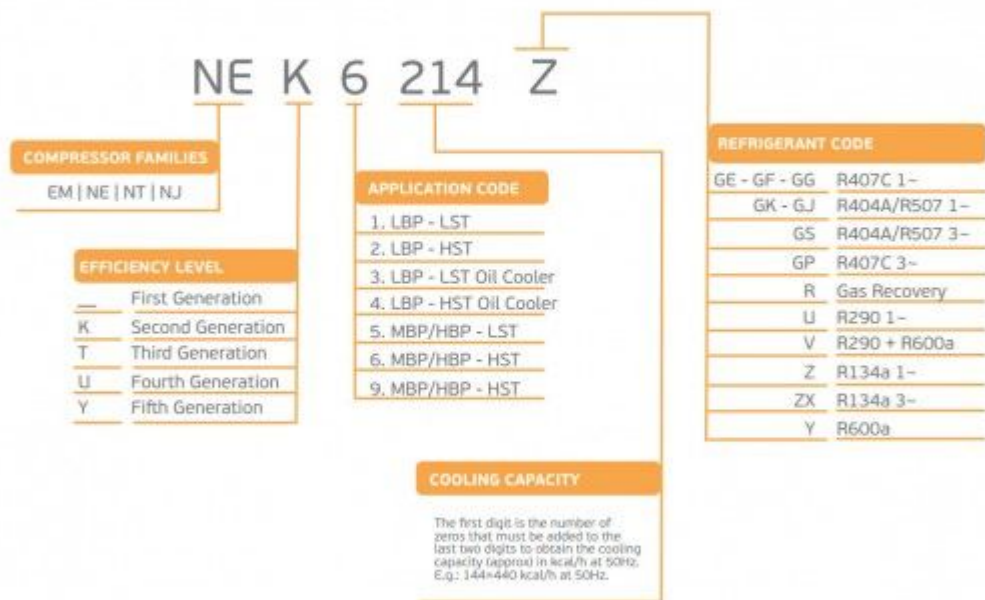

R134a								
50Hz 50-60Hz	LBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]	HBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]
NT NTU					NT6215Z	C / N	1.405	17,39
					NT6217Z	A / N	1.619	20,44
					NT6220Z	N	1.744	22,37
					NTU6222ZV	A	2.117	23,70
					NTU6224ZV	A	2.582	27,80

PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.Pro , Tecumseh Refrigeration
Compressor, CAE9460Z ,R404A
refrigerant ,3/8 hp, mhbp, 1/2HP
,1PH(phase) , 220V to 240V

Category: Solutions,Tester ok
written by Jamila | 28 December 2018

411445

 
6B88330200
CAE9460Z

R404A LRA 17
220-240V ~ 50Hz I_{LA} 3.40


53 D1510 10 195819 A
COUNTRY OF ORIGIN: FRANCE THERMALLY PROTECTED

PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.Pro , Tecumseh Refrigeration Compressor ,R404A refrigerant ,1/2HP
,1PH(phase) , 220V to 240V

- Brand Name:Tecumseh
- Certification:RoHS
- Application:Refrigeration Parts
- Type:Refrigeration Compressor

411445

 
6B88330200
CAE9460Z

R404A LRA 17
220-240V ~ 50Hz I_A 3.40


53 D1510 10 195819 A
COUNTRY OF ORIGIN: FRANCE THERMALLY PROTECTED

LOW BACK PRESSURE COMPRESSORS

Type	COMPRESSOR MODELS	Nominal Power (H.P.)		REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)								VOLTAGE	
		t	Refrigerant	Displacement (cm ³)	Evaporating Temperature								
					Oil charge (cm ³)	-45°C	-40°C	-35°C	-30°C	-23.3°C	-20°C		-10°C
						t	t	t	t	t	t		t
PISTON	AEZ2415Z	7/16	R404A	8.1	350			160	231	355	429	703	220-240V/1/50Hz
	CAE2417Z	7/16	R404A	11.3	350	37.8	62	161	280	460	557	891	220-240V/1/50Hz
	CAE2420Z	1/2	R404A	12.6	350	194	179	232	357	547	654	1047	220-240V/1/50Hz
	CAE2424Z	5/8	R404A	15.1	350	228	180	291	442	664	783	1199	220-240V/1/50Hz
	CAJ2428	3/4	R404A	15.2	887			306	434	628	773	1246	220-240V/1/50Hz 400V/3/50Hz
	CAJ2432Z	3/4	R404A	18.3	887	331	285	318	510	792	950	1560	220-240V/1/50Hz 400V/3/50Hz
	CAJ2440Z	1	R404A	21	887	532	394	452	647	975	1166	1876	220-240V/1/50Hz
	CAJ2446Z	1	R404A	26.15	887	702	575	549	797	1194	1423	2290	220-240V/1/50Hz 400V/3/50Hz
	CAJ2464Z	1-1/2	R404A	34.45	887	805	626	723	1076	1605	1902	3012	220-240V/1/50Hz 400V/1/3/50Hz
	FH2480Z	2	R404A	53.2	1625	292	420	738	1319	2183	2662	4419	220-240V/1/50Hz 400V/3/50Hz
	TFH2480Z												
	FH2511Z	3	R404A	74.25	1625	1561	1203	1380	2016	3135	3796	6222	220-240V/1/50Hz 400V/3/50Hz
	TFH2511Z												
	TAG2516Z	4	R404A	112.5	1960	1696	1407	1743	2704	4356	5335	9038	400V/3/50Hz
TAGP2516Z													
TAG2522Z	6	R404A	134.8	1960	2541	2012	2378	3542	5522	6688	11062	400V/3/50Hz	
TAGP2522Z													

Picture5 Mbsm Dot Pro : www.mbsm.pro

THE NEW TWO GENERATION BRAZIL COMPRESSORS

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)		REFRIGERATION CAPACITY AT 50HZ Rafed 54.5°C Cond Temp (Watts)								VOLTAGE		
		t	Refrigerant	Displacement (cm ³)	Evaporating Temperature									
					Oil charge (cm ³)	-20°C	-15°C	-10°C	-5°C	0°C	+5°C		+10°C	+15°C
						t	t	t	t	t	t		t	t
PISTON	AE4425Z-FZ1A	1/5	R404A	4.24	222	228	290	362	446	545	659	792	220-240V/1/50Hz	
	AE4430Z-FZ1A	1/4	R404A	5.16	216	293	375	466	568	685	821	977	220-240V/1/50Hz	
	AE4440Z-FZ1A	1/3	R404A	6.69	278	377	482	599	730	881	1055	1257	220-240V/1/50Hz	
	AE4450Z-FZ1A	7/16	R404A	8.85	369	500	640	795	970	1170	1401	1688	220-240V/1/50Hz	
	AE4460Z-FZ1C	1/2	R404A	10.33		636	784	959	1160	1380	1630	1920	220-240V/1/50Hz	

Tecumseh Compressor

LOW BACK PRESSURE COMPRESSORS

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)		REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)						VOLTAGE		
		t	Refrigerant	Displacement (cm ³)	Evaporating Temperature							
					Oil charge (cm ³)	-35°C	-30°C	-25°C	-20°C		-15°C	-10°C
						t	t	t	t		t	t
ROTARY	RGA/HGA2426Z	2/3	R404A	9.50	290	375	474	590	726	888	1080	220-240V/1/50Hz
	RGA/HGA2432Z	4/5	R404A	11.50	290	451	567	707	872	1065	1290	220-240V/1/50Hz
	RGA/HGA2436Z	1	R404A	12.70	290	508	643	804	994	1219	1483	220-240V/1/50Hz

Picture5 Mbsm Dot Pro : www.mbsm.pro

Tecumseh Compressor

MEDIUM/HIGH BACK PRESSURE COMPRESSORS

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)		REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)								VOLTAGE	
			Refrigerant	Displacement (cm ³)	Oil charge (cm ³)	Evaporating Temperature							
						-15°C	-10°C	-5°C	0°C	+5°C	+10°C		+15°C
ROTARY	RGA/HGA4467Z	1/2	R404A	9.50	290	679	847	1047	1283	1557	1872	2231	220-240V/1/50Hz
	BGA/HGA4480Z	2/3	R404A	11.50	290	825	1017	1252	1530	1851	2212	2613	220-240V/1/50Hz
	RGA/HGA4492Z	3/4	R404A	12.50	290	905	1133	1398	1706	2060	2468	2932	220-240V/1/50Hz
	RGA/HGA4512Z	1	R404A	16.10	290	1163	1438	1770	2160	2609	3118	3689	220-240V/1/50Hz
	RGA/HGA4445Y	1/3	R134a	9.50	290	392	493	618	770	954	1173	1430	220-240V/1/50Hz
	RGA/HGA4450Y	2/5	R134a	11.50	290	501	625	778	963	1184	1445	1749	220-240V/1/50Hz
	RGA/HGA4460Y	1/2	R134a	12.70	290	537	677	844	1045	1287	1576	1920	220-240V/1/50Hz

PictureS Mbsm Dot Pro : www.mbsm.pro



Mbsm.pro , China ,Freezer Compressor, for Small Refrigerator, Mk Series- Adw66, Adw66, R134A Gas, 220V, 1/4-HP, 1/5++ hp , 220V, Lbp, Rsir , cooling capacity 165W

Category: Solutions,Tester ok
written by Jamila | 28 December 2018



R134A 220/ 50HZ		TECUMSEH		MOTEC		FINLEY		BLUESTAR	
POTENCIA	MOD	COD RM	MOD	COD RM	MOD	COD RM	MOD	COD RM	
1/6 HP	THG1358YS	MT0033	GFM44AA	MT0160	HCF16XL	MT0218	ADW51	MT0098	
1/5 HP	THG1365YS	MT0034	GFF57AA	MT0161	HCF15XL	MT0219	ADW57	MT0149	
1/5+ HP	THG1374YS	MT0035	-	-	-	-	ADW66	MT0090	
1/4 HP	TSB1380YGS	MT0036	GFF66AA	MT0122	HCF14XL	MT0205	ADW91	MT0082	
1/4+ HP	TSB1390YS	MT0037	GFF75AA	MT0123	HCF14-L	MT0204	-	-	
1/3 HP	TCW410YS	MT0038	GFF86AA	MT0120	HCF13XL	MT0206	ADW110	MT0084	
1/3+ HP	TCW413Y	MT0039	GFF93AA	MT0121	HCF13-L	MT0207	ADW128	MT0158	

MOTOCOMPRESORES COMERCIALES

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro , China ,Freezer Compressor, for Small Refrigerator, Mk Series-Adw66, Adw66, R134A Gas, 220V, 1/4-HP, 1/5++ hp , 220V, Lbp, Rsir , cooling capacity 165W

MBSM.PRO ,Copeland ,KCE432HAG ,Compresseur Hermétique, 1/4HP, R134, 1ph , Afcon Industrial Equipment,High / Medium temperature (HBP / CBP)

Category: Solutions,Tester ok
written by Jamila | 28 December 2018

Performance Nominals

High Back Pressure			Capacity						Commercial Back Pressure		
Model	HP	Displacement cc per Rev	7.2°C			-6.7°C			Cooling Type (CFM)	Oil Charge Qty (cc)	Net Wt. (Kg.)
			Btu/Hr.	kCal/Hr.	Watt	Btu/Hr.	kCal/Hr.	Watt			
R134a, 50Hz, 1 Phase											
KCE419HAG	1/6	5.79	1585	399	465	860	217	252	Fan 350	310	10.2
KCN413CAG	1/6	6.15	-	-	-	1080	272	316	Fan 350	340	9.7
KCE425HAG	1/5	7.58	2145	540	629	1075	271	315	Fan 350	310	10.8
KCN416CAG	1/5	7.31	-	-	-	1380	338	392	Fan 350	340	9.7
KCE432HAG	1/4	9.42	2690	678	788	1330	332	390	Fan 350	310	11.8
KCE444HAG	3/8	12.05	3675	926	1077	1880	474	551	Fan 350	310	11.8
KCN444HAG	3/8	12.58	3700	932	1064	1720	433	504	Fan 350	890	20.2
KCN463HAG	1/2	15.33	5250	1323	1538	3130	789	917	Fan 350	380	11.5
KCE467HAG	1/2	18.27	5600	1411	1640	2830	713	829	Fan 350	890	21.0
KCN498HAG	3/4 +	25.91	8200	2066	2402	4100	1033	1201	Fan 350	890	21.5
R134a, 60Hz, 1 Phase 230V											
KCE432HAG	1/4	9.42	3225	813	944	1585	402	487	Fan 350	310	11.8
KCN444HAG	3/8	12.05	4275	1077	1252	2187	551	640	Fan 350	310	11.8
KCN463HAG	1/2	15.33	6300	1588	1845	3243	868	1008	Fan 350	380	11.5
KCE467HAG	1/2	18.27	6700	1688	1964	3120	786	914	Fan 350	890	21.0
KCN498HAG	3/4 +	25.91	9250	2330	2710	4633	1167	1358	Fan 350	890	21.5
R134a, 60Hz, 115V											
KCE444HAG	1/3	12.05	4200	1058	1231	2175	548	637	Fan 350 FM	310	11.8
R22, 50Hz, 1 Phase											
KCE443HAE	1/3	8.00	3600	907	1054	1620	408	475	Fan 350	310	11.8
KCE461HAE	1/2	11.50	5100	1285	1494	2590	653	759	Fan 350	590	13.4
KCE511HAE	1	18.27	9350	2356	2740	4210	1061	1234	Fan 350	905	21.5
KCE513HAE	1 1/4	25.91	12800	3225	3749	6366	1604	1865	Fan 350	890	22.5
CR22K6M-PF1	1 1/2+	40.80	19000	4768	5563	8920	2248	2614	Fan 400	1330	29.8
CR30K6M-PF1	2 1/2	51.47	25000	6300	7330	12000	3024	3516	Fan 400	1330	32.5
CR36K6-PFZ	3	59.65	30100	7585	8814	14200	3578	4161	Fan 400	1330	34.9
CR42K6-PFZ	3 1/2	72.08	36100	9100	10570	17300	4360	5069	Fan 400	1330	34.9
R22, 50Hz, 3 Phase											
CR22K6M-TFM	1 1/2+	40.80	18350	4633	5373	8260	2082	2420	Fan 400	1330	29.5
CR30K6M-TFM	2 1/2	51.47	24400	6161	7144	11600	2923	3399	Fan 400	1330	30.0
CR36K6-TF6	3	59.66	29900	7535	8755	14500	3654	4249	Fan 400	1330	31.0
CR42K6-TF5	3 1/2	72.09	35100	8845	10278	17200	4334	5040	Fan 400	1330	32.7
KCG554HAE	4 1/2	99.96	45000	11340	13185	-	-	-	Fan 420	2250	50.1
KCG562HAE	5	117.65	52000	13100	15236	-	-	-	Fan 420	2250	50.7
KCG572HAE	6	133.22	60000	15120	17580	-	-	-	Fan 420	2250	51.4
R22, 60Hz, 1 Phase											
KCE461HAE	1/2	11.50	6100	1537	1788	3082	-	-	Fan 350	510	13.4
KCE511HAE	1	18.27	10500	2646	3077	4210	1061	1234	Fan 350	905	21.5

Private Picture Copyright : WWW.MBSM.PRO

MBSM.PRO ,Copeland ,KCE432HAG ,Compresseur Hermétique, 1/4HP, R134, 1ph , Afcon Industrial Equipment,High / Medium temperature (HBP / CBP)