

Mbsm.pro, Compressor, DkLP-15x-EwL, Dwm copeland, 1/5 hp, Copeland™ Semi-Hermetic Compressors, 3 ph

Category: compressor

written by rober us | 30 March 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, DkLP-15x-EwL, Dwm copeland, 1/5 hp, Copeland™ Semi-Hermetic Compressors, 3 ph





Mbsm.pro, Compressor, Embraco, Fractional, Domestic, Compressor Data, EMU45HSC, 1/6 hp, lbp

Category: compressor

written by rober us | 30 March 2023



Private Picture Copyright : WWW.MBSM.PRO

Embraco Fractional Domestic Compressor Data

Embraco/Embraco R134a series EMU45HSC

Wholesale and Retail Embraco/Embraco Compressor, Embraco/Embraco Piston Compressor Model: emu45hsc, Refrigerant: R134a, Supply Voltage: 220-240V, 50-60Hz, Horsepower: 1/6 HP, Provide Embraco / Embraco emu45hsc models, specifications, parameters, pictures, prices and other data. Embraco, a company focused on refrigeration solutions, is the leader in the hermetic compressor market

Product model: EMU45HSC

Refrigerant: R134a

Power frequency: 50/60Hz

Power supply voltage: 220-240V

Product horsepower: 1/6 HP

Model	Refrigerator	Voltage	Frequency / Rotation	Application	HP	Efficiency (Kcal/wh)	Capacity (Kcal/h)	Displacement (cm³)	Type of oil	Type of motor	Starting torque	Type of test
EMI30HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/10	0,92	69	3	ISO22	RSIR-CSIR	LST	ASHRAE32
EMIE30HJR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/10	1,03	76	2,83	ISO10	RSIR	LST	ASHRAE32
EMI30HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/10	1,03	77	3	ISO10	RSIR-CSIR	LST	ASHRAE32

EM30HNR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/10	0,93	77	3	IS022	RSIR-CSIR	LST	ASHRAE32
EM30HHR	R-134a	115 V 60 Hz 1 ~	60 Hz	LBP	1/10	0,81	78	3	IS022	CSIR	LST	ASHRAE32
EM30HHR	R-134a	115 V 60 Hz 1 ~	60 Hz	LBP	1/10	0,81	78	3	IS022	RSIR	LST	ASHRAE32
EM30HHR	R-134a	115 V 60 Hz 1 ~	60 Hz	LBP	1/10	0,81	78	3	IS022	RSIR-CSIR	LST	ASHRAE32
EMT30HSC	R-134a	115 V 60 Hz 1 ~	60 Hz	LBP	1/10	1,08	78	3	IS010	RSCR – 12 μF	LST	ASHRAE32
EMI28HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/10	1,01	81	3	IS010	RSIR-CSIR	LST	ASHRAE32
EMU30HSC	R-134a	115 V 60 Hz 1 ~	60 Hz	LBP	1/10	1,21	83	3	IS010	RSCR – 12 μF	LST	ASHRAE32
EMI40HNR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/10	1,05	94	3,77	IS010	RSIR-CSIR	LST	ASHRAE32
EMI45HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/8	1,13	106	3,77	IS010	RSIR	LST	ASHRAE32
EMI45HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/8	1,08	106	3,77	IS022	RSIR	LST	ASHRAE32
EM45HNR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/8	1	106	3,77	IS010	RSIR-CSIR	LST	ASHRAE32
EM45HNR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/8	0,98	106	3,77	IS022	RSIR-CSIR	LST	ASHRAE32
EMU45HEP	R-134a	100 V 50-60 Hz 1 ~	60 Hz	LBP	1/6	1,14	110	3,77	IS010	RSIR	LST	ASHRAE32
EMU45HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/8	1,19	113	3,77	IS07	RSIR	LST	ASHRAE32
EMU45HSC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,22	113	3,77	IS010	RSCR – 20 μF	LST	ASHRAE32
EMU45HSC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,25	113	3,77	IS010	RSCR – 15 μF	LST	ASHRAE32
EMU45HSC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,25	113	3,77	IS010	RSCR – 12 μF	LST	ASHRAE32
EMI30HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/10	0,92	69	3	IS022	RSIR-CSIR	LST	ASHRAE32
EMIE30HJR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/10	1,03	76	2,83	IS010	RSIR	LST	ASHRAE32
EMI30HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/10	1,03	77	3	IS010	RSIR-CSIR	LST	ASHRAE32
EM30HNR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/10	0,93	77	3	IS022	RSIR-CSIR	LST	ASHRAE32
EM30HHR	R-134a	115 V 60 Hz 1 ~	60 Hz	LBP	1/10	0,81	78	3	IS022	CSIR	LST	ASHRAE32
EM30HHR	R-134a	115 V 60 Hz 1 ~	60 Hz	LBP	1/10	0,81	78	3	IS022	RSIR	LST	ASHRAE32
EM30HHR	R-134a	115 V 60 Hz 1 ~	60 Hz	LBP	1/10	0,81	78	3	IS022	RSIR-CSIR	LST	ASHRAE32
EMT30HSC	R-134a	115 V 60 Hz 1 ~	60 Hz	LBP	1/10	1,08	78	3	IS010	RSCR – 12 μF	LST	ASHRAE32
EMI28HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/10	1,01	81	3	IS010	RSIR-CSIR	LST	ASHRAE32
EMU30HSC	R-134a	115 V 60 Hz 1 ~	60 Hz	LBP	1/10	1,21	83	3	IS010	RSCR – 12 μF	LST	ASHRAE32

EMI40HNR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/10	1,05	94	3,77	IS010	RSIR-CSIR	LST	ASHRAE32
EMI45HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/8	1,13	106	3,77	IS010	RSIR	LST	ASHRAE32
EMI45HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/8	1,08	106	3,77	IS022	RSIR	LST	ASHRAE32
EM45HNR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/8	1	106	3,77	IS010	RSIR-CSIR	LST	ASHRAE32
EM45HNR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/8	0,98	106	3,77	IS022	RSIR-CSIR	LST	ASHRAE32
EMU45HEP	R-134a	100 V 50-60 Hz 1 ~	60 Hz	LBP	1/6	1,14	110	3,77	IS010	RSIR	LST	ASHRAE32
EMU45HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/8	1,19	113	3,77	IS07	RSIR	LST	ASHRAE32
EMU45HSC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,22	113	3,77	IS010	$R_{SCR} - 20 \mu F$	LST	ASHRAE32
EMU45HSC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,25	113	3,77	IS010	$R_{SCR} - 15 \mu F$	LST	ASHRAE32
EMU45HSC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,25	113	3,77	IS010	$R_{SCR} - 12 \mu F$	LST	ASHRAE32
EMY45HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,22	115	3,77	IS010	RSIR	LST	ASHRAE32
EMY45HSC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/8	1,33	115	3,77	IS010	$R_{SCR} - 12 \mu F$	LST	ASHRAE32
EM2U50HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,2	126	4,5	IS010	RSIR	LST	ASHRAE32
EM55HNR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,02	129	4,6	IS022	RSIR-CSIR	LST	ASHRAE32
EM55HNX	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,01	129	4,6	IS022	CSIR	HST	ASHRAE32
EMI55HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,12	129	4,6	IS022	RSIR-CSIR	LST	ASHRAE32
EM2Y50HLT	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,42	130	4,5	IS010	$R_{SCR} - 12 \mu F$	LST	ASHRAE32
EM2Y50HLT	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,42	130	4,5	IS010	$R_{SCR} - 15 \mu F$	LST	ASHRAE32
EM3U50HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,35	140	4,5	IS010	RSIR	LST	ASHRAE32
EMI60HEP	R-134a	100 V 50-60 Hz 1 ~	60 Hz	LBP	1/6	1,09	141	4,99	IS022	RSIR	LST	ASHRAE32
EMI60HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,06	144	4,99	IS022	RSIR-CSIR	LST	ASHRAE32
EMI60HEP	R-134a	100 V 50-60 Hz 1 ~	60 Hz	LBP	1/6	1,14	144	4,99	IS010	RSIR	LST	ASHRAE32
NEK2116Z	R-134a	115 V 60 Hz 1~	60 Hz	LBP	1/5	0,79	147	7,37	IS022	CSIR	HST	ARI4
EMU60HSC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,25	149	4,99	IS010	$R_{SCR} - 12 \mu F$	LST	ASHRAE32
EGD60HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,5	149	5,17	IS010	$R_{SCR} - 12 \mu F$	LST	ASHRAE32
EGD60HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,54	149	5,17	IS010	$R_{SCR} - 12 \mu F$	LST	ASHRAE32
EGZS60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,46	150	5,09	IS010	$R_{SCR} - 12 \mu F$	LST	ASHRAE32

EGZS60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,46	150	5,09	IS010	RSCR – 15 μF	LST	ASHRAE32
EGZS60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,46	150	5,09	IS010	RSCR – 20 μF	LST	ASHRAE32
EMY60HSC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,36	152	4,99	IS010	RSCR – 12 μF	LST	ASHRAE32
EMYS60HEP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5+	1,29	153	5,19	IS010	RSCR – 12 μF	LST	ASHRAE32
EMY60HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,27	154	4,99	IS010	RSIR	LST	ASHRAE32
EMY60HSC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6	1,34	154	4,99	IS010	RSCR – 12 μF	LST	ASHRAE32
EGZS60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,48	154	5,09	IS010	RSCR – 12 μF	LST	ASHRAE32
EGZS60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,48	154	5,09	IS010	RSCR – 15 μF	LST	ASHRAE32
EGZS60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,48	154	5,09	IS010	RSCR – 20 μF	LST	ASHRAE32
EGZS60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,51	154	5,09	IS010	RSCR – 12 μF	LST	ASHRAE32
EGZS60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,51	154	5,09	IS010	RSCR – 15 μF	LST	ASHRAE32
EGZS60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,51	154	5,09	IS010	RSCR – 20 μF	LST	ASHRAE32
EGZS60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,52	154	5,09	IS07	RSCR – 12 μF	LST	ASHRAE32
EGZS60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,52	154	5,09	IS07	RSCR – 15 μF	LST	ASHRAE32
EGZS60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,52	154	5,09	IS07	RSCR – 20 μF	LST	ASHRAE32
EGX60HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,53	154	5,09	IS010	RSCR – 12 μF	LST	ASHRAE32
ONE 60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,4	154	5,09	IS010	RSIR	LST	ASHRAE32
ONE 60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,41	154	5,09	IS07	RSIR	LST	ASHRAE32
FF7,5HBK	R-134a	115 V 60 Hz 1	60 Hz	LBP	1/5+	0,94	159	6,92	IS022	RSIR-CSIR	LST	ASHRAE32
EM2U60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,32	162	5,54	IS010	RSCR – 12 μF	LST	ASHRAE32
EM2U60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,26	162	5,54	IS010	RSIR	LST	ASHRAE32
EMH60HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,27	163	5,19	IS07	RSIR	LST	ASHRAE32
EM3D60HLT	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,58	163	5,19	IS010	RSCR – 12 μF	LST	ASHRAE32
EM3D60HLT	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,58	163	5,19	IS010	RSCR – 15 μF	LST	ASHRAE32
EM65HNR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6+	0,99	164	5,54	IS010	RSIR-CSIR	LST	ASHRAE32
EM65HNR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/6+	0,98	164	5,54	IS022	RSIR-CSIR	LST	ASHRAE32
EM2Y60HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,44	165	5,54	IS010	RSCR – 12 μF	LST	ASHRAE32

EGD70HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,56	169	5,64	IS010	RSCR – 12 μF	LST	ASHRAE32
EM2Z60HLT	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,48	170	5,54	IS010	RSCR – 12 μF	LST	ASHRAE32
EM2Z60HLT	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,48	170	5,54	IS010	RSCR – 15 μF	LST	ASHRAE32
FFV6HAK	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,19	170	6,23	IS022	RSIR-CSIR	LST	ASHRAE32
FEE6HAK	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,07	171	6,23	IS022	RSIR-CSIR	LST	ASHRAE32
EMY70HER	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,21	171	5,72	IS010	RSIR-CSIR	LST	ASHRAE32
EMYE70HEP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,31	173	5,96	IS010	RSIR	LST	ASHRAE32
EMYE70HEP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,37	173	5,96	IS010	RSIR-RSCR – 12 μF	LST	ASHRAE32
EMYE70HEP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,37	173	5,96	IS010	RSIR-RSCR – 15 μF	LST	ASHRAE32
EMYE70HEP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5	1,3	173	5,96	IS010	RSIR	LST	ASHRAE32
EGAS70HLR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5+	1,29	174	5,56	IS010	RSIR	LST	ASHRAE32
FGS70HA	R-134a	100 V 50-60 Hz 1 ~	60 Hz	LBP	1/5+	1,32	174	6,36	IS010	RSCR – 20 μF	LST	ASHRAE32
EMX70HSC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/5+	1,44	175	5,96	IS010	RSCR – 12 μF	LST	ASHRAE32
EGX70HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,55	175	5,56	IS010	RSCR – 15 μF	LST	ASHRAE32
EGX70HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,56	175	5,56	IS010	RSCR – 12 μF	LST	ASHRAE32
EGX70HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,57	175	5,56	IS07	RSCR – 15 μF	LST	ASHRAE32
EGX70HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,58	175	5,56	IS07	RSCR – 12 μF	LST	ASHRAE32
EGZS70HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,54	175	5,56	IS07	RSCR – 12 μF	LST	ASHRAE32
EGZS70HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,54	175	5,56	IS07	RSCR – 15 μF	LST	ASHRAE32
EGZS70HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,54	175	5,56	IS07	RSCR – 20 μF	LST	ASHRAE32
ONE 70HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,43	175	5,56	IS010	RSIR	LST	ASHRAE32
ONE 70HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,44	175	5,56	IS07	RSIR	LST	ASHRAE32
ONE 70HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,39	176	5,56	IS010	RSIR	LST	ASHRAE32
FF8,5HBK	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	0,94	186	7,95	IS022	RSIR-CSIR	LST	ASHRAE32
FFU70HAK	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,29	189	6,36	IS010	RSIR-CSIR	LST	ASHRAE32
EM3Z70HLT	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4+	1,5	189	5,96	IS010	RSCR – 12 μF	LST	ASHRAE32
EM3Z70HLT	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4+	1,5	189	5,96	IS010	RSCR – 15 μF	LST	ASHRAE32

EM3D70HLT	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4+	1,57	193	5,96	IS010	RSCR – 12 μF	LST	ASHRAE32
EM3D70HLT	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4+	1,57	193	5,96	IS010	RSCR – 15 μF	LST	ASHRAE32
FFI7,5HAK	R-134a	115 V 60 Hz 1	60 Hz	LBP	1/4	1,16	193	6,76	IS022	RSIR-CSIR	LST	ASHRAE32
EM2U80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,32	197	6,76	IS010	RSIR	LST	ASHRAE32
EM2U80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,32	197	6,76	IS010	RSCR – 12 μF	LST	ASHRAE32
EM2U80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,32	197	6,76	IS010	RSCR – 15 μF	LST	ASHRAE32
EM2U80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,46	199	6,76	IS010	RSCR – 12 μF	LST	ASHRAE32
EM2U80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,46	199	6,76	IS010	RSCR – 15 μF	LST	ASHRAE32
EM2U80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,42	199	6,76	IS010	RSIR	LST	ASHRAE32
EGUS80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,38	203	6,36	IS010	RSIR	LST	ASHRAE32
EGD80HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,59	204	6,44	IS010	RSCR – 12 μF	LST	ASHRAE32
EGAS80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,24	204	6,44	IS010	RSIR	LST	ASHRAE32
EGAS80HLR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4+	1,32	205	6,36	IS010	RSIR-CSIR	LST	ASHRAE32
EGX80HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,55	205	6,36	IS010	RSCR – 12 μF	LST	ASHRAE32
EM2Z80HLT	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,51	205	6,76	IS010	RSCR – 12 μF	LST	ASHRAE32
EM2Z80HLT	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,51	205	6,76	IS010	RSCR – 15 μF	LST	ASHRAE32
ONE 80HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,44	207	6,36	IS010	RSIR	LST	ASHRAE32
EGX80HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,55	207	6,36	IS010	RSCR – 12 μF	LST	ASHRAE32
EGX80HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,57	207	6,36	IS010	RSCR – 15 μF	LST	ASHRAE32
EGX80HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,59	207	6,36	IS07	RSCR – 15 μF	LST	ASHRAE32
EGX80HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4	1,59	207	6,36	IS07	RSCR – 12 μF	LST	ASHRAE32
FFI8,5HAK	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4+	1,18	209	7,15	IS022	RSIR-CSIR	LST	ASHRAE32
FF10HBX	R-134a	115 V 60 Hz 1	60 Hz	LBP	1/4+	0,98	212	9,04	IS022	CSIR	HST	ASHRAE32
EGUS90HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4+	1,42	234	7,15	IS010	RSIR	LST	ASHRAE32
ONE 90HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4+	1,45	236	7,15	IS010	RSIR	LST	ASHRAE32
EGAS90HLR	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/3-	1,37	236	7,15	IS010	RSIR-CSIR	LST	ASHRAE32
EGX90HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4+	1,58	239	7,15	IS07	RSCR – 15 μF	LST	ASHRAE32

EGX90HLC	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4+	1,58	239	7,15	ISO7	RSCR – 12 μF	LST	ASHRAE32
EGZS90HLP	R-134a	115-127 V 60 Hz 1 ~	60 Hz	LBP	1/4+	1,54	239	7,15	ISO7	RSCR – 12 μF	LST	ASHRAE32

Embraco/Embraco piston compression emu45hsc detailed parameters:

Refrigerant:	R-134a	Displacement (cm³):	3.77
Voltage:	220-240V 50-60Hz 1~	Lubricant category:	ISO10
frequency(Hz):	50	Lubricating oil volume (ml):	160
application:	LBP	motor model:	RSCR
horsepower:	1/6	Starting torque:	LST
efficiency:	1.40	Test type:	ASHRAE32
Cooling capacity:	109		

Number: 513308034 513308056 513308063

Appearance

	shape	material	Dimensions (mm)
suction port	Slanted	Copper	6.50
exhaust port	Straight	Copper	4.94
Process interface	Straight	Copper	6.50
Oil cooler:			
Floor:	Universal EG/F/AMEM version 2		
bracket:	No		
Weight(kg):	7.74		

application

Maximum ambient temperature (°C):	43
Expansion device:	Capillary
cool down:	Straight cold
Air Velocity:	

mechanical data

Bill of Materials:	513308034
Starting torque:	low starting torque
Bore (mm):	19.00
Stroke(mm):	6.65
Weight(kg):	7.74

digital data

motor model:	RSCR
Wireset Resistance (25°C) – Startup (25°C) – Startup:	19.00
Cordset Resistance (26°C) – Operating (25°C) – Operating:	27.10

Check point – condensing temperature 54.4 °C

Evaporation temperature	Cooling capacity +/-5%			Energy consumption +/-5%	Now energy efficient +/-5%	Energy efficiency +/-7%		
°C	(kcal/h)	(IN)	(Btu/h)	(IN)	(A)	(kcal/Wh)	(W/W)	(Btu/Wh)
-23.3	94	109	372	75	0.36	1.25	1.46	4.98

Condensing temperature 45°C

Evaporation temperature	Cooling capacity +/-5%			Energy consumption +/-5%	Now energy efficient +/-5%	Gas flow rate +/-5%	Energy efficiency +/-7%		
°C	(kcal/h)	(IN)	(Btu/h)	(IN)	(A)	(kg/h)	(kcal/Wh)	(W/W)	(Btu/Wh)
-35	49	56	193	57	0.28	1.09	0.85	0.99	3.38
-30	74	86	293	64	0.30	1.66	1.16	1.35	4.60
-25	98	114	390	71	0.34	2.21	1.39	1.61	5.50
-20	125	145	496	79	0.38	2.82	1.59	1.84	6.29
-15	157	183	623	87	0.42	3.56	1.80	2.09	7.13
-10	197	229	783	97	0.47	4.49	2.04	2.37	8.10

Condensing temperature 55°C

Evaporation temperature	Cooling capacity +/-5%			Energy consumption +/-5%	Now energy efficient +/-5%	Gas flow rate +/-5%	Energy efficiency +/-7%		
°C	(kcal/h)	(IN)	(Btu/h)	(IN)	(A)	(kg/h)	(kcal/Wh)	(W/W)	(Btu/Wh)
-35	39	45	154	55	0.25	0.87	0.70	0.81	2.77
-30	62	72	247	63	0.29	1.40	0.99	1.15	3.92
-25	85	99	337	72	0.34	1.91	1.18	1.38	4.70
-20	110	127	435	81	0.39	2.47	1.35	1.57	5.35
-15	139	162	552	92	0.45	3.15	1.52	1.77	6.03
-10	177	206	702	103	0.50	4.02	1.72	2.00	6.82

Condensing temperature 65°C

Evaporation temperature	Cooling capacity +/-5%			Energy consumption +/-5%	Now energy efficient +/-5%	Gas flow rate +/-5%	Energy efficiency +/-7%		
°C	(kcal/h)	(IN)	(Btu/h)	(IN)	(A)	(kg/h)	(kcal/Wh)	(W/W)	(Btu/Wh)
-35	29	33	114	56	0.29	0.65	0.51	0.59	2.03
-30	51	60	204	64	0.33	1.15	0.80	0.93	3.16
-25	73	84	288	74	0.37	1.64	0.99	1.15	3.91
-20	96	111	380	84	0.41	2.16	1.14	1.32	4.52
-15	124	144	491	96	0.45	2.80	1.29	1.50	5.12
-10	159	185	632	109	0.48	3.62	1.47	1.71	5.82

Embraco/Embraco Piston Compression Product List:

model	Refrigerant	Voltage	frequency	application	horsepower	frequency/rotation	Cooling capacity	Displacement(cm³)	Lubricant category	motor model	starting torque	test type
EM2U80HLP	R-134a	115-127V 60Hz 1~	60Hz	LBP	1/4	1.70	232	6.76	ISO10	RSCR-12μF	LST	ASHRAE32
EM2U80HLP	R-134a	115-127V 60Hz 1~	60Hz	LBP	1/4	1.70	232	6.76	ISO10	RSCR-15μF	LST	ASHRAE32
EM2U80HLP	R-134a	115-127V 60Hz 1~	60Hz	LBP	1/4	1.65	232	6.76	ISO10	RSIR	LST	ASHRAE32
EM2U80HLP	R-134a	220V 60Hz 1~	60Hz	LBP	1/4	1.67	232	6.76	ISO10	RSCR-4μF	LST	ASHRAE32
EM2U80HLP	R-134a	220V 60Hz 1~	60Hz	LBP	1/4	1.61	232	6.76	ISO10	RSIR	LST	ASHRAE32
EM2Z80HLT	R-134a	115-127V 60Hz 1~	60Hz	LBP	1.76	239	6.76	ISO10	RSCR-12μF	LST	ASHRAE32	

EM2Z80HLT	R-134a	115-127V 60Hz 1~	60Hz	LBP	1.76	239	6.76	ISO10	RSCR-15μF	LST	ASHRAE32	
EM20HHR	R-134a	220-240V 50-60Hz 1~	50Hz	HBP	1/12	2.51	246	2.27	ISO22	RSIR-CSIR	LST	CECOMAF
EM20HBR	R-134a	115V 60Hz 1~	60Hz	HBP	1/12	2.37	289	2.27	ISO22	RSIR	LST	ASHRAE32
EM20HHR	R-134a	220-240V 50-60Hz 1~	60Hz	HBP	1/12	2.48	292	2.27	ISO22	RSIR-CSIR	LST	ASHRAE32
EM20HHR	R-134a	115-127V 60Hz 1~	60Hz	HBP	1/12	2.53	299	2.27	ISO22	RSIR-CSIR	LST	ASHRAE32
EMIS20HHR	R-134a	115-127V 60Hz 1~	60Hz	HBP	1/12	2.49	308	2.27	ISO22	RSIR-CSIR	LST	ASHRAE32
EMIS20HHR	R-134a	220V 60Hz 1~	60Hz	HBP	1/12	2.37	308	2.27	ISO22	RSIR-CSIR	LST	ASHRAE32



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Zanussi ,ZEL,
0F1033A, 1/5 hp, lbp, 220-240V, 50HZ,
R134A

Category: compressor

written by rober us | 30 March 2023



Mbsm.pro, Compressor,Zanussi ,ZEL, 0F1033A, 1/5 hp, lbp, 220-240V, 50HZ, R134A

- Voltage frequency
220-240V/50Hz
- Refrigerant / Réfrigérant
R134a
- Nominal horsepower / Horse Powr
1/5CV
- Application condition/ Application
PSL
- Cooling capacity (w) Capacité de refroidissement
50-70
- Type of engine
RSIR
- La temperature d'évaporation (W)
-23.3°C



○ R134a LBP 220-240V/50Hz

系列 压缩机 / LBP	型号	排气 量	电机 功率	电机 类型	制冷量 (W) 蒸发温度 (°C) / Cooling Capacity ASHRAE											输入 功率	能效 等级	高度
					-30	-25	-23.3	-20	-15	-10	-5	0	5	7.3	10			
					W / °C													
	Model	Displ.	Power	Motor type												Input Power without RC	COP without RC	Height (mm)
		cc	hp													W	W/W	mm
Tau 系列 / LBP	CP605	3.4	1/11	RSR	45	50	70	95	118	149	180	208			75	1.01	163	
	CP700	3.8	1/8	RSR	55	72	94	118	147	184	220	262			85	1.01	163	
	CP780	4.4	1/8	RSR	65	85	110	138	172	210	268	300			102	1.03	174	
	CP1030A	5.7	1/5	RSR	83	100	141	176	220	270	344	423			118	1.18	174	
	CP1350A	7.5	1/4	RSR	105	137	178	223	278	340	434	534			158	1.13	183	
Tau 中 系列 / LBP	GVY35AA	3.5	1/11	RSRRSRR	47	62	80	100	125	157	195	240			89	1.18	163	
	GVY40AA	4.0	1/7	RSRRSRR	58	77	100	125	156	190	244	300			83	1.20	174	
	GVY44AA	4.4	1/6	RSRRSRR	70	91	118	148	184	231	288	354			94	1.25	174	
	GVY53AA	5.3	1/5	RSRRSRR	82	107	138	174	217	272	339	417			105	1.33	174	
	GVY57AA	5.7	1/5	RSRRSRR	89	116	150	186	234	294	368	460			113	1.33	174	
	GVY66AA	6.6	1/4	RSRRSRR	107	140	182	228	284	357	444	546			133	1.37	174	
	GVY75AA	7.5	1/4	RSRRSRR	118	154	200	250	312	382	480	600			149	1.34	174	
	GTH6AA	6.6	1/4	RSRRSRR	136	172	230	285	358	451	561	690			185	1.43	174	
	GTH63AA	9.3	1/4	RSRRSRR	152	200	260	325	406	510	634	780			182	1.43	184	
	GTH63AA	9.3	1/4	RSR	150	200	270	338	421	525	659	810			230	1.35	184	
南德 系列 / LBP	GTM15AA	10.0	1/3	CSR	177	231	300	375	468	588	730	900			232	1.35	184	
	GTM12AA	12.0	1/3	CSR	190	254	330	413	515	647	805	990			241	1.37	184	

Private Picture Copyright : WWW.MBSM.PRO

○ R134a LBP 220-240V/50Hz

Lambda 系列 / LBP	QML20A	3.4	1/12	RSR	40	50	68	85	106	133	166	204				87	1.20	182
	QML115A	4.1	1/8	RSR	56	66	112	140	175	220	273	336				96	1.25	182
	QML140A	4.9	1/6	RSR	63	108	160	175	218	274	342	420				108	1.30	182
	QML1400	4.9	1/6	RSRRSRR	83	108	140	175	218	274	342	420				106	1.40	182
	QML1600	5.7	1/5	RSRRSRR	99	129	168	210	262	329	410	504				125	1.30	184
	QML180A	6.5	1/5	RSRRSRR	110	144	187	234	292	367	456	561				144	1.30	184
	QML200A	7.5	1/5	RSRRSRR	118	154	200	250	312	382	480	600				152	1.32	184
	QXL180A	5.7	1/7	RSR	104	136	176	220	275	340	420	528				1	1	184
	QXL200A	7.5	1/6	RSR	126	164	213	266	332	417	520	638				1	1	184

○ R134a M/HBP 220-240V/50Hz

中德 系列 / HBP	GL80TG	5.3	1/3	CSR				172	213	260	320	418	502	540	605	340	2.25	174
	GL80TB	7.5	1/2	CSR				204	252	308	380	486	595	640	717	352	2.44	174
	GL90TB	7.5	1/2	CSR				238	296	361	456	570	698	750	840	323	2.32	184
	GL10TB	9.3	1/2	CSR				248	307	375	470	583	725	780	874	342	2.28	184
	GL10TB	9.3	1/2	CSR				281	347	423	537	669	819	880	996	429	2.05	184
	GHF13AA	13.0	1	CSR				351	433	529	671	838	1029	1100	1232	530	2.00	215
	GHF15AA	15.0	1	CSR				418	512	625	793	988	1209	1300	1496	650	2.00	215
	GHF18AA	18.0	1	CSR				510	630	770	976	1218	1488	1600	1782	730	2.20	215
中德 系列 / HBP	GHF21AA	21.0	1	CSR				606	749	916	1158	1444	1767	1880	2128	800	2.10	215

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, embraco, aspera, egas80h1r, 1/4 hp++, 1/3 hp-, R134A, 195W

Category: compressor

written by rober us | 30 March 2023



Private Picture Copyright : WWW.MBSM.PRO

Compresseur hermétique Embraco EGAS80HLR – HMBP – R134a 220-240/1/50 – CSIR
Volume balayé : 6.36 cm³



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, aza2370y, 1/6
hp, r134a, Kulthorn


Category: compressor

written by rober us | 30 March 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, aza2370y, 1/6 hp, r134a, Kulthorn

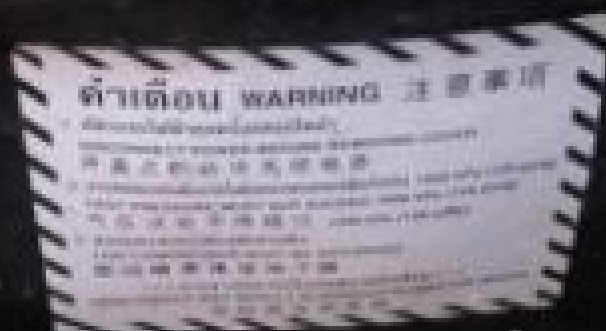

R134a LBP																
Model	Power kW	Displ. cm ³ /rev	Operating Temperature										Weight kg	Refrigerant G		
			Evaporating Temperature					Condensing Temperature								
			5°C	15°C	25°C	35°C	45°C	55°C	65°C	75°C	85°C	95°C				
220-240V/50Hz / 1 Ph.																
AE200Y	1/8	6.92	88	119	127	200	382	145	1.28	140	303	270	R.S.L.R	—	—	184
			88	119	127	200	440	134	1.48	140	303	279	R.S.C.S	—	4440	184
AE200Y	1/8	6.10	82	119	127	185	327	142	1.12	140	303	276	C.S.L.R	30-43/100	—	183
AE100MY	1/8	6.42	110	183	214	262	480	140	1.21	290	388	485	R.S.L.R	—	—	183
			110	183	214	240	478	190	1.30	290	388	485	R.S.C.R	—	4440	184
AE200Y	1/8	6.42	110	183	214	217	408	215	1.19	290	338	485	C.S.L.R	30-43/100	—	183
AE240Y	1/8	14.18	128	183	248	270	521	285	1.38	347	480	586	C.S.L.R	30-43/100	—	216
			128	183	248	270	521	210	1.28	347	480	586	C.S.R	30-43/100	4440	184
AE240Y	1/8	13.04	130	181	244	270	521	226	1.19	323	416	520	C.S.L.R	30-43/100	—	216
AE241Y	1/2	14.18	188	227	302	338	1128	285	1.18	388	493	607	C.S.L.R	30-43/100	—	216
AE241Y	1/2	16.15	188	241	324	375	1262	280	1.32	407	544	658	C.S.R	30-43/100	4440	212
AE240Y	3/8	18.80	188	240	320	400	1365	325	1.32	505	601	690	C.S.R	30-43/100	10440	216
115V/60Hz / 1 Ph.																
AEV20Y-6	1/10	2.72	33	48	88	77	282	77	1.00	84	124	180	R.S.L.R	—	—	182
AEV20Y-6	1/10	3.28	40	58	84	92	316	84	1.10	115	152	198	R.S.L.R	—	—	188
AEV20Y-6	1/10	3.89	41	67	88	110	375	87	1.12	125	176	222	R.S.L.R	—	—	188
AEV20Y-6	1/10	3.80	40	68	102	112	382	106	1.08	141	188	238	R.S.L.R	—	—	188
AEV20Y-6	1/10	4.00	52	86	111	128	430	120	1.00	152	205	260	R.S.L.R	—	—	188
AEV20Y-6	1/8	5.00	40	58	102	148	505	140	1.06	187	248	312	R.S.L.R	—	—	172
AEV20Y-6	1/8	5.89	49	102	182	180	616	158	1.10	220	302	385	R.S.L.R	—	—	178
AEV20Y-6	1/8	6.80	57	118	172	188	688	176	1.15	241	320	410	R.S.L.R	—	—	178
208-230V/60Hz / 1 Ph.																
AEV20Y-2	1/10	2.95	38	48	88	77	282	77	1.00	84	123	157	R.S.L.R	—	—	182
AEV20Y-2	1/10	3.28	40	58	84	92	316	86	1.07	115	152	188	R.S.L.R	—	—	188
AEV20Y-2	1/10	3.89	41	67	88	110	375	86	1.16	125	176	222	R.S.L.R	—	—	188
AEV20Y-2	1/10	3.80	52	74	102	118	382	106	1.11	141	184	238	R.S.L.R	—	—	188
AEV20Y-2	1/10	4.00	48	74	114	128	407	112	1.16	157	203	260	R.S.L.R	—	—	188

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Copeland, Scroll Compressor, série ZB, CR37K6M PFZ-101, 3 hp, r22

Category: compressor

written by rober us | 30 March 2023



Private Picture Copyright : WWW.MBSM.PRO

Copeland Scroll Compressor série ZB – Modèle CR37K6M PFZ-101

Puissance (HP) : 3,08

Ampères de charge nominaux (RLA) : 16

Ampères à rotor bloqué (LRA) : 90

Réfrigérant : R22

Alimentation électrique : 220-240V/1P/50Hz




Private Picture Copyright : WWW.MBSM.PRO

Model	R22, 50HZ					
	Capacity (W)	Input power (KW)	Input Current (A)	COP (W/W)	Oil injection (L)	Weight (kg)
MT18	3881	1.45	2.73	2.68	0.95	22
MT22	5363	1.89	3.31	2.84	0.95	23
MT28	7378	2.55	4.56	2.89	0.95	24.5
MT32	8064	2.98	4.97	2.7	0.95	25
MT36	9272	3.37	5.77	2.75	0.95	25.5
MT40	10475	3.85	6.47	2.72	0.95	26
MT44	11037	3.89	7.37	2.84	1.8	36
MT50	12324	4.32	8.46	2.85	1.8	37
MT56	12771	5.04	10.25	2.73	1.8	37
MT64	15820	5.66	9.54	2.79	1.8	37.5
MT72	17124	6.31	10.54	2.71	1.8	39
MT80	19534	7.13	11.58	2.74	1.8	42
MT100	23403	7.98	14.59	2.93	3.9	66
MT125	30429	10.66	17.37	2.85	3.9	68
MT144	34340	11.95	22.75	2.87	3.9	69
MT160	38273	13.39	22.16	2.86	3.9	69
MT200	46807	15.97	29.19	2.93	10.4	175
MT250	60858	21.33	34.73	2.85	10.4	180
MT288	68379	23.91	45.5	2.87	10.4	183
MT320	76547	26.79	44.32	2.86	10.4	185

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, LS19GBBDI, LG Refrigerator, 17.9 Cu.Ft , Silver PCM Color, Smart Inverter, Domper Compressor, vfl110cy1, 1/4 hp, r600a

Category: Refrigerator

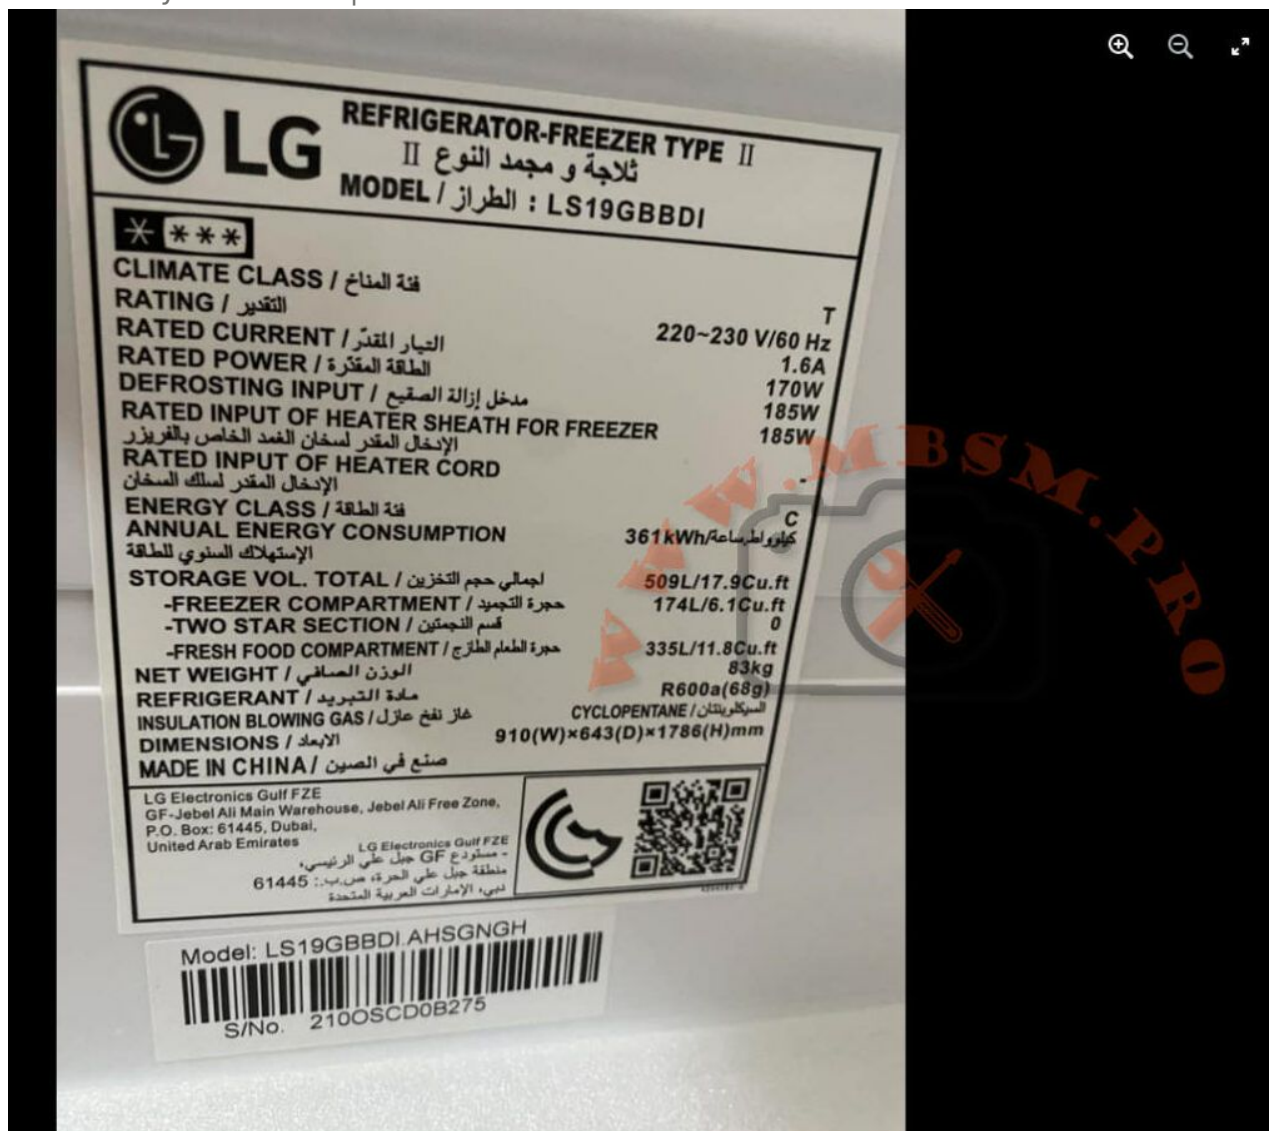

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Type	frequency conversion	Model	VFL110CY1
Refrigerant	R600a	Voltage	
Frequency		Application	LBP
HP		Displacement(cm ³)	11
Cooling	ST	Lubricant Type	
Lubricant(ml)		Motor Type	BLDC
Starting Type		Starter	

Mbsm.pro, Files, PDF, compressori
ortiz, all compressor in one file

Category: Files

written by rober us | 30 March 2023

Embraco

CONDIZIONI DI RESA	ASHRAE	TEMP. EVAPORAZIONE	MOTORE V.220/50Hz
Temp. condens.: + 55		da - 25 a +10°C (MBP-HBP)	CSIR=Condensatore di spurto e relè
Temp. liquido: + 46(32)		da - 40 a -10°C (LBP)	CSR=Condens. di spurto,marcia, relè.
Temp. ambiente: + 35			3Phase= V.380/50Hz
Temp. Gas aspir.: + 35			

ATTACCHI A SALDARE

R. 404

(MBP-HBP) MEDIA-ALTA TEMPERATURA OLIO ESTERE

CODICE ASPE-	MODELLO	HP	ASHRAE		CIL. cc	W.assorb.	Tipo Motore V220	PREZZO EURO,00
			Resa -10°	Watt 0°				
404H2105	NB 6144 GK	1/6	297	450	4.38	331	CSIR	142
404H2110	NB 6152 GK	1/5	351	530	4.85	375	CSIR	148
404H2115	NB 6165 GK	1/4	413	611	6.00	511	CSIR	155
404H2120	NB 6181 GK	1/4P	514	774	7.40	567	CSIR	160
404H2125	NE 6210 GK	1/3	595	935	8.90	620	CSIR	168
404H2130	NE 9213 GK	1/2	840	1303	12.00	740	CSR	185
404H2135	T 6217 GK	3/4	961	1515	14.50	1000	CSIR	290
404H2140	T 6220 GK	3/4	1164	1826	17.40	1100	CSR	328
404H2145	T 6222 GK	1	1554	2381	22.30	1500	CSR	340
404H2150	NJ/J 9226 GK	1	1587	2475	21.70	1320	CSR	400
404H2155	NJ/J 9232 GK	1.2	1904	2976	26.20	1620	CSR	406
404H2160	NJ/J 9238 GK	1.5	2420	3705	32.70	2100	CSR	412
404H2165	NJ/J 9226 GS	1	1587	2475	21.70	1280	3 Phase	408
404H2170	NJ/J 9232 GS	1.2	1904	2976	26.20	1600	3 Phase	410
404H2175	NJ/J 9238 GS	1.5	2420	3705	32.70	2000	3 Phase	420

Private Picture Copyright : WWW.MBSM.PRO

Embraco

CONDIZIONI DI RESA	ASHRAE	TEMP. EVAPORAZIONE	MOTORE V.220/50Hz
Temp. condens.: + 55		da - 25 a +10°C (MBP-HBP)	CSIR=Condensatore di spurto e relè
Temp. liquido: + 46(32)		da - 40 a -10°C (LBP)	CSR=Condens. di spurto,marcia, relè.
Temp. ambiente: + 35			3Phase= V.380/50Hz
Temp. Gas aspir.: + 35			

ATTACCHI A SALDARE

R. 404

(MBP-HBP) MEDIA-ALTA TEMPERATURA OLIO ESTERE

CODICE ASPE-	MODELLO	HP	ASHRAE		CIL. cc	W.assorb.	Tipo Motore V220	PREZZO EURO,00
			Resa -10°	Watt 0°				
404H2105	NB 6144 GK	1/6	297	450	4.38	331	CSIR	142
404H2110	NB 6152 GK	1/5	351	530	4.85	375	CSIR	148
404H2115	NB 6165 GK	1/4	413	611	6.00	511	CSIR	155
404H2120	NB 6181 GK	1/4P	514	774	7.40	567	CSIR	160
404H2125	NE 6210 GK	1/3	595	935	8.90	620	CSIR	168
404H2130	NE 9213 GK	1/2	840	1303	12.00	740	CSR	185
404H2135	T 6217 GK	3/4	961	1515	14.50	1000	CSIR	290
404H2140	T 6220 GK	3/4	1164	1826	17.40	1100	CSR	328
404H2145	T 6222 GK	1	1554	2381	22.30	1500	CSR	340
404H2150	NJ/J 9226 GK	1	1587	2475	21.70	1320	CSR	400
404H2155	NJ/J 9232 GK	1.2	1904	2976	26.20	1620	CSR	406
404H2160	NJ/J 9238 GK	1.5	2420	3705	32.70	2100	CSR	412
404H2165	NJ/J 9226 GS	1	1587	2475	21.70	1280	3 Phase	408
404H2170	NJ/J 9232 GS	1.2	1904	2976	26.20	1600	3 Phase	410
404H2175	NJ/J 9238 GS	1.5	2420	3705	32.70	2000	3 Phase	420

Private Picture Copyright : WWW.MBSM.PRO

SAMSUNG RSA1ZTWP

Category: Refrigerator
written by rober us | 30 March 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, regenerator, SAMSUNG, RSA1ZTWP, 555 L, Compressor, 1/3 hp



Private Picture Copyright : WWW.MBSM.PRO

SAMSUNG



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

SUNG



S/N:Y2EH4ADD100340F

REFRIGERATOR MODEL:	RSA1NTWP	طراز التلاجة
DIMENSION (W X D X H):	912mm X 734mm X 178mm	الأبعاد (العرض « العمق « الارتفاع)
GROSS CAPACITY:	555 ltr	السعة الإجمالية
SASO VOLUME:	18.57 Cu.ft	حجم SASO
RATED VOLTAGE:	220V-	الجهد المقدر
RATED FREQUENCY:	50-60Hz	التردد المقدر
RATED CURRENT:	0.8A	التيار المقدر
DEFROSTING INPUT:	280W	إدخال إذابة الثلج
POWER CONSUMPTION:	2.25kWh/24h	استهلاك الطاقة
PERCENTAGE RUNNING TIME:	56%	النسبة المئوية لمدة التشغيل
CLIMATIC CLASS OF THE APPLIANCE:	T	الفئة المناخية للمعدات
INSULATION CLASS OF MOTOR COMPRESSOR (MOTOR):	B	فئة عزل لفائف مضخة المحرك
RATED MAXIMUM INPUT OF LAMP:	(FREEZER) LED 1 (W) (REFRIGERATOR) LED 1 (W)	المد الأقصى للإضاءة المقدر للمصابيح
NAME OF REFRIGERANT:	R-134a	الغاز المبرد بالتلاجة
MASS OF REFRIGERANT:	0.19kg	حجم الغاز المبرد
INSULATION BLOWING GAS:	CYCLO-PENTANE	غاز العزل المتدفق
YEAR OF MANUFACTURE:	2013	عام الإنتاج
MADE IN CHINA		صنع في الصين

DA99-01770X



Private Picture Copyright : WWW.MBSM.PRO



Mbsm.pro, Compressor, a13rv, 1/2 hp,
Capacitor staring 53 to 64 mfr

Category: compressor

written by www.mbsm.pro | 30 March 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, a13rv, 1/2 hp, Capacitor staring 53 to 64 mrf