

Mbsm.pro, Dongbei compressor,
aluminum wire, R600a, R134a, S65CY1,
S75CY1, S80CY1, S96CY1, H170CY1,
L118CY1, L126CY1, L140CY1, K270CY1,
D40CY1, D53CY1, D65CY1, A80CY1,
A100CY1, A120CY

Category: compressor

written by mahdi miled | 17 November 2022



Mbsm.pro, Dongbei compressor, aluminum wire, R600a, R134a, S65CY1, S75CY1, S80CY1, S96CY1, H170CY1, L118CY1, L126CY1, L140CY1, K270CY1, D40CY1, D53CY1, D65CY1, A80CY1, A100CY1, A120CY

Mbsm.pro, compressor, Highly,
hitachi, rotary, SHX33 , shx33sc4-u,
2.5 hp, 17750 btu, R22

Category: compressor

written by Jamila | 17 November 2022



Mbsm.pro, Danfoss, Reciprocating, compressor, NLX11KK.2, 105H6971, NLX11KK.2 105H6971, 1/4 hp++, 1/3 hp-, r600a

Category: compressor

written by mahdi miled | 17 November 2022



			-35	-30	-20	-15	-10	-5	0	5	[W]	[W/W]	[W/W]	[W]	[kcal/h]	[W/W]	[kcal/Wh]
Energy optimized	1.	PLE35K	101H0360								27		0.68	38	33		
		TLES4KK.3	102H4438	19	29	57	75	96			42	0.90		57	49	1.18	
		TLES4.8KK.3	102H4538	28	40	73	94	119			55	1.00		74	65	1.30	
		TLES5.7KK.3	102H4638	36	50	89	114	144			68	1.02		91	79	1.32	
		TLES6.5KK.3	102H4738	45	61	105	134	168			81	1.02		108	94	1.31	
		TLES7.5KK.3	102H4838	53	71	122	155	194			94	1.02	1.07	126	108	1.32	1.14
		TLES8.7KK.3	102H4938	62	83	143	181	228			110	1.03	1.08	147	126	1.33	1.14
		TLES10KK.3	102H4038								130	1.04		172	148	1.35	1.15
		NLE8.8KK.4	105H6800	63	84	141	179	223			110	1.18	1.22	147	127	1.51	1.30
		NLE10KK.4	105H6867	74	98	164	207	257			128	1.19	1.23	170	151	1.51	1.30
4.		NLE11KK.4	105H6952	82	109	184	232	290			143	1.19	1.22	191	165	1.52	1.31
		NLE13KK.4	105H6959	99	131	217	274	340			170	1.18	1.23	226	194	1.50	1.29
		NLE15KK.4	105H6968	110	146	243	307	382			190	1.20	1.25	253	213	1.53	1.32
		TLY4 KK.3	102H4442	19	29	57	74	95			42	0.96	0.99	57	49	1.26	1.08
		TLY4.8KK.3	102H4542	28	40	73	94	119			55	1.04	1.06	74	65	1.35	1.16
		TLY5.7KK.3	102H4642	36	51	89	114	144			68	1.03	1.06	91	79	1.33	1.15
		TLY6.5KK.3	102H4742	46	62	106	135	170			82	1.10	1.14	110	94	1.42	1.22
		TLY7.5KK.3	102H4842	53	71	122	155	194			94	1.09	1.14	126	108	1.41	1.22
		TLY8.7KK.3	102H4942	65	86	144	182	227			112	1.12	1.16	149	126	1.44	1.24
		TLX4KK.3	102H4447	21	32	59	76	95			45		1.15***	60	52		
High Energy optimized		TLX4.8KK.3	102H4547	36	52	90	116	146			57		1.24***	76	65		
		TLX5.7KK.3	102H4647	37	52	91	115	143			70		1.28***	93	80		
		TLX6.5KK.3	102H4747	46	63	106	133	165			83		1.30***	110	95		
		TLX7.5KK.3	102H4847	55	75	125	157	195			98		1.32***	130	112		
		TLX8.7KK.3	102H4947	65	88	146	184	227			115		1.31***	152	131		
		NLX8.8KK	105H6874	60	83	144	182	227			111		1.35	148	127		
		NLX10KK	105H6871	74	100	169	215	269			131		1.36	174	150		
		NLX11KK	105H6984	84	112	189	240	300			147		1.36	195	168		
		NLX13KK	105H6983	98	133	223	282	350			174		1.36	231	199		
		NLX15KK	105H6981	110	147	249	317	397			193		1.34	257	221		
2.		NLX8.0KK.2	105H6010	52	73	130	167	210			99		1.47***	133	115		
		NLX8.8KK.2	105H6011	62	85	147	187	234			113		1.49***	151	130		
		NLX10KK.2	105H6101	75	101	171	217	271			133		1.49***	178	153		
		NLX11KK.2	105H6971	86	115	192	242	301			150		1.49***	200	172		

Private Picture Copyright : WWW.MBSM.PRO

Description

Product details

Gross weight 12.47 kg

Net weight 12.47 kg

Gross weight 12.47 kg

Net weight 12.47 kg

Application energy level

Applications

Auxiliary winding resistance (start winding) for single-phase compressors alt [Ohm]

Base plate type

Brand technique

High Energy-optimized
LBP

31.8 Ohm

EU small

Reciprocating compressor

Capacity control	Fixed speed
Colour	Black
Compressor power supply [V/Ph/Hz]	220-240/1/50
Configuration code	Single
Cut in current LST [A]	6.4 A
Description	NLX11KK.2
Discharge connection angle [°]	21 °
Discharge connection comments	Al-cap
Discharge connection diameter [mm]	5 mm
Discharge connection material	Cu-plated steel
Economizer	No
Free gas volume [cm ³]	2360 cm ³
Frequency [Hz]	50
Height from baseplate [mm]	197 mm
High value of nominal voltage at 50Hz [V]	240 V
High value of voltage range at 50Hz [V]	255 V
Length [mm]	252 mm
Liquid injection	No
Low value of nominal voltage at 50Hz [V]	220 V
Low value of voltage range at 50Hz [V]	187 V
LRA LST [A]	3.5 A
Main winding resistance for single-phase compressors [Ohm]	18.5 Ohm
Model number	NLX11KK.2
Motor type	RSCR
No. of phases (compressor)	1
Oil quantity [cm ³]	270 cm ³
Oil type	P0E
Packing format	Industrial pack
Packing quantity	80
Process connection angle [°]	25 °
Process connection comments	Al-cap
Process connection diameter [mm]	6.2 mm
Process connection material	Cu-plated steel
Refrigerant	R600a
Refrigerant charge [kg] [Max]	0.15 kg
RLA	0.70 A
Rotational speed at 50Hz [rpm]	3000 rpm
Run capacitor capacitance	2 µF
Segment usage	Refrigeration LT
Speed Platform	Fixed-speed
Suction connection angle [°]	2 °
Suction connection comments	Al-cap
Suction connection diameter [mm]	6.2 mm
Suction connection material	Cu-plated steel
Swept volume [cm ³]	11.15 cm ³

Technology	Reciprocating
Total height [mm]	203 mm
Type	NL
Type designation	Compressor
Voltage 50Hz [V]	220 V
Voltage 50Hz [V] [Max]	240 V
Width [mm]	166 mm
Winding temperature short term [°C] [Max]	110 °C
Winding temperature stat [°C] [Max]	95 °C
Application energy level	High Energy-optimized
Applications	LBP
Auxiliary winding resistance (start winding) for single-phase compressors alt [Ohm]	31.8 Ohm
Base plate type	EU small
Brand technique	Reciprocating compressor
Capacity control	Fixed speed
Colour	Black
Compressor power supply [V/Ph/Hz]	220-240/1/50
Configuration code	Single
Cut in current LST [A]	6.4 A
Description	NLX11KK.2
Discharge connection angle [°]	21 °
Discharge connection comments	Al-cap
Discharge connection diameter [mm]	5 mm
Discharge connection material	Cu-plated steel
Economizer	No
Free gas volume [cm3]	2360 cm3
Frequency [Hz]	50
Height from baseplate [mm]	197 mm
High value of nominal voltage at 50Hz [V]	240 V
High value of voltage range at 50Hz [V]	255 V
Length [mm]	252 mm
Liquid injection	No
Low value of nominal voltage at 50Hz [V]	220 V
Low value of voltage range at 50Hz [V]	187 V
LRA LST [A]	3.5 A
Main winding resistance for single-phase compressors [Ohm]	18.5 Ohm
Model number	NLX11KK.2
Motor type	RSCR
No. of phases (compressor)	1
Oil quantity [cm3]	270 cm3
Oil type	P0E
Packing format	Industrial pack
Packing quantity	80
Process connection angle [°]	25 °

Process connection comments	Al-cap
Process connection diameter [mm]	6.2 mm
Process connection material	Cu-plated steel
Refrigerant	R600a
Refrigerant charge [kg] [Max]	0.15 kg
RLA	0.70 A
Rotational speed at 50Hz [rpm]	3000 rpm
Run capacitor capacitance	2 ÂµF
Segment usage	Refrigeration LT
Speed Platform	Fixed-speed
Suction connection angle [Â°]	2 Â°
Suction connection comments	Al-cap
Suction connection diameter [mm]	6.2 mm
Suction connection material	Cu-plated steel
Swept volume [cm3]	11.15 cm3
Technology	Reciprocating
Total height [mm]	203 mm
Type	NL
Type designation	Compressor
Voltage 50Hz [V]	220 V
Voltage 50Hz [V] [Max]	240 V
Width [mm]	166 mm
Winding temperature short term [Â°C] [Max]	110 Â°C
Winding temperature stat [Â°C] [Max]	95 Â°C
Refrigerant: R600a, Segment usage: Refrigeration LT, Compressor power supply [V/Ph/Hz]: 220-240/1/50	

		-35	-30	-20	-10	-5	0	5	(W)	(W/W)	(W/W)	(W)	(kcal/h)	(W/W)	(kcal/h)
Energy-optimized	PLE3K	10294360			38	52	66	87	109		27	0.90	38	53	
	TLK3.8KK.3	10294438	19	29	57	75	96			42	0.90	57	49	1.18	
	TLK4.8KK.3	10294538	28	40	73	94	119			55	1.00	74	65	1.30	
	TLK5.7KK.3	10294638	36	50	89	114	144			68	1.02	91	79	1.32	
	TLK6.4KK.3	10294738	45	61	105	134	168			81	1.02	108	94	1.31	
	TLK7.5KK.3	10294838	53	71	122	155	194			94	1.02	126	108	1.32	1.14
	TLK8.7KK.3	10294938	62	83	143	181	226			110	1.03	147	126	1.33	1.14
	TLK10KK.3	10295038								130	1.04	172	148	1.35	1.15
	NLK3.8KK.4	10294800	13	24	44	59	73			110	1.18	122	127	1.51	1.30
	NLK5.7KK.4	10294907	24	35	64	87	107			128	1.19	123	131	1.51	1.30
	NLK7.5KK.4	10295012	32	46	84	112	140			143	1.19	122	131	1.52	1.31
	NLK10KK.4	10295109	39	53	97	127	160			170	1.18	123	134	1.50	1.29
High Energy-optimized	NLK15KK.4	10295168	110	146	243	307	382			190	1.20	125	213	1.53	1.32
	TLK4.8KK.3	10294442	19	29	57	74	95			42	0.96	0.99	57	49	1.26
	TLK4.8KK.3	10294542	28	40	73	94	119			55	1.04	1.06	74	65	1.35
	TLK5.7KK.3	10294642	36	51	89	114	144			68	1.03	1.06	91	79	1.33
	TLK6.4KK.3	10294742	46	62	106	135	170			82	1.10	1.14	110	94	1.42
	TLK7.5KK.3	10294842	53	71	122	155	194			94	1.09	1.14	126	108	1.41
	TLK8.7KK.3	10294942	65	86	144	182	227			112	1.12	1.16	149	126	1.44
	TLK10KK.3	10294447	21	32	59	76	95			45	1.15***	60	52		
	TLK6.4KK.3	10294547	36	52	90	116	146			57	1.24***	76	65		
	TLK7.5KK.3	10294647	37	52	91	115	143			70	1.28***	88	80		
	TLK8.7KK.3	10294747	46	62	106	133	163			83	1.30***	110	95		
	TLK7.5KK.3	10294847	55	75	125	157	195			96	1.32***	130	112		
	TLK8.7KK.3	10294947	65	88	146	184	227			115	1.32***	152	131		
High Energy-optimized	NLX10KK	10294874	60	83	144	182	227			111	1.35	148	127		
	NLX10KK	10294871	74	100	169	215	269			131	1.36	174	150		
	NLX10KK	10294884	84	112	189	240	300			147	1.36	195	168		
	NLX10KK	10294893	98	133	223	282	350			174	1.36	231	199		
	NLX10KK	10294891	110	147	249	317	397			193	1.34	257	221		
	NLX8.7KK.2	10294810	52	73	130	167	210			99	1.42***	133	115		
	NLX8.7KK.2	10294811	62	85	147	187	234			113	1.49***	151	130		
	NLX10KK.2	10294821	75	101	171	217	271			133	1.49***	178	153		
	NLX10KK.2	10294871	86	115	192	242	301			150	1.49***	200	172		

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, PW3.5VK,
DFV4.0HF, DFV4.5HF, DFV5.5HF,
DFV6.5HF, DFV6.5HF, DFV7.5HF,

Category: compressor

written by mahdi miled | 17 November 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, PW3.5VK, DFV4.0HF, DFV4.5HF, DFV5.5HF, DFV6.5HF, DFV6.5HF,
DFV7.5HF,

Mbsm.pro, Compressor, nf10fx,
Danfoss, 1/3 hp, LBP, MBP, 1046 btu,
115 v

Category: compressor

written by Jamila | 17 November 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, nf10fx, Danfoss, 1/3 hp, LBP, MBP, 1046 btu, 115 v

Mbsm.pro, Picture, reversing valve

Category: Pictures

written by mahdi miled | 17 November 2022




Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Picture, reversing valve



Private Picture Copyright : WWW.MBSM.PRO

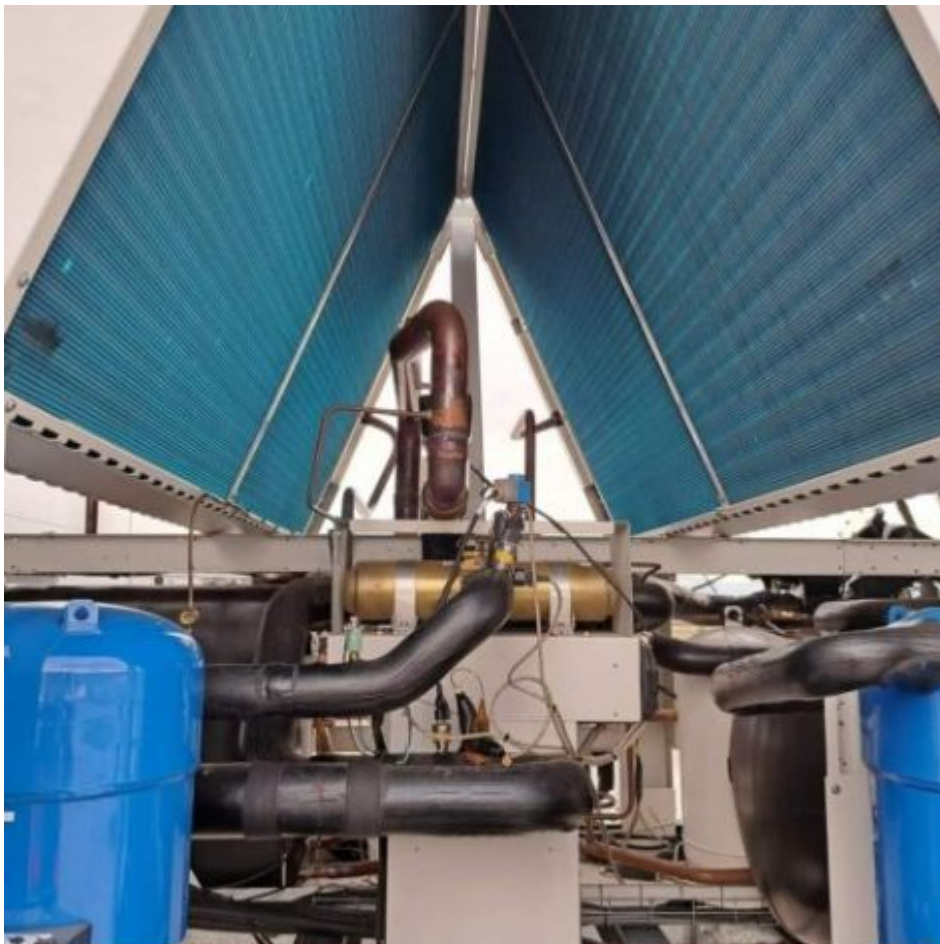

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO


Mbsm.pro, R-410A, Fixed Speed,
Rotary, Compressor, Mitsubishi,
NN21YDAMT, 1.74 hp, 18000 btu, 3 Ph,
380 v

Category: compressor

written by Jamila | 17 November 2022



SIAM COMPRESSOR
INDUSTRY CO., LTD.



REFRIGERANT COMPRESSOR

MODEL **NN21YDAMT**

MANUFACTURING DATE **05112016**

POWER SOURCE

380-415V 3~ 50Hz

460V 3~ 60Hz

POWER INPUT **1780** W AT **50** Hz

LRA **31/33** A

REFRIGERANT **R-410A**

OIL **1.20 L**

AP **4.15** MPa

SP **15.0** MPa

THERMALLY PROTECTED

MADE IN THAILAND



Mbsm.pro, R-410A, Fixed Speed, Rotary, Compressor, Mitsubishi, NN21YDAMT, 1.74 hp, 18000 btu, 3 Ph, 380 v

Mbsm.pro, Cubigel, GP16TB, hermetic, compressor, 3/8 hp++, 1/2 hp-, HBP, R134a, R1234yf, CSIR,

Category: compressor

written by www.mbsm.pro | 17 November 2022



Private Picture Copyright : WWW.MBSM.PRO


Mbsm.pro, Cubigel, GP16TB, hermetic, compressor, 3/8 hp++, 1/2 hp-, HBP, R134a,

R1234yf, CSIR,

Mbsm.pro, Freezer, 135 L, Ch140,
Mondial for home appliance,
compressor, LG63DZ1, 1/4– hp, 1/5 hp,
r134a, 110 g

Category: compressor, Freezer

written by Jamila | 17 November 2022

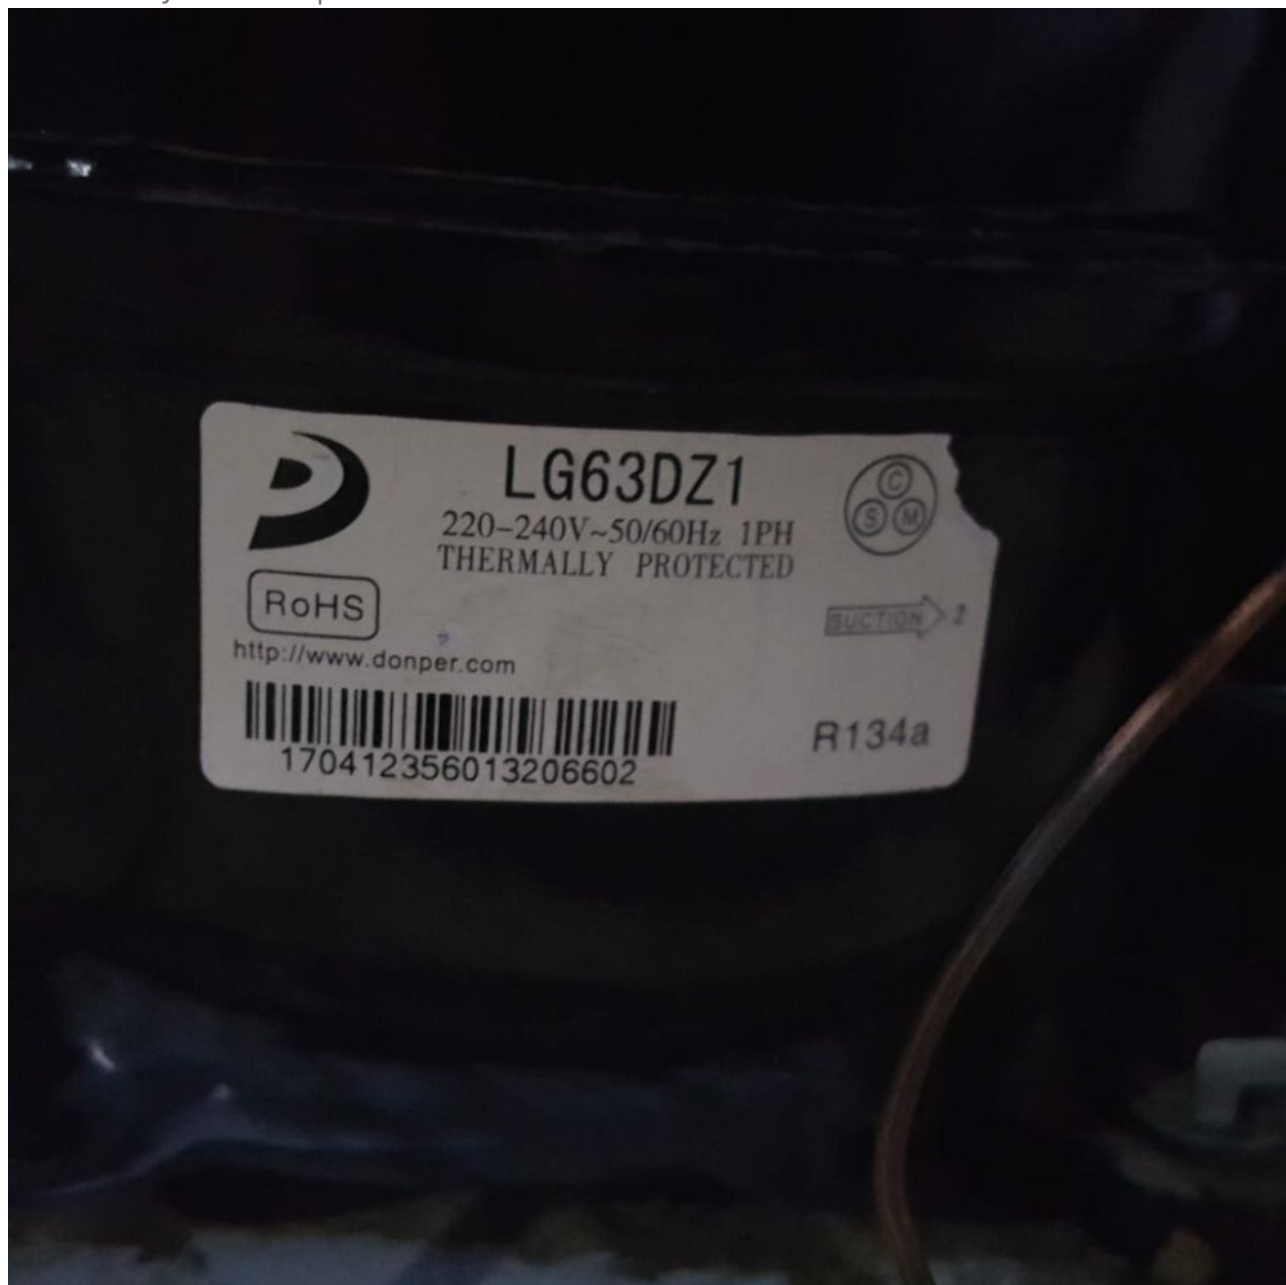

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Freezer, 135 L, Ch140, Mondial for home appliance, compressor,
LG63DZ1, 1/4 hp, r134a, 110 g

Mbsm.pro, Donper, compressor,
aluminum, wire, R600a, R134a,
Exemple, a100cy1, 1/5 hp, 93 w, Lbp,
R600a

Category: compressor

written by Jamila | 17 November 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Donper, compressor, aluminum, wire, R600a, R134a, Exemple, a100cy1, 1/5 hp, 93 w, Lbp, R600a