

Mbsm.pro, Dongbei compressor,  
aluminum wire, R600a, R134a, S65CY1,  
S75CY1, S80CY1, S96CY1, H170CY1,  
L118CY1, L126CY1, L140CY1, K270CY1,  
D40CY1, D53CY1, D65CY1, A80CY1,  
A100CY1, A120CY

Category: compressor

written by mahdi miled | 17 November 2022



Mbsm.pro, Dongbei compressor, aluminum wire, R600a, R134a, S65CY1, S75CY1, S80CY1, S96CY1, H170CY1, L118CY1, L126CY1, L140CY1, K270CY1, D40CY1, D53CY1, D65CY1, A80CY1, A100CY1, A120CY

---

Mbsm.pro, compressor, Highly,  
hitachi, rotary, SHX33 , shx33sc4-u,  
2.5 hp, 17750 btu, R22

Category: compressor

written by Jamila | 17 November 2022



# Mbsm.pro, Danfoss, Reciprocating, compressor, NLX11KK.2, 105H6971, NLX11KK.2 105H6971, 1/4 hp++, 1/3 hp-, r600a

Category: compressor

written by mahdi miled | 17 November 2022



|                       |    |             |          | -35 | -30 | -20 | -15 | -10 | -5 | 0   | 5 | [W] | [W/W] | [W/W]   | [W] | [kcal/h] | [W/W] | [kcal/Wh] |
|-----------------------|----|-------------|----------|-----|-----|-----|-----|-----|----|-----|---|-----|-------|---------|-----|----------|-------|-----------|
| Energy optimized      | 1. | PLE35K      | 101H0360 |     |     | 38  | 52  | 68  | 87 | 109 |   | 27  |       | 0.68    | 38  | 33       |       |           |
|                       |    | TLES4KK.3   | 102H4438 | 19  | 29  | 57  | 75  | 96  |    |     |   | 42  | 0.90  |         | 57  | 49       | 1.18  |           |
|                       |    | TLES4.8KK.3 | 102H4538 | 28  | 40  | 73  | 94  | 119 |    |     |   | 55  | 1.00  |         | 74  | 65       | 1.30  |           |
|                       |    | TLES5.7KK.3 | 102H4638 | 36  | 50  | 89  | 114 | 144 |    |     |   | 68  | 1.02  |         | 91  | 79       | 1.32  |           |
|                       |    | TLES6.5KK.3 | 102H4738 | 45  | 61  | 105 | 134 | 168 |    |     |   | 81  | 1.02  |         | 108 | 94       | 1.31  |           |
|                       |    | TLES7.5KK.3 | 102H4838 | 53  | 71  | 122 | 155 | 194 |    |     |   | 94  | 1.02  | 1.07    | 126 | 108      | 1.32  | 1.14      |
|                       |    | TLES8.7KK.3 | 102H4938 | 62  | 83  | 143 | 181 | 228 |    |     |   | 110 | 1.03  | 1.08    | 147 | 126      | 1.33  | 1.14      |
|                       |    | TLES10KK.3  | 102H4038 |     |     |     |     |     |    |     |   | 130 | 1.04  |         | 172 | 148      | 1.35  | 1.15      |
|                       |    | NLE8.8KK.4  | 105H6800 | 63  | 84  | 141 | 179 | 223 |    |     |   | 110 | 1.18  | 1.22    | 147 | 127      | 1.51  | 1.30      |
|                       |    | NLE10KK.4   | 105H6867 | 74  | 98  | 164 | 207 | 257 |    |     |   | 128 | 1.19  | 1.23    | 170 | 151      | 1.51  | 1.30      |
| High Energy optimized | 4. | NLE11KK.4   | 105H6952 | 82  | 109 | 184 | 232 | 290 |    |     |   | 143 | 1.19  | 1.22    | 191 | 165      | 1.52  | 1.31      |
|                       |    | NLE13KK.4   | 105H6959 | 99  | 131 | 217 | 274 | 340 |    |     |   | 170 | 1.18  | 1.23    | 226 | 194      | 1.50  | 1.29      |
|                       |    | NLE15KK.4   | 105H6968 | 110 | 146 | 243 | 307 | 382 |    |     |   | 190 | 1.20  | 1.25    | 253 | 213      | 1.53  | 1.32      |
|                       |    | TLY4 KK.3   | 102H4442 | 19  | 29  | 57  | 74  | 95  |    |     |   | 42  | 0.96  | 0.99    | 57  | 49       | 1.26  | 1.08      |
|                       |    | TLY4.8KK.3  | 102H4542 | 28  | 40  | 73  | 94  | 119 |    |     |   | 55  | 1.04  | 1.06    | 74  | 65       | 1.35  | 1.16      |
|                       |    | TLY5.7KK.3  | 102H4642 | 36  | 51  | 89  | 114 | 144 |    |     |   | 68  | 1.03  | 1.06    | 91  | 79       | 1.33  | 1.15      |
|                       |    | TLY6.5KK.3  | 102H4742 | 46  | 62  | 106 | 135 | 170 |    |     |   | 82  | 1.10  | 1.14    | 110 | 94       | 1.42  | 1.22      |
|                       |    | TLY7.5KK.3  | 102H4842 | 53  | 71  | 122 | 155 | 194 |    |     |   | 94  | 1.09  | 1.14    | 126 | 108      | 1.41  | 1.22      |
|                       |    | TLY8.7KK.3  | 102H4942 | 65  | 86  | 144 | 182 | 227 |    |     |   | 112 | 1.12  | 1.16    | 149 | 126      | 1.44  | 1.24      |
|                       |    | TLX4KK.3    | 102H4447 | 21  | 32  | 59  | 76  | 95  |    |     |   | 45  |       | 1.15*** | 60  | 52       |       |           |
| High Energy optimized | 3. | TLX4.8KK.3  | 102H4547 | 36  | 52  | 90  | 116 | 146 |    |     |   | 57  |       | 1.24*** | 76  | 65       |       |           |
|                       |    | TLX5.7KK.3  | 102H4647 | 37  | 52  | 91  | 115 | 143 |    |     |   | 70  |       | 1.28*** | 93  | 80       |       |           |
|                       |    | TLX6.5KK.3  | 102H4747 | 46  | 63  | 106 | 133 | 165 |    |     |   | 83  |       | 1.30*** | 110 | 95       |       |           |
|                       |    | TLX7.5KK.3  | 102H4847 | 55  | 75  | 125 | 157 | 195 |    |     |   | 98  |       | 1.32*** | 130 | 112      |       |           |
|                       |    | TLX8.7KK.3  | 102H4947 | 65  | 88  | 146 | 184 | 227 |    |     |   | 115 |       | 1.31*** | 152 | 131      |       |           |
|                       | 1. | NLX8.8KK    | 105H6874 | 60  | 83  | 144 | 182 | 227 |    |     |   | 111 |       | 1.35    | 148 | 127      |       |           |
|                       |    | NLX10KK     | 105H6871 | 74  | 100 | 169 | 215 | 269 |    |     |   | 131 |       | 1.36    | 174 | 150      |       |           |
|                       |    | NLX11KK     | 105H6984 | 84  | 112 | 189 | 240 | 300 |    |     |   | 147 |       | 1.36    | 195 | 168      |       |           |
|                       |    | NLX13KK     | 105H6983 | 98  | 133 | 223 | 282 | 350 |    |     |   | 174 |       | 1.36    | 231 | 199      |       |           |
|                       |    | NLX15KK     | 105H6981 | 110 | 147 | 249 | 317 | 397 |    |     |   | 193 |       | 1.34    | 257 | 221      |       |           |
| 2.                    |    | NLX8.0KK.2  | 105H6010 | 52  | 73  | 130 | 167 | 210 |    |     |   | 99  |       | 1.47*** | 133 | 115      |       |           |
|                       |    | NLX8.8KK.2  | 105H6011 | 62  | 85  | 147 | 187 | 234 |    |     |   | 113 |       | 1.49*** | 151 | 130      |       |           |
|                       |    | NLX10KK.2   | 105H6101 | 75  | 101 | 171 | 217 | 271 |    |     |   | 133 |       | 1.49*** | 178 | 153      |       |           |
|                       |    | NLX11KK.2   | 105H6971 | 86  | 115 | 192 | 242 | 301 |    |     |   | 150 |       | 1.49*** | 200 | 172      |       |           |

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Description

## Product details

Gross weight 12.47 kg

Net weight 12.47 kg

Gross weight 12.47 kg

Net weight 12.47 kg

Application energy level

Applications

Auxiliary winding resistance (start winding) for single-phase compressors alt [Ohm]

Base plate type

Brand technique

High Energy-optimized  
LBP

31.8 Ohm

EU small

Reciprocating compressor

|                                                            |                       |
|------------------------------------------------------------|-----------------------|
| Capacity control                                           | Fixed speed           |
| Colour                                                     | Black                 |
| Compressor power supply [V/Ph/Hz]                          | 220-240/1/50          |
| Configuration code                                         | Single                |
| Cut in current LST [A]                                     | 6.4 A                 |
| Description                                                | NLX11KK.2             |
| Discharge connection angle [°]                             | 21 °                  |
| Discharge connection comments                              | Al-cap                |
| Discharge connection diameter [mm]                         | 5 mm                  |
| Discharge connection material                              | Cu-plated steel       |
| Economizer                                                 | No                    |
| Free gas volume [cm <sup>3</sup> ]                         | 2360 cm <sup>3</sup>  |
| Frequency [Hz]                                             | 50                    |
| Height from baseplate [mm]                                 | 197 mm                |
| High value of nominal voltage at 50Hz [V]                  | 240 V                 |
| High value of voltage range at 50Hz [V]                    | 255 V                 |
| Length [mm]                                                | 252 mm                |
| Liquid injection                                           | No                    |
| Low value of nominal voltage at 50Hz [V]                   | 220 V                 |
| Low value of voltage range at 50Hz [V]                     | 187 V                 |
| LRA LST [A]                                                | 3.5 A                 |
| Main winding resistance for single-phase compressors [Ohm] | 18.5 Ohm              |
| Model number                                               | NLX11KK.2             |
| Motor type                                                 | RSCR                  |
| No. of phases (compressor)                                 | 1                     |
| Oil quantity [cm <sup>3</sup> ]                            | 270 cm <sup>3</sup>   |
| Oil type                                                   | P0E                   |
| Packing format                                             | Industrial pack       |
| Packing quantity                                           | 80                    |
| Process connection angle [°]                               | 25 °                  |
| Process connection comments                                | Al-cap                |
| Process connection diameter [mm]                           | 6.2 mm                |
| Process connection material                                | Cu-plated steel       |
| Refrigerant                                                | R600a                 |
| Refrigerant charge [kg] [Max]                              | 0.15 kg               |
| RLA                                                        | 0.70 A                |
| Rotational speed at 50Hz [rpm]                             | 3000 rpm              |
| Run capacitor capacitance                                  | 2 µF                  |
| Segment usage                                              | Refrigeration LT      |
| Speed Platform                                             | Fixed-speed           |
| Suction connection angle [°]                               | 2 °                   |
| Suction connection comments                                | Al-cap                |
| Suction connection diameter [mm]                           | 6.2 mm                |
| Suction connection material                                | Cu-plated steel       |
| Swept volume [cm <sup>3</sup> ]                            | 11.15 cm <sup>3</sup> |

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Technology                                                                          | Reciprocating            |
| Total height [mm]                                                                   | 203 mm                   |
| Type                                                                                | NL                       |
| Type designation                                                                    | Compressor               |
| Voltage 50Hz [V]                                                                    | 220 V                    |
| Voltage 50Hz [V] [Max]                                                              | 240 V                    |
| Width [mm]                                                                          | 166 mm                   |
| Winding temperature short term [°C] [Max]                                           | 110 °C                   |
| Winding temperature stat [°C] [Max]                                                 | 95 °C                    |
| Application energy level                                                            | High Energy-optimized    |
| Applications                                                                        | LBP                      |
| Auxiliary winding resistance (start winding) for single-phase compressors alt [Ohm] | 31.8 Ohm                 |
| Base plate type                                                                     | EU small                 |
| Brand technique                                                                     | Reciprocating compressor |
| Capacity control                                                                    | Fixed speed              |
| Colour                                                                              | Black                    |
| Compressor power supply [V/Ph/Hz]                                                   | 220-240/1/50             |
| Configuration code                                                                  | Single                   |
| Cut in current LST [A]                                                              | 6.4 A                    |
| Description                                                                         | NLX11KK.2                |
| Discharge connection angle [°]                                                      | 21 °                     |
| Discharge connection comments                                                       | Al-cap                   |
| Discharge connection diameter [mm]                                                  | 5 mm                     |
| Discharge connection material                                                       | Cu-plated steel          |
| Economizer                                                                          | No                       |
| Free gas volume [cm3]                                                               | 2360 cm3                 |
| Frequency [Hz]                                                                      | 50                       |
| Height from baseplate [mm]                                                          | 197 mm                   |
| High value of nominal voltage at 50Hz [V]                                           | 240 V                    |
| High value of voltage range at 50Hz [V]                                             | 255 V                    |
| Length [mm]                                                                         | 252 mm                   |
| Liquid injection                                                                    | No                       |
| Low value of nominal voltage at 50Hz [V]                                            | 220 V                    |
| Low value of voltage range at 50Hz [V]                                              | 187 V                    |
| LRA LST [A]                                                                         | 3.5 A                    |
| Main winding resistance for single-phase compressors [Ohm]                          | 18.5 Ohm                 |
| Model number                                                                        | NLX11KK.2                |
| Motor type                                                                          | RSCR                     |
| No. of phases (compressor)                                                          | 1                        |
| Oil quantity [cm3]                                                                  | 270 cm3                  |
| Oil type                                                                            | POE                      |
| Packing format                                                                      | Industrial pack          |
| Packing quantity                                                                    | 80                       |
| Process connection angle [°]                                                        | 25 °                     |

|                                                                                                      |                  |
|------------------------------------------------------------------------------------------------------|------------------|
| Process connection comments                                                                          | Al-cap           |
| Process connection diameter [mm]                                                                     | 6.2 mm           |
| Process connection material                                                                          | Cu-plated steel  |
| Refrigerant                                                                                          | R600a            |
| Refrigerant charge [kg] [Max]                                                                        | 0.15 kg          |
| RLA                                                                                                  | 0.70 A           |
| Rotational speed at 50Hz [rpm]                                                                       | 3000 rpm         |
| Run capacitor capacitance                                                                            | 2 ÂµF            |
| Segment usage                                                                                        | Refrigeration LT |
| Speed Platform                                                                                       | Fixed-speed      |
| Suction connection angle [Â°]                                                                        | 2 Â°             |
| Suction connection comments                                                                          | Al-cap           |
| Suction connection diameter [mm]                                                                     | 6.2 mm           |
| Suction connection material                                                                          | Cu-plated steel  |
| Swept volume [cm3]                                                                                   | 11.15 cm3        |
| Technology                                                                                           | Reciprocating    |
| Total height [mm]                                                                                    | 203 mm           |
| Type                                                                                                 | NL               |
| Type designation                                                                                     | Compressor       |
| Voltage 50Hz [V]                                                                                     | 220 V            |
| Voltage 50Hz [V] [Max]                                                                               | 240 V            |
| Width [mm]                                                                                           | 166 mm           |
| Winding temperature short term [Â°C] [Max]                                                           | 110 Â°C          |
| Winding temperature stat [Â°C] [Max]                                                                 | 95 Â°C           |
| Refrigerant: R600a, Segment usage: Refrigeration LT, Compressor power supply [V/Ph/Hz]: 220-240/1/50 |                  |

|                       |            | -35       | -30 | -20 | -15 | -10 | -5  | 0  | 5   | (W) | (W/W)   | (W/W) | (W)  | (kcal/h) | (W/W) | (kcal/h) |
|-----------------------|------------|-----------|-----|-----|-----|-----|-----|----|-----|-----|---------|-------|------|----------|-------|----------|
| Energy-optimized      | PLE35K     | 10294360  |     |     | 38  | 52  | 66  | 87 | 109 |     | 27      | 0.90  | 0.68 | 38       | 53    |          |
|                       | TLK3.8KK.3 | 10294438  | 19  | 29  | 57  | 75  | 96  |    |     | 42  | 0.90    |       |      | 57       | 49    | 1.18     |
|                       | TLK3.8KK.3 | 10294438  | 28  | 40  | 73  | 94  | 119 |    |     | 55  | 1.00    |       |      | 74       | 65    | 1.30     |
|                       | TLK3.8KK.3 | 10294438  | 36  | 50  | 89  | 114 | 144 |    |     | 68  | 1.02    |       |      | 91       | 79    | 1.32     |
|                       | TLK3.8KK.3 | 102944730 | 45  | 61  | 105 | 134 | 168 |    |     | 81  | 1.02    |       |      | 108      | 94    | 1.31     |
|                       | TLK3.8KK.3 | 102944730 | 53  | 71  | 122 | 155 | 194 |    |     | 94  | 1.02    | 1.07  | 126  | 108      | 1.32  | 1.14     |
|                       | TLK3.8KK.3 | 102944730 | 62  | 83  | 143 | 181 | 228 |    |     | 110 | 1.03    | 1.06  | 147  | 126      | 1.33  | 1.14     |
|                       | TLK3.8KK.3 | 102944730 |     |     |     |     |     |    |     | 130 | 1.04    |       | 172  | 148      | 1.35  | 1.15     |
|                       | NLK3.8KK.4 | 102944805 | 53  | 64  | 141 | 179 | 223 |    |     | 110 | 1.18    | 1.22  | 147  | 127      | 1.31  | 1.30     |
|                       | NLK3.8KK.4 | 102944807 | 74  | 90  | 164 | 207 | 257 |    |     | 128 | 1.19    | 1.23  | 170  | 151      | 1.31  | 1.30     |
|                       | NLK3.8KK.4 | 102944952 | 82  | 100 | 184 | 232 | 290 |    |     | 143 | 1.19    | 1.22  | 191  | 165      | 1.32  | 1.31     |
|                       | NLK3.8KK.4 | 102944959 | 99  | 119 | 217 | 274 | 340 |    |     | 170 | 1.18    | 1.23  | 226  | 194      | 1.30  | 1.29     |
| High Energy-optimized | NLK3.8KK.4 | 102944968 | 110 | 146 | 243 | 307 | 382 |    |     | 190 | 1.20    | 1.25  | 253  | 213      | 1.33  | 1.32     |
|                       | TLK4.8KK.3 | 102944442 | 19  | 29  | 57  | 74  | 95  |    |     | 42  | 0.96    | 0.99  | 57   | 49       | 1.26  | 1.08     |
|                       | TLK4.8KK.3 | 102944542 | 28  | 40  | 73  | 94  | 119 |    |     | 55  | 1.04    | 1.06  | 74   | 65       | 1.35  | 1.16     |
|                       | TLK3.8KK.3 | 102944642 | 36  | 51  | 89  | 114 | 144 |    |     | 68  | 1.03    | 1.06  | 91   | 79       | 1.33  | 1.15     |
|                       | TLK3.8KK.3 | 102944742 | 46  | 62  | 106 | 135 | 170 |    |     | 82  | 1.10    | 1.14  | 110  | 94       | 1.42  | 1.22     |
|                       | TLK3.8KK.3 | 102944842 | 53  | 71  | 122 | 155 | 194 |    |     | 94  | 1.09    | 1.14  | 126  | 108      | 1.41  | 1.22     |
|                       | TLK3.8KK.3 | 102944942 | 65  | 86  | 144 | 182 | 227 |    |     | 112 | 1.12    | 1.16  | 149  | 126      | 1.44  | 1.24     |
|                       | TLK3.8KK.3 | 102944447 | 21  | 32  | 59  | 76  | 95  |    |     | 45  | 1.15*** |       | 60   | 52       |       |          |
|                       | TLK3.8KK.3 | 102944547 | 36  | 52  | 90  | 116 | 146 |    |     | 57  | 1.24*** |       | 76   | 65       |       |          |
|                       | TLK3.8KK.3 | 102944647 | 57  | 82  | 141 | 175 | 213 |    |     | 70  | 1.38*** |       | 93   | 80       |       |          |
|                       | TLK3.8KK.3 | 102944747 | 46  | 62  | 106 | 133 | 163 |    |     | 83  | 1.30*** |       | 110  | 95       |       |          |
|                       | TLK3.8KK.3 | 102944847 | 55  | 75  | 125 | 157 | 195 |    |     | 96  | 1.32*** |       | 130  | 112      |       |          |
|                       | TLK3.8KK.3 | 102944947 | 65  | 88  | 146 | 184 | 227 |    |     | 115 | 1.32*** |       | 152  | 131      |       |          |
| High Energy-optimized | NLX3.8KK   | 102944874 | 60  | 83  | 144 | 182 | 227 |    |     | 111 | 1.35    |       | 148  | 127      |       |          |
|                       | NLX3.8KK   | 102944871 | 74  | 100 | 169 | 215 | 269 |    |     | 131 | 1.36    |       | 174  | 150      |       |          |
|                       | NLX3.8KK   | 102944884 | 84  | 112 | 189 | 240 | 300 |    |     | 147 | 1.36    |       | 195  | 168      |       |          |
|                       | NLX3.8KK   | 102944893 | 98  | 133 | 223 | 282 | 350 |    |     | 174 | 1.36    |       | 231  | 199      |       |          |
|                       | NLX3.8KK   | 102944891 | 110 | 147 | 249 | 317 | 397 |    |     | 193 | 1.34    |       | 257  | 221      |       |          |
|                       | NLX3.8KK.2 | 102944910 | 52  | 73  | 130 | 167 | 210 |    |     | 99  | 1.42*** |       | 133  | 115      |       |          |
|                       | NLX3.8KK.2 | 102944911 | 62  | 85  | 147 | 187 | 234 |    |     | 113 | 1.49*** |       | 151  | 130      |       |          |
|                       | NLX3.8KK.2 | 102944910 | 75  | 101 | 171 | 217 | 271 |    |     | 133 | 1.49*** |       | 178  | 153      |       |          |
|                       | NLX3.8KK.2 | 102944911 | 86  | 115 | 192 | 242 | 301 |    |     | 150 | 1.49*** |       | 200  | 172      |       |          |
|                       |            |           |     |     |     |     |     |    |     |     |         |       |      |          |       |          |
|                       |            |           |     |     |     |     |     |    |     |     |         |       |      |          |       |          |
|                       |            |           |     |     |     |     |     |    |     |     |         |       |      |          |       |          |

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, compressor, PW3.5VK,  
DFV4.0HF, DFV4.5HF, DFV5.5HF,  
DFV6.5HF, DFV6.5HF, DFV7.5HF,

Category: compressor

written by mahdi miled | 17 November 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, compressor, PW3.5VK, DFV4.0HF, DFV4.5HF, DFV5.5HF, DFV6.5HF, DFV6.5HF,  
DFV7.5HF,

---

Mbsm.pro, Compressor, nf10fx,  
Danfoss, 1/3 hp, LBP, MBP, 1046 btu,  
115 v

Category: compressor

written by Jamila | 17 November 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Compressor, nf10fx, Danfoss, 1/3 hp, LBP, MBP, 1046 btu, 115 v

# Mbsm.pro, Picture, reversing valve

Category: Pictures

written by mahdi miled | 17 November 2022




Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Picture, reversing valve



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

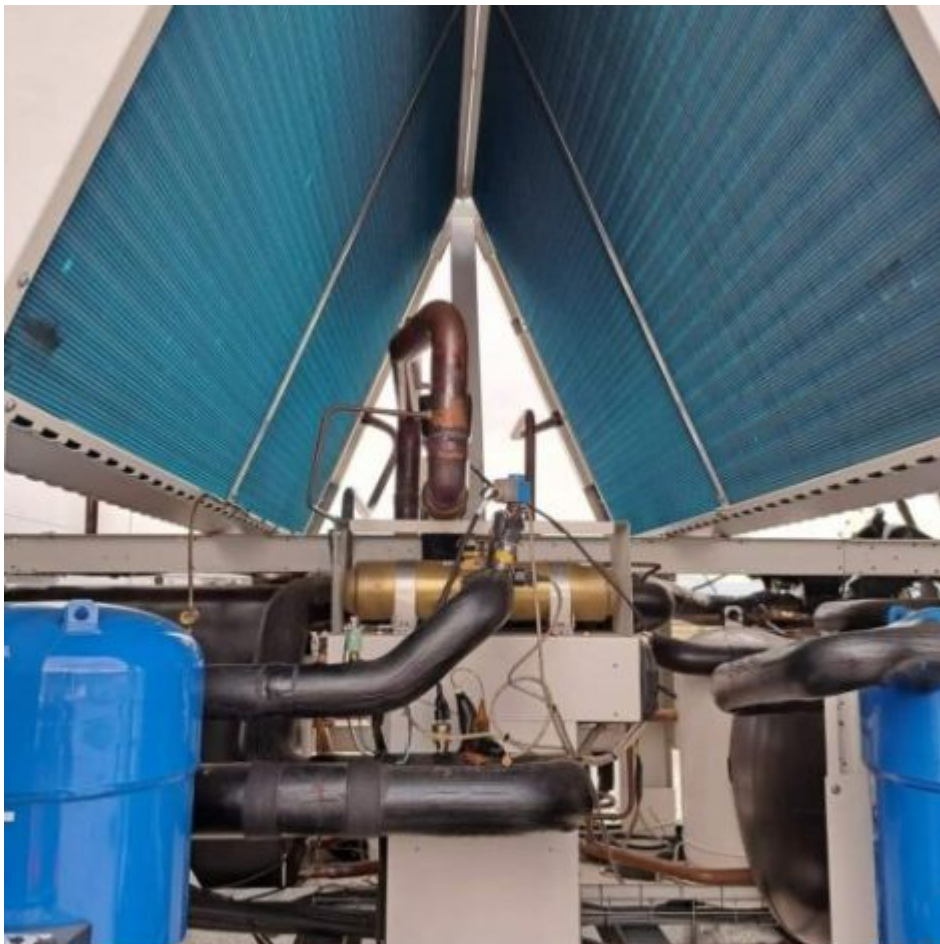

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

---


Mbsm.pro, R-410A, Fixed Speed,  
Rotary, Compressor, Mitsubishi,  
NN21YDAMT, 1.74 hp, 18000 btu, 3 Ph,  
380 v

Category: compressor

written by Jamila | 17 November 2022



SIAM COMPRESSOR  
INDUSTRY CO., LTD.



REFRIGERANT COMPRESSOR

MODEL **NN21YDAMT**

MANUFACTURING DATE **05112016**

POWER SOURCE

**380-415V 3~ 50Hz**

**460V 3~ 60Hz**

POWER INPUT **1780** W AT **50** Hz

LRA **31/33** A

REFRIGERANT **R-410A**

OIL **1.20 L**

AP **4.15** MPa

SP **15.0** MPa

**THERMALLY PROTECTED**

MADE IN THAILAND



Mbsm.pro, R-410A, Fixed Speed, Rotary, Compressor, Mitsubishi, NN21YDAMT, 1.74 hp, 18000 btu, 3 Ph, 380 v

---

Mbsm.pro, Cubigel, GP16TB, hermetic, compressor, 3/8 hp++, 1/2 hp-, HBP, R134a, R1234yf, CSIR,

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 17 November 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)


Mbsm.pro, Cubigel, GP16TB, hermetic, compressor, 3/8 hp++, 1/2 hp-, HBP, R134a,

R1234yf, CSIR,

Mbsm.pro, Freezer, 135 L, Ch140,  
Mondial for home appliance,  
compressor, LG63DZ1, 1/4– hp, 1/5 hp,  
r134a, 110 g

Category: compressor, Freezer

written by Jamila | 17 November 2022

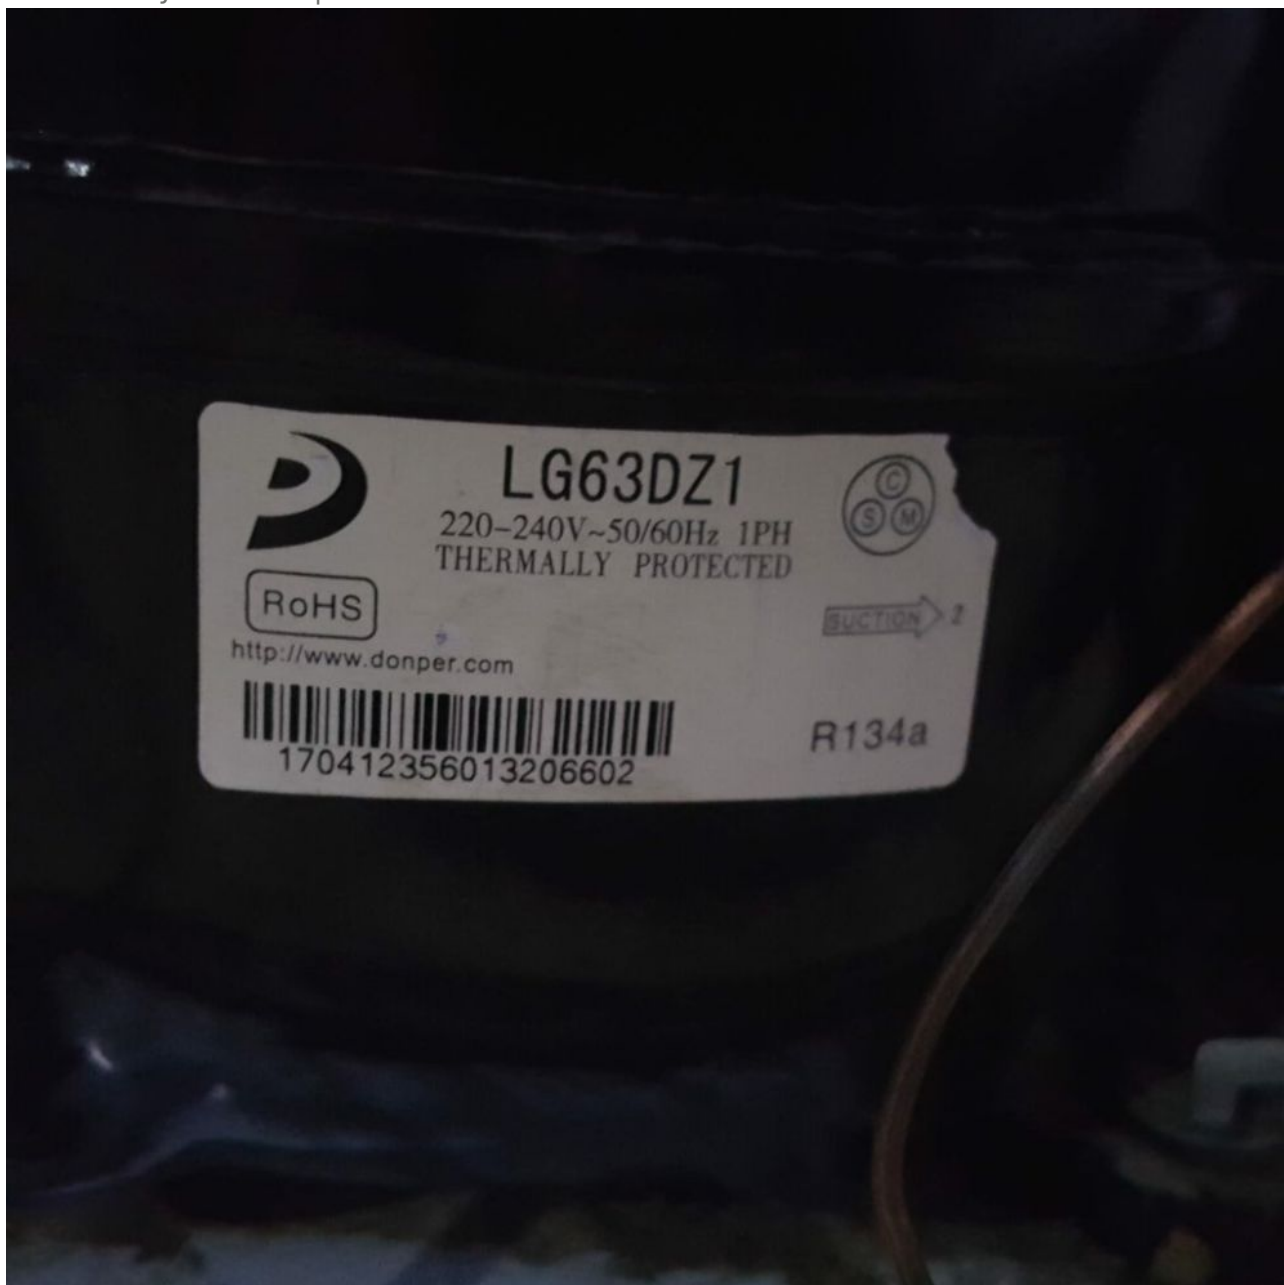

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Freezer, 135 L, Ch140, Mondial for home appliance, compressor,  
LG63DZ1, 1/4 hp, r134a, 110 g

---

Mbsm.pro, Donper, compressor,  
aluminum, wire, R600a, R134a,  
Exemple, a100cy1, 1/5 hp, 93 w, Lbp,  
R600a

Category: compressor

written by Jamila | 17 November 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Donper, compressor, aluminum, wire, R600a, R134a, Exemple, a100cy1, 1/5 hp, 93 w, Lbp, R600a