Mbsm.pro, Compressor, BP1072Z, 221CA32, 1/10 Hp, 66W, EMBRACO, ASPERA, r134A, Lbp, HERMETIC COMPRESSORS, Oil 200 cc, 220 V/ 60 Hz

Category: compressor
written by www.mbsm.pro | 2 February 2022

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, BP1072Z, 221CA32, 1/10 Hp, 66W, EMBRACO, ASPERA, r134A, Lbp, HERMETIC COMPRESSORS, Oil 200 cc, 220 V/ 60 Hz

Mbsm.pro, Compressor, R600a, PZ59E1C, 1/8 Hp, 95 W, Lbp

Category: compressor
written by www.mbsm.pro | 2 February 2022

Mbsm.pro, Compressor, R600a, PZ59E1C, 1/8 Hp, 95 W, Lbp

Mbsm.pro, Compressor, Samsung, MSV162AL1J/TS, MSV162, MSV162A-L1B, Compressor Inverter, Block DC, 1200/4000 RPM, 70/244 W, 238/834 BTU, Lnb, 1/3 hp, R134A, Blcd

Category: compressor
written by www.mbsm.pro | 2 February 2022

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Samsung, MSV162AL1J/TS, MSV162, MSV162A-L1B, Compresseur Inverter, Block DC, 1200/4000 RPM, 70/244 W, 238/834 BTU, Lnb, 1/3 hp, R134A, Blcd

---

Mbsm.pro, Compressor, Tecumseh, TAH4518A, 1.5 Hp, HBp, R12, 440V 3~ 60Hz 400V 3~ 50Hz, 1684 W, 14048 btu

Category: compressor
written by www.mbsm.pro | 2 February 2022

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Tecumseh, TAH4518A, 1.5 Hp, HBp, R12, 440V 3~ 60Hz 400V 3~ 50Hz, 1684 W, 14048 btu

الطريقة الصحيحة والوحيدة لحساب قدرة ضواغط تي .. The Only Correct And Reliable Way To Calculate The Capacity Of TEE Compressors.

Category: Arabe,Chaud&Froid
written by www.mbsm.pro | 2 February 2022

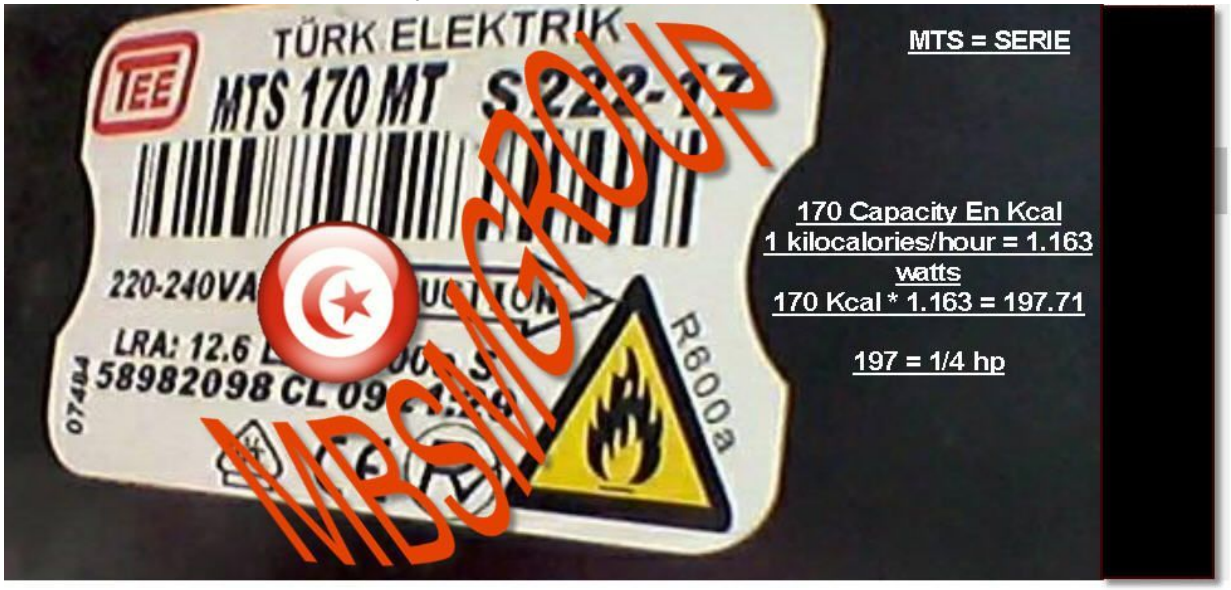

Picture Private Copyright WWW.MBSMGROUP.TN
Private Picture Copyright : WWW.MBSM.PRO

الطريقة الصحيحة والوحيدة لحساب قدرة ضواغط تي .. The Only Correct And Reliable Way To Calculate The Capacity Of TEE Compressors.

Mbsm.pro, Compressor, 4ec-6.2-4os, 6HP, Bitzer Piston Compressor, 4ces-6, Refrigeration Compressor , 4ec-6.2/4ees-6, Cold Room. R22, R404

Category: compressor
written by www.mbsm.pro | 2 February 2022

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, 4ec-6.2-4os, 6HP, Bitzer Piston Compressor, 4ces-6, Refrigeration Compressor , 4ec-6.2/4ees-6, Cold Room. R22, R404

Mbsm.pro, Compressor, inverter, LG Refrigerator, BMG110NHMV, BMG/BMA LG, Lbp, 1/4 Hp , R600A

Category: compressor
written by www.mbsm.pro | 2 February 2022

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, inverter, LG Refrigerator, BMG110NHMV, BMG/BMA LG, Lbp, 1/4 Hp , R600A

Mbsm.pro, Compressor, AJE4511YTZ , R134a, hbp, TAJ4511Y, R-12/R-409A, lbp, 1HP, 3hp, 400V U.H., CAJ4511A, 1ph, R-12, lbp, 220v

Category: compressor
written by www.mbsm.pro | 2 February 2022

Mbsm.pro, Compressor, AJE4511YTZ , R134a, TAJ4511Y, R-12/R-409A, 1HP, 3hp, 400V U.H., CAJ4511A, 1ph, R-12, 220v

---

Mbsm.pro, Compressor, R290, 0.110Kg,

SC15CNX.2, Secop, DANFOSS, SC15CNX, 15,28cm³, LBP, 230V, Hermetic piston compressors, 5/8 Hp, 104h 8568, 104h8568

Category: compressor
written by www.mbsm.pro | 2 February 2022

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, R290, 0.110Kg, SC15CNX, 15,28cm³, LBP, 230V, Hermetic piston compressors, 5/8 Hp, 104h 8568, 104h8568

Mbsm.pro, Daikin, compressor , R22/R407C

Category: compressor
written by www.mbsm.pro | 2 February 2022

High Performance Scroll

-◎ Model Standard Dimension (Refrigerant R22/R407C)

Model	A	B	C	D	E	F	G	H
JT125GBBY1L/JT125G-YE JT140G-P4Y1/JT140G-YE	454	89	89	89	89	89	454	89.6
JT252/JT252-P2YE	468	89	89	89	89	89	468	89.5
JT90-100B-T1A/Y1L	457	89	89	89	89	89	457	89.5
JT90-100B-P1A	457	89	89	89	89	89	457	89.5

-◎ Model Compressor Range (Refrigerant R22)

OUTPUT (HP)	POWER SOURCE	MODEL	60Hz RATING CONDITION POWER SOURCE	NOMINAL CAPACITY BTU/H	Watts	INPUT W	CURRENT A	EER BTU/W	CAPACITY BTU/H	LINE CONNECTIONS SUCTION TUBE in	DISCHARGE TUBE in
7	380V/50Hz 3 PHASE	JT212G-Y1L	380V/50Hz	23.3	23400	6.56	11.2	3.25	217.3	5/8	3/8
7.5		JT230G-Y1L	380V/50Hz	25.6	25800	7.27	12.4	3.27	231	5/8	3/8
8.5		JT265G-Y1L	380V/50Hz	28.5	28700	8.05	13.7	3.5	244.7	7/8	3/8
10		JT300G-Y1L	380V/50Hz	33.3	33500	9.38	15.2	3.55	257.7	7/8	3/8
12		JT335G-Y1L	380V/50Hz	37.5	38000	10.7	17.2	3.5	271.2	7/8	3/8
7	380-415V/ 460-480V 3 PHASE 50/60Hz	JT212G-YE	380V/50Hz	23.3	23400	6.56	11.2	3.25	217.3	5/8	3/8
7.5		JT230G-YE	380V/50Hz	25.6	25800	7.27	12.4	3.27	231	5/8	3/8
8.5		JT265G-YE	380V/50Hz	28.5	28700	8.05	13.7	3.5	244.7	7/8	3/8
10		JT300G-YE	380V/50Hz	33.3	33500	9.38	15.2	3.55	257.7	7/8	3/8
12		JT335G-YE	380V/50Hz	37.5	38000	10.7	17.2	3.5	271.2	7/8	3/8
7		JT212G-P1YE	380V/50Hz	23.3	23400	6.56	11.2	3.25	217.3	5/8	3/8
7.5		JT230G-P1YE	380V/50Hz	25.6	25800	7.27	12.4	3.27	231	5/8	3/8
8.5		JT265G-P1YE	380V/50Hz	28.5	28700	8.05	13.7	3.5	244.7	7/8	3/8
10		JT300G-P1YE	380V/50Hz	33.3	33500	9.38	15.2	3.55	257.7	7/8	3/8
12		JT335G-P1YE	380V/50Hz	37.5	38000	10.7	17.2	3.5	271.2	7/8	3/8

TEST CONDITION OF COMPRESSOR					
	CONDENSING TEMPERATURE	EVAPORATION TEMPERATURE	DEGREE OF SUPERHEAT	DEGREE OF SUBCOOLING	ENTERING TEMPERATURE
COMPRESSOR	54.4℃	7.2℃	11.1℃	8.3℃	35℃

-◎ Model Compressor Range (Refrigerant R407C)

OUTPUT (HP)	POWER SOURCE	MODEL	60Hz RATING CONDITION POWER SOURCE	NOMINAL CAPACITY BTU/H	Watts	INPUT W	CURRENT A	EER BTU/W	CAPACITY BTU/H	LINE CONNECTIONS SUCTION TUBE in	DISCHARGE TUBE in
7	380-415V 3 PHASE 50Hz	JT212DA-Y1	60Hz/50Hz	19.9	20300	5.87	10.7	3.75	23.3	5/8	3/8
7.5	380-415V 3 PHASE 50Hz	JT230DA-Y1	60Hz/50Hz	21.9	22400	6.56	11.1	3.8	244.7	7/8	3/8
8	380-415V 3 PHASE 50Hz	JT240DA-Y1	60Hz/50Hz	23.3	23400	6.84	11	3.81	257	7/8	3/8
8	460V 3 PHASE 60Hz	JT240DA-Y1	60Hz/50Hz	19.9	20300	5.7	9.9	3.78	244.2	7/8	3/8
10	460V 3 PHASE 60Hz	JT300DA-Y1L	60Hz/50Hz	25.6	26000	7.55	13.4	3.1	283	7/8	3/8
10	460V 3 PHASE 60Hz	JT310DA-Y1L	60Hz/50Hz	26.3	26900	11.01	18.3	2.12	284.2	7/8	3/8

TEST CONDITION OF COMPRESSOR					
	CONDENSING TEMPERATURE	EVAPORATION TEMPERATURE	DEGREE OF SUPERHEAT	DEGREE OF SUBCOOLING	ENTERING TEMPERATURE
COMPRESSOR	54.4℃	7.2℃	11.1℃	8.3℃	35℃

-◎ Model Tandem Compressor Standard Dimension (Refrigerant R22)

- Capacity Range(7HP~12HP)Free Connection
- Reliable and Simple Oil Rtance Design
- Low Noise/Low Vibration

Model	A	B	C	D	E	F	G	H
JT252/JT252-P2YE	468	89	89	89	89	89	468	89.5
JT90-100B-T1A/Y1L	457	89	89	89	89	89	457	89.5
JT90-100B-P1A	457	89	89	89	89	89	457	89.5

-◎ Model Tandem Compressor Range (Refrigerant R22)

OUTPUT (HP)	POWER SOURCE	MODEL	60Hz RATING CONDITION POWER SOURCE	NOMINAL CAPACITY BTU/H	Watts	INPUT W	CURRENT A	EER BTU/W	CAPACITY BTU/H	LINE CONNECTIONS SUCTION TUBE in	DISCHARGE TUBE in
7	380V/50Hz 3 PHASE	JT212G-TY1L	380V/50Hz	11.3	11400	3.58	11.3	3.25	217.3	5/8	3/8
7.5		JT230G-TY1L	380V/50Hz	11.3	11500	3.77	12.4	3.27	231	5/8	3/8
8.5		JT265G-TY1L	380V/50Hz	14.5	14300	4.65	13.7	3.5	244.7	7/8	3/8
10		JT300G-TY1L	380V/50Hz	16.8	16900	5.68	15.2	3.55	257.7	7/8	3/8
12		JT335G-TY1L	380V/50Hz	16.8	16200	5.34	15.7	3.43	271.2	7/8	3/8
7		JT335G-TY1L	380V/50Hz	11.7	11600	3.68	17.2	3.34	284.2	7/8	3/8
7	380-415V/ 460-480V 3 PHASE 50/60Hz	JT212G-TYE	380V/50Hz	11.3	11400	3.58	11.2	3.25	217.3	5/8	3/8
7.5		JT230G-TYE	380V/50Hz	11.3	11500	3.77	12.4	3.27	231	5/8	3/8
8.5		JT265G-TYE	380V/50Hz	14.5	14300	4.65	13.7	3.5	244.7	7/8	3/8
10		JT300G-TYE	380V/50Hz	16.8	16900	5.68	15.2	3.55	257.7	7/8	3/8
12		JT335G-TYE	380V/50Hz	16.8	16200	5.34	15.7	3.43	271.2	7/8	3/8
7		JT335G-TYE	380V/50Hz	11.7	11600	3.68	17.2	3.34	284.2	7/8	3/8

TEST CONDITION OF COMPRESSOR					
	CONDENSING TEMPERATURE	EVAPORATION TEMPERATURE	DEGREE OF SUPERHEAT	DEGREE OF SUBCOOLING	ENTERING TEMPERATURE
COMPRESSOR	54.4℃	7.2℃	11.1℃	8.3℃	35℃

JT90GAJV1L JT95BHBYIL JT125GBBY1L JT125BGBY1L JT125G-YE @ K JT140G-P4Y1 @ K

JT150BCBY1L JT150BK-YE JT160BCBY1L JT170GABY1L JT170FDKYE JT300D-YE JT300D-P1YE JT300D-YE @ JT315D-Y1L JT335D-Y1L JT100BHVYE JT100BHV JT100BCBV1L JT100GABV1L 2YC45BXD 2YC45JXD 2YC45BXD 1GDY23AXD 2YC32VXD JT1FCVDKTYR JT1GCVDKYR 6T55TAC5YE 6T55WACSYE JT170G-K1YE JT170G-KYE@BA etc. Mainly used for refrigeration equipment such as air conditioners. Varieties ***, ***, ***, service is exhausted, welcome to call to discuss!

Daikin Compressor Features: JT170G-K1YE JT170G-KYE@BA
Daikin Compressor Features: Small and light. High reliability and easy to use.
?Due to the small diameter and slenderness of the compressor cylinder, it provides a good choice for the small and lightweight outdoor unit.
?In order to save the flexibility of space and location design, a new model with three-legged chassis is added on the basis of the original four-legged chassis. Give users more choices.
?The number of compressor parts is small and the reliability is high.
?Compressors can withstand the most brutal tests of heat pump systems.
?Only the protection device of the motor in the compressor is built-in, and other protections are matched by the system. This allows system designers to set protections in the system as needed, allowing product designers to better control the compressors used.
JT300DJT160B-NYE JT160B-NFYE New original Daikin marine air conditioner refrigeration equipment compressor A-Y1L JT335DA-Y1L New original Daikin compressor R407CJT100BDVTYE JT100FBVD JT100FAVD New original Daikin inverter air conditioner compressor JT170G-K1YE JT170FDKYE JT170FBKYE New original Daikin air conditioner compressor Machine JT160BCBY1L JT160GABY1L Original Daikin 5 HP Central Air Conditioning Compressor VRV3 generation RHXYQ14PY1 inverter compressor original new JT160GAJY1L Daikin 5 hp central air conditioning compressor three feet return air pipe upward R22 original 12 hp JT335D-P1YE JT300D-P1YE Daikin central air conditioning compressor 10 hp JT315D Original 5 HP JT160GABY1L JT170GABY1L Daikin Air Conditioning Compressor Heat Pump Straight Tube Daikin Parallel Compressor JT300DA-YE Daikin 10P12 HP Air Conditioning Compressor R40JT100FBVD JT100BHV JT100G-VDL@S Original Daikin Inverter Air Conditioning Refrigeration Compressor JT140G-P4Y1@K Brand New Original 5 Daikin Fixed Frequency Air Conditioning Compressor R410A 3 Foot Daikin 5P JT160BCBY1L Panasonic C-SB373H8A Air Conditioning Air Energy Heat Pump Compressor C-SB453

Private Picture Copyright : WWW.MBSM.PRO