


Mbsm.pro, LG compressor, R22, QK Series, QK222P, 1PH, 1.5 hp, 220/240V – 50Hz, 12000 btu, 1 Ton, Capacitor 35 mf

Category: compressor

written by www.mbsm.pro | 13 April 2023

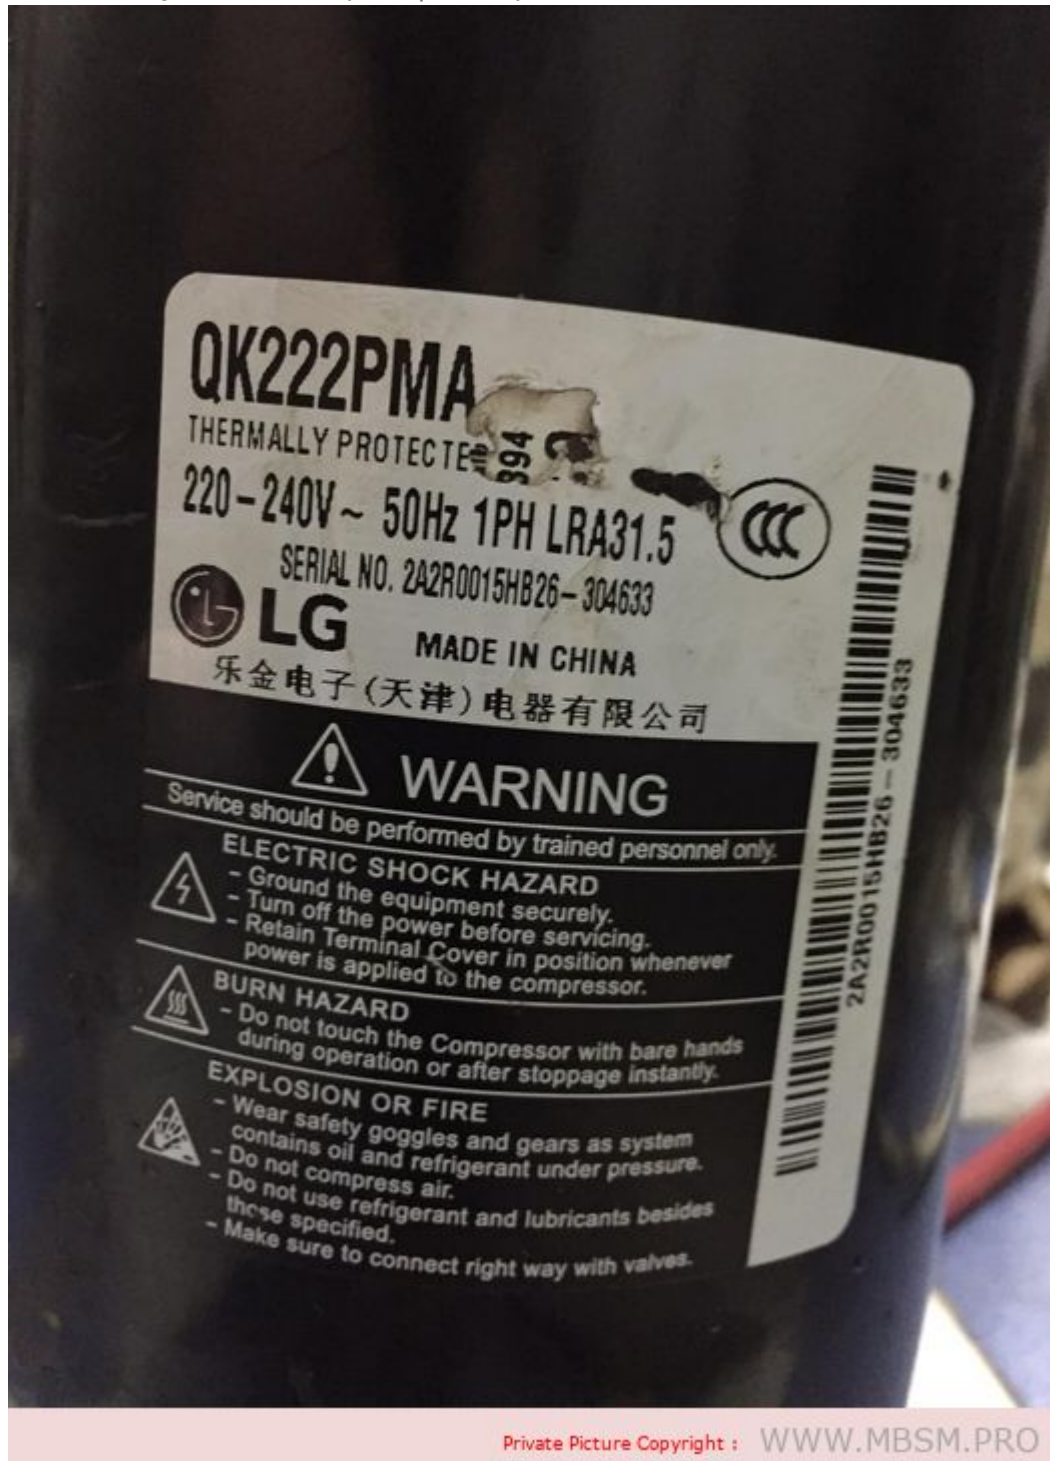


Private Picture Copyright : WWW.MBSM.PRO

LG Original New, with separate carton loading

Product detail

Shift	22.2cm3/tr
Refrigerant	R22
Power source	220V~240V/50Hz
Cooling capacity	3883W/13250BTU
power input	1275W
Operating current	6.0A
Compressor status	LG Original New
Capacitor	35/400μF-V
Net weight	12,5 kg
hp	1.5 hp

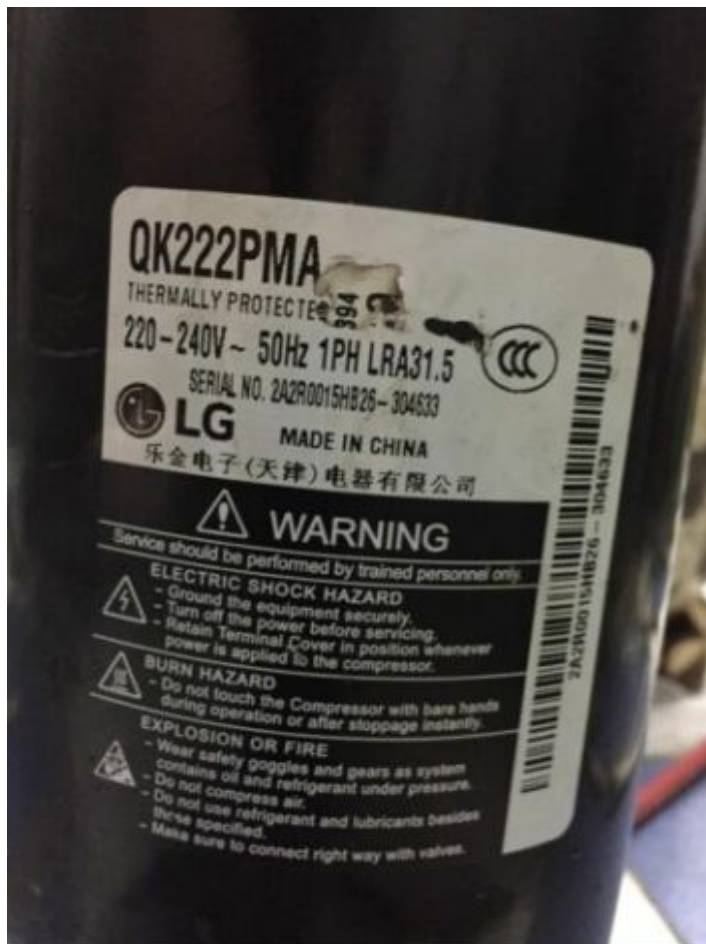

Private Picture Copyright : WWW.MBSM.PRO

50Hz/60Hz

Power Source	Cooling Capacity		Motor Input (Watts)	EER (BTU/W·h)	COP (W/W)	Discharge (L/h)	Weight (kg)	Dimension (mm)									
	(Btu/h)	(kW)						A	B	C	D	E					
L 115V - 60Hz	8790	2576	814	10.8	3.16	280	11.5	224.3	200	38.6	50.8	93					
L 115V - 60Hz	9400	2756	854	11.0	3.22	280	11.5	232.0	200	38.6	50.8	93					
L 115V - 60Hz	9900	2901	900	11.0	3.22	280	11.5	224.0	200	38.6	50.8	93					
L 115V - 60Hz	10200	2989	927	11.0	3.22	280	12.1	232.0	200	38.6	50.8	93					
L 115V - 60Hz	11000	3223	1048	10.5	3.08	280	11.5	224.0	200	38.6	50.8	93					
L 115V - 60Hz	11600	3399	1055	11.0	3.22	280	12.1	224.0	200	38.6	50.8	93					
L 115V - 60Hz	12300	3604	1153	10.7	3.13	350	12.3	240.3	220	43.6	65.0	103					
L 115V - 60Hz	12500	3663	1157	10.8	3.17	350	12.3	240.3	220	43.6	65.0	103					
L 115V - 60Hz	13100	3839	1224	10.7	3.14	350	12.3	240.3	220	43.6	65.0	103					
L 115V - 60Hz	13600	3985	1259	10.8	3.17	350	12.3	240.3	220	43.6	65.0	103					
L 115V - 60Hz	13900	4073	1287	10.8	3.16	380	13.2	236.9	220	45.9	65.0	103					
L 115V - 60Hz	15000	4396	1415	10.6	3.11	380	13.2	236.9	220	45.9	65.0	103					
98/230V - 60Hz	8700	2549	805	10.8	3.17	280	11.5	224.0	200	38.6	50.8	93					
98/230V - 60Hz	9350	2740	874	10.7	3.13	280	11.5	224.0	200	38.6	50.8	93					
98/230V - 60Hz	9800	2872	907	10.8	3.17	280	11.5	224.0	200	38.6	50.8	93					
98/230V - 60Hz	10100	2960	935	10.8	3.17	280	11.5	224.0	200	38.6	50.8	93					
98/230V - 60Hz	11100	3223	1028	10.7	3.14	280	11.5	224.0	200	38.6	50.8	93					
98/230V - 60Hz	11500	3370	1045	11.0	3.22	280	12.1	224.0	200	38.6	50.8	93					
98/230V - 60Hz	12100	3546	1141	10.6	3.11	350	12.3	240.3	220	43.6	65.0	103					
98/230V - 60Hz	12500	3663	1179	10.6	3.11	350	12.3	240.3	220	43.6	65.0	103					
98/230V - 60Hz	13000	3810	1215	10.7	3.14	350	11.6	240.3	220	43.6	65.0	103					
98/230V - 60Hz	13400	3927	1252	10.7	3.14	350	12.3	240.3	220	43.6	65.0	103					
98/230V - 60Hz	13900	4073	1287	10.8	3.16	380	13.2	236.9	220	45.9	65.0	103					
98/230V - 60Hz	14800	4337	1383	10.7	3.14	380	13.2	236.9	220	45.9	65.0	103					
98/230V - 60Hz	15900	4659	1458	10.9	3.20	380	13.2	236.9	220	45.9	65.0	103					
L 265V - 60Hz	8650	2535	801	10.8	3.16	280	11.3	221.3	220	38.6	50.8	93					
L 265V - 60Hz	9800	2872	907	10.8	3.17	280	11.5	224.3	220	38.6	50.8	93					
L 265V - 60Hz	11500	3370	1075	10.7	3.13	280	11.5	224.3	220	38.6	50.8	93					
L 265V - 60Hz	12100	3546	1142	10.6	3.11	350	11.6	232.3	220	43.6	50.8	93					
20/240V - 50Hz	7100	7150	2081	2095	670	687	10.6	10.4	3.11	3.07	280	11.3	221.3	200	38.6	50.8	93
20/240V - 50Hz	7550	7650	2213	2242	719	742	10.5	10.3	3.08	3.02	280	11.5	224.3	200	38.6	50.8	93
20/240V - 50Hz	8050	8150	2359	2388	770	795	10.5	10.3	3.08	3.02	280	11.5	224.3	200	38.6	50.8	93
20/240V - 50Hz	8250	8300	2418	2432	778	798	10.6	10.4	3.10	3.05	280	11.5	224.3	200	38.6	50.8	93
20/240V - 50Hz	9300	9400	2725	2755	877	895	10.6	10.5	3.11	3.08	280	11.5	224.3	200	38.6	65.0	103
20/240V - 50Hz	9800	9900	2872	2901	933	952	10.5	10.4	3.08	3.05	350	11.7	232.3	220	43.6	65.0	103
20/240V - 50Hz	10500	10650	3077	3121	1000	1029	10.5	10.3	3.08	3.03	350	11.7	232.3	220	43.6	65.0	103
20/240V - 50Hz	11150	11250	3267	3297	1062	1082	10.5	10.4	3.08	3.05	350	11.7	232.3	220	43.6	65.0	103
20/240V - 50Hz	11800	12000	3458	3516	1103	1143	10.7	10.5	3.14	3.08	380	13.2	236.9	220	45.9	65.0	103
20/240V - 50Hz	12800	12900	3751	3780	1219	1285	10.5	10.2	3.08	2.99	380	13.2	236.9	220	45.9	65.0	103

± 5%. 2) All data above is rated at ASHRAE-T condition. 3) Figures in the table are subject to change without prior notice for performance improvement.

Capacité	Pouvoir	RC	Casquette	Hauteur	Lester	Emballer
9250BTU	844W	4.1A	35µF-V	292,3 mm	11,8 kg	48 ensembles/palett
12285BTU	1290W	6.1A	35µF-V	298.0mm	12.0kg	48 ensembles/palett
13250BTU	1350W	6.2A	35µF-V	303,0 mm	12,5 kg	48 ensembles/palett
18200BTU	1800W	8.6A	50µF-V	333,6 mm	19,1 kg	40 ensembles/palett
19050BTU	1850W	7.8A	50µF-V	343,8 mm	19,2 kg	40 ensembles/palett
24700BTU	2287W	10.9A	45µF-V	340,5 mm	22.0kg	32 ensembles/palett
25300BTU	2365W	11.2A	50µF-V	346,5 mm	22,4 kg	32 ensembles/palett