

Mbsm.pro, Cubigel, RL90TG, HMBP, 3/8
Hp++, Compressor, 240V~50Hz, 1470
Btu, 220-240V 50/60Hz ~1 , For cola
display fridges and water coolers

Category: Archivation,compressor

written by www.mbsm.pro | 15 April 2022

RL90TG 0.6E06 MA



RL90TG

220-240V~50Hz PH1

220-240V~60Hz

THERMALLY PROTECTED



c



US



9603834437300476

2

05062



RL90TG 0.6E06 MA



RL90TG

220-240V~50Hz PH1

220-240V~60Hz

THERMALLY PROTECTED



c



US



9603834437300476


2

05062

Characteristics

- Design
 - Lo
- Freon
 - R22
- Extension
 - VS
- Start
 - R
- Engine
 - CSIR
- Cooling
 - F
- Application
 - HMBP
- Power
 - 3/8
- Dimensions

L Серия

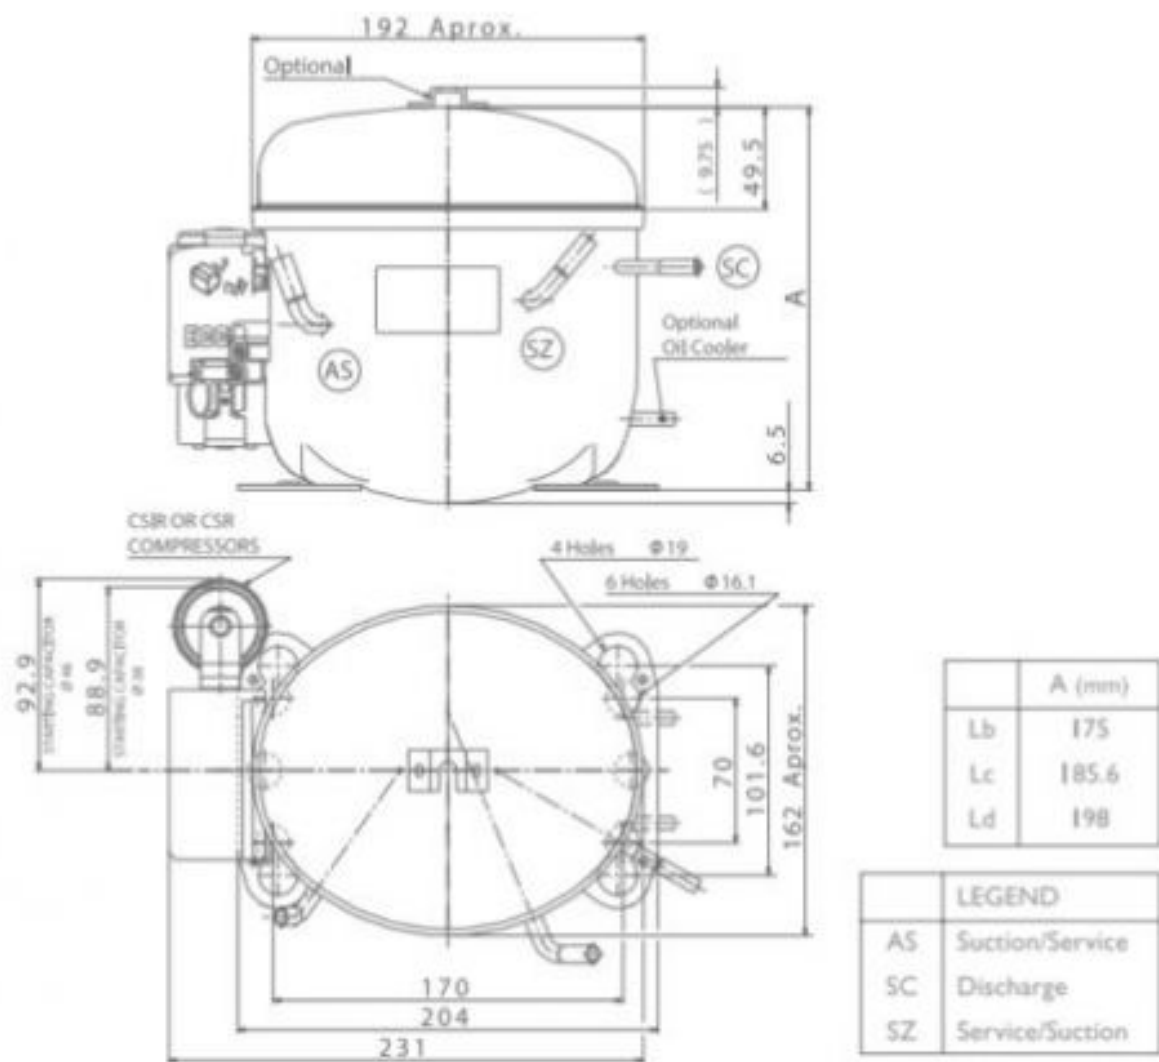

Private Picture Copyright: WWW.MBSM.PRO

Working volume

9.09

Cooling capacity $t_0 = 10\text{ C}$

1732

Cooling capacity $t_0 = -15\text{ C}$

666

Cooling capacity $t_0 = 5\text{ C}$

1470

Cooling capacity $t_0 = -20\text{ C}$

527

Mbsm_dot_pro_private_PDF_RL90TGTélécharger



rl90tg

**R22****SPECIAL****60 Hz**

MODEL	DISPLACEMENT	POWER	APPLICATION	COOLING	VOLTAGE FREQUENCY	MOTOR	STARTING	EXPANSION	REFRIGERATION CAPACITY l °C								WEIGHT	DESIGN
									COP in W/W 1 W = 0,864 kcal/h = 3,415 BTU/h Evaporating Temperature °C									
									Cecomaf (W)				Ashrae					
									5				7,2					
									-20	-15	W	COP	10	kcal/h	COP	Kg		
RL90TE	9.09	3/8	HMBP	F	100/115V 50/60Hz ~1	CSIR	R	C	527	666	1470	1.72	1732	1470	1.93	10.8	Ld	
RL90TG	9.09	3/8	HMBP	F	220-240V 50/60Hz ~1	CSIR	R	C	527	666	1470	1.93	1732	1470	2.16	10.8	Ld	

R22**AC****50 Hz**

MODEL	DISPLACEMENT cm ³	POWER hp	APPLICATION	COOLING	VOLTAGE FREQUENCY	MOTOR	STARTING	EXPANSION	REFRIGERATION CAPACITY l °C						WEIGHT Kg	DESIGN		
									COP in W/W 1 W = 0,864 kcal/h = 3,415 BTU/h									
									5			7,2						

Private Picture Copyright : WWW.MBSM.PRO