

COMPRESSOR, DONPER, NE6213CK, 1/2hp, R404a

Category: compressor

written by www.mbsm.pro | 28 March 2021

Ne6213Ck Compressor R404A Med Temp 12 Disp 1080W @ -5 1/2Hp 240V 50Hz



Private Picture Copyright : WWW.MBSM.PRO



NE6213CK COMPRESSOR R404A MED TEMP 12 DISP 1080W @ -5 1/2HP 240V 50HZ

Displacement: 12 cm³

Power: 1/2 HP

Oil Charge: 450 +/- 10 mL

Cooling capacity: 1080W @-5 SST

COP: ASHRAE 1.80

Private Picture Copyright : WWW.MBSM.PRO

Testing condition:

Test conditions	H.B.P	
	ASHRAE	CECOMAF
Evaporating Temp.	+7.2°C	+5°C
Ambient Temp.	+35.0°C	+32°C
Condensing Temp.	+54.4°C	+55°C
Suction Temp.	+35.0°C	+32°C
Subcooling Temp.	+46.1°C	+55°C

3. Running Condition

Ambient temp.	0~43°C
Evaporating temp.	-15~10°C
Voltage range	187~264V
Max. condensing temp.	65°C
Max. winding temp.	130°C
Max. shell temp.	95°C
Max. discharge temp.	120°C
Start voltage	187V [5/5bar(abs)]
Shell min. resistance to pressure	35bar

Private Picture Copyright : WWW.MBSM.PRO

1. Compressor Type

Compressor model	NE6213CK
Rated voltage/frequency	220-240V~50Hz
Refrigerant	R404A
Application	High back pressure (H.B.P)
Cooling method	Fan Cooling
Start torque	High starting torque (HST)
Control device	Capillary tube
Motor type	CSIR

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_ne6213ck-compressorTélécharger

Compressor, QD110, 3/10 HP, LBP, R12/R406, 276w, R12, R406

Category: compressor

written by www.mbsm.pro | 28 March 2021

Quantité(Pièce) 1 – 30 31 – 70 71 – 150 >150


Durée estimée (jours) 5 10 15 À négocier

Tension: 220 V-240 V

50 HZ

Compresseur LBP R12/R406

Modèle	Valage	Fréquence	Déplacement	Capacité	Puissance d'entrée	Type de moteur	De charge d'huile	Type de refroidissement	Poids
	(V)	(Hz)	(CC)	(W)	(W)		(CC)		(Kg)
QD30	220-240	50	3.0	62	81	RSIR	180	ST	6.3
QD36	220-240	50	3.6	75	93	RSIR	180	ST	6.4
QD55	220-240	50	5.5	133	110	RSIR	240	ST	8.4
QD65	220-240	50	6.5	155	130	RSIR	240	ST	8.4
QD75	220-240	50	7.5	176	146	RSIR	240	ST	8.6
QD85	220-240	50	8.5	202	168	RSIR	240	ST	8.9
QD110	220-240	50	11.0	276	236	RSIR	240	ST	9.9
QD125	220-240	50	12.5	305	254	RSCR	280	ST	11.2

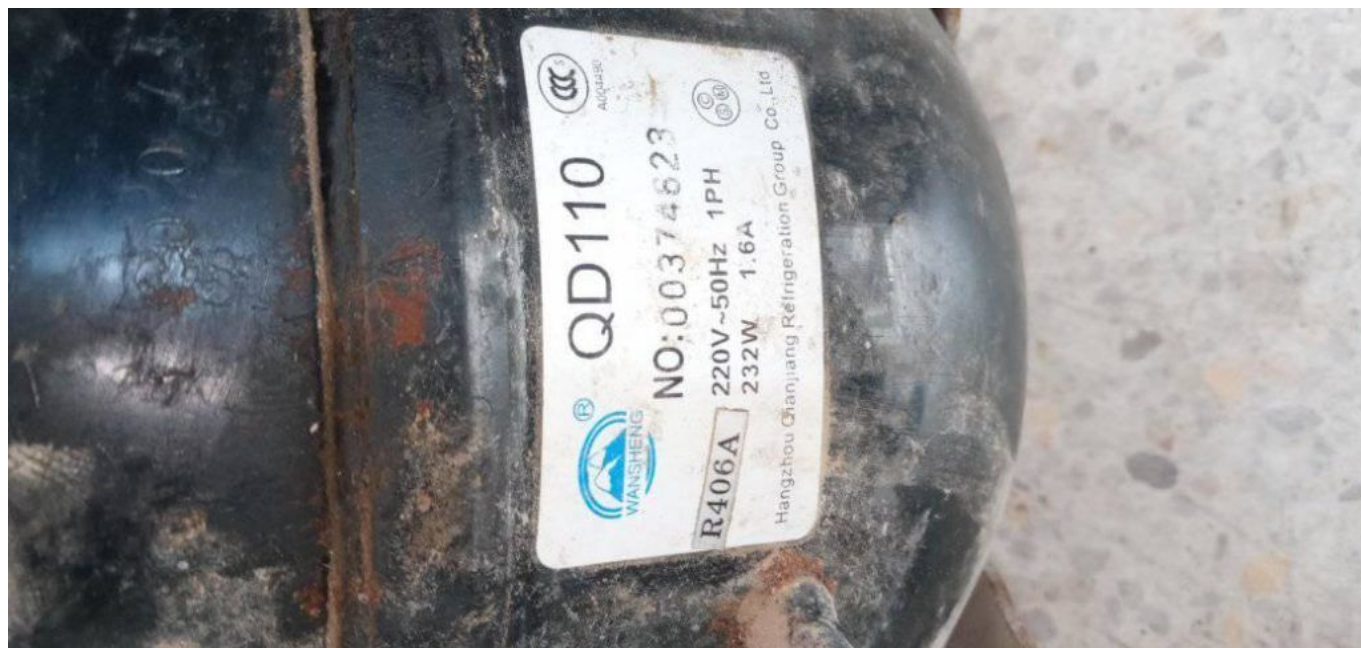

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_QD110-1Télécharger

R406a 220~240V/50Hz

LBP
低背压

序号 No.	应用类型 Application	产品系列 Serial	产品型号 type	马力 Hp	电压/频率 Power Supply (V/Hz)	电机类型 Motor type	制冷量 Capacity		COP Power Efficiency		启动器 Starting Device	启动电容 Starting Capacitor (μF)	运行电容 Running Capacitor (μF)	冷却方式 Cool
							ASHRAE (-23.3°C)	CECOMAF (-25°C)	ASHRAE (-23.3°C)	CECOMAF (-25°C)				
							w		COP (w/w)					
1	LBP 低背压	WT	QD55	1/6	220~240V ~50Hz	RSIR	130	98	1.04	0.81	PTC	/	/	S
2			QD65	1/5		RSIR	158	119	1.08	0.84		/	/	S
3			QD75	1/4		RSIR	176	132	1.09	0.85		/	/	S
4			QD85	1/4		RSIR	202	152	1.10	0.86		/	/	S
5			QD91	1/4		RSIR	216	162	1.12	0.87		/	/	S
6	LBP 低背压	WQ	QD110	3/10	220~240V ~50Hz	RSIR	271	203	1.17	0.91	重锤 Starting Relay	/	/	F
7			QD128	1/3		RSIR	306	230	1.18	0.92		/	/	F
8			QD142	2/5		CSIR	333	250	1.19	0.93		80	/	F
9	LBP 低背压	SC	QD168	1/2	220~240V ~50Hz	CSIR	380	330	1.15	1.06	电流式 Current	80	/	F2
10			QD180	1/2		CSIR	440	382	1.15	1.07		80	/	F2
11			QD210	3/5		CSIR	510	443	1.17	1.08		80	/	F2

Private Picture Copyright : WWW.MBSM.PRO

Cubigel Compressors, Compressor, GQY80AT, 1/4Hp, LBP, R134a, 8.1cmc, 165 W, REFRIGERATEUR INDESIT

Category: compressor

written by www.mbsm.pro | 28 March 2021

Compresor GQY80AT, freon R134a, capacitate 8.1

cmc, capacitate frigorifica ASHRAE 222 W, capacitate

frigorifica CECOMAF 165 W, racire statica #GQY80AT

Model: GQY80AT

Freon: R134a

Capacitate: 8.1 cmc

Capacitate frigorifica ASHRAE: 222 W

Capacitate frigorifica CECOMAF: 165 W

35 -30 -25 -10 w COP

- 451.00.3301 GD40AAa / GY40AA 1/10 S 4.03 34 49 70 0.77 154 C 200 6.7 RSIR P •
- 451.00.3202 GD40AA 1/10 S 4.03 34 49 70 0.77 154 C 200 6.7 RSIR P •
- 451.00.3302 GL45AA / GY44AA 1/8 S 4.55 37 56 81 0.81 183 C 265 8.3 RSIR P •
- 451.00.3303 GL60AA / GY57AA 1/6 S 5.99 50 75 107 0.85 238 C 265 9.1 RSIR P •
- 451.00.3304 GL75AA / GY66AA 1/5 S 6.65 57 85 121 0.87 267 C 345 9.6 RSIR P •
- 451.00.3305 GL80AA / GY75AA 1/5 S 7.52 68 101 144 0.89 326 C 345 9.9 RSIR P •
- 451.00.3104 GL80AAb 1/5 OC 8.10 68 101 144 0.89 326 C-V 345 9.9 CSIR R •
- 451.00.3005 GL90AA 1/4 S 9.08 82 119 165 0.90 350 C 345 10.2 RSIR P •
- 451.00.3306 GL90AAa / GY80AT 1/4 S 9.08 82 119 165 0.90 350 C 345 10.2 RSIR P •
-
- 451.00.3105 GL90AAb 1/4 OC 9.08 82 119 165 0.90 350 C-V 345 10.2 CSIR R •
- 451.00.3205 GL90AAb 1/4 F 9.08 82 119 165 0.90 350 C-V 345 10.2 CSIR R •
- 451.00.3325 GL90AAa 1/4 OC 9.08 82 119 165 0.90 350 C-V 345 10.2 CSIR R •
- 451.00.3106 GP12BB 1/3 OC 12.00 83 131 190 0.88 424 C 400 11.5 RSIR R •
- 451.00.3206 GP12FB 1/3 F 12.00 83 131 190 0.88 424 C 400 11.5 RSIR R •
- 451.00.3326 GP12BB 1/3 OC 12.00 83 131 190 0.88 424 C 400 11.5 RSIR R •
- 451.00.3218 GP14CB 3/8 F 14.17 99 158 228 0.90 509 C 400 11.5 RSIR R •
- 451.00.3223 GP16FB 3/8 F 16.15 109 182 266 0.89 585 C-V 530 12.0 CSIR R •
- 451.00.3224 GX18FB 3/7 F 18.40 123 199 291 0.91 660 C-V 500 15.1 CSIR R •
- 451.00.3225 GX21FB 2/3 F 20.72 151 243 351 0.93 778 C-V 500 15.5 CSIR R •
- 451.00.3403 GL45TB 1/6 F 4.50 76 134 342 1.62 412 C-V 300 8.4 CSIR R •
- 451.00.3503 GL45PB 1/6 F 4.50 76 134 342 1.62 412 C-V 300 8.4 CSIR R •
- 451.00.3404 GL60TB 1/5 F 5.67 95 170 437 1.82 527 C-V 300 9.5 CSIR R •
- 451.00.3504 GL60PB 1/5 F 5.67 95 170 437 1.82 527 C-V 300 9.5 CSIR R •
- 451.00.3406 GL80TB 1/5 F 7.57 111 212 554 1.83 667 C-V 300 9.5 CSIR R •
- 451.00.3505 GL90TB 1/4 F 8.85 142 259 661 1.91 796 C-V 300 10.8 CSIR R •
- 451.00.3506 GP12TB 3/8 F 12.05 169 338 893 1.80 1077 C-V 350 11.2 CSIR R •
- 451.00.3418 GP14TB 3/8 F 14.00 190 373 999 1.77 1208 C-V 400 11.5 CSIR R •
- 451.00.3513 GP14TB 3/8 F 14.00 190 373 999 1.77 1208 C-V 400 11.5 CSIR R •
- 451.00.3419 GX18TB 1/2 F 18.40 285 539 1390 1.91 1673 C-V 500 16.0 CSIR R •
- 451.00.3420 GX21TB 5/8 F 20.72 332 603 1550 1.90 1866 C-V 500 17.0 CSIR R •
- 451.00.3421 GX23TB 5/8 F 23.20 368 677 1730 1.89 2083 C-V 500 17.0 CSIR R •
- 451.00.3422 GS26TB 3/4 F 25.93 392 771 2071 2.09 1011 C-V 887 22.7 CSIR R •
- 451.00.3423 GS30TB 7/8 F 29.95 317 785 2452 2.33 3020 C-V 887 22.7 CSR R •
- 451.00.3424 GS34TB 1 F 34.42 476 1068 2852 2.28 3421 C-V 887 22.7 CSR R •



Private Picture Copyright : WWW.MBSM.PRO

BAJA presión					serie LBP					R-134a					
CÓDIGO REMLE	MODELO	Potencia	Enfri.	Cilindr.	Producción Frigorífica en Watios.					Expansión	Aceite cm3	Peso Kg.	Motor	Arranque	220-240V/ 50Hz
• Gases sustitutivos del R-12 y R-134a.					CECOMAF (W)										
• Últimas existencias					-35	-30	-25		-10						
							w	COP							
• 451.00.3301	GD40AAa / GYV40AA	1/10	S	4.03	34	49	70	0.77	154	C	200	6.7	RSIR	P	•
• 451.00.3202	GD40AA	1/10	S	4.03	34	49	70	0.77	154	C	200	6.7	RSIR	P	•
• 451.00.3302	GL45AA / GYV44AA	1/8	S	4.55	37	56	81	0.81	183	C	265	8.3	RSIR	P	•
• 451.00.3303	GL60AA / GYV57AA	1/6	S	5.99	50	75	107	0.85	238	C	265	9.1	RSIR	P	•
• 451.00.3304	GL75AA / GYV66AA	1/5	S	6.65	57	85	121	0.87	267	C	345	9.6	RSIR	P	•
• 451.00.3305	GL80AA / GYV75AA	1/5	S	7.52	68	101	144	0.89	326	C	345	9.9	RSIR	P	•
• 451.00.3104	GL80AAb	1/5	OC	8.10	68	101	144	0.89	326	C-V	345	9.9	CSIR	R	•
• 451.00.3005	GL90AA	1/4	S	9.08	82	119	165	0.90	350	C	345	10.2	RSIR	P	•
• 451.00.3306	GL90AAa / GQY80AT	1/4	S	9.08	82	119	165	0.90	350	C	345	10.2	RSIR	P	•
• 451.00.3105	GL90AAb	1/4	OC	9.08	82	119	165	0.90	350	C-V	345	10.2	CSIR	R	•
• 451.00.3205	GL90AAb	1/4	F	9.08	82	119	165	0.90	350	C-V	345	10.2	CSIR	R	•
• 451.00.3325	GL90AAa	1/4	OC	9.08	82	119	165	0.90	350	C-V	345	10.2	CSIR	R	•
• 451.00.3106	GP12BB	1/3	OC	12.00	83	131	190	0.88	424	C	400	11.5	RSIR	R	•
• 451.00.3206	GP12FB	1/3	F	12.00	83	131	190	0.88	424	C	400	11.5	RSIR	R	•
• 451.00.3326	GP12BB	1/3	OC	12.00	83	131	190	0.88	424	C	400	11.5	RSIR	R	•
451.00.3218	GP14CB	3/8	F	14.17	99	158	228	0.90	509	C	400	11.5	RSIR	R	•
451.00.3223	GP16FB	3/8	F	16.15	109	182	266	0.89	585	C-V	530	12.0	CSIR	R	•
451.00.3224	GX18FB	3/7	F	18.40	123	199	291	0.91	660	C-V	500	15.1	CSIR	R	•
451.00.3225	GX21FB	2/3	F	20.72	151	243	351	0.93	778	C-V	500	15.5	CSIR	R	•

Private Picture Copyright : WWW.MBSM.PRO

ALTA - MEDIA presión					serie HMBP					R-134a					
CÓDIGO REMLE	MODELO	Potencia	Enfriamiento	Cilindrada	Producción Frigorific en Watios.					Expansión	Aceite cm3	Peso Kg.	Motor	Arranque	220-240V/ 50Hz
• Gases sustitutivos de R-12 y R-134a.					CECOMAF (W)										
• Últimas existencias					-25	-15	5		10						
							w	COP							
• 451.00.3403	GL45TB	1/6	F	4.50	76	134	342	1.62	412	C-V	300	8.4	CSIR	R	•
• 451.00.3503	GL45PB	1/6	F	4.50	76	134	342	1.62	412	C-V	300	8.4	CSIR	R	•
• 451.00.3404	GL60TB	1/5	F	5.67	95	170	437	1.82	527	C-V	300	9.5	CSIR	R	•
• 451.00.3504	GL60PB	1/5	F	5.67	95	170	437	1.82	527	C-V	300	9.5	CSIR	R	•
451.00.3406	GL80TB	1/5	F	7.57	111	212	554	1.83	667	C-V	300	9.5	CSIR	R	•
• 451.00.3505	GL90TB	1/4	F	8.85	142	259	661	1.91	796	C-V	300	10.8	CSIR	R	•
• 451.00.3506	GP12TB	3/8	F	12.05	169	338	893	1.80	1077	C-V	350	11.2	CSIR	R	•
• 451.00.3418	GP14TB	3/8	F	14.00	190	373	999	1.77	1208	C-V	400	11.5	CSIR	R	•
• 451.00.3513	GP14TB	3/8	F	14.00	190	373	999	1.77	1208	C-V	400	11.5	CSIR	R	•
451.00.3419	GX18TB	1/2	F	18.40	285	539	1390	1.91	1673	C-V	500	16.0	CSIR	R	•
451.00.3420	GX21TB	5/8	F	20.72	332	603	1550	1.90	1866	C-V	500	17.0	CSIR	R	•
451.00.3421	GX23TB	5/8	F	23.20	368	677	1730	1.89	2083	C-V	500	17.0	CSIR	R	•
• 451.00.3422	GS26TB	3/4	F	25.93	392	771	2071	2.09	1011	C-V	887	22.7	CSIR	R	•
451.00.3423	GS30TB	7/8	F	29.95	317	785	2452	2.33	3020	C-V	887	22.7	CSR	R	•
• 451.00.3424	GS34TB	1	F	34.42	476	1068	2852	2.28	3421	C-V	887	22.7	CSR	R	•

Private Picture Copyright : WWW.MBSM.PRO

BAJA presión					serie LBP												R-600a		
CÓDIGO REMLE	MODELO	Potencia	Enfriamiento	Cilindrada	Producción Frigorífica en Watios.								Expansión	Aceite cm3	Peso Kg.	Motor	Arranque	220-240V/ 50Hz	
					-35	-30	-25	-23.3	-20	-15	-10								
451.00.0605	HQY55AA	1/9	S	5.46	28	44	62	69	83	105	130	C	210	8.9	RSIR/RSCR	P	•		
451.00.0610	HQY70AA	1/8	S	6.64	42	59	80	88	104	131	161	C	210	9.0	RSIR/RSCR	P	•		
451.00.0615	HLY99AA	1/6	S	9.93	69	90	119	130	155	198	248	C	345	9.6	RSIR/RSCR	P	•		
451.00.0620	HPY12AA	1/5	S	12.10	79	107	143	157	187	239	299	C	300	10.7	RSIR/RSCR	P	•		
451.00.0625	HPY14AA	1/5	S	14.31	92	124	165	181	215	274	342	C	300	11.0	RSIR/RSCR	P	•		
451.00.0630	HPY16AA	1/4	S	16.14	102	136	180	198	236	302	379	C	300	11.2	RSIR/RSCR	P	•		

Private Picture Copyright : WWW.MBSM.PRO

ALTA - MEDIA presión **serie HMBP** **R-22**

CÓDIGO REMLE	MODELO	Potencia	Enfriamiento	Cilindrada	Producción Frigorífica en Vatios.								Expansión	Aceite cm3	Peso Kg.	Motor	Arranque	220-240V/ 50Hz
					-20	-15	-10	-5	0	5	7.2	10						
451.00.1404	L45TN	1/5	F	4.50	157	206	265	333	410	496	537	592	C-V	400	9.5	CSIR	P	•
451.00.1405	L57TN	1/4	F	5.67	194	255	327	410	505	610	660	727	C-V	300	9.5	CSIR	R	•
451.00.1428	L76TN	3/8	F	7.57	268	347	441	550	675	814	881	969	C-V	470	10.0	CSIR	R	•
451.00.1408	L88TN	3/8	F	8.85	523	416	527	658	806	973	1052	1159	C-V	400	10.6	CSIR	R	•
451.00.1409	P12TN	1/2	F	12.00	412	537	689	868	1075	1309	1421	1570	C-V	400	12.3	CSR	R	•
451.00.1416	S22TN	7/8	F	21.77	645	890						3000	C-V	887	22.7	CSR	R	•
451.00.1418	S26TN	1 1/4	F	25.93	857	1182	1561	1993	2480	3021	3275	3615	C-V	887	22.7	CSR	R	•

Private Picture Copyright : WWW.MBSM.PRO

ALTA - MEDIA presión **serie HMBP** **sustituto del R-404a - R507 (*)**

220-240V 50Hz

CÓDIGO REMLE	MODELO	CV	Enfr.	Cil. cm3	Int. A	Conex.		Conex. aspir. Rotalock	Rendimientos (Wattios)*				Aplic.
						ODF	Rotalock		+7,2	-0°C	-5°C	-10°C	
451.00.0299	ML40TB	1/6	F	4.04	2,03	1/4"	-	3/16"	516	387	320	260	C-V
451.00.0300	ML45TB	1/5	F	4.50	2,19	1/4"	-	3/16"	559	432	356	289	C-V
451.00.0305	ML60TB	1/4	F	5.67	2,77	1/4"	-	3/16"	686	525	428	343	C-V
451.00.0310	ML80TB	3/8	F	7.57	3,27	1/4"	-	3/16"	931	720	590	475	C-V
451.00.0315	ML90TB	3/8	F	8.85	3,98	1/4"	-	3/16"	1118	861	705	569	C-V
451.00.0321	MP12RB	1/2	F	12.00	3,80	5/16"	-	1/4"	1765	1379	1142	931	C-V
451.00.0323	MP14RB	1/2	F	14.00	4,86	5/16"	-	1/4"	1765	1379	1142	931	C-V
451.00.0325	MX18TB	7/8	F	18.12	6,50	3/8"	-	1/4"	2275	1719	1379	1078	C-V
451.00.0326	MX21TB	1	F	21,74	6,28	3/8"	-	1/4"	2745	2063	1645	1275	C-V
451.00.0327	MS26TB-V	1 3/8	F	25.95	8,97	5/8"	1" 5/8"R	5/16"	3382	2578	2085	1647	C-V
451.00.0328	MA34TB-V	1 5/8	F	34,42	11,50	5/8"	1" 5/8"R	5/16"	4450	3480	2870	2310	C-V

Private Picture Copyright : WWW.MBSM.PRO

BAJA presión **serie LBP** **sustituto del R-404a - R507 (*)**

220-240V 50Hz

CÓDIGO REMLE	MODELO	CV	Enfr.	Cilindr. cm3	Int. A	Conex. aspir.		Conex. descar. ODF	Rendimientos (Wattios)*			Aplic.
						ODF	Rotalock		-35°C	-25°C	-10°C	
451.00.0450	ML45FB	1/6	F	4,60	1,58	1/4"	-	3,16"	70	130	270	C-V
451.00.0455	ML60FB	1/5	F	6,00	1,77	1/4"	-	3,16"	100	180	340	C-V
451.00.0460	ML80FB	1/4	F	8,10	2,21	1/4"	-	3,16"	140	250	490	C-V
451.00.0465	ML90FB	1/3	F	8,85	2,24	1/4"	-	3/16"	150	280	530	C-V
451.00.0470	MP12FB	3/8	F	12,00	2,88	3/8"	-	1/4"	170	350	720	C-V
451.00.0471	MP14FB	1/2	F	14,00	3,38	3/8"	-	1/4"	200	400	850	C-V
451.00.0472	MPT14LA [®]	1/2	F	14,32	2,70	3/8"	-	1/4"	360	550	1000	C-V
451.00.0473	MX18FBa	5/8	F	18,20	2,97	3/8"	-	1/4"	210	510	1160	C-V
451.00.0474	MX23FB	7/8	F	23,20	3,78	3/8"	-	1/4"	380	720	1450	C-V
451.00.0475	MS26FB-V	3/4	F	26,15	4,72	5/8"	1" 5/8"R	5/16"	360	820	1570	C-V
451.00.0476	MS30FB-V	7/8	F	30,00	5,60	5/8"	1" 5/8"R	5/16"	420	940	1900	C-V
451.00.0477	MS34FB-V	1	F	34,25	6,68	5/8"	1" 5/8"R	5/16"	480	1090	2230	C-V

Private Picture Copyright : WWW.MBSM.PRO

FRÍO DOMÉSTICO / COMERCIAL

ALTA - MEDIA presión
serie HMBP

CÓDIGO REMLE	MODELO	Potencia	Enfriam.	Cilind.	Producción Frigorífic en Watts.										Expans.	Aceite cm3	Peso Kg.	Motor	Arrang.	Modelos MIX Sustitutos R-12 / 134a	
Últimas existencias					-25	-20	-15	-10	-5	0	5	7.2	10	Sustitutos R-12 / R134a							
451.00.0403	L45PX	1/6	F	4.50	77	101	132	169	214	266	325	353	390	C	300	8.4	RSIR	R	GL45PB	451.00.3503	
451.00.0404	L57PX	1/5	F	5.67	98	130	171	221	279	346	421	457	505	C	300	9.5	RSIR	R	GL60PB	451.00.3504	
451.00.0405	L88TY	1/4	F	8.85	165	215	277	351	437	535	645	697	767	C-V	400	11.2	CSIR	R	GL90TB	451.00.3505	
451.00.0406	P12TY	3/8	F	12.00	209	274	357	458	577	714	869	943	1043	C-V	400	11.2	CSIR	R	GP12TB	451.00.3506	
451.00.0412	S26TY	7/8	F	25.93	392	565	771	1011	1284	1591	1930	2090	2303	C-V	887	22.7	CSIR	R	GS26TB-V	451.00.3422	
451.00.0413	P14TY	7/16	F	14.00	243	318	412	526	659	812	983	1065	1174	C-V	400	11.5	CSIR	R	GP14TB	451.00.3513	
451.00.0417	S34TY	1 1/5	F	34.42	644	886	1172	1501	1873	2289	2748	2963	3249	C-V	887	22.7	CSIR	R	GS34TB-V	451.00.3424	

Private Picture Copyright : WWW.MBSM.PRO


BAJA presión
serie LBP

CÓDIGO REMLE	MODELO	Potencia	Enfriam.	Cilind.	Producción Frigorífic en Watts.								Expans.	Aceite cm3	Peso Kg.	Motor	Arranq.	Modelos MIX Sustitutos R-12 / 134a			
Últimas existencias					-35	-30	-25	-23,3	-20	-15	-10	Sustitutos R-12 / R134a									
451.00.0202	D40AS	1/10	S	4.00	40	56	74	81	96	121	149	C	240	6.7	RSIR	P	GD40AAa	451.00.3301			
451.00.0002	L45AV	1/8	S	4.50	39	57	79	87	105	136	171	C	300	8.4	RSIR	R	GL45AA	451.00.3302			
451.00.0003	L55AV	1/6	S	5.47	49	73	101	112	134	171	211	C	470	9.5	RSIR	R	GL60AA	451.00.3303			
451.00.0004	L76AV	1/5	S	7.57	58	89	125	139	168	217	271	C	530	10.5	RSIR	R	GL75AA	451.00.3304			
451.00.0104	L76BV	1/5	OC	7.57	58	89	125	139	168	217	271	C	530	10.5	RSIR	R					
451.00.0005	L88AV	1/4	S	8.85	69	107	150	167	200	255	317	C	530	11.0	RSIR	R	GL80AA	451.00.3305			
451.00.0105	L88BV	1/4	OC	8.85	69	107	150	167	200	255	317	C	530	11.0	RSIR	R	GL90AAa OC	451.00.3325			
451.00.0205	L88FW	1/4	F	8.85	69	107	150	167	200	255	317	C-V	530	10.0	RSIR	R	GL90AAb	451.00.3205			
451.00.0106	P12BW	1/3	OC	12.00	79	132	192	215	261	337	422	C	530	11.5	RSIR	R	GP12BB OC	451.00.3326			
451.00.0206	P12FW	1/3	F	12.00	79	132	192	215	261	337	422	C-V	530	11.5	RSIR	R	GP12FB	451.00.3206			

Private Picture Copyright : WWW.MBSM.PRO

Compresor GQY80AT, freon R134a, capacitate 8.1 cmc, capacitate frigorífica ASHRAE 222 W, capacitate frigorífica CECOMAF 165 W, racire statica #GQY80AT

Model: GQY80AT

Freon: R134a

Capacitate: 8.1 cmc

Capacitate frigorífica ASHRAE: 222 W

Capacitate frigorífica CECOMAF: 165 W

Racire : statica



Private Picture Copyright : WWW.MBSM.PRO

Category: Non classé

written by www.mbsm.pro | 28 March 2021

Type: Hermetic piston compressors Producer: ACC Series: HMBP

Model: GL60AN

Defining reports: [B134](#)

Discharge element: C

Cooling: S

Maximum ambient temperature [°C]: 50

Cylinder capacity [cm³]: 6

Displacement [m³/h]: 1

Weight [kg]: 9.9

Oil charge [cm³]: 345

Oil type: ISO VG 19 ESTER

Engine type:	DCTD
--------------	------

Power [KM]: 1/6

Starting element: LST

Power supply: 220V 50Hz

Voltage range: 170-264

Locked rotor current [A]: 14.6

Running winding resistance (25°C) [Ω]: 9.33

Starting winding resistance (25°C) [Ω]: 10.81

Belarus 2003

Shielding element: MRA38085, T0515, AF11BJ

Starting capacitor volume [μF]:

millimeters inches

Suction tube: 6,5

Service tube: 6.5

Discharge tube: 4.9



Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_GL60ANTélécharger

Mbsm.pro, Donper, Hermetic, Compressor , R600a, Lj126Cy, lu126cy1, 1/3 Hp, R600a

Category: compressor

written by www.mbsm.pro | 28 March 2021



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Donper, Hermetic, Compressor , R600a, Lj126Cy, lu126cy1, 1/3 Hp, R600a

HERMETIC, Freezer, COMPRESSOR, ZEL, GTH86AA, R134A, 1/4 Hp, Lbp, 230W, 8.6CC

Category: compressor

written by www.mbsm.pro | 28 March 2021

COMPRESSOR ZEL GTH86AA

APPLICATION: LBP

FREON: R134A

DISPLACEMENT: 8.6CC

POWER SUPPLY: 220V

POWER: 1 / 4HP – 230W

APPLICATION: UNIVERSAL

Specifications

Description

Detailed Product Description

1.Low levels of noise and vibration

2.Standard,medium,high and very high levels of efficiency

R134a 220-240V/50HZ

Model	Displ.(cm ³)	Motor Type	Cooling capacity(w)	Input Power without RC(w)	Power with RC(w)	COP without RC(w/w)	COP with RC(w/w)	Run Capacltor	Start Capacltor	Height(mm)
Standard Efficiency Range										
OF789	4.4	RSIR	110	102		1.08				174
OF1033A	5.7	RSIR	141	118		1.19				174
OF1350A	7.5	RSIR	178	158		1.13				183
GTH86AA	8.6	RSIR/RSCR	230	161	153	1.43	1.50	5		174
GTH93AA	9.3	RSIR/RSCR	260	182	173	1.43	1.50	5		183
Medium Efficiency Range										
GTM40AT	4.0	RSIR	102	91		1.12				163
GTM57AT	5.7	RSIR	156	128		1.21				183
GTM60AT	6.0	RSIR	165	136		1.27				163
GVY75AT	7.5	RSIR/RSCR	200	149	139	1.34	1.44	5		183
GTM75AA	7.5	RSIR	200	166		1.20			50	183
GTM93AA	9.3	RSIR	270	220		1.35				183
GTM10AA	11.0	RSIR/RSCR	300	222		1.35			50	183
GTM12AA	12.0	RSIR/RSCR	330	241		1.37			50	183



Reciprocating Compressors, Q Series,
Reciprocating Fixed Speed, R134a,
100g, LBP, QA66C14GAX5, RSIR, 145W,
1/5HP, 170L

Category: compressor

written by www.mbsm.pro | 28 March 2021



MODEL QA66C14GAX5
220V ~ 50Hz 1PH R134a
THERMALLY PROTECTED
MATSUSHITA ELECTRIC IND. CO., LTD.
MADE IN MALAYSIA



Electrostar
الكتروستار

Model **ES170 T**

طراز

W **136** وات

A **1.12** أمبير

HZ **50** نذبنة

Ser No.



018018

مستسل

V

220

فولت

R134a

100 gm

وزن وسيط
التبريد

Total Capacity **170 Lit.**

Class **T**

صنع في مصر

Vacuum Pump, 1/4 Hp , Vane Pump, Rotary Vane, Valve Rotary, POMPE À VIDE, Restoration

Category: Technologie, Tester ok
written by www.mbsm.pro | 28 March 2021



Private Picture Copyright : WWW.MBSM.PRO






Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

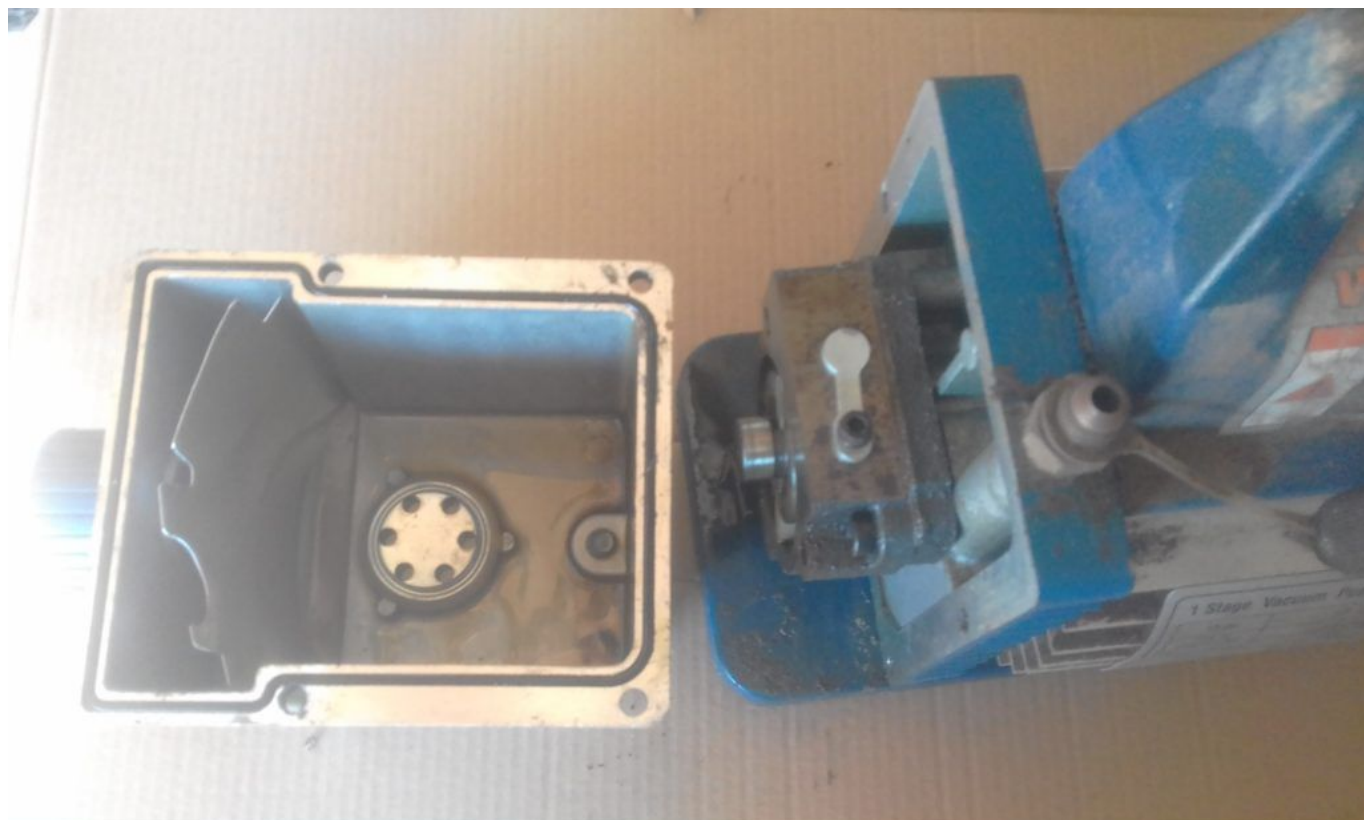

Private Picture Copyright : WWW.MBSM.PRO




Private Picture Copyright : WWW.MBSM.PRO




Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

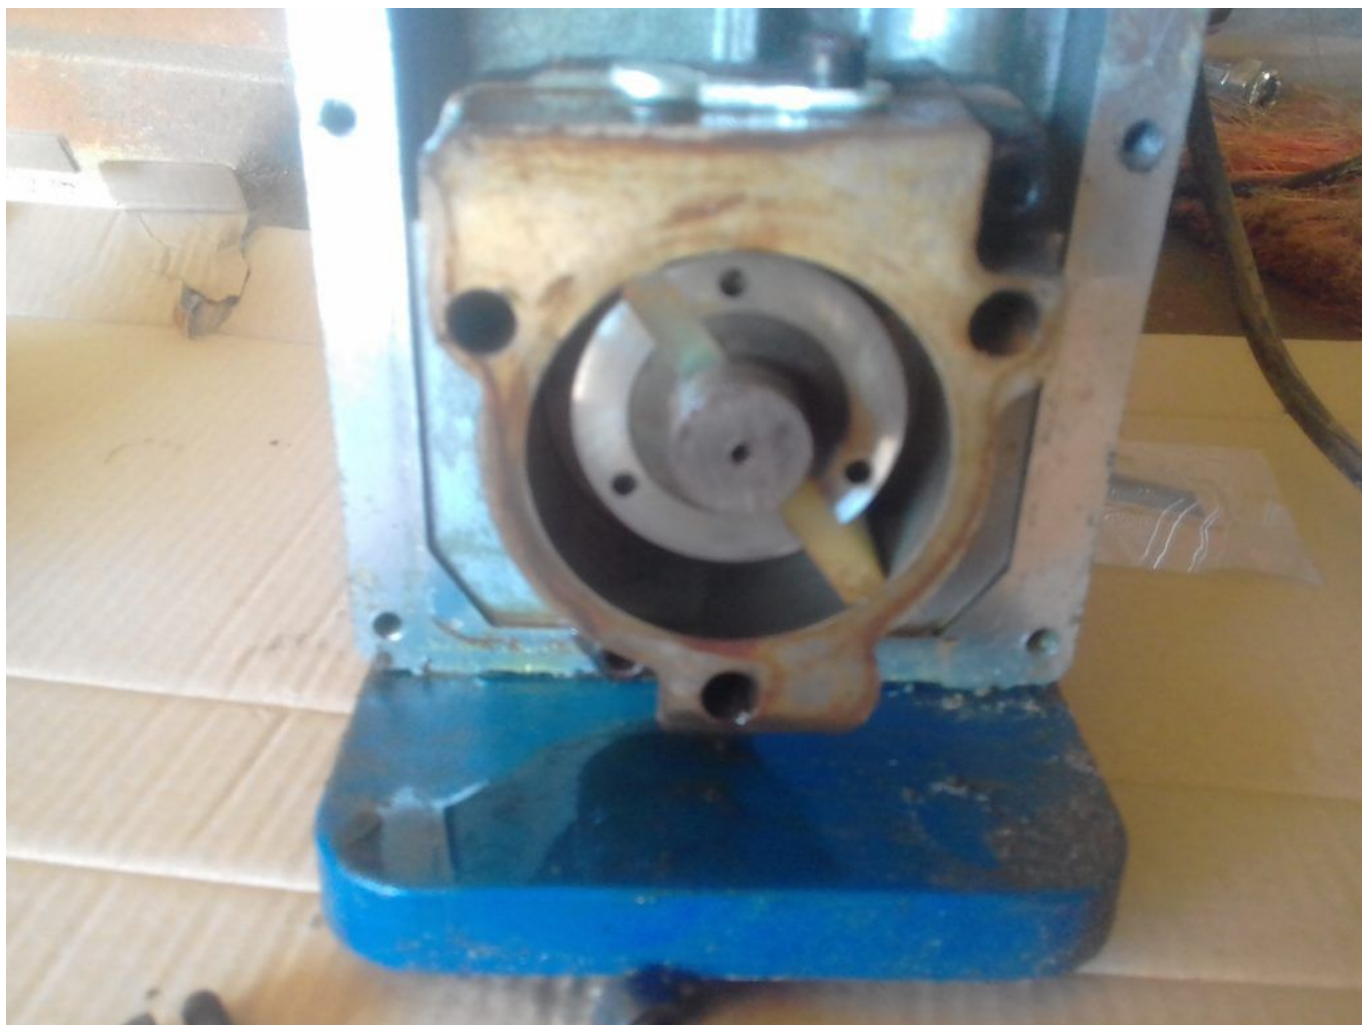

Private Picture Copyright : WWW.MBSM.PRO

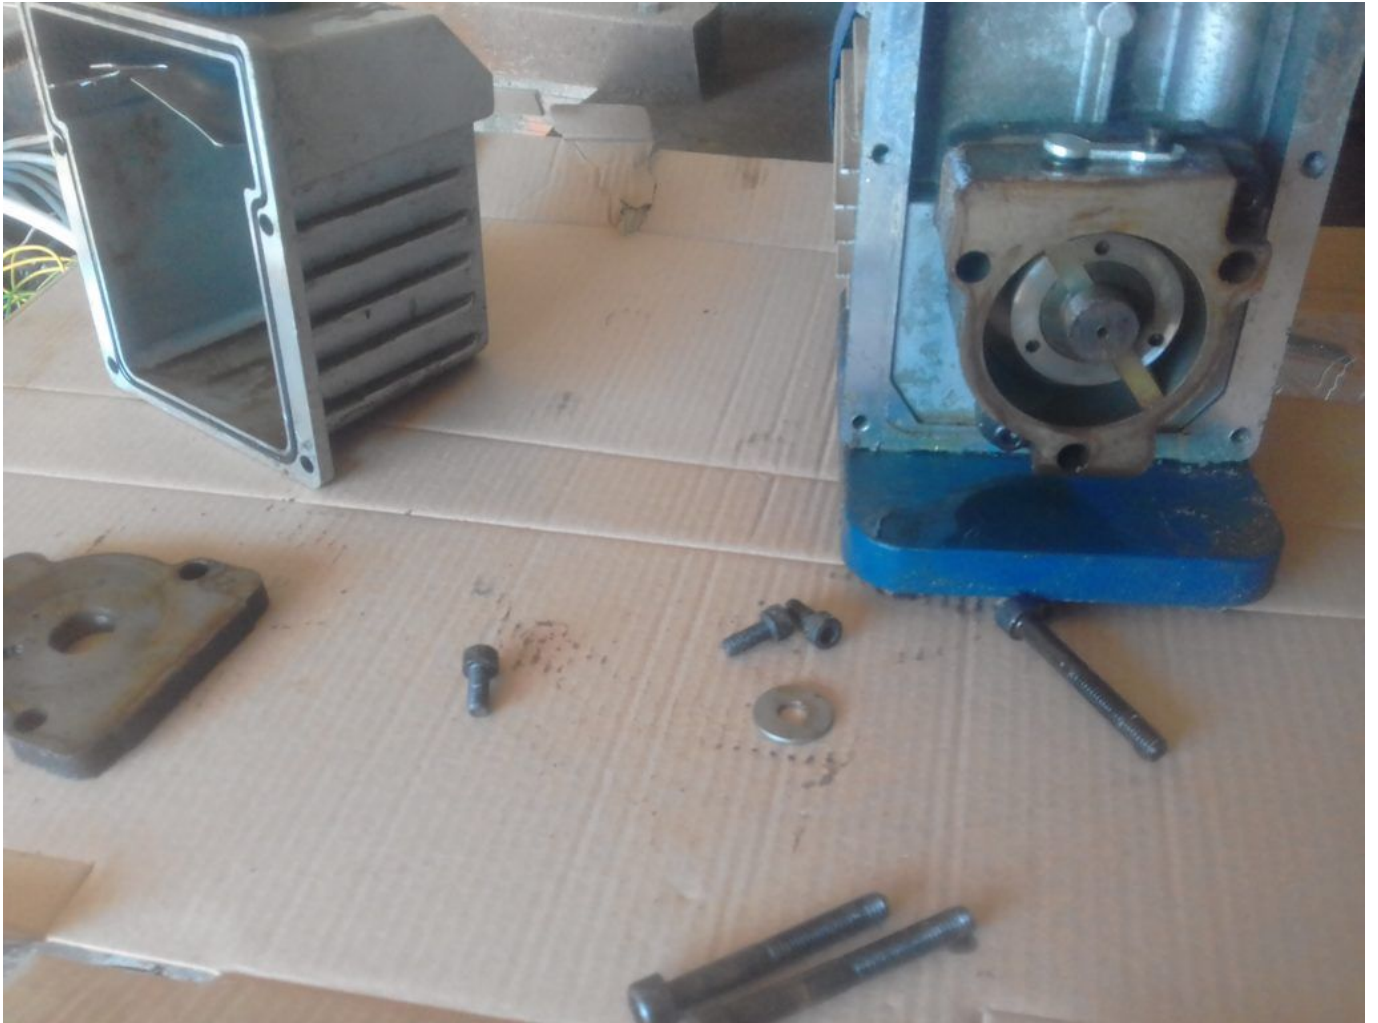

Private Picture Copyright: WWW.MBSM.PRO







Private Picture Copyright : WWW.MBSM.PRO





Private Picture Copyright : WWW.MBSM.PRO





Private Picture Copyright : WWW.MBSM.PRO







Private Picture Copyright : WWW.MBSM.PRO







Private Picture Copyright : WWW.MBSM.PRO





Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Compressor, Zanussi, HLY80AA, 1/7Hp,
220-240V 50Hz ~1, R600a, ZEM, Low
Back Pressure, RSIR

Category: compressor

written by www.mbsm.pro | 28 March 2021



Private Picture Copyright : WWW.MBSM.PRO

Technical Data Sheet

Compressor model HLY80AAa

Voltage 220-240V 50Hz ~1

Refrigerant R600a

APPLICATION COMPRESSOR MOTOR

Application Low Back Pressure Displacement 8,10 cm³ Nominal Power 1/7 hp

Refrigerant R600a Diameter 24,29 mm Voltage/Frequency 220-240V 50Hz
Evaporating Temp. -35,0 °C to -10,0 °C Stroke 17,47 mm Voltage range 187-264 V
Expansion Capillar Net Weight 9,45 Kg Type RSIR
Comp. Cooling Static Oil type ISO VG 10 MINER Phase number 1 PH
Max. ambient temp. 43,0 °C Oil charge 205 cm³ Locked Rotor Amps (LRA) 8,60 A
Max. Cont. Current (MCC) 1,00 A
Main W. resist. at 25°C 22,02 Ω
Start W. resist. at 25°C 22,53 Ω
NOMINAL PERFORMANCE
ASHRAE CECOMAF
Cooling Capacity 113 kCal/h 99 W
COP 1,41 W/W 1,11 W/W
EER 1,22 kCal/Wh 0,96 kCal/Wh
Input Power 93 W 89 W
Current 0,62 A 0,60 A
TEST CYCLE CONDITIONS
ASHRAE CECOMAF
LBP (B) LBP (A)
Evaporating temp. -23,3 °C -25,0 °C
Condensing temp. 55,0 °C 55,0 °C
Liquid temp. 32,0 °C 55,0 °C
Ambient temp. 32,0 °C 32,0 °C
Suction temp. 32,0 °C 32,0 °C
Voltage/Frequency 220 V 50 Hz 220 V 50 Hz
ELECTRICAL COMPONENTS
Relay Option 1
Reference PTC K100
Voltage 200-240 V
Resistance 14.00 Ω
Protector Option 1 Option 2 Option 3 Option 4
Reference MSP318LZ 4TM189NFBYY T0462 AE37FJ
Current 5,90 A 5,50 A 6,20 A 5,90 A
Time check 7,5-14 seg 5-15 seg 7,5-14 seg 7,5-14 seg
Disc temp. (Open/Close) 120,00 / 61,00 °C 120,00 / 61,00 °C 110,00 / 62,00 °C
115,00 / 62,00 °C

[Mbsm_dot_pro_private_PDF_HLY80aa_danfoss_HLY80AAa_R600a_220_50Télécharger](#)



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

smart

ZMC, zanussi, Made in Egypt, Compressor, Frost Free Freezer, GM90AZ, EGM90AZ, 155W, 1/5Hp, 134A, 150G, Electrostar Freezer, 260L CRoss, 235L SStorage , 220v-50H, 1.2A, Class T

Category: compressor

written by www.mbsm.pro | 28 March 2021

COMPRESSOR TECHNICAL DATA

General Data

Refrigerant:	R134a
Application:	LBP
Evaporating Temperature Range:	-30°C to -10°C
Voltage/Frequency:	220/240V/50 HZ
Compressor Cooling:	Static
Expansion Device:	Capillary Tube
Packaging Quantity:	Multi – 96:120 pcs
Approvals:	CE-VDE-GOST

Mechanical Data

Oil Charge:	300 cm ³
Oil Type Configuration:	ester
Oil Type Viscosity:	19 cSt
Weight:	10 kg

Electrical Data

Motor Type:	RSIR / RSCR*
Voltage working range at 50 Hz:	187-264V
Maximum Motor Temperature:	130°C
Locked Rotor Current:	14.46 / 9.86 A
Start Winding Resistance:	23.40Ω at 25°C
Run Winding Resistance:	8.08 Ω at 25°C
Phase:	1 ph

External Characteristics

Internal Diameter	(mm)
Suction Connector	6.5
Discharge Connector	4.9

Process Connector 6.5

Material Copper


Electrical Components

Starting Device: PTC 14Ω

Motor Protection: T0490/xx



OO HUAWEI NOVA 5T
OO AI QUAD CAMERA



Made In Egypt

Frost Free Freezer

Model **ES 260 NF** طراز

Voltage **220 V - 50 HZ 1.2A 155 W**

Freezing Capacity 22 Kg/24Hr

Freezer Stopage Volume 235 Lit.

Total Gross Volume 260 Lit

Refrig. Storage Volume



024287

R134a **150g** وزن وسيط

التبريد

Class T صنع في مصر

max. lamp input

Without

15 W

Protection Rating

IPX 4

According To

ES 6000 / 2008 - ISO 15502 / 2005

OO HUAWEI nova 5T
OO AI QUAD CAMERA

Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_EGM90AZTélécharger