


COMPRESSOR, DONPER, NE6213CK, 1/2hp, R404a

Category: compressor

written by www.mbsm.pro | 28 March 2021

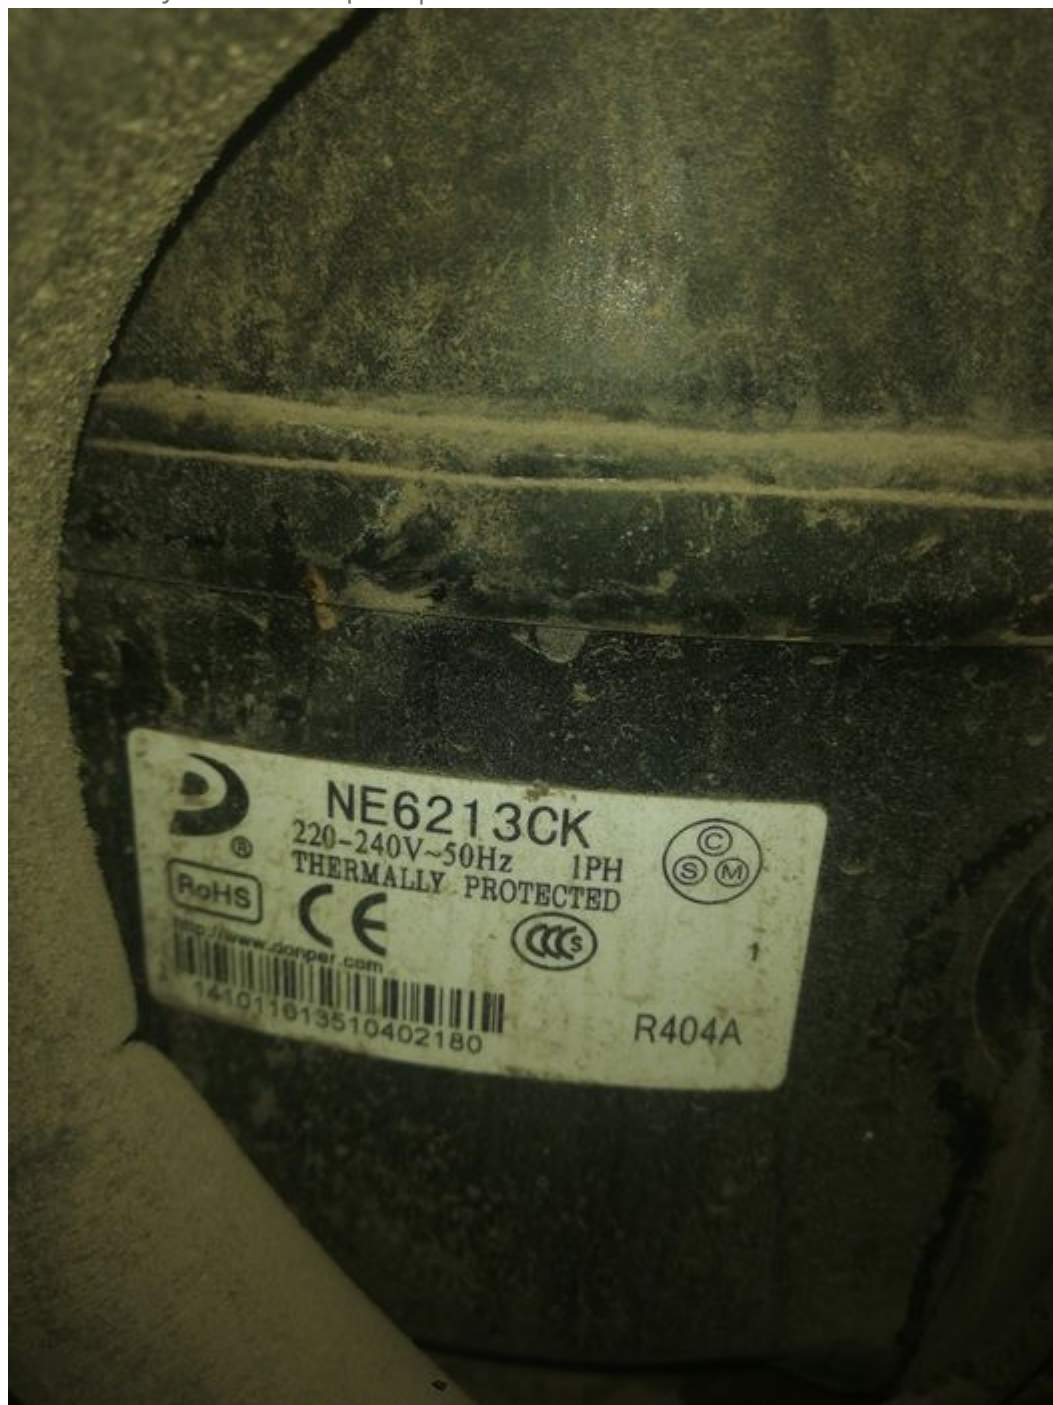

Private Picture Copyright : WWW.MBSM.PRO

Ne6213Ck Compressor R404A Med Temp 12 Disp 1080W @ -5 1/2Hp 240V 50Hz



Private Picture Copyright : WWW.MBSM.PRO



NE6213CK
220-240V-50Hz 1PH
THERMALLY PROTECTED
RoHS CE ACC0083 2
R404A
http://www.danfoss.com
0126741729011801180

NE6213CK COMPRESSOR R404A MED TEMP 12 DISP 1080W @ -5 1/2HP 240V 50HZ

Displacement: 12 cm³

Power: 1/2 HP

Oil Charge: 450 +/- 10 mL

Cooling capacity: 1080W @-5 SST

COP: ASHRAE 1.80

Private Picture Copyright : WWW.MBSM.PRO

Testing condition:

Test conditions	H.B.P	
	ASHRAE	CECOMAF
Evaporating Temp.	+7.2°C	+5°C
Ambient Temp.	+35.0°C	+32°C
Condensing Temp.	+54.4°C	+55°C
Suction Temp.	+35.0°C	+32°C
Subcooling Temp.	+46.1°C	+55°C

3. Running Condition

Ambient temp.	0~43°C
Evaporating temp.	-15~10°C
Voltage range	187~264V
Max. condensing temp.	65°C
Max. winding temp.	130°C
Max. shell temp.	95°C
Max. discharge temp.	120°C
Start voltage	187V [5/5bar(abs)]
Shell min. resistance to pressure	35bar

Private Picture Copyright : WWW.MBSM.PRO

1. Compressor Type

Compressor model	NE6213CK
Rated voltage/frequency	220-240V~50Hz
Refrigerant	R404A
Application	High back pressure (H.B.P)
Cooling method	Fan Cooling
Start torque	High starting torque (HST)
Control device	Capillary tube
Motor type	CSIR

Private Picture Copyright : WWW.MBSM.PRO


Mbsm_dot_pro_private_PDF_ne6213ck-compressorTélécharger

Freezer, AHT, Paris 185, freezer compressor, 400w, R290, 90 g, 571 liters, inverter compressor, Dc compressor, 1/2HP, Secop compressor

Category: compressor


written by www.mbsm.pro | 28 March 2021

x

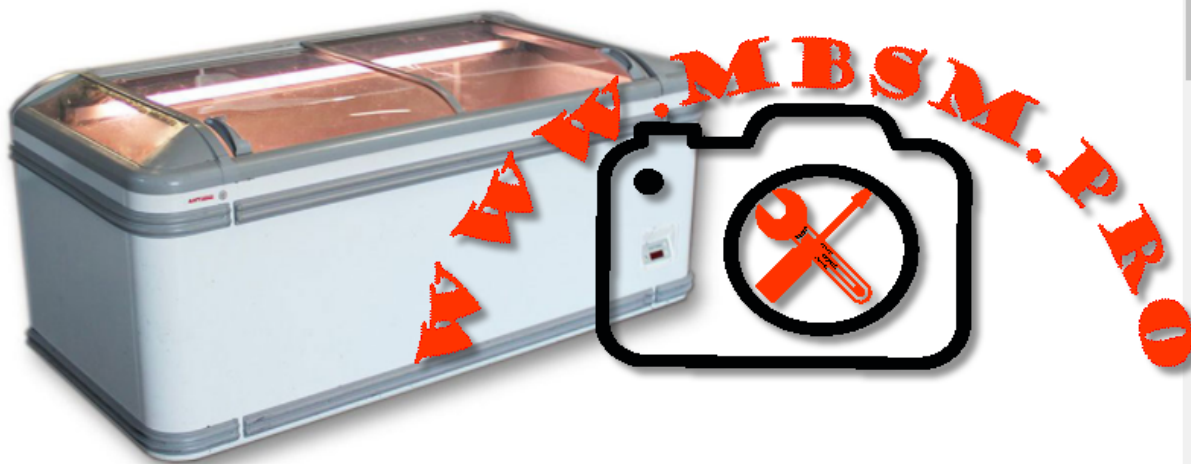

Private Picture Copyright : WWW.MBSM.PRO

FREEZER AHT PARIS 185 (-) VS AD

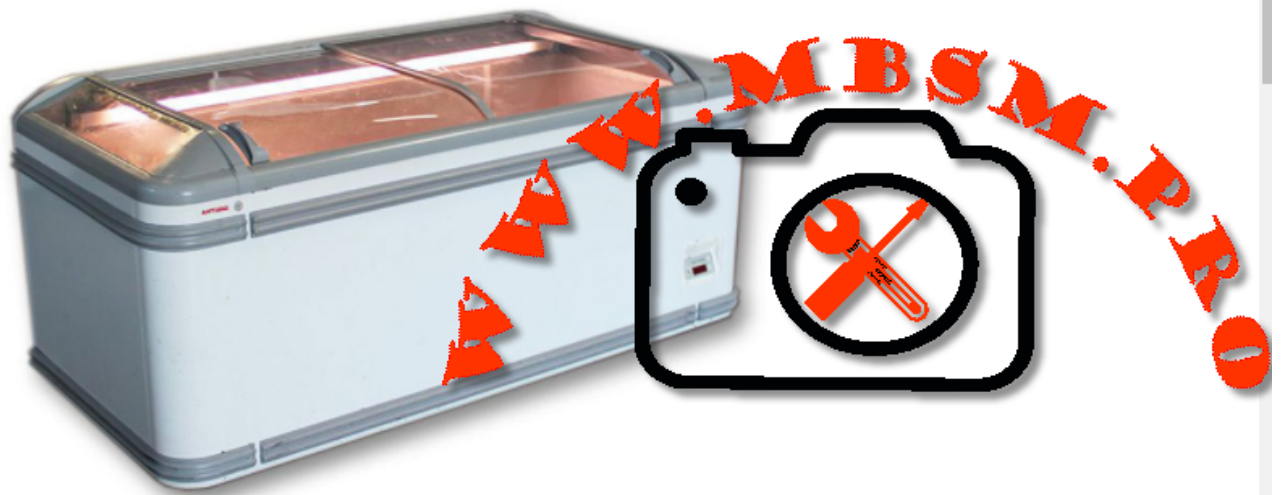

Private Picture Copyright: WWW.MBSM.PRO



Paris 185 | R290
 -18°C ... -23°C




Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

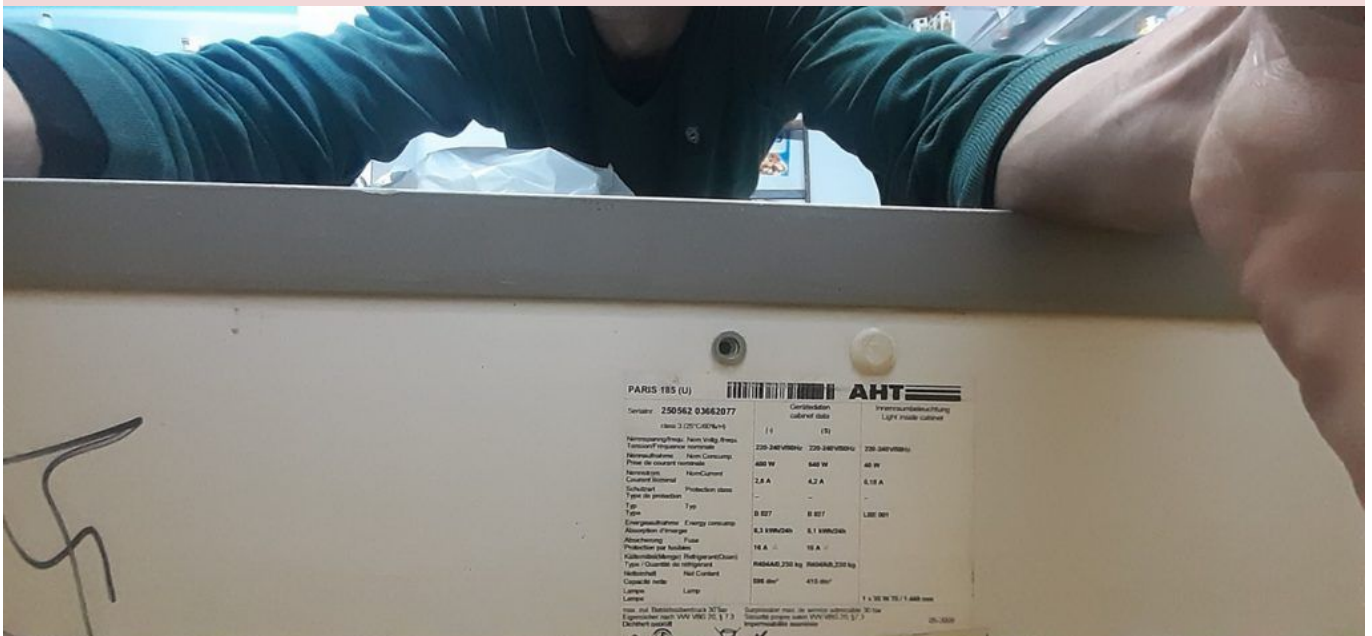

Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_Super-Market-Freezer-AHT_ParisTélécharger

- Gross Content: 571 liters
- Net Content: freezing: 571 liters
- Display Area: 1,02 m²
- Ambient Temperature: +16 to +25 ° C
- Temperature Range: (Standard setting is freezing – change of temperature setting only by service technician): Freezing: -18 °C to -23 °C
- Rated Voltage / Nominal Frequency: 220 – 240 V / 50 Hz
- Rated Power Consumption: 400 W
- Rated Power Consumption Light: 41 W
- Rated Current: 1.8 A
- Protection: 16 A
- Energy consumption (at 25 °C): Freezing: 6.1 kWh / 24 h
- Length of Connection Cable: 1750 mm
- Refrigerant: R290
- Refrigerant Quantity: 90 g

- Max. Permissible Operating Pressure: 30 bar
- Length (Outside / Inside): 1854 / 1723 mm
- Depth (Outside / Inside): 853 / 723 mm
- Working Height (Front / Outside Height): 770 / 833 mm
- Stacking Height: Cooling: 380 mm / Freezing: 550 mm
- Weight (net): 120 kg
- Lighting: fluorescent tube

Meuble congélateur AHT EQ PARIS 185 – rénové

CONGÉLATEUR QUI COMBINE QUALITÉ, FLEXIBILITÉ ET EFFICACITÉ

Le congélateur / réfrigérateur enfichable qui redéfinit l'économie et élève la présentation du produit à un niveau innovant. PARIS maximise également votre espace de vente au moyen d'inserts d'étagères, ce qui augmentera encore vos revenus. PARIS – un multitalent extrêmement efficace qui peut prétendre à une excellence prestigieuse.

AHT EQ – congélateurs d'occasion qui maximisent l'affichage de votre produit

- Grand stock jusqu'à 1000 pièces disponibles à la commande
- Garantie de six mois sur les pièces du congélateur
- Livraison rapide
- Les documents d'exportation peuvent être organisés sur demande
- Possibilité de charger des camions ou des conteneurs pleins
- Tous les congélateurs AHT EQ d'occasion sont soigneusement testés et remis à neuf dans notre atelier avant les navires
- Livraison internationale
- Emballage carton d'origine AHT Cooling Systems GmbH inclus par défaut
- Emballage d'origine renforcé AHT Cooling Systems GmbH pour les expéditions longue distance contre les routes lourdes

Avantages clés

- Une économie d'énergie élevée peut être obtenue par rapport aux unités ouvertes conventionnelles
- Écologique avec le propane réfrigérant naturel
- 100% sans CFC et sans PFC
- Modèle enfichable ne nécessitant aucune installation supplémentaire
- Faibles coûts d'investissement et d'exploitation
- Système de réfrigération sans entretien
- Compresseur à vitesse contrôlée électronique (VS) – uniquement avec le réfrigérant R290
- La solution parfaite – dégivrage semi-automatique intégré (AD) – uniquement avec le réfrigérant R290

Accessoires

- Séparateurs et jeu de grille – inclus par défaut
- Unité d'éclairage disponible en différentes versions – disponible sur demande
- Pare-chocs de protection contre les chocs disponibles en différentes couleurs – disponibles sur demande
- Couvercles pour mise en ligne – disponibles sur demande
- Les plaques de protection empêchent l'eau et la poussière de tomber sous les armoires – disponibles sur demande
- Le chariot protège contre les chocs physiques – disponible sur demande
- Autres accessoires supplémentaires – disponibles sur demande

Plages de température

- Congélation: -18°C до -23°C
- Réfrigération de la viande et de la viande hachée: 0°C à $+2^{\circ}\text{C}$ (modèle universel (U) uniquement)
- Plage de température ambiante: $+16^{\circ}\text{C}$ / $+25^{\circ}\text{C}$

Modèles disponibles de congélateur AHT EQ PARIS

- AHT EQ PARIS xxx (-) / (U) / VS / AD / L

Informations utiles

- AD – dégivrage automatique (deux fois par semaine – standard)
- VS – compresseur électronique à vitesse contrôlée
- (-) – modèle standard de congélateur
- (U) – modèle universel d'armoire de congélation / réfrigération
- L – éclairage intérieur néon
- R290 – Réfrigérant ECO R290
- R404a – réfrigérant R404a

Dimensions du congélateur AHT EQ PARIS 185

- Longueur extérieur / intérieur: 1854/1723 mm
- Profondeur extérieur / intérieur: 853/723 mm
- Hauteur d'accès avant / hauteur extérieur: 770/833 mm
- Hauteur d'empilage: 550 mm
- Poids net: 120 kg
- Contenu brut: 800 litres
- Surface d'affichage totale (TDA): 1,02 m²

Données techniques du congélateur AHT EQ ATHEN

- Plug-in 230V / 50HZ
- Longueur du cordon d'alimentation: 2500-3500 mm

Options de localisation flexibles

- Peut être utilisé comme une unité autonome
- Peut être utilisé dans une ligne
- Maximise l'utilisation de l'espace au sol avec une armoire d'extrémité

- Peut être installé sous des étagères à soufflet ou intégré dans des systèmes d'étagères existants

Compresseur, Danfoss, SC15G, R134a, 1/2HP, 50/60Hz

Category: compressor

written by www.mbsm.pro | 28 March 2021

Design


Displacement	cm ³	15.28
Oil quantity	cm ³	600 (550 on comp. with oil cooler)
Maximum refrigerant charge	g	1300
Free gas vol. in compressor	cm ³	1410
Weight without electrical equipment	kg	13.1

Motor

Motor size	watt	385
LRA (rated after 4 sec. UL984) HST	A	14.8
Cut-in current HST	A	14.8
Resistance, main and start winding (25°C)	Ω	5.0/13.7
Approvals		EN 60335-2-34

Dimensions

		104G8530	104G8520	104G8525
Height	mm	A	209	
		B	203	
		B1	183	
		B2	100	
Suction connector	location/I.D. mm	C 10.2 ±0.09	10.2 ±0.09	10.2 ±0.09
Process connector	location/I.D. mm	D 6.2 ±0.09	6.2 ±0.09	6.5 ±0.09
Discharge connector	location/I.D. mm	E 6.2 ±0.09	6.2 ±0.09	6.5 ±0.09
Oil cooler	location/I.D. mm	F 6.2 ±0.09		
Compressors on a pallet	pcs.	80		

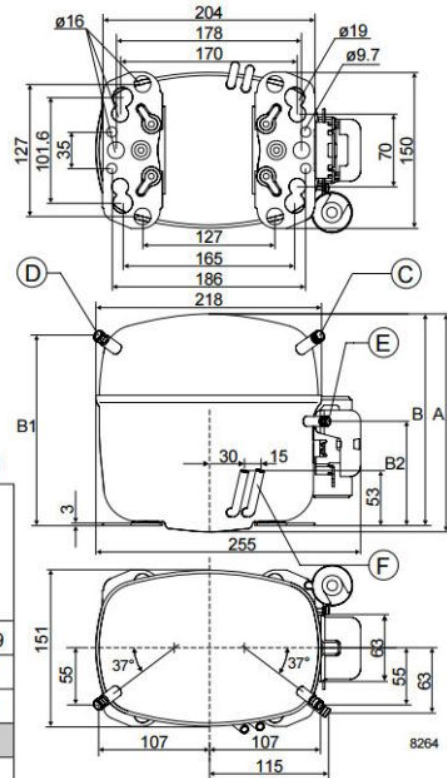


Private Picture Copyright: WWW.MBSM.PRO

Données techniques

- Modèle: **SC15G**
- Gaz: **R-134a**
- Température/Pression: **Moyenne / Haute**
- Puissance: **1/2 HP**
- Voltage: **230 V**
- Type De Courant: **Monophasé**
- Fréquence: **50/60 Hz**
- Type De Compresseur: **Hermétique**
- Décalage: **15.28 cm³**
- Cons.Énergie -25°C: **233 W**
- Cons.Énergie -10°C: **440 W**
- Cons.Énergie -5°C: **497 W**
- Cons.Énergie 0°C: **549 W**
- Cons.Énergie +5°C: **595 W**
- Cons.Énergie +7,2°C: **613 W**

- T° De Condensation: **55 °C**
- Capacidad Frigorífica -25°C: **175 Kcal/h**
- Capacidad Frigorífica -20°C: **308 Kcal/h**
- Capacidad Frigorífica -15°C: **450 Kcal/h**
- Capacidad Frigorífica -10°C: **604 Kcal/h**
- Capacidad Frigorífica -5°C: **775 Kcal/h**
- Capacidad Frigorífica 0°C: **966 Kcal/h**
- Capacidad Frigorífica 5°C: **1184 Kcal/h**
- Capacidad Frigorífica 7.2°C: **1289 Kcal/h**
- Capacidad Frigorífica 10°C: **1431 Kcal/h**
- Tipo Test: **Ashare 32**

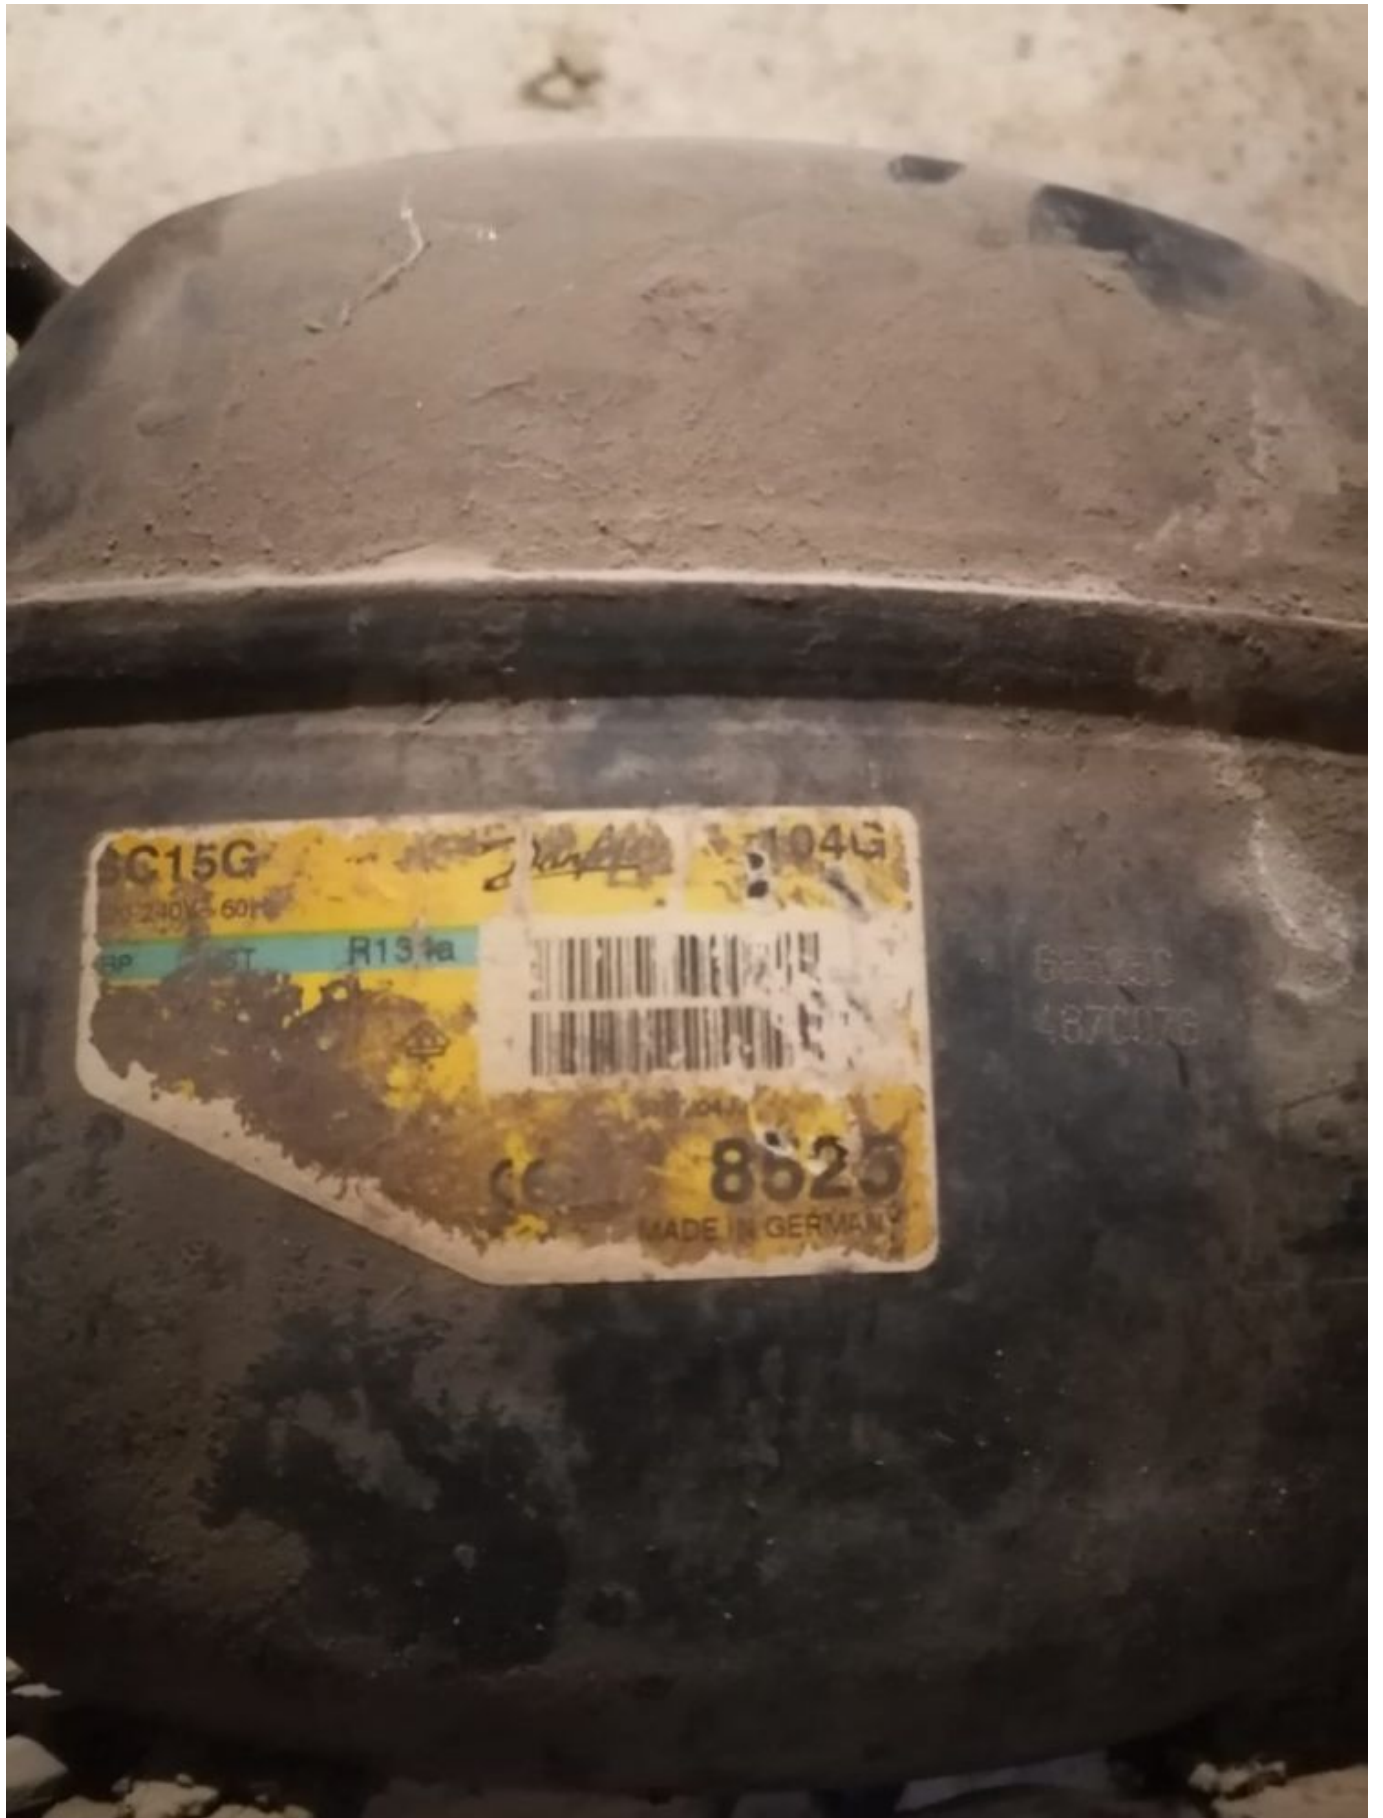

Design


Displacement	cm ³	15.28
Oil quantity	cm ³	600 (550 on comp. with oil cooler)
Maximum refrigerant charge	g	1300
Free gas vol. in compressor	cm ³	1410
Weight without electrical equipment	kg	13.1

Motor

Motor size	watt	385
LRA (rated after 4 sec. UL984) HST	A	14.8
Cut-in current HST	A	14.8
Resistance, main and start winding (25°C)	Ω	5.0/13.7
Approvals		EN 60335-2-34

Dimensions

		104G8530	104G8520	104G8525
Height	mm	A	209	
		B	203	
		B1	183	
		B2	100	
Suction connector	location/I.D. mm	C	10.2 ±0.09	10.2 ±0.09
Process connector	location/I.D. mm	D	6.2 ±0.09	6.2 ±0.09
Discharge connector	location/I.D. mm	E	6.2 ±0.09	6.5 ±0.09
Oil cooler	location/I.D. mm	F	6.2 ±0.09	
Compressors on a pallet	pcs.		80	

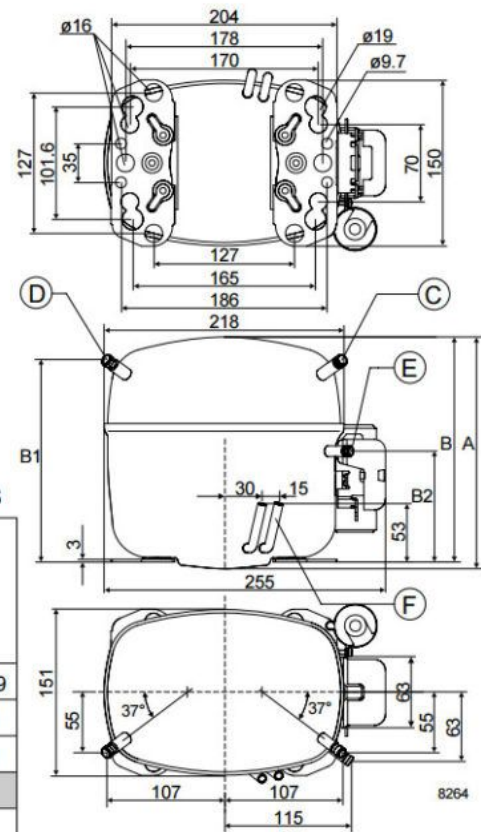

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_sc15gTélécharger


Mbsm_dot_pro_private_PDF_sc15g_104g7560_r134a_115v_60hz_01-2020_desd404o322Télécharger

Mbsm_dot_pro_private_PDF_sc15g_104g8526_r134a_220v_60hz_01-2020_desd403j302Télécharger

R134A, MBP, Copeland Hermetic, Reciprocating, Freezer, Compressor, Kcj467Hag, 1/2Hp

Category: compressor

written by www.mbsm.pro | 28 March 2021

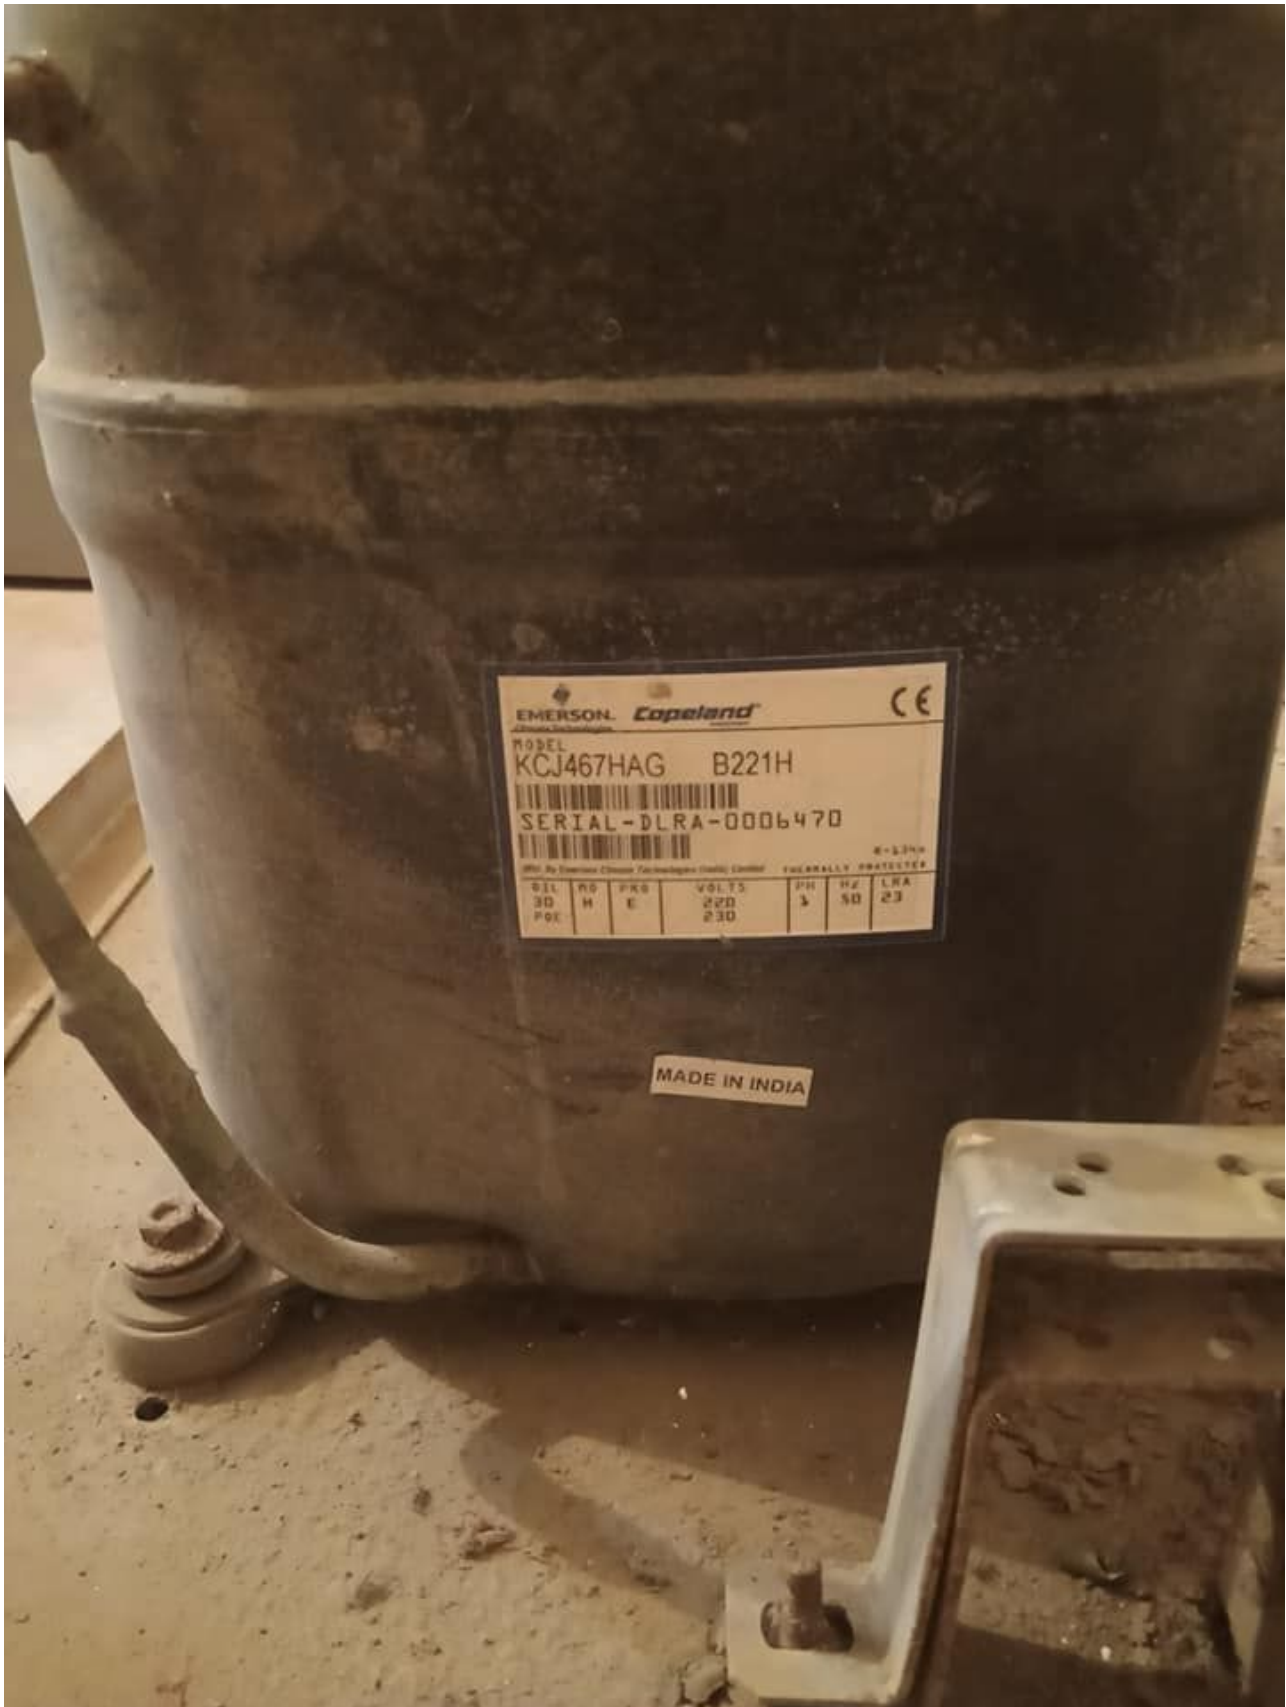

Private Picture Copyright : WWW.MBSM.PRO

R134A, MBP, Copeland Hermetic, Reciprocating, Freezer, Compressor, Kcj467Hag, 1/2Hp

Mbsm.Pro , Tecumseh Refrigeration
Compressor, CAE9460Z ,R404A
refrigerant ,3/8 hp, mhbp, 1/2HP
,1PH(phase) , 220V to 240V

Category: Solutions,Tester ok
written by Jamila | 28 March 2021

411445

 
6B88330200
CAE9460Z

R404A LRA 17
220-240V ~ 50Hz I_{LA} 3.40


53 D1510 10 195819 A
COUNTRY OF ORIGIN: FRANCE THERMALLY PROTECTED

PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm.Pro , Tecumseh Refrigeration Compressor ,R404A refrigerant ,1/2HP
,1PH(phase) , 220V to 240V

- Brand Name:Tecumseh
- Certification:RoHS
- Application:Refrigeration Parts
- Type:Refrigeration Compressor

411445

 
6B88330200
CAE9460Z

R404A LRA 17
220-240V ~ 50Hz I_A 3.40


53 D1510 10 195819 A
COUNTRY OF ORIGIN: FRANCE THERMALLY PROTECTED

LOW BACK PRESSURE COMPRESSORS

Type	COMPRESSOR MODELS	Nominal Power (H.P.)			REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)								VOLTAGE
		t	Refrigerant	Displacement (cm ³)	Evaporating Temperature								
					Oil charge (cm ³)	-45°C	-40°C	-35°C	-30°C	-23.3°C	-20°C	-10°C	
						t	t	t	t	t	t	t	
PISTON	AEZ2415Z	7/16	R404A	8.1	350			160	231	355	429	703	220-240V/1/50Hz
	CAE2417Z	7/16	R404A	11.3	350	37.8	62	161	280	460	557	891	220-240V/1/50Hz
	CAE2420Z	1/2	R404A	12.6	350	194	179	232	357	547	654	1047	220-240V/1/50Hz
	CAE2424Z	5/8	R404A	15.1	350	228	180	291	442	664	783	1199	220-240V/1/50Hz
	CAJ2428	3/4	R404A	15.2	887			306	434	628	773	1246	220-240V/1/50Hz 400V/3/50Hz
	CAJ2432Z	3/4	R404A	18.3	887	331	285	318	510	792	950	1560	220-240V/1/50Hz 400V/3/50Hz
	CAJ2440Z	1	R404A	21	887	532	394	452	647	975	1166	1876	220-240V/1/50Hz
	CAJ2446Z	1	R404A	26.15	887	702	575	549	797	1194	1423	2290	220-240V/1/50Hz 400V/3/50Hz
	CAJ2464Z	1-1/2	R404A	34.45	887	805	626	723	1076	1605	1902	3012	220-240V/1/50Hz 400V/1/3/50Hz
	FH2480Z	2	R404A	53.2	1625	292	420	738	1319	2183	2662	4419	220-240V/1/50Hz 400V/3/50Hz
	FH2511Z	3	R404A	74.25	1625	1561	1203	1380	2016	3135	3796	6222	220-240V/1/50Hz 400V/3/50Hz
	TAG2516Z	4	R404A	112.5	1960	1696	1407	1743	2704	4356	5335	9038	400V/3/50Hz
	TAG2522Z	6	R404A	134.8	1960	2541	2012	2378	3542	5522	6688	11062	400V/3/50Hz

Picture5 Mbsm Dot Pro : www.mbsm.pro

THE NEW TWO GENERATION BRAZIL COMPRESSORS

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)			REFRIGERATION CAPACITY AT 50HZ Rafed 54.5°C Cond Temp (Watts)								VOLTAGE	
		t	Refrigerant	Displacement (cm ³)	Evaporating Temperature									
					Oil charge (cm ³)	-20°C	-15°C	-10°C	-5°C	0°C	+5°C	+10°C		+15°C
						t	t	t	t	t	t	t		t
PISTON	AE4425Z-FZ1A	1/5	R404A	4.24	222	228	290	362	446	545	659	792	220-240V/1/50Hz	
	AE4430Z-FZ1A	1/4	R404A	5.16	216	293	375	466	568	685	821	977	220-240V/1/50Hz	
	AE4440Z-FZ1A	1/3	R404A	6.69	278	377	482	599	730	881	1055	1257	220-240V/1/50Hz	
	AE4450Z-FZ1A	7/16	R404A	8.85	369	500	640	795	970	1170	1401	1688	220-240V/1/50Hz	
	AE4460Z-FZ1C	1/2	R404A	10.33		636	784	959	1160	1380	1630	1920	220-240V/1/50Hz	

Tecumseh Compressor

LOW BACK PRESSURE COMPRESSORS

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)			REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)						VOLTAGE	
		t	Refrigerant	Displacement (cm ³)	Evaporating Temperature							
					Oil charge (cm ³)	-35°C	-30°C	-25°C	-20°C	-15°C		-10°C
						t	t	t	t	t		t
ROTARY	RGA/HGA2426Z	2/3	R404A	9.50	290	375	474	590	726	888	1080	220-240V/1/50Hz
	RGA/HGA2432Z	4/5	R404A	11.50	290	451	567	707	872	1065	1290	220-240V/1/50Hz
	RGA/HGA2436Z	1	R404A	12.70	290	508	643	804	994	1219	1483	220-240V/1/50Hz

Picture5 Mbsm Dot Pro : www.mbsm.pro

Tecumseh Compressor

MEDIUM/HIGH BACK PRESSURE COMPRESSORS

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)		REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)								VOLTAGE	
		Displacement (cm ³)	Oil charge (cm ³)	Evaporating Temperature									
				Refrigerant									
				-15°C	-10°C	-5°C	0°C	+5°C	+10°C	+15°C			
ROTARY	RGA/HGA4467Z	1/2	R404A	9.50	290	679	847	1047	1283	1557	1872	2231	220-240V/1/50Hz
	BGA/HGA4480Z	2/3	R404A	11.50	290	825	1017	1252	1530	1851	2212	2613	220-240V/1/50Hz
	RGA/HGA4492Z	3/4	R404A	12.50	290	905	1133	1398	1706	2060	2468	2932	220-240V/1/50Hz
	RGA/HGA4512Z	1	R404A	16.10	290	1163	1438	1770	2160	2609	3118	3689	220-240V/1/50Hz
	RGA/HGA4445Y	1/3	R134a	9.50	290	392	493	618	770	954	1173	1430	220-240V/1/50Hz
	RGA/HGA4450Y	2/5	R134a	11.50	290	501	625	778	963	1184	1445	1749	220-240V/1/50Hz
	RGA/HGA4460Y	1/2	R134a	12.70	290	537	677	844	1045	1287	1576	1920	220-240V/1/50Hz

PictureS Mbsm Dot Pro : www.mbsm.pro

