

Mbsm.pro, 1/2HP, LG, Commercial, Freezer, Compressor ,Lx110lajm, SC21G, r134a

Category: compressor

written by www.mbsm.pro | 24 November 2024



1/2HP, LG, Commercial, Freezer, Compressor ,Lx110lajm, SC21G, r134a



Mbsm.pro, Compresor, 1/2hp, Caj2t12, AJE2425AXA, Tecumseh, r12, mhbp, 64 uf, 260v, 3ARR18A-101B, Low

Temperature R12

Category: compressor

written by www.mbsm.pro | 24 November 2024

Compressors

Electrics - Low Temperature R12							
Realcold Stock No.	Compressor	Relay	Overload		Capacitor Start		Capacitor Run
C0010	AEZ1336A	C1010	CTP MSDAI	C1510	MRP 379HK-3240	n/a	
C0012	AEZ1343A	C1010	CTP MSDAI	C1523	MRP380AMK-3240	n/a	
C0019	AEZ1360A	C1010	CTP MSDAI	C1523	MRP380AMK-3240	n/a	
C0022	CAE4ZF11	C1080	9660-B467-138	C1591	MRP63AMK-3240	C2000	50 uf/260V
C0024	AEZ1380A	C1070	9660-B467-131	C1540	MRP304AMN-3240	n/a	
C0026	CAE2410A	C1080	9660-B467-138	C1550	MRT39AMHD-3240	C2000	50 uf/260V
C0037	CAE2412A	C1100	9660-B467-149	C1550	MRT39AMHD-3240	C2030	88 uf/260V
C0058	CAJ2T12	C1150	3ARR18A-101B	C1605	T0155-C2	C2010	64 uf/260V
C0060	AZ4414Y	C1150	3ARR18A-101B	C1630	MRT16APK-3242	C2037	88 uf/330V
C0077	CAJ2446L	C1140	3ARR3-L10AB3	C1580	MRT20ALKD-3242	C2037	88 uf/330V
C0105	CAJ2464L	C1155	3ARR3-L10AA3	C1583	MRT00AJZ-3241	C2037	88 uf/330V
C0011	AZ1335A	C1010	CTP MSDAI	C1601	MRP 419HZ-3240	n/a	
C0014	AZ1340A	C1010	CTP MSDAI	C1601	MRP 419HZ-3240	n/a	
C0021	AEZ2380C	C1080	9660-B467-138	C1506	MRP61AMGE-3240	C2010	64 uf/260V

Crankcase Heaters

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, 1/2hp, Caj2t12, AJE2425AXA, Tecumseh, r12, mhbp, 64 uf, 260v, 3ARR18A-101B, Low Temperature R12

Mbsm.pro, Compressor, coolant, Cubigel, R134a, GL18AA, 220-240V, 50Hz, 3/8 hp++, 1/2HP-

Category: expertise

written by www.mbsm.pro | 24 November 2024



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, coolant, Cubigel, R134a, GL18AA, 220-240V, 50Hz, 3/8 hp++, 1/2HP-

Mbsm.pro, AJA4461AXA, Tecumseh, Compressors, AJ311AT-141-J7, 115V, 1/2HP, R12, high temperature, 6100 BTU,

Category: compressor

written by Jamila | 24 November 2024



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, AJA4461AXA, Tecumseh, Compressors, AJ311AT-141-J7, 115V, 1/2HP, R12, high temperature, 6100 BTU,

**Mbsm.pro, compressor, CUBIGEL,
ELECTOLUX, ACC, R404a, R507, MP14FB,
220-240V 50Hz, LBP, 1/2HP**

Category: compressor

written by www.mbsm.pro | 24 November 2024



Cubigel
THERMALLY PROTECTED
R404A
R507
MADE IN SPAIN
9030151328100037

MP14FG
200-220V~50Hz
230V~60Hz PH1

2
00251

Mbsm.pro, compressor, CUBIGEL, ELECTOLUX, ACC, R404a, R507, MP14FB, 220-240V
50Hz, LBP, 1/2HP

Mbsm.pro, Compressor, DAEW00
Compressor, Zed7003-9009H, NW108LHG4,
R-134a, 1/2HP, 230V, Lbp, Single-
Phase, Lra 11.7, 391 W, 336 Kcal/h,
1333 BTU/h, CSIR

Category: Archivation,compressor
written by www.mbsm.pro | 24 November 2024



Private Picture Copyright: WWW.MBSM.PRO


Mbsm.pro, Compressor, DAEW00 Compressor, Zed7003-9009H, NW108LHG4, R-134a,
1/2HP, 230V, Lbp, Single-Phase, Lra 11.7, 391 W, 336 Kcal/h, 1333 BTU/h, CSIR

Mbsm.pro, Compressor, ACC, Cubigel,

Motor type: CSR
Weight: 13.4 kg
Evaporation temperature
-40°C: 243W
-30°C: 420W
-25°C: 535W
-10°C: 988W



Private Picture Copyright : WWW.MBSM.PRO

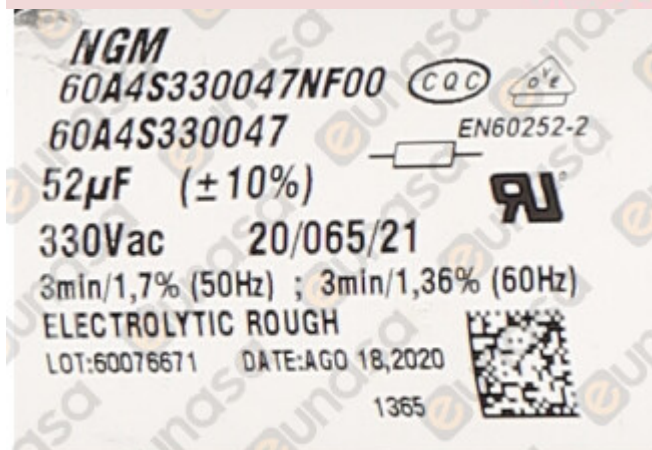

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_MPT14LATélécharger

Neon compressor, QD128H(360W), 1/3Hp,
QD158H(450W), 3/8+, QD142H(395W),
3/8+, QD168H (322W), 1/2Hp, R134a

Category: compressor

written by www.mbsm.pro | 24 November 2024





Neon compressor, QD128H(360W), 1/3Hp, QD158H(450W), 3/8+, QD142H(395W), 3/8+, QD168H (322W), 1/2Hp, R134a

Compressor, Danfoss, Secop, SC18G, 104g8822, 1/2HP, R134A, 685 Litres, Presentoire cokacolla, LBP/HBP

Category: compressor

written by www.mbsm.pro | 24 November 2024

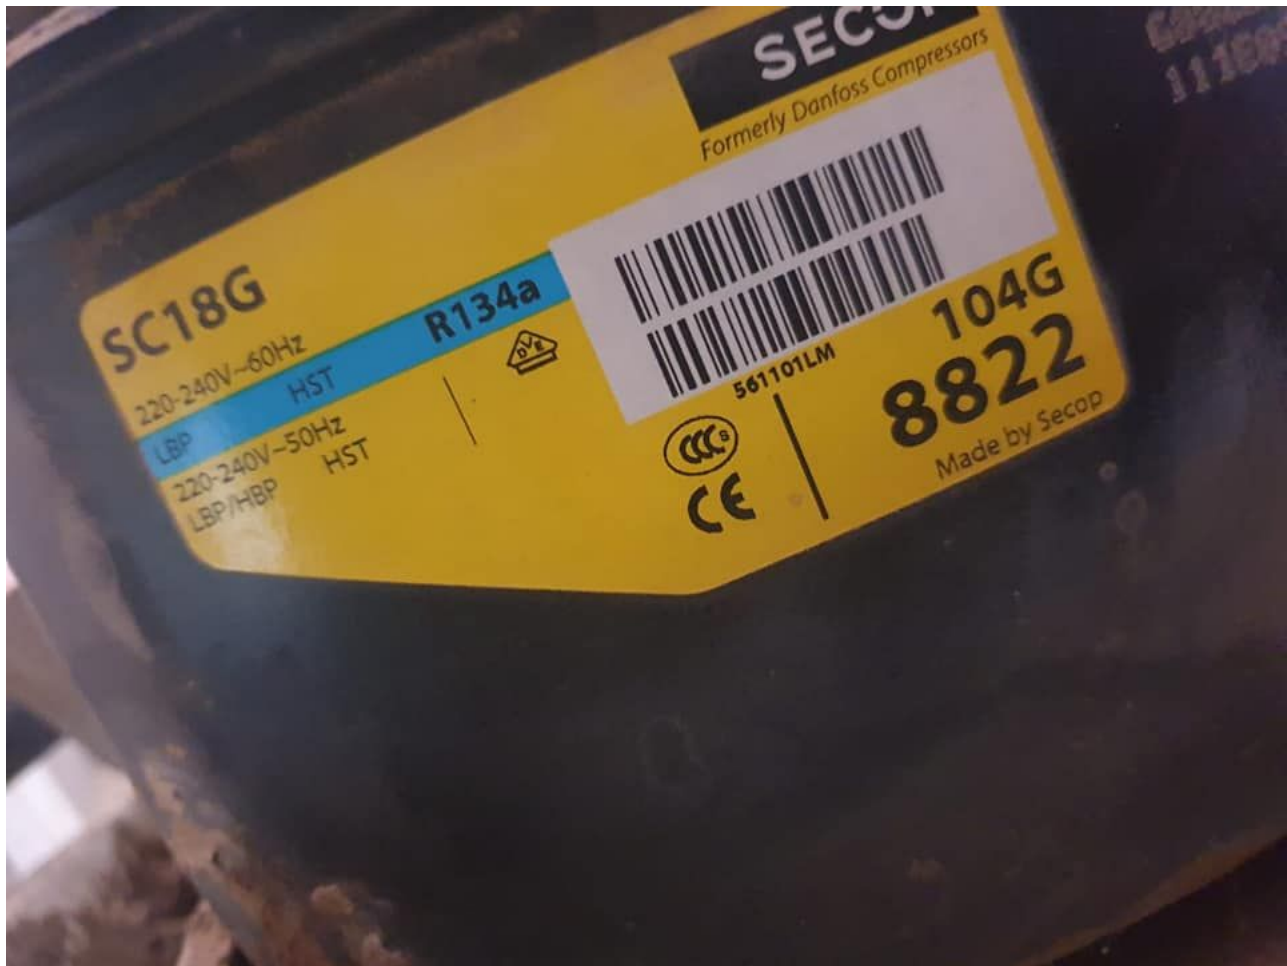

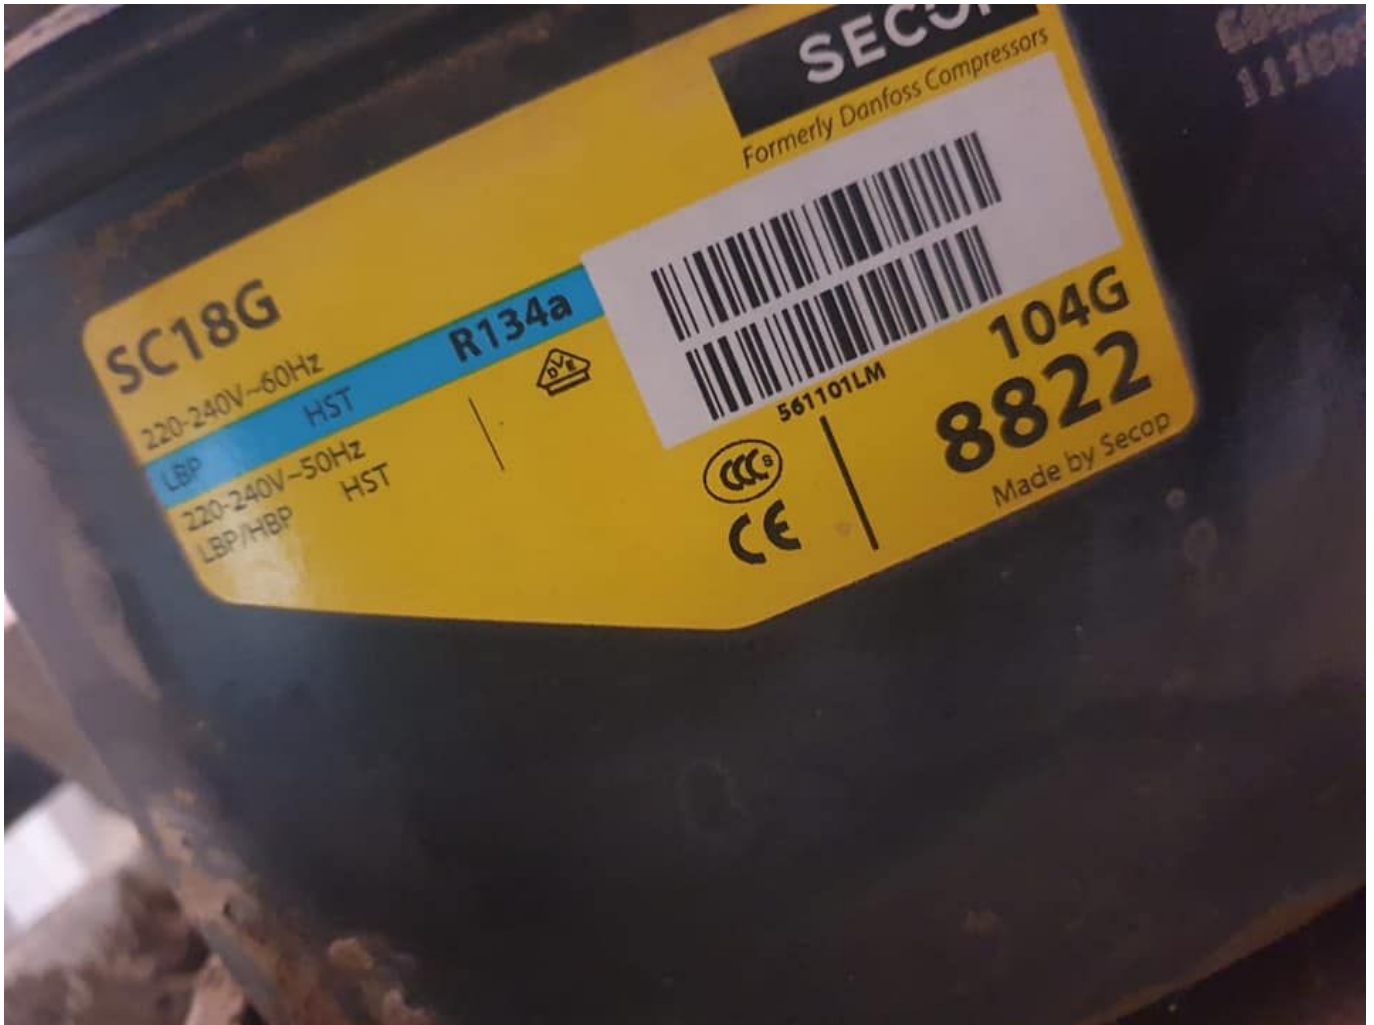

Private Picture Copyright : WWW.MBSM.PRO

Overview Quick details Type : compressor Brand Name : SECOP Model Number : ASC18G Certification : CE, CCC After-sales service provided : No overseas service provided. Gas : R134a Type : Piston Power Source : AC Power Lubrication Style : Lubricated Mute : Yes Package : wooden case or carton Application : Danfoss Freezer Compressor Delivery time : 7-20 Days Special period : 1 month Supply Ability Supply Ability 3000 Piece / Pieces per Month Packaging and shipping Packaging Details 1. For small order quantity: packed with a wooden case or carton.

2. For full container: packed with pallet, 24 pallets in one 20ft container. posture GuangZhou, Huangpu port Processing time: : A. 7-30 days

1. Product name:

1, Danfoss refrigeration / refrigeration compressor SC18G

2. Type: LBP 3. Voltage

: 220 ~ 240V / 50Hz, 1 / 2HP

No	Model	HP	Temperature	Electricity	Refrigerant
1	SC10C	1/3	LBP	220~240V/50HZ	R22
2	SC12C	3/8	LBP	220~240V/50HZ	R22
3	SC15CM	1/2	LBP	220~240V/50HZ	R22
4	SC18CM	5/8	LBP	220~240V/50HZ	R22
5	SC10D	3/8	MBP	220~240V/50HZ	R22
6	SC12D	1/2	MBP	220~240V/50HZ	R22
7	SC15D	5/8	MBP	220~240V/50HZ	R22
8	SC10G	5/16	MBP	220~240V/50HZ	R22
9	SC12G	1/3	MBP	220~240V/50HZ	R134A
10	SC15G	3/8	MBP	220~240V/50HZ	R134A
11	SC18G	1/2	MBP	220~240V/50HZ	R134A
12	SC21G	5/8	MBP	220~240V/50HZ	R134A
13	SC10CL	1/3	LBP	220~240V/50HZ	R404a
14	SC12CL	3/8	LBP	220~240V/50HZ	R404a
15	SC15CL	1/2	LBP	220~240V/50HZ	R404a
16	SC18CL	5/8	LBP	220~240V/50HZ	R404a
17	SC21CL	7/8	LBP	220~240V/50HZ	R404a

Private Picture Copyright : WWW.MBSM.PRO

4. Gas consumption: R134a



Everest

Number	: 1117825	Model	: EV 024 SD		
Volume	: 1.2 CBM	Capacity	: 685 LTRS		
Weight	: 157 KG	Color/Logo	: RED		
Consumption	: 14 Kwh/24 hrs	Date	: DEC 2011		
Hz	: 50	Ref. Type	: R134A	GRMS	: 475
Watt	: 646	Climate Class	: D		
Capacity at 0 Deg.C evaporator temperature: 980					

MADE IN EGYPT



Lighting of Lamps: 20(TOP) 40(SIDE)



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

PARIS 210 (-)



AHT

Serialnr 409974 00007779

Gerätedaten
cabinet data

Innenraumbeleuchtung
Light inside cabinet

class 3 (25°C/60%rH)

(-)

Nennspannung/frequ. Nom Voltg./frequ.
Tension/Fréquence nominale

220-240V/50Hz

220-240V/50Hz

Nennaufnahme Nom Consump.
Prise de courant nominale

480 W

50 W

Nennstrom Nom Current
Courant nominal

2,6 A

0,21 A

Schutzart Protection class
Type de protection

IP 21

IP 21

Typ Type

B 825

LE221

Energieaufnahme Energy consump.
Absorption d'énergie

9,2 kWh/24h

Absicherung Fuse
Protection par fusibles

16 A

Kältemittel(Menge) Refrigerant(Quan)
Type / Quantité de réfrigérant

R404A/0,250 kg

Nettoinhalt Net Content
Capacité nette

724 dm³

Lampe Lamp
Lampe

max. zul. Betriebsüberdruck 30 bar
Eigensicher nach VVV-VBG 20, § 7.3
Dichtheit geprüft

Surpression max. de service admise
Sécurité propre selon VVV-VBG 20
Imperméabilité examinée



ENTSORGUNGSHINWEIS

WARMEDAMMSTOFF: PU MIT PENTAN

Das Gerät nicht dem normalen Müll, sondern als Sondermüll entsprechend den Vorschriften für die Entsorgung zu behandeln.

Darauf achten, daß dabei die Rohrleitungen nicht beschädigt werden.

Make sure that the tubes are not damaged.

with local waste disposal regulations.

The cabinet is not standard waste but has to be disposed of as special waste according to the regulations.

Make sure that the tubes are not damaged.

MISE AU REBUT

ISOLATION THERMIQUE: PU AVEC PENTANE

Ne pas jeter cet appareil dans les poubelles ordinaires. Il doit être traité comme un déchet spécial conformément aux réglementations locales de la mise au rebut.

Faites attention de ne pas endommager les conduites.

Kulthorn, Kirby, Compressor,
AE2425ZK, ae 2425zk-sr, R404, 1/2HP,
Hermetic piston compressor, AE2425ZK-
SR, Application: low temperature,
Displacement: 14.14 cm³, Cooling
capacity: 613 W, 220 V / 50 Hz / 1
phase.

Category: compressor

written by www.mbsm.pro | 24 November 2024

16L3

 **KULTHORN**
AE 2425ZK-SR 03D
220 - 240 V ~ 50Hz R404A/R507
RLA 2.71 LRA 16.3 CE

  
KULTHORN KIRBY RoHS TIS.812-2548
MADE IN THAILAND 03D17L13023143

Private Picture Copyright : WWW.MBSM.PRO

Kulthorn, Kirby, Compressor, AE2425ZK, ae 2425zk-sr, R404, 1/2HP, Hermetic piston compressor, AE2425ZK-SR, Application: low temperature, Displacement: 14.14 cm³, Cooling capacity: 613 W, 220 V / 50 Hz / 1 phase.