

# Mbsm.pro, compressor, EM Series, Embraco, EMY75HLC, 211 w, 1/4 hp, lbp, 750 btu, r134a

Category: compressor

written by www.mbsm.pro | 30 May 2022

| R          | Series     | Model      | Performance Data |                |                |                |                |                |                | ISO     | Type    | Capacity | Power |      |
|------------|------------|------------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|---------|---------|----------|-------|------|
|            |            |            | Q <sub>1</sub>   | Q <sub>2</sub> | Q <sub>3</sub> | Q <sub>4</sub> | Q <sub>5</sub> | Q <sub>6</sub> | Q <sub>7</sub> |         |         |          |       |      |
| R 134a     | EMZ        | EMZ 66 CLP | 220-240/50       | 10.61          | 190            | 163.4          | 1.74           | 1.50           | 4              | ISO 5   | CCC/VDE | 171      | 6.73  |      |
|            |            | EMX        | EMX 32 CLC       | 220-240/50     | 5.96           | 102            | 87.7           | 1.78           | 1.53           | 2.5     | ISO 5   | CCC      | 166   | 6.54 |
|            |            |            | EMX 40 CLC       | 220-240/50     | 7.24           | 128            | 110.1          | 1.80           | 1.55           | 4       | ISO 5   | CCC      | 166   | 6.54 |
|            | EMB        | EMB 32 CLC | 220-240/50       | 5.96           | 103            | 88.6           | 1.88           | 1.62           | 2.5            | ISO 5   | CCC     | 166      | 6.54  |      |
|            |            | EMB 40 CLC | 220-240/50       | 7.24           | 128            | 110.1          | 1.92           | 1.65           | 4              | ISO 5   | CCC/VDE | 171      | 6.73  |      |
|            |            | EMB 46 CLC | 220-240/50       | 7.96           | 142            | 122.1          | 1.90           | 1.63           | 4              | ISO 5   | CCC/VDE | 171      | 6.73  |      |
|            |            | EMB 55 CLC | 220-240/50       | 9.05           | 163            | 140.2          | 1.88           | 1.62           | 4              | ISO 5   | CCC/VDE | 171      | 6.73  |      |
|            |            | EMB 66 CLC | 220-240/50       | 10.61          | 190            | 163.4          | 1.87           | 1.61           | 4              | ISO 5   | CCC/VDE | 171      | 6.73  |      |
|            | EMT        | EMT 45 HLP | 220-240/50       | 4.85           | 145            | 124.7          | 1.40           | 1.20           |                | ISO 7   | CCC/VDE | 158      | 6.22  |      |
|            |            | EMU        | EMU 45 HLP       | 220-240/50     | 4.85           | 145            | 124.7          | 1.50           | 1.29           |         | ISO 7   | CCC/VDE  | 158   | 6.22 |
|            |            |            | EMU 55 HLP       | 220-240/50     | 5.20           | 161            | 138.5          | 1.50           | 1.29           |         | ISO 7   | CCC/VDE  | 166   | 6.54 |
|            |            |            | EMU 65 HLP       | 220-240/50     | 5.96           | 185            | 159.1          | 1.47           | 1.26           |         | ISO 7   | CCC/VDE  | 166   | 6.54 |
|            |            |            | EMU 45 HLP       | 200-230/50     | 4.85           | 145            | 124.7          | 1.45           | 1.25           |         | ISO 22  | CCC/VDE  | 158   | 6.22 |
|            |            |            | EMU 55 HLP       | 200-230/50     | 5.20           | 161            | 138.5          | 1.45           | 1.25           |         | ISO 22  | CCC/VDE  | 166   | 6.54 |
|            |            |            | EMU 65 HLP       | 200-230/50     | 5.96           | 185            | 159.1          | 1.45           | 1.25           |         | ISO 22  | CCC/VDE  | 166   | 6.54 |
|            |            | EMU 55 HLP | 115-127/60       | 4.15           | 148            | 127.3          | 1.46           | 1.26           |                | ISO 7   | UL      | 158      | 6.22  |      |
|            |            | EMY        | EMY 55 HLC       | 220-240/50     | 5.20           | 161            | 138.5          | 1.60           | 1.38           | 4       | ISO 7   | CCC/VDE  | 166   | 6.54 |
|            |            |            | EMY 65 HLC       | 220-240/50     | 5.96           | 185            | 159.1          | 1.60           | 1.38           | 4       | ISO 7   | CCC/VDE  | 166   | 6.54 |
| EMY 75 HLC | 220-240/50 |            | 7.00             | 215            | 184.9          | 1.60           | 1.38           | 4              | ISO 7          | CCC/VDE | 171     | 6.73     |       |      |
| EMY 50 HLP | 115-127/60 |            | 4.15             | 140            | 120.4          | 1.60           | 1.38           | 12             | ISO 7          | UL      | 158     | 6.22     |       |      |
| EMY 55 HLP | 115-127/60 |            | 4.50             | 160            | 137.6          | 1.60           | 1.38           | 12             | ISO 7          | UL      | 158     | 6.22     |       |      |
| EMY 60 HLP | 115-127/60 |            | 4.85             | 180            | 154.8          | 1.60           | 1.38           | 12             | ISO 7          | UL      | 166     | 6.54     |       |      |
| EMH        | EMH 60 HER | 115-127/60 | 5.19             | 189            | 162.5          | 1.47           | 1.26           |                | ISO 7          | CCC     | 166     | 6.54     |       |      |
|            | R 290      | EMT 2121 U | 220-240/50       | 5.57           | 256            | 220.0          | 1.42           | 1.22           | 48             | ISO 22  | CCC/VDE | 166      | 6.54  |      |
| EMT 2125 U |            | 220-240/50 | 5.96             | 301            | 259.0          | 1.48           | 1.28           | 58             | ISO 22         | CCC/VDE | 166     | 6.54     |       |      |

测试条件: 蒸发-23.3° C(-10° F) 冷凝54.4° C (130° F) 吸气/环境32.2° C (90° F) 液体32.2° C (90° F)  
 Test Conditions: Evaporating: -23.3°C (-10°F) | Condensing: 54.4°C (130°F) | Gas and Ambient: 32.2°C (90°F) | Liquid: 32.2°C (90°F)

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, compressor, EM Series, Embraco, EMY75HLC, 211 w, 1/4 hp, lbp, 750 btu, r134a

# Mbsm.pro, Freezer, 420 L, regeneration, using Cooling, Aluminium Plated, Roll Bonded, Evaporator Plate, Compressor, L72cZ1, 1/4 hp, r134a, capillarie 3 M, 0.032

Category: Chaud&Froid,compressor

written by www.mbsm.pro | 30 May 2022



Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Freezer, 420 L, regeneration, using Cooling, Aluminium Plated, Roll Bonded, Evaporator Plate, Compressor, L72cZ1 , 1/4 hp, r134a, capillarie 3 M, 0.032

Mbsm.pro, Refrigerator, Fridge-Freezer, RT511JSPN, No Frost, Samsung, 441 L, 309 L, Compressor, Mk172Q-L2U, 1/4 Hp, 205 W, 699 BTu/H, Samsung Compressor, Mk Serie, R134A, 7.21 cc, 220-240 v, LBP, Static Compressor, RSIR

Category: Refrigerator

written by www.mbsm.pro | 30 May 2022



Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Refrigerator, Fridge-Freezer, RT511JSPN, No Frost, Sumsung, 441 L, 309 L, Compressor, Mk172Q-L2U, 1/4 Hp, 205 W, 699 BTu/H, Samsung Compressor, Mk Serie, R134A, 7.21 cc, 220-240 v, LBP, Static Compressor, RSIR

Mbsm.pro, Compressor, HML190a, 1/4 hp, zel, Lambda, LBP, RSCR, Freezing compressor, R600a, 190 w, 163 kcal/h, run capacitor 3  $\mu$ F, aluminum wire

Category: compressor

written by www.mbsm.pro | 30 May 2022



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Compressor, HML190a, 1/4 hp, zel, LBP, RSCR, Freezing compressor, R600a, 190 w, 163 kcal/h, run capacitor 3  $\mu$ F, aluminum wire

---

## Mbsm.pro, Compressor, Aspera, B3119Z, 234 w, 1/4 hp, r134a

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 30 May 2022



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Compressor, Aspera, B3119Z, 234 w, 1/4 hp, r134a

---

Mbsm.pro, Compressor, QBH73C13GAE,  
1/4 hp, RSIR, Reciprocating  
Compressors, Fixed Speed, Q Series,  
R134a, LBP

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 30 May 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Compressor, QBH73C13GAE, 1/4 hp, RSIR, Reciprocating Compressors, Fixed Speed, Q Series, R134a, LBP

# Mbsm.pro, PDF, compressor, C-BZN200L6X, 1/4 hp, LBP, 826 btu

Category: Files

written by www.mbsm.pro | 30 May 2022

|           |      |     |      |    |    |     |     |      |      |      |      |      |   |    |    |     |     |     |
|-----------|------|-----|------|----|----|-----|-----|------|------|------|------|------|---|----|----|-----|-----|-----|
| C-QH40L6* | 1/19 | LBP | 2.77 | 46 | 54 | 157 | 183 | 1.30 | 1.34 | 4.44 | 4.57 | RSCR | N | ** | ** | 3-5 | 350 | 167 |
| C-QH50L6* | 1/15 | LBP | 3.58 | 59 | 69 | 203 | 237 | 1.30 | 1.34 | 4.44 | 4.57 | RSCR | N | ** | ** | 3-5 | 350 | 177 |
| C-QH60L6* | 1/12 | LBP | 3.92 | 65 | 76 | 222 | 260 | 1.33 | 1.35 | 4.54 | 4.61 | RSCR | N | ** | ** | 3-5 | 350 | 177 |
| C-QH75L6* | 1/10 | LBP | 4.36 | 72 | 85 | 247 | 289 | 1.33 | 1.35 | 4.54 | 4.61 | RSCR | N | ** | ** | 3-5 | 350 | 177 |

## C-B Type

| Models                                     | Power (HP) | App. | Disp. (cc) | Cooling (w) |       | Cooling (Btu) |       | COP (w/w) |       | EER (Btu/w) |       | Motor type | Cooling Type | Start Cap |     | Run Cap |     | Dim. "H1" |
|--|------------|------|------------|-------------|-------|---------------|-------|-----------|-------|-------------|-------|------------|--------------|-----------|-----|---------|-----|-----------|
|  |            |      |            | 50 Hz       | 60 Hz | 50 Hz         | 60 Hz | 50 Hz     | 60 Hz | 50 Hz       | 60 Hz |            |              | mF        | vac | mF      | vac |           |
| <b>C-BZN Series (Standard Performance)</b> |            |      |            |             |       |               |       |           |       |             |       |            |              |           |     |         |     |           |
| <b>R134a</b>                               |            |      |            |             |       |               |       |           |       |             |       |            |              |           |     |         |     |           |
| 100V / 50Hz, 60Hz.                         |            |      |            |             |       |               |       |           |       |             |       |            |              |           |     |         |     |           |
| C-BZN100L0*                                | 1/8        | LBP  | 4.50       | 109         | 131   | 372           | 447   | 1.14      | 1.19  | 3.89        | 4.06  | RSIR/CSIR  | N            | 75        | 125 | **      | **  | 175       |
| C-BZN110L0*                                | 1/7        | LBP  | 5.20       | 142         | 170   | 485           | 580   | 1.20      | 1.24  | 4.10        | 4.23  | RSIR/CSIR  | N            | 75        | 125 | **      | **  | 175       |
| C-BZN120L0*                                | 1/6        | LBP  | 5.70       | 156         | 190   | 532           | 648   | 1.23      | 1.25  | 4.20        | 4.27  | RSIR/CSIR  | N            | 75        | 125 | **      | **  | 188       |
| C-BZN140L0*                                | 1/6        | LBP  | 6.08       | 170         | 194   | 580           | 662   | 1.25      | 1.27  | 4.27        | 4.33  | RSIR/CSIR  | N            | 75        | 125 | **      | **  | 188       |
| C-BZN150L0*                                | 1/5        | LBP  | 6.65       | 192         | 232   | 655           | 792   | 1.27      | 1.29  | 4.33        | 4.40  | RSIR/CSIR  | N            | 75        | 125 | **      | **  | 188       |
| C-BZN175L0*                                | 1/5        | LBP  | 7.24       | 210         | 247   | 717           | 843   | 1.30      | 1.31  | 4.44        | 4.47  | RSIR/CSIR  | FIO          | 75        | 125 | **      | **  | 195       |
| C-BZN200L0*                                | 1/4        | LBP  | 8.37       | 242         | 295   | 826           | 1,007 | 1.32      | 1.33  | 4.50        | 4.54  | RSIR/CSIR  | FIO          | 75        | 125 | **      | **  | 195       |
| C-BZN225L0*                                | 1/3        | LBP  | 9.03       | 261         | 318   | 891           | 1,086 | 1.33      | 1.35  | 4.54        | 4.61  | RSIR/CSIR  | FIO          | 75        | 125 | **      | **  | 198       |
| C-BZN250L0*                                | 1/3        | LBP  | 9.82       | 284         | 346   | 969           | 1,181 | 1.33      | 1.35  | 4.54        | 4.61  | RSIR/CSIR  | FIO          | 75        | 125 | **      | **  | 198       |
| 100V / 50Hz., 115-127V / 60Hz.             |            |      |            |             |       |               |       |           |       |             |       |            |              |           |     |         |     |           |
| C-BZN100L2*                                | 1/8        | LBP  | 4.50       | 109         | 131   | 372           | 447   | 1.14      | 1.19  | 3.89        | 4.06  | RSIR/CSIR  | N            | 100       | 125 | **      | **  | 175       |

## C-B Type

28

Private Picture Copyright: WWW.MBSM.PRO

# Mbsm.pro, PDF, compressor, C-BZN200L6X, 1/4 hp, LBP, 826 btu

|           |      |     |      |    |    |     |     |      |      |      |      |      |   |    |    |     |     |     |
|-----------|------|-----|------|----|----|-----|-----|------|------|------|------|------|---|----|----|-----|-----|-----|
| C-QH40L6* | 1/19 | LBP | 2.77 | 46 | 54 | 157 | 183 | 1.30 | 1.34 | 4.44 | 4.57 | RSCR | N | ** | ** | 3-5 | 350 | 167 |
| C-QH50L6* | 1/15 | LBP | 3.58 | 59 | 69 | 203 | 237 | 1.30 | 1.34 | 4.44 | 4.57 | RSCR | N | ** | ** | 3-5 | 350 | 177 |
| C-QH60L6* | 1/12 | LBP | 3.92 | 65 | 76 | 222 | 260 | 1.33 | 1.35 | 4.54 | 4.61 | RSCR | N | ** | ** | 3-5 | 350 | 177 |
| C-QH75L6* | 1/10 | LBP | 4.36 | 72 | 85 | 247 | 289 | 1.33 | 1.35 | 4.54 | 4.61 | RSCR | N | ** | ** | 3-5 | 350 | 177 |

## C-B Type

| Models                                     | Power (HP) | App. | Disp. (cc) | Cooling (w) |       | Cooling (Btu) |       | COP (w/w) |       | EER (Btu/w) |       | Motor type | Cooling Type | Start Cap |     | Run Cap |     | Dim. "H1" |
|--|------------|------|------------|-------------|-------|---------------|-------|-----------|-------|-------------|-------|------------|--------------|-----------|-----|---------|-----|-----------|
|  |            |      |            | 50 Hz       | 60 Hz | 50 Hz         | 60 Hz | 50 Hz     | 60 Hz | 50 Hz       | 60 Hz |            |              | mF        | vac | mF      | vac |           |
| <b>C-BZN Series (Standard Performance)</b> |            |      |            |             |       |               |       |           |       |             |       |            |              |           |     |         |     |           |
| <b>R134a</b>                               |            |      |            |             |       |               |       |           |       |             |       |            |              |           |     |         |     |           |
| 100V / 50Hz, 60Hz.                         |            |      |            |             |       |               |       |           |       |             |       |            |              |           |     |         |     |           |
| C-BZN100L0*                                | 1/8        | LBP  | 4.50       | 109         | 131   | 372           | 447   | 1.14      | 1.19  | 3.89        | 4.06  | RSIR/CSIR  | N            | 75        | 125 | **      | **  | 175       |
| C-BZN110L0*                                | 1/7        | LBP  | 5.20       | 142         | 170   | 485           | 580   | 1.20      | 1.24  | 4.10        | 4.23  | RSIR/CSIR  | N            | 75        | 125 | **      | **  | 175       |
| C-BZN120L0*                                | 1/6        | LBP  | 5.70       | 156         | 190   | 532           | 648   | 1.23      | 1.25  | 4.20        | 4.27  | RSIR/CSIR  | N            | 75        | 125 | **      | **  | 188       |
| C-BZN140L0*                                | 1/6        | LBP  | 6.08       | 170         | 194   | 580           | 662   | 1.25      | 1.27  | 4.27        | 4.33  | RSIR/CSIR  | N            | 75        | 125 | **      | **  | 188       |
| C-BZN150L0*                                | 1/5        | LBP  | 6.65       | 192         | 232   | 655           | 792   | 1.27      | 1.29  | 4.33        | 4.40  | RSIR/CSIR  | N            | 75        | 125 | **      | **  | 188       |
| C-BZN175L0*                                | 1/5        | LBP  | 7.24       | 210         | 247   | 717           | 843   | 1.30      | 1.31  | 4.44        | 4.47  | RSIR/CSIR  | FIO          | 75        | 125 | **      | **  | 195       |
| C-BZN200L0*                                | 1/4        | LBP  | 8.37       | 242         | 295   | 826           | 1,007 | 1.32      | 1.33  | 4.50        | 4.54  | RSIR/CSIR  | FIO          | 75        | 125 | **      | **  | 195       |
| C-BZN225L0*                                | 1/3        | LBP  | 9.03       | 261         | 318   | 891           | 1,086 | 1.33      | 1.35  | 4.54        | 4.61  | RSIR/CSIR  | FIO          | 75        | 125 | **      | **  | 198       |
| C-BZN250L0*                                | 1/3        | LBP  | 9.82       | 284         | 346   | 969           | 1,181 | 1.33      | 1.35  | 4.54        | 4.61  | RSIR/CSIR  | FIO          | 75        | 125 | **      | **  | 198       |
| 100V / 50Hz., 115-127V / 60Hz.             |            |      |            |             |       |               |       |           |       |             |       |            |              |           |     |         |     |           |
| C-BZN100L2*                                | 1/8        | LBP  | 4.50       | 109         | 131   | 372           | 447   | 1.14      | 1.19  | 3.89        | 4.06  | RSIR/CSIR  | N            | 100       | 125 | **      | **  | 175       |

## C-B Type

28

Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

Mbsm\_dot\_pro\_private\_PDF\_C-BZN200L6XTélécharger

# Mbsm.pro, Compressor, LX72LAT, 1/4 hp, LX Capacity, 7.2 cc, R134a, LBP, 220-240V, 50Hz 220V, 60Hz, CSIR, PTC

Category: compressor  
 written by www.mbsm.pro | 30 May 2022

:LBP

| Series | Model    | Motor Type | Voltage/<br>Frequency | Performance |         |         |       |         | Test Condition | Dimension<br>Height<br>mm |
|--------|----------|------------|-----------------------|-------------|---------|---------|-------|---------|----------------|---------------------------|
|        |          |            |                       | Capacity    |         |         | EER   | COP     |                |                           |
|        |          |            |                       | V/Hz        | Kcal/hr | Btu/Whr | Watts | Btu/Whr |                |                           |
|        | LX67LABM | RSCR       | 220/50                | 155         | 615     | 180     | 4.81  | 1.41    | ASHRAE         | 200                       |
|        | LX67LHBM | RSCR       | 220/50                | 155         | 615     | 180     | 4.02  | 1.18    | ASHRAE         | 203                       |
|        | LX72LATG | RSIR       | 220-240/50            | 170         | 675     | 198     | 4.24  | 1.24    | ASHRAE         | 200                       |
|        | LX72LBEG | RSIR       | 220-240/50            | 170         | 675     | 198     | 4.38  | 1.28    | ASHRAE         | 200                       |
|        | LX72LAAM | RSCR       | 110/50                | 170         | 675     | 198     | 4.30  | 1.26    | ASHRAE         | 200                       |
|        | LX72LATF | CSIR       | 220-240/50            | 170         | 675     | 198     | 4.24  | 1.24    | ASHRAE         | 200                       |
|        | LX72LATH | CSR        | 220-240/50            | 170         | 675     | 198     | 4.30  | 1.26    | ASHRAE         | 200                       |
|        | LX72LAEM | RSCR       | 220-240/50            | 172         | 683     | 200     | 4.50  | 1.32    | ASHRAE         | 200                       |
|        | LX72LHJH | CSR        | 220/50                | 172         | 683     | 200     | 4.24  | 1.24    | ASHRAE         | 203                       |
|        | LX72LHJM | RSCR       | 220/50                | 172         | 683     | 200     | 4.24  | 1.24    | ASHRAE         | 203                       |
|        | LX72LHJF | CSIR       | 220/50                | 172         | 683     | 200     | 3.80  | 1.11    | ASHRAE         | 203                       |
|        | LX67LAQG | RSIR       | 100-115/60            | 187         | 742     | 217     | 4.19  | 1.23    | ASHRAE         | 200                       |
|        | LX86LABM | RSCR       | 220/50                | 194         | 770     | 226     | 4.84  | 1.42    | ASHRAE         | 203                       |
|        | LX86LBEG | RSIR       | 220-240/50            | 194         | 770     | 226     | 4.30  | 1.26    | ASHRAE         | 200                       |
|        | LX86LBEF | CSIR       | 220-240/50            | 194         | 770     | 226     | 4.30  | 1.26    | ASHRAE         | 200                       |
|        | LX86LCEC | RSIR       | 220-240/50            | 194         | 770     | 226     | 4.22  | 1.24    | ASHRAE         | 203                       |

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, LX72LAT, 1/4 hp, LX Capacity, 7.2 cc, R134a, LBP,

220-240V,50Hz 220V,60Hz, CSIR, PTC

---

## Mbsm.pro, compressor, PW12.0B, 1/4 hp, 182 w, R600a LBP Series

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 30 May 2022



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, compressor, PW12.0B, 1/4 hp, 182 w, R600a LBP Series

---

Mbsm.pro, Congélateur GN-bd(w)-370, Gean Electronique, Made in Chine, T classe, 370 L, Compressor, 1/4 Hp, R134A, 105 G, 1.3 A, 220 V, Freezer horizontal, Filtre 20 G, Capilaire


# 0.036, 2 M, Thermostat mecanique

Category: Archivation,compressor,Freezer  
written by www.mbsm.pro | 30 May 2022



## Congélateur GN-BD(W)-370

### Schéma électrique

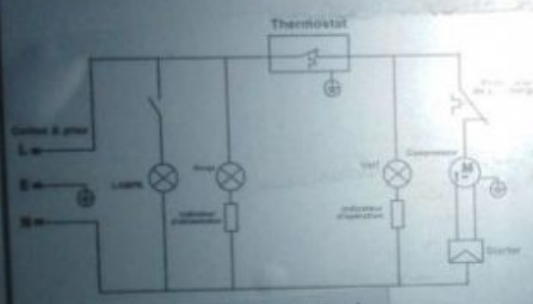

|                                 |            |
|---------------------------------|------------|
| CLIMAT DE TYPE:                 | T CLASSE   |
| CLASSIFICATION DE               |            |
| ELECTRICITE RESISTANTE:         | I          |
| VOLUME DE STOCKAGE:             | 370L       |
| VOLUME DU CONGELATEUR :         | 370L       |
| FROZEN CAPACITE:                | 12kg/24h   |
| TENSION NOMINALE :              | 220V~      |
| FREQUENCE NOMINALE :            | 50Hz       |
| COURANT :                       | 1.3A       |
| VALEUR DE BRUIT:                | 42dB (A)   |
| ALIMENTATION DE LAMPE NOMINALE: | 2W         |
| QUANTITE DE REFRIGERANT :       | R134a/105g |
| GAZ D'ISOLATION:                | CoHfc      |

بلد المنشأ: الصين

CJ160337003172

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Congélateur GN-bd(w)-370, Gean Electronique, Made in Chine, T classe,

370 L, Compressor, 1/4 Hp, R134A, 105 G, 1.3 A, 220 V, Freezer horizontal,  
Filtre 20 G, Capilaire 0.036, 2 M, Thermostat mecanique