

# Mbsm.pro, Hitachi, compressor, for refrigerator water, FL1875-SY, FL1875, 1/4 Hp, Lbp, 717btu

Category: compressor

written by www.mbsm.pro | 20 January 2022

## Hitachi Hermetic Compressors

FL Series																			
STANDARD MODEL																			
Application & Refrigerant LBP R134a																			
Model	Nominal Power		Cooling Capacity				D	Cooling			O	Wg	Motor Type	Power Source					Dimension
	HP	W	Hz	W	Kcal/h	BTU/h		N	Oil	Fan				cm3	Kg	1	2	3	
FL0634	1/12	65	50	78	67	266	3.42				200	6.8	RSCR	•					Type1-165
			60	90	77	307								•	•	•	•		
FL0739	1/10	75	50	95	82	324	3.94				270	7.8	RSCR	•	•	•	•		Type1-179 Type2-180
			60	108	93	368								•	•	•	•		
FL0845	1/8	85	50	105	90	358	4.50				270	8.1	RSCR	•	•	•	•		Type1-179 Type2-180
			60	118	101	403								•	•	•	•		
FL1052	1/6	100	50	120	103	409	5.19	•			270	8.3	RSCR	•	•	•	•		Type1-195 Type2-200
			60	140	120	478								•	•	•	•		
FL1157	1/6	110	50	135	116	461	5.70				240	8.7	RSIR	•	•	•	•		Type1-195 Type2-200
			60	158	136	539								•	•	•	•		
FL1262	1/5	125	50	150	129	512	6.23	•			320	9.5	RSCR	•	•	•	•		Type1-195 Type2-200
			60	170	146	580								•	•	•	•		
FL1675	1/4	180	50	185	159	631	7.47		•	•	300	10.6	CSIR	•	•	•	•		Type3-211
			60	210	181	717								•	•	•	•		
FL1888	1/4	180	50	215	185	734	8.83		•	•	300	11.1	CSIR	•	•	•	•		Type4-216
			60	250	215	853								•	•	•	•		

Note All data covered by this catalog are given as general information only.

Since we are constantly improving our product, the specification and availability are subject to change with out notice.

Test Conditions (ASHRAE Condition)	Low back pressure (FL, RL, CL Series)	High back pressure (FH Series)
Evaporating Temperature	-23.3°C (-10°F)	7.2°C (45°F)
Condensing Temperature	54.4°C (130°F)	54.4°C (130°F)
Liquid Temperature	32.2°C (90°F)	46.1°C (115°F)
Return gas Temperature	32.2°C (90°F)	35°C (95°F)
Ambient Temperature	32.2°C (90°F)	35°C (95°F)
Power Source	Rated Voltage	

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Hitachi, compressor, for refrigerator water, FL1875-SY, FL1875, 1/4 Hp, Lbp, 717btu

# Mbsm.pro, DL25YE-4, 1/4 hp , 1Ph, DAEWOO, COMPRESSOR R12, CSR, compressor, LBp, 220V 60hz

Category: compressor

written by www.mbsm.pro | 20 January 2022





Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, DL25YE-4, 1/4 hp , 1Ph, DAEWOO,COMPRESSOR, R12, CSR, compressor, LBp, 220V 60hz

## COMPRESSOR, EMBRACO, 1/4 HP++ (big), 220V, R134A, EGAS 80HLR, FREEZER MOTOR

Category: compressor

written by www.mbsm.pro | 20 January 2022

### Technical Specifications

Brand	Embraco
Production place	Brazil
Compressor Type	Hermetic Piston
Compression Line	1/4 "
Working Regime	LBP (-23,3 ° C / + 54,4 ° C)
Frequency (Hz)	50-60
Suction Line	5/16 "
Cooling Capacity (Watts)	195
good kodu	51370117399RA
Compressor Model	EGAS80HLR
Piston Diameter (cm <sup>3</sup> /rev)	6.36
Tipi Motorcycle	1 FAZ - RSIR
Refrigerant Gas	R134a
Compressor Power(Hp)	1/4 +



Private Picture Copyright : WWW.MBSM.PRO

#mbsmpro

# TECHNICAL SPECIFICATIONS

- Voltage: 220V 50 / 60Hz
- Refrigerant: R-134A
- Evaporation temperature range: -35 ° C to -10 ° C
- Power: 1/4 +

Mbsm\_dot\_pro\_private\_PDF\_pdf\_embraco-compressor-egas-80-hlrTélécharger  
Technical Specifications

Brand	Embraco
Production place	Brazil
Compressor Type	Hermetic Piston
Compression Line	1/4 "
Working Regime	LBP (-23,3 ° C / + 54,4 ° C)
Frequency (Hz)	50-60
Suction Line	5/16 "
Cooling Capacity (Watts)	195
good kodu	51370117399RA
Compressor Model	EGAS80HLR
Piston Diameter (cm3/rev)	6.36
Tipi Motorcycle	1FAZ - RSIR
Refrigerant Gas	R134a
Compressor Power(Hp)	1/4 +



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Embraco, VEGY 8H, VEGZ 8H, Inverter Compressor, R134A, Refrigerator

# General Electric,110, 1/4++ HP, 1/3 hp, Variable Speed Compressor

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 20 January 2022



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Embraco, VEGY 8H, Inverter Compressor, R134A, Refrigerator General Electric,110, 1/4 HP,Variable Speed Compressor







Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Compressor, 103U2954, Danfoss, fr10B,  
103u, 2954, 1/3 HP, lbp, r12, FR10B  
COMPRESSOR 220V, 103U2954FR10B, FR11B  
Compressor R-12 3/8 HP 230V, fr21b  
Compressor R134a 3/4 HP++/ 1 hp-,  
230V, hbp++

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 20 January 2022



Compressor, 103U2954, Danfoss, fr10B, 103u, 2954, 1/4 HP, lbp, r12, FR10B  
COMPRESSOR 220V, 103U2954FR10B

---

no frost, egl99aa zmc refrigerator,  
DF40, silver, ideal, zanussi, IDEAL  
ZANUSSI, EGL99AA ZMC, DF 40 Elgance,  
Compressor, ACC Cubigel, Huayi,  
Electrolux, ZEM GL99AA, GL99AA, LBP ,  
R134a, 220-240V/1/50Hz, 1/4 HP,  
discharge 9.93 cm<sup>3</sup>, motor type RSIR,  
LRA 14.4A

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 20 January 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



[Mbsm\\_dot\\_pro\\_private\\_PDF\\_GL99AA-compresseur-acc-cubigell-gl99aaTélécharger](#)  
[Mbsm\\_dot\\_pro\\_private\\_PDF\\_GL99AATélécharger](#)

Compressor ACC Cubigel Huayi Electrolux ZEM GL99AA, LBP – R134a,  
220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm<sup>3</sup>, motor type RSIR, LRA 14.4A,  
expansion device: capillary, cooling: static, weight 11 kg , the statutory  
warranty period shall apply (24 months), Delivery time Info: with “immediately  
available” and “scarce stock”, usually delivery within 2 days. For “currently  
not available” delivery time usually 2 weeks or delivery time in urgent cases  
contact us.

---

Refrigerant:

R134a

Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	4,9 mm
Suction:	6,5 mm
Working area:	LBP
Design type:	Hermetic
Model series:	GL
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 22 Ester
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions ( length × width × height ):	23,10 × 16,20 × 18,60 cm
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	GL99AA
Stroke volume (cm3):	9,93
Cooling capacity (W):	174
Power (HP):	0,25
Max. Starting current (A):	14,4
Max. Operating current (A):	1,31
Engine type:	RSIR
COP:	0,92
Note:	Static cooling
Conveying and suction volume (m3):	1,72
Oil quantity (l):	0,295
Compressor type:	Piston
Cooling:	Static
RPM:	2900
Power range:	-35 C to -10 C
Alternative:	HLY90AA, NL11F
Pressure line (mm):	4,9
Suction line (mm):	6,5

**ZMC** C **GL99AA** 0326  
220-240V~50Hz  
R 134a  
MADE IN EGYPT  
CE  
482  
50-3975 6

**GL99AAa VE09**  
**220-240V 50Hz ~1**

**COMPRESSOR**

Displacement (cm <sup>3</sup> )	9.95
Diameter (mm)	25.4
Stroke (mm)	19.62
Net Weight (Kg)	9.6
Oil type	ISO VG 22 ESTER
Oil charge (cm <sup>3</sup> )	295

**MOTOR**

Approximate Power (CV)	1/4
Voltage/Frequency (V/Hz)	220V 50Hz
Voltage range (V)	187-264
Code	-
Type	RSIR
Phase number	1 PH
Locked rotor current (A)	14.0
Main W. resist. at 25°C (Ω)	9.96
Start W. resist. at 25°C (Ω)	20.39

**ELECTRICAL COMPONENTS**

Relay	PTC 3003 - K100		
Nominal voltage (V)	200 - 240		
Resistance μ	14,00		
Protector	MRP336JZ	T0377	AE11FU

**APPLICATION**

Application	Low back pressure
Refrigerant	R134a
Evaporating (°C)	-35 to -10
Expansion	Capillar
Comp. cooling	Static
Max. ambient temp. (°C)	43

**NOMINAL PERFORMANCE**

	CYCLE A	CYCLE B
Cooling capacity (W)	175	238
Input power (W)	189	200
EER (kcal/Wh)	0.79	1.02
COP (W/W)	0.92	1.19
Current (A)	1.31	1.34

**TEST CONDITIONS**

	CYCLE A	CYCLE B
Evaporating temp. (°C)	-25.0	-23.3
Condensing temp. (°C)	55.0	55.0
Liq.t. entering expan. (°C)	55.0	32.0
Ambient t. and return (°C)	32.0	32.0
Tens/Freq (V/Hz)	220V 50Hz	220V 50Hz



موديل : KGT1

الشركة العالمية لصناعة الأجهزة المنزلية - الاسكندرية

١,٢ امبير

١٩٥ وات

٥٠ هيرتز

٢٢٠ فولت ~

السعة : ١,٣ اقدم

درجة الحماية : IPX2

التصنيف : ST

الشحنة : ١٧٠ جم ف ١٣٤ ا

سنة الانتاج

No.

٢٠٠٥/٣٢٠

صنع في مصر

200

3 2

٢٠٠٥/٣٢٠

Made in Egypt



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



REDMI NOTE 9 PRO  
AI QUAD CAMERA

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



REDMI NOTE 9 PRO  
AI QUAD CAMERA


Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

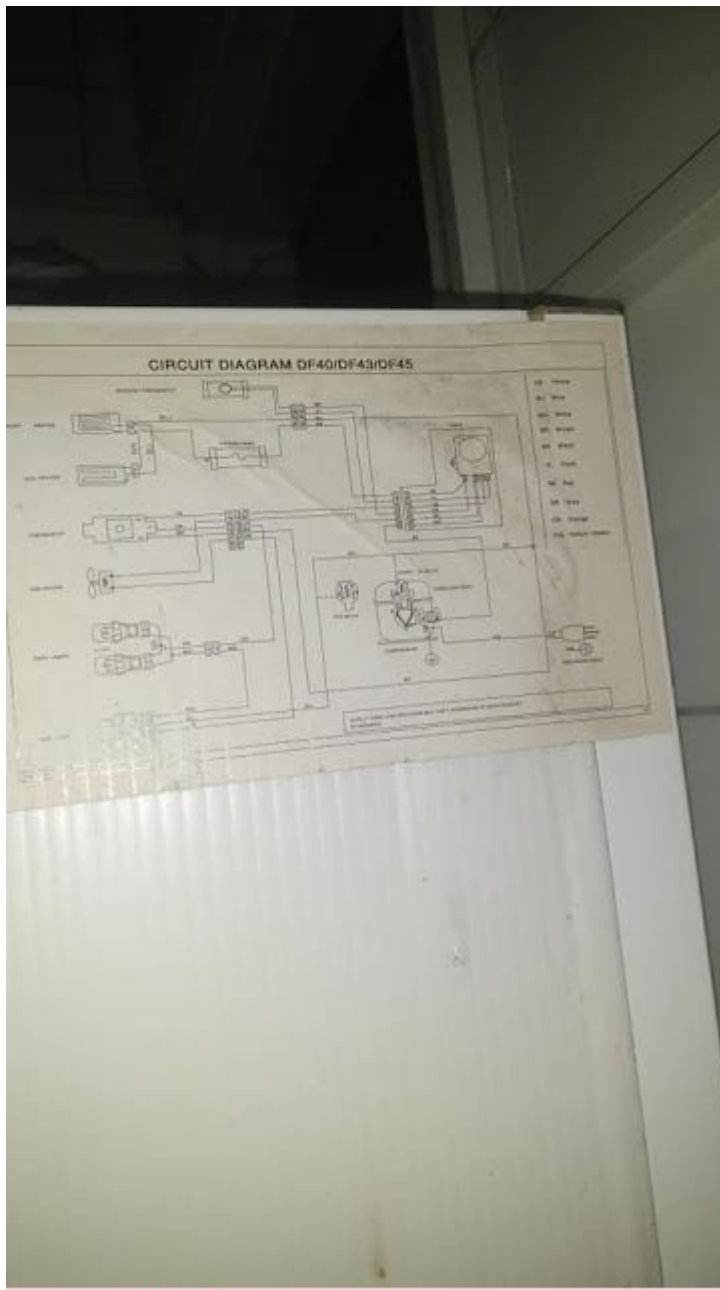

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

**ZMC**

**EGL99AA 1002**

220-240V~50Hz


**R 134 a**

MADE IN EGYPT



3

480

0250659 



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

**HERMETIC, Freezer, COMPRESSOR, ZEL, GTH86AA, R134A, 1/4 Hp, Lbp, 230W, 8.6CC**

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 20 January 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

## COMPRESSOR ZEL GTH86AA

APPLICATION: LBP

FREON: R134A

DISPLACEMENT: 8.6CC

POWER SUPPLY: 220V

POWER: 1 / 4HP – 230W

APPLICATION: UNIVERSAL

### Specifications

### Description

### Detailed Product Description

1.Low levels of noise and vibration

2.Standard,medium,high and very high levels of efficiency

R134a 220-240V/50HZ

Model	Displ.(cm <sup>3</sup> )	Motor Type	Cooling capacity(w)	Input Power without RC(w)	COP with RC(w)	COP without RC(w/w)	with RC(w/w)	Run Capacltor	Start Capacltor	Height(mm)
Standard Efficiency Range										
0F789	4.4	RSIR	110	102		1.08				174

OF1033A5.7	RSIR	141	118	1.19				174
OF1350A7.5	RSIR	178	158	1.13				183
GTH86AA8.6	RSIR/RSCR230		161	1.43	1.50	5		174
GTH93AA9.3	RSIR/RSCR260		182	1.43	1.50	5		183
Medium Efficiency Range								
GTM40AT4.0	RSIR	102	91	1.12				163
GTM57AT5.7	RSIR	156	128	1.21				183
GTM60AT6.0	RSIR	165	136	1.27				163
GVY75AT7.5	RSIR/RSCR200		149	1.34	1.44	5		183
GTM75AA7.5	RSIR	200	166	1.20			50	183
GTM93AA9.3	RSIR	270	220	1.35				183
GTM10AA11.0	RSIR/RSCR300		222	1.35			50	183
GTM12AA12.0	RSIR/RSCR330		241	1.37			50	183



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Compressor, NL7.3FT, SECOP, 105G6726, DANFOSS, 6726, 105G, 105 G 6726, 105G 6726, 1/5 HP, 180W, LBP, Zanussi, Kiriazi Electric Company, TGV 335L,

NO FROST, TSV 320L, FC 83L , R134A,  
125G, 220-240V 50Hz, CSIR

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 20 January 2022

# KIRIAZI



# CE



ELECTRIC  
COMPANY

®

Product	No Frost Refrigerator	Class	T
Model	E 335N/3	Current / Amp.	1.1/~
Rated Voltage	220-240V/50HZ	Refrigerant	R 134a 125g
Rated input of lamp	1 x 25 w	Total Gross Volume	335 L
Ins : Basic	Type II IPX4	Total Storge Volume	320 L
Freezing Capacity	4 kg/24hr	Freezer Capacity	83L
ES 6000 / 2008		Tow Door Ref.	
ES 3793 / 2006			
Serial Number		Made in Egypt	



● ○ REDMI NOTE 8  
○ ∞ AI QUAD CAMERA

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

R134a is a low pressure refrigerant, very efficient for high temperature applications.

This makes it ideal in air conditioning applications that may leak refrigerant like car air conditioning.

Now it is being phased out because of its high global warming potential and replaced by R134

R404a is a high pressure refrigerant ideal for applications in low and medium temperature.

You want low pressure refrigerants in household applications like refrigerators that may be inside kitchens with (possible) high ambient temperature, so you make sure nothing will blow up. For the same reason you want R134a in your car air conditioning.

R404a instead has pressures slightly above atmospheric in low temperature applications where R134a would have negative pressures and its heat transmission coefficients would be much lower.

<b>Type de gaz</b>	<b>App</b>	<b>HP</b>	<b>Watt</b>	<b>Modèle</b>	<b>TL</b>
<b>R134A</b>	<b>LBP</b>	<b>1/6</b>	<b>134</b>	<b>TLY5.1FK</b>	
<b>R134A</b>	<b>LBP</b>	<b>1/4</b>	<b>183</b>	<b>TLES7FT.4</b>	


R134A	LBP	1/5	156	NL6FT.2	
R134A	LBP	1/5	185	NL7.3FT (RSIR)	
R134A	LBP	+ 1/4	219	NL9FT.2 (RSIR)	
R134A	LBP	1/4	185	NL7.3FT (CSIR)	
R134A	LBP	+ 1/4	219	NL9FT.2 (CSIR)	NL
R134A	LBP	1/3	284	NL10FT	
R134A	MBP	1/3	621	NL11MF	
R404A	LBP	1/3	433	NL7CLX	
R404A	LBP	1/3	471	NL8.4CLX	
R134A	LBP	1/4	187	NLY6F	
R134A	LBP	+ 4 /	213	NLY7F	
		(1)			
R134A	LBP	1/3	237	NLY9FK	
R600A	LBP	+ 1/4	227	NLE13KTK.2	
R600A	LBP	1/3	253	NLE15KTK.2	
R600A	LBP	+ 1/4	225	NLX13KK.3	
R600A	LBP	1/3	254	NLX15KK.3	

R134A	LBP / MBP / 1/3 HBP	264	SC12G	
R134A	LBP / MBP / 1/2 HBP	392	SC18G	
R134A	LBP / MBP / 3/4 HBP	456	SC21G	SC
R134A	MBP 3/4	1073	SC21MFX	
R134A	LBP 3/4	567	SC21FTX	
R404A	LBP 1	1033	ST21CL	
R404A	LBP 1	986	SC18CLX.2	
R404A	MBP 1/2	359/650	SC15MLX	
R404A	MBP 7/8	762/1584	SC18MLX	

# KIRIAZI



# CE



ELECTRIC  
COMPANY

®


Product	No Frost Refrigerator	Class	T
Model	E 335N/3	Current / Amp.	1.1/~
Rated Voltage	220-240V/50HZ	Refrigerant	R 134a 125g
Rated input of lamp	1 x 25 w	Total Gross Volume	335 L
Ins : Basic	Type II IPX4	Total Storge Volume	320 L
Freezing Capacity	4 kg/24hr	Freezer Capacity	83L
ES 6000 / 2008		Tow Door Ref.	
ES 3793 / 2006			
Serial Number		Made in Egypt	



REDMI NOTE 8  
AI QUAD CAMERA



REDMI NOTE 8  
AI QUAD CAMERA

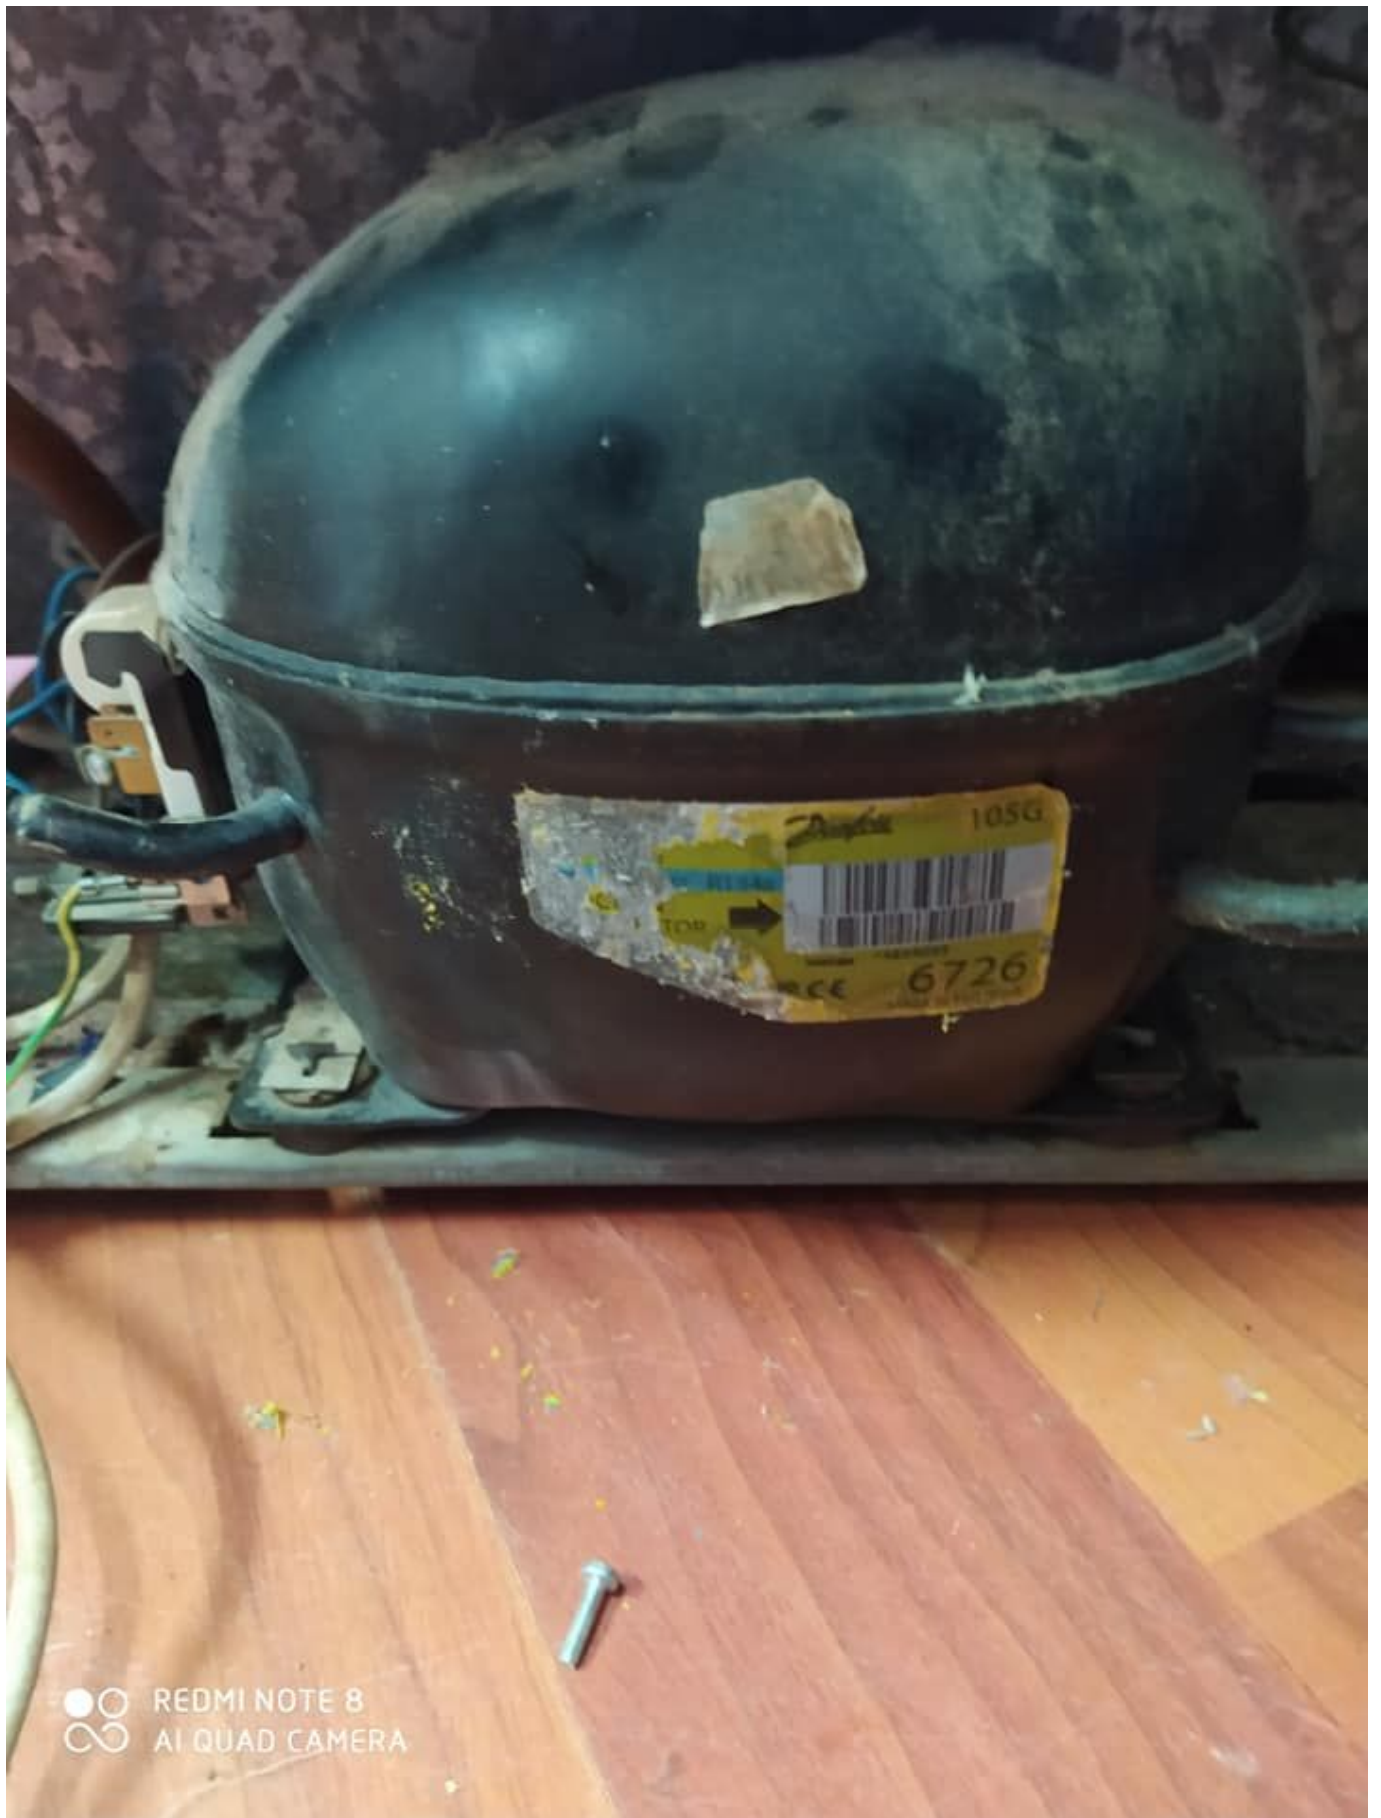

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_NL7.3FTTélécharger

Mbsm\_dot\_pro\_private\_PDF\_nl73ft\_105g6731\_r134a\_220v\_50hz\_11-2011\_desd406c102Télécharger

Refrig	Applic	oil cooling	Evaporating temperature [°C]													Evaporating tem		
			-35	-30	-25	-20	-15	-10	-5	0	5	10	15	-25	-10			
R134a	LBP		1/20	14	26	40	56	74	95							60	86	
		PL50F	101G0220	1/16	21	34	50	69	92	120						62	93	
		TL53FT	102G4324	1/10	27	43	63	88	117	152						88	123	
		TL54FT	102G4424	1/8+	48	71	98	131	170	216						114	165	
		TL55FT	102G4524	1/6	66	90	120	156	200	253						120	170	
		TL55.7FT.3	102G4615	1/5			136									139		
		TL56.5FT.3	102G4703	1/6	60	84	115	152	198	253						123	184	
		NL6FT	105G6628	1/6	60	84	115	152	198	253						123	184	
		NL6.1FT	105G6620	1/5	71	100	136	181	235	299						145	220	
		NL7FT	105G6728	105G6738	1/5	71	100	136	181	235	299					145	220	
		NL7.3FT	105G6726		1/4	87	120	162	213	275	350					169	252	
		NL8.4FT	105G6865		1/4	87	120	162	213	275	350					169	252	
		NL9FT	105G6828	105G6838	1/3	113	158	213	281	361	455					215	316	
		NL10FT	105G6829	105G6839	1/4	92	118	154	201	258	325					148	221	
		NLE7.3FT	105G6710		1/3	103	163	233	314	408	517	645				265	380	
		SC12FT	104G8205	104G8215	1/2	126	197	280	376	489	620	772				311	451	
		SC15FT	104G8505		5/8	144	229	325	437	567	719	896				365	517	
		SC18FTX	104G8805		3/4	192	296	415	553	713	901	1119				428	613	
		SC21FTX 50Hz	104G8105		3/4	240	345	470	620	800	1012	1262				475	707	
		SC21FTX 60Hz	104G8106		1/12	11	23	36	51	69	90	116	145	179	219	264	60	84
		TL2.5G	102G4251		1/8	41	58	80	107	140	180	226	280	342	413	83	118	
		TL3G	102G4350		1/6	56	79	107	139	178	224	278	341	414	497	100	149	
		TL4G	102G4452		1/5	48	83	124	171	226	290	365	452	552		109	172	
	TL5G	102G4550		1/5	62	99	142	193	254	325	408	505	618		126	194		
	FR6G	103G6660		1/4	85	123	171	228	298	381	478	592	722		151	231		
	FR7.5G	103G6680	103G6690	1/4	92	136	188	250	324	412	516	638	779		179	265		
	FR8.5G	103G6780	103G6790	1/3	115	170	233	307	395	501	628	780			202	317		
	FR10G	103G6880	103G6890	1/4			174	219	279	349	425	520				202		
	FR11G	103G6980		1/4			141	189	245	312	390	482	588	709		187		
	TL6.5MF	102G4781		1/4			179	236	304	385	480	591	719	867		227		
	NL6.1MF	105G6660		1/4+			213	277	353	445	553	679	825	994		261		
	NL7.3MF	105G6772		1/3			266	346	441	554	687	843	1023	1231		323		
	NL8.4MF	105G6879		1/3	88	137	194	262	343	440	554	688	845		198	308		
	NL10MF	105G6885		3/8			292	380	485	609	756	927	1125	1354		360		
	NLE10MF	105G6888		5/16	23	60	113	183	268	369	486	618	764	925	1100	181	290	
	SC10G	104G8000		3/8	65	113	175	252	348	464	603	768	960	1182	1437	227	355	
	SC12G	104G8240	104G8250	1/2			164	290	424	568	728	908	1110	1340	1600	233	440	
	SC15G	104G8520	104G8530	1/2+			283	394	526	684	870	1087	1337	1624	1950	2331	507	
	SC18G	104G8820	104G8830															

model	watt	HP	LBP/MBP	نوع گاز	توضیحات
SC12G	246	1/3	LBP/MBP	134	
SC18G	392	1/2	LBP/MBP	134	
SC21G	456	3/4	LBP/MBP	134	
SC21MFX	1073	3/4	MBP	134	هیگرتن SC21G
SC21FTX	567	3/4	LBP	134	هیگرتن SC21G
SC12CL	629		LBP	404	
SC15CL	782		LBP	404	
SC18CLX.2	986		LBP	404	
TLS5FT(PTC)	134	1/6	LBP	134	
TLES5.7FT(PTC)	163	1/5	LBP	134	
TLES6.5FT(PTC)	183	1/4	LBP	134	سفن NL7
NL6FT.2(PTC)*	156	1/5	LBP	134	
NL7FT.2(PTC)*	185	1/4	LBP	134	
NL9FT.2(PTC)*	219	1/4+	LBP	134	
NL10FT	284	1/3	LBP	134	هیگرتن SC12G (پارنه و سفن)
NL11MF	621	1/3	MBP	134	هیگرتن SC12G (پارنه و سفن)
NL7CLX	433		LBP	404	
NL8.4CLX	471		LBP	404	
NL7.3MF	393		MBP	134	
NL8.4MF	455		MBP	134	
NLY6F	187		LBP	134	سفن NL7 - High efficiency (7% در سفن)
NLY7F	213		LBP	134	سفن NL9 - High efficiency (7% در سفن)
NLY9FK	237		LBP	134	High efficiency (7% در سفن)
BD50F	72		LBP/MBP	134	
BD350GH	167		LBP/MBP	134	
GS21MLX	2200		MBP	404	
GS26CLX	1430		LBP	404	
GS34CLX	2072		LBP	404	
GS26MLX	2866		MBP	404	
GS34MLX	3726		MBP	404	


(LBP @ -33.3°C ASHRAE) زیر صفر  
(MBP @ -6.7°C ASHRAE) بالای صفر

## Vacuum Pump, 1/4 Hp , Vane Pump, Rotary Vane, Valve Rotary, POMPE À VIDE, Restoration

Category: Technologie, Tester ok  
written by [www.mbsm.pro](http://www.mbsm.pro) | 20 January 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

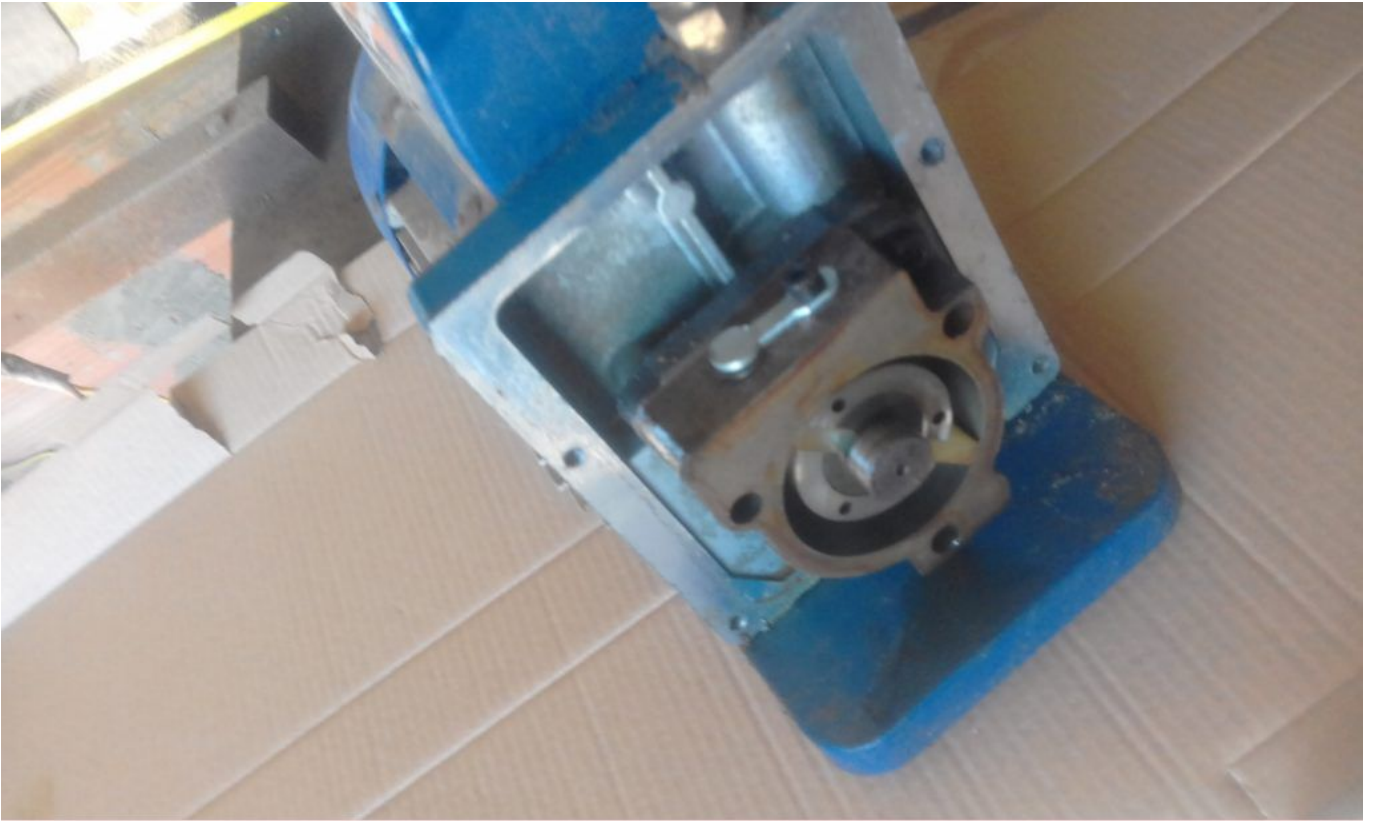

Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)






Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

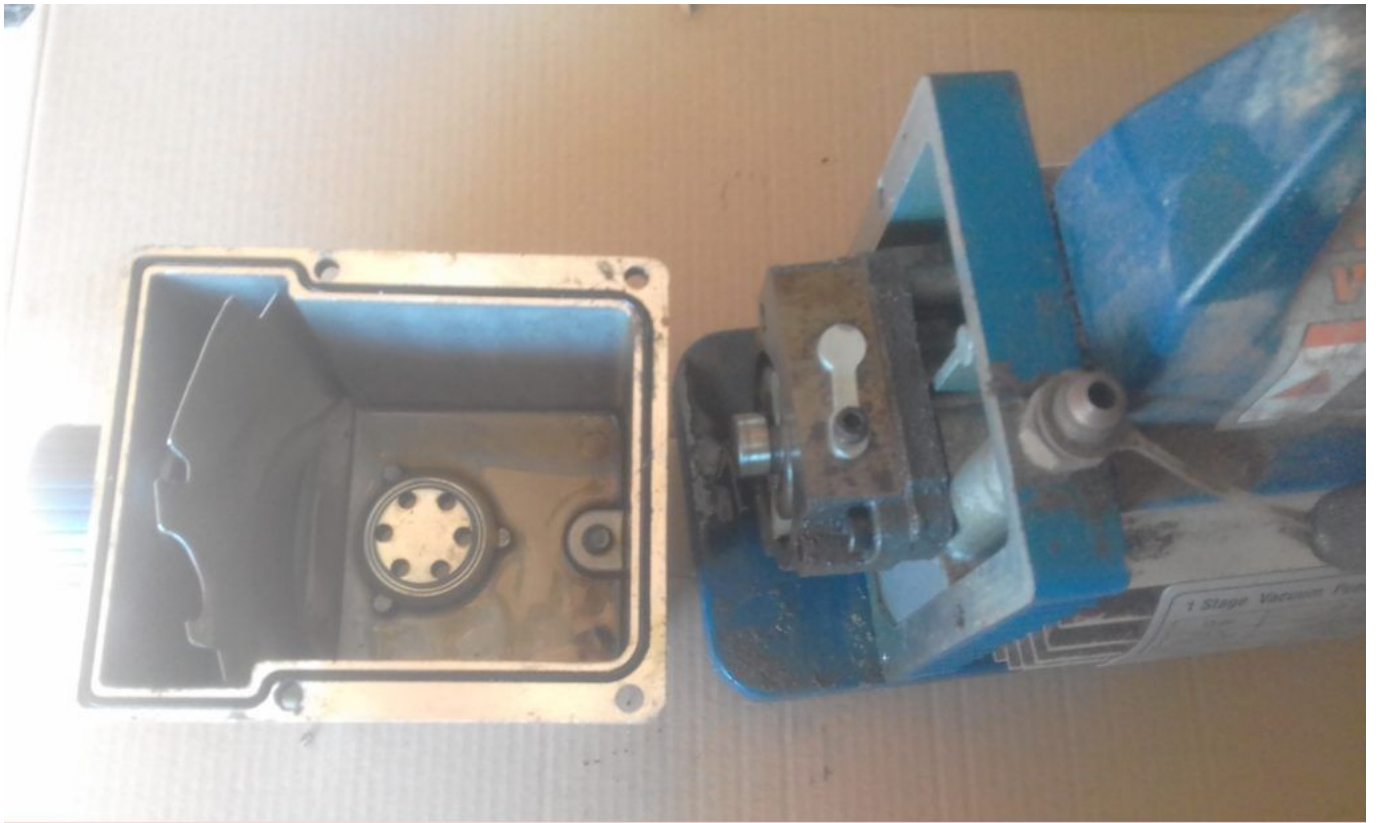

Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)




Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



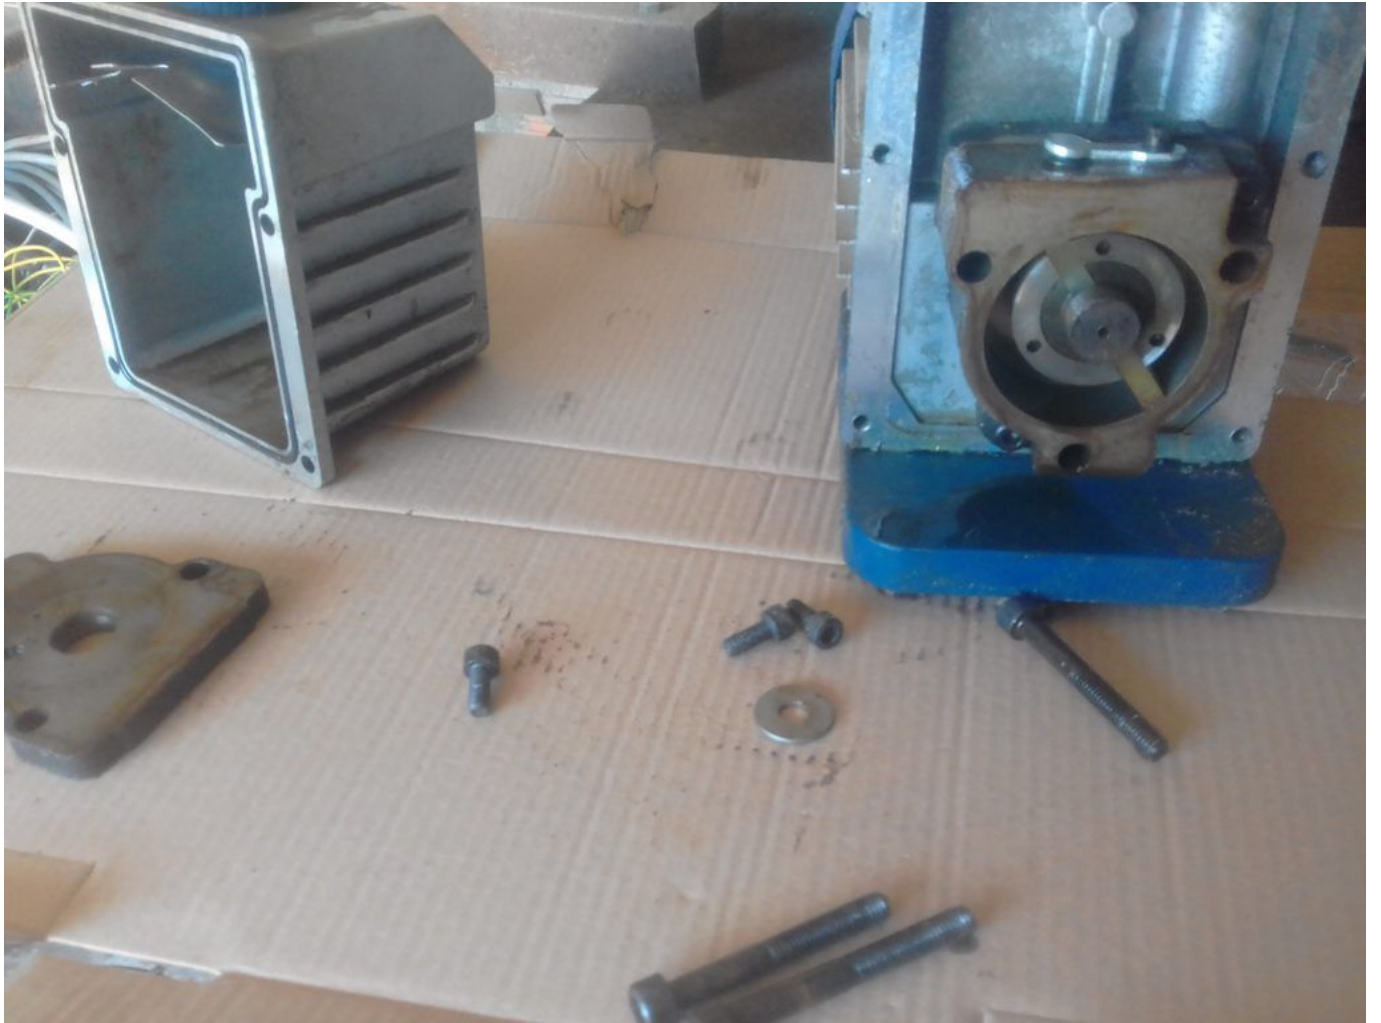







Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





















Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

## Embraco, NBT1118Z, Refrigerator, Freezer, Compressor, 1/4 HP, R134a, LBP, RSCR

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 20 January 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Réfrigérant: R-134a

Application: LBP

Fréquence: 50Hz

Déplacement: 8.40cm<sup>3</sup> / 0.51in<sup>3</sup>

B.OM : 298BA

Tension / Fréquence: 220-240V 50Hz 1 ~

Type de moteur: Démarrage résistif Inductif Run-Resistive Start Capacitive Run

LRA (A): 6.9

Dispositif d'expansion:

Lubrifiant capillaire : Charge: 350cm<sup>3</sup>,6.2oz<sup>3</sup>;

Type: polyolester 10

Poids: 10,8 kg, 23,8

lb Hauteur maximale: 200,0 mm, 7,9 pouces

Type de refroidissement: (Refroidissement statique) – le compresseur n'a pas besoin de refroidissement forcé, mais il doit être installé afin de garantir la circulation naturelle de l'air en convection, pour éviter la surchauffe.

Capacité nominale / température d'évaporation, W / ° C (avec une température de température de 54,4 ° C): 150 / -30,204 / -25,271 / -20,352 / -15? 446 / -10,554 / -5

Capacité nominale / température d'évaporation, W / ° C (avec température ambiante de 45 ° C): 165 / -30, 220 / -25,289 / -20,371 / -15? 468 / -10,579 / -5

Point nominal -23,3 ° C : Refroidissement: 225 W, 194 kcal / h;

W. entrée: 151W;

Courant: 0,60A;

EER: 1,49 W / W, 1,28 kcal / hW

### **Détails techniques**

220/240V 50Hz

puissance 1/4L – cylindrée 8,40 cc

gaz R134a LBP

ASPERA

### **MONDIAL FRAMEC**

**Mondial Framec Armoire réfrigérée** BRIO ICE 4 SK, KIC N40 R134A EBA210815, KIC NX40 R134A EBA210813

...et d'autres dispositifs

NBT1118Z-RSCR – ASPERA

NBT1118Z-RSCR – EMBRACO

LF3070231 – GEV – MONDIAL FRAMEC

...numéros de fabricant supplémentaires possibles

281302061000210

**Embraco®** NBT1118Z

220-240V~50Hz

THERMALLY PROTECTED		
0.94RLA	8.9LRA	R 134a
POE. OIL 350CC		1 PH

5KM NO START WITHOUT STARTING DEVICE

SUCTION

298BA42 06/MAY/10 P10RLOJG

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_NBT1118Z\_Embraco\_VerdichterTélécharger