

Mbsm.pro, COMPRESSOR, HYK95AA, 240V, 1/5HP, 167W, R600, ARISTON, FREEZER

Category: compressor

written by Jamila | 20 December 2022



REDMI NOTE 9
AI QUAD CAMERA

2022/10/1 18:54

Embraco, Compressor, Fridge,
Refrigerator, 1/5HP, LBP, 1/6++, mbp,
R134a, FFI 7.5HAK, FFI7.5HAK, FFi
7.5HAK, FFI 7.5 HAK, FFI 7.5HAK,
220-240V/50HZ

Category: compressor

written by www.mbsm.pro | 20 December 2022



Embraco FFI 7.5HAK



THERMALLY PROTECTED

14.5/14-LRA

R 134a 1-PR

220V~
50-60Hz



JOINVILLE-SC
MADE IN BRAZIL



513200370 FAB 1 04-APR-01 F01NDMB6



Embraco, Compressor, Fridge, Refrigerator, 1/5HP, LBP, 1/6++, mbp, R134a, FFI 7.5HAK, FFI7.5HAK, FFi 7.5HAK, FFI 7.5 HAK, FFI 7.5HAK, 220-240V/50HZ

Mbsm.pro, COMPRESSEUR, CUBIGEL, L45TN, R22, HMBP, 1/5HP, 220/240V 50HZ, ORIGINE 4.56CM3

Category: Archivation,compressor
written by www.mbsm.pro | 20 December 2022



Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, COMPRESSEUR, CUBIGEL, L45TN, R22, HMBP, 1/5HP, 220/240V 50HZ, ORIGINE 4.56CM3

Mbsm.pro, Compressor, R600a, GMCC,
Refrigerant, PZ90H1Y, SXF-562JA,
1/5hp, 167 W

Category: compressor

written by www.mbsm.pro | 20 December 2022



Mbsm.pro, Compressor, R600a, GMCC, Refrigerant, PZ90H1Y, SXF-562JA, 1/5hp, 167 W

Mbsm.pro, Compressor, cubigel, huayi,
ACC, Electrolux, HPY14AA, LBP, R600a,
1/5HP, 220-240V/1/50Hz, 166 W

Category: compressor



Private Picture Copyright: WWW.MBSM.PRO

Compressors/Compressors ACC – Electrolux HP14AH, LBP – R600a, Power consumption 1/5HP, 220-240V/1/50Hz, Motor type RSIR, Injection: Capillary operation, Displacement 14.32 cm³, Oil type ISO VG10 Mineral oil, Oil quantity 300 cm³, Power 147 W at -25 / +55 °C, Power consumption 166 W, Power 0.0 W, Cooling capacity

-10 °C	-15 °C	-20 °C	-25 °C	-30 °C	-35 °C
344	276	216	166	124	92

Shipping Class	Standard
Scope Of Application	LBP
Lieferzeit	2-3 Wochen
Type Of Construction	Piston

Condensation Temperature	55°C
Maker	ACC
Manufacturer No.	HPY14AA
Displacement In Cm3	14.32
Measuring Requirements	Ashrae
Refrigerants	R600a
Series	HPY
Condensing Units Compressors	Compressors
Suspense	220-240V
Weight In Kg	13

Compressor ACC Cubigel Huayi Electrolux ZEM HPY14AA, LBP -R600a, 220-240V/1/50Hz, 1/5 HP, discharge 14.32 cm³, motor type RSIR, oil type ISO VG10 mineral, oil charge 300 cm³, 166 W at -25 / +55 °, input power, current 147 W, 0.96 A, expansion device: capillar, cooling: static, weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with "immediately available" and "scarce stock", usually delivery within 2 days. For "currently not available" delivery time usually 2 weeks or delivery time in urgent cases contact us.

Refrigerant:	R600a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	6,5 mm
Suction:	8,1 mm
Working area:	LBP
Design type:	Hermetic
Model series:	HPY
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 10 Mineral
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions (length × width × height):	20,40 × 16,20 × 19,60 cm
customs tariff number:	84143081
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	HPY14AA
Modelname:	HP14AH
Stroke volume (cm ³):	14,32
Cooling capacity (W):	147
Power (HP):	0,25
Max. Starting current (A):	11,5
Max. Operating current (A):	0,96

Engine type:	RSIR
Note:	Static cooling
Oil quantity (l):	0,3
Compressor type:	Piston
Power range:	-35 C to -10 C
Alternative:	NBM1118Y , EMX70CLC , NBM1116Y
Pressure line (mm):	6,5
Suction line (mm):	8,1





Private Picture Copyright : WWW.MBSM.PRO

[Mbsm_dot_pro_private_PDF_HPYP14AA-1Télécharger](#)

[Mbsm_dot_pro_private_PDF_HPYP14AATélécharger](#)

L111CYA, COMPRESSOR, ASSY, Indesit ,
Ariston, whirlpool, 1/5hp, lbp, 180W,
r600a

Category: compressor

written by www.mbsm.pro | 20 December 2022



REDMI NOTE 8 PRO
AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 8 PRO
AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO

WARNING


Electrical Shock Hazard



Disconnect power before servicing.
Any ground circuit disconnected during service must be reconnected.
Do not reconnect unit to electrical supply until compressor terminal cover is securely in place.
If refrigerant leak is suspected around compressor terminal, relieve all pressure from the system, keeping terminal, cover in place.
Failure to do so can result in death or electrical shock.

FREQUENCY	50 Hz
VOLTAGE RANGE	220-240VAC
INPUT WATTS	710 W
INPUT CURRENT	3.3 A
COMFORT WATTS	600 W
COOLING CAPACITY	AS PER TABLE
CLIMATE CLASS	T

Do Not service with R134a
Follow only Approved R600a
service procedure & a
Qualified technician while
repairing



Risk of fire



WARNING


Caution: Risk of fire
Always observe the following points of caution when repairing or servicing the refrigerator since the refrigerant is a flammable gas.
Avoid using any flame or heat source to service the sealed system when the unit is not charged with refrigerant.
In the event of refrigerant leak, fully vent the area before recharging the unit.
Do not use any flammable refrigerant gas leak.

BLOWING AGENT: R600a (ISOTHERM)
CFLC (CYCLO PENTANE)
AS PER TABLE

MFG. BY: WHIRLPOOL OF INDIA LTD.
PLOT NO. A-4, M.D.C.
KARJANGAON, TAL. SHIBPUR,
DIST. PUNE - 412 204

"WHIRLPOOL" IS A REGISTERED TRADEMARK OF "WHIRLPOOL CORPORATION USA"

WIRING DIAGRAM

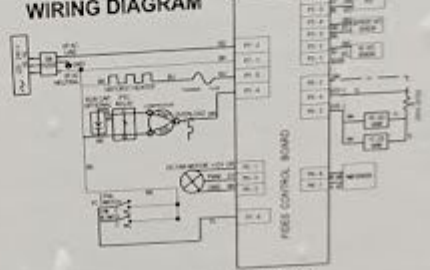

SYMBOL CODE

- CONNECTOR - SCREW ON
- CONNECTOR - CLOSED END
- DISCONNECT TERMINAL
- PERMANENT CONNECTION
- ⊕ PLUS CONNECTOR
- ⊖ GROUND (OR CHASSIS)

WIRE COLOR CODE

- GR = GREEN
- BL = BLUE
- BR = BLACK
- RD = RED
- WH = WHITE
- YL = YELLOW
- OR = ORANGE
- PK = PINK
- VT = VIOLET
- SL = SILVER
- BRN = BROWN
- BLK = BLACK
- BLU = BLUE
- GRN = GREEN

NAME	MODEL	GROSS CAPACITY	STORAGE CAPACITY	REFRIGERANT TYPE (SOLUBLE/CHARGE)
L1500004	WT1117502R	460L	400L	1,1,1,3,3,3A 70

WT117502R

REDMI NOTE 8 PRO
AI QUAD CAMERA

E	E1130DZ	CSIR	220/60	390	1.35	F	NE	NE6213CK	CSF
	EU1121DZ	RSCR	220/60	325	1.52	F		NE6213BK	CSF
S	SK35XZ	RSIR	127/60	88	1.38		CT6217CK	CSF	
L	LU65XZ	RSIR	127/60	190	1.52	S	CT6220CK	CSF	
E	EU1121XZ	CSIR	127/60	250	1.50	F	CJ6228CK	CSF	
R600a L.B.P 宽电压									
S	S66CY	RSIR	160~260/50	108	1.20		CJ6232CK	CSF	
	SG66CY	RSIR	160~260/50	108	1.40		CJ6240CK	CSF	
	SU66CY	RSCR	160~260/50	108	1.60		ES8CU	RSIF	
	SZ66CY	RSCR	160~260/50	108	1.70		ER32CU	RSIF	
L	L88CYA	RSIR	160~260/50	155	1.36	S	LZ58CU	RSCF	
	L111CYA	RSIR	160~260/50	185	1.40	S	R290 H.B.P		
	LK76CYA	RSCR	160~260/50	142	1.50	S	NB	NB5175CU	RSIF
	LK88CYA	RSCR	160~260/50	155	1.50	S	NE	NE5195CU	RSIF

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_L111CYATélécharger

mbsm.pro, Refrigeration, Compressor, GFF57AA, SEBERIA, Hermetic, Compressor GFF57AA, LBP, R134a, Disp.5.7cc, 1/5HP, Series, LBP

Category: compressor

written by www.mbsm.pro | 20 December 2022



Private Picture Copyright : WWW.MBSM.PRO

mbsm.pro, Refrigeration, Compressor, GFF57AA, SEBERIA, Hermetic, Compressor GFF57AA, LBP, R134a, Disp.5.7cc, 1/5HP, Series, LBP

ZMC, zanussi, Made in Egypt, Compressors

Category: compressor

written by www.mbsm.pro | 20 December 2022

R134a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
<input type="checkbox"/> GL45AA	LBP::R134a	1/8	43	A	96	82	1.06	0.82		
<input type="checkbox"/> GL45AN	LBP::R134a	1/8	50	C	96	81	1.05	0.8		
<input type="checkbox"/> GL60AA	LBP::R134a	1/6	43	A	132	114	1.14	0.89		
<input type="checkbox"/> GL60AF	LBP::R134a	1/6	43	D	132	113	1.07	0.82		
<input type="checkbox"/> GL60AH	LBP::R134a	1/6	43	A	133	114	1.31	1.01		
<input type="checkbox"/> GL60AN	LBP::R134a	1/6	50	C	132	114	1.07	0.83		
<input type="checkbox"/> GL70AA	LBP::R134a	1/5	43	A	149	128	1.18	0.92		
<input type="checkbox"/> GL70AN	LBP::R134a	1/5	50	D	150	129	1.08	0.83		
<input type="checkbox"/> GL70AT	LBP::R134a	1/5	43	E	144	122	1.09	0.84		
<input type="checkbox"/> GL75AA	LBP::R134a	1/5	43	A	155	133	1.18	0.92		
<input type="checkbox"/> GL80AA	LBP::R134a	1/5	43	A	173	148	1.19	0.93		
<input type="checkbox"/> GL80AF	LBP::R134a	1/5	43	D	166	141	1.14	0.88		
<input type="checkbox"/> GL80AH	LBP::R134a	1/5	43	A	175	150	1.35	1.06		
<input type="checkbox"/> GL80AN	LBP::R134a	1/4	43	A	196	168	1.36	1.06		
<input type="checkbox"/> GL90AA	LBP::R134a	1/4	43	A	195	167	1.19	0.93		
<input type="checkbox"/> GL90AH	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
<input type="checkbox"/> GL90AN	LBP::R134a	1/4	50	D	190	163	1.1	0.85		
<input type="checkbox"/> GL90AT	LBP::R134a	1/4	43	E	190	161	1.19	0.92		
<input type="checkbox"/> GL99AA	LBP::R134a	1/4	43	A	214	182	1.24	0.96		
<input type="checkbox"/> GL99AH	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
<input type="checkbox"/> GL80AD	LBP::R134a	1/5	43	W	0	0	0	0		
<input type="checkbox"/> GL90AD	LBP::R134a	1/4	43	W	0	0	0	0		

R134a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE -23.3°C	CECOMAF -25°C	ASHRAE -23.3°C	CECOMAF -25°C	ASHRAE -23.3°C	CECOMAF -25°C
					kcal/h	W	W/W	W/W	W/W	W/W
▶ <input type="checkbox"/> GL45AA	LBP::R134a	1/8	43	A	96	82	1.06	0.82		
▶ <input type="checkbox"/> GL45AN	LBP::R134a	1/8	50	C	96	81	1.05	0.8		
▶ <input type="checkbox"/> GL60AA	LBP::R134a	1/6	43	A	132	114	1.14	0.89		
▶ <input type="checkbox"/> GL60AF	LBP::R134a	1/6	43	D	132	113	1.07	0.82		
▶ <input type="checkbox"/> GL60AH	LBP::R134a	1/6	43	A	133	114	1.31	1.01		
▶ <input type="checkbox"/> GL60AN	LBP::R134a	1/6	50	C	132	114	1.07	0.83		
▶ <input type="checkbox"/> GL70AA	LBP::R134a	1/5	43	A	149	128	1.18	0.92		
▶ <input type="checkbox"/> GL70AN	LBP::R134a	1/5	50	D	150	129	1.08	0.83		
▶ <input type="checkbox"/> GL70AT	LBP::R134a	1/5	43	E	144	122	1.09	0.84		
▶ <input type="checkbox"/> GL75AA	LBP::R134a	1/5	43	A	155	133	1.18	0.92		
▶ <input type="checkbox"/> GL80AA	LBP::R134a	1/5	43	A	173	148	1.19	0.93		
▶ <input type="checkbox"/> GL80AF	LBP::R134a	1/5	43	D	166	141	1.14	0.88		
▶ <input type="checkbox"/> GL80AH	LBP::R134a	1/5	43	A	175	150	1.35	1.06		
▶ <input type="checkbox"/> GL80AN	LBP::R134a	1/4	43	A	196	168	1.36	1.06		
▶ <input type="checkbox"/> GL90AA	LBP::R134a	1/4	43	A	195	167	1.19	0.93		
▶ <input type="checkbox"/> GL90AH	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
▶ <input type="checkbox"/> GL90AN	LBP::R134a	1/4	50	D	190	163	1.1	0.85		
▶ <input type="checkbox"/> GL90AT	LBP::R134a	1/4	43	E	190	161	1.19	0.92		
▶ <input type="checkbox"/> GL99AA	LBP::R134a	1/4	43	A	214	182	1.24	0.96		
▶ <input type="checkbox"/> GL99AH	LBP::R134a	1/4	43	A	215	182	1.39	1.08		
▶ <input type="checkbox"/> GL80AD	LBP::R134a	1/5	43	W	0	0	0	0		
▶ <input type="checkbox"/> GL90AD	LBP::R134a	1/4	43	W	0	0	0	0		

R12

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ <input type="checkbox"/> L45AV	LBP::R12	1/8	43	B	221	192	0.91	0.71		
▶ <input type="checkbox"/> L55AV	LBP::R12	1/6	43	B	115	101	0.99	0.78		
▶ <input type="checkbox"/> L55BV	LBP::R12	1/6	43	B	115	101	0.99	0.78		
▶ <input type="checkbox"/> L76AV	LBP::R12	1/5	43	B	145	127	1.05	0.84		
▶ <input type="checkbox"/> L76BV	LBP::R12	1/5	43	B	145	127	1.05	0.84		
▶ <input type="checkbox"/> L88AV	LBP::R12	1/4	43	B	171	150	1.02	0.81		
▶ <input type="checkbox"/> L88BV	LBP::R12	1/4	43	B	171	150	1.02	0.81		
▶ <input type="checkbox"/> LT45AV	LBP::R12	1/8	50	B	94	83	1.04	0.83		
▶ <input type="checkbox"/> LT55AV	LBP::R12	1/6	50	B	115	102	1.06	0.85		
▶ <input type="checkbox"/> LT55BV	LBP::R12	1/6	50	B	115	102	1.06	0.85		
▶ <input type="checkbox"/> LT76BV	LBP::R12	1/5	50	B	155	137	1.14	0.91		
▶ <input type="checkbox"/> LT88BV	LBP::R12	1/4	50	B	190	169	1.16	0.93		
▶ <input type="checkbox"/> P12BW	LBP::R12	1/3	43	A	221	192	0.91	0.71		

Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_catalogo_cubigel_R134aTélécharger

R600a

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP without RC		COP with RC	
					ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF
					-23.3°C kcal/h	-25°C W	-23.3°C W/W	-25°C W/W	-23.3°C W/W	-25°C W/W
▶ <input type="checkbox"/> HL80AH	LBP::R600a	1/7	43	A	104	89	1.37	1.06		
▶ <input type="checkbox"/> HL90AH	LBP::R600a	1/7	43	A	115	99	1.38	1.08		
▶ <input type="checkbox"/> HL99AH	LBP::R600a	1/6	43	A	120	103	1.34	1.03		

Private Picture Copyright: WWW.MBSM.PRO

Model	Refr.	HP	Ambient Temp C	Rated Voltage	Cooling Capacity		COP _a 7.2 _a
					CECOMAF 5°C	ASHRAE 7.2°C	
					W	kcal/h	
▶ <input type="checkbox"/> GL45PB	HMBP::R134a	1/6	43	A			
▶ <input type="checkbox"/> GL45PB	HMBP::R134a	1/6	0	300			
▶ <input type="checkbox"/> GL45TB	HMBP::R134a	1/6	43	A			
▶ <input type="checkbox"/> GL60PB	HMBP::R134a	1/5	43	A			
▶ <input type="checkbox"/> GL60TB	HMBP::R134a	1/5	43	A			
▶ <input type="checkbox"/> GL80PB	HMBP::R134a	1/5	43	A			
▶ <input type="checkbox"/> GL80TB	HMBP::R134a	F	0	300			
▶ <input type="checkbox"/> GL90TB	HMBP::R134a	1/4	43	A			
▶ <input type="checkbox"/> GP12TB	HMBP::R134a	3/8	43	A			

Private Picture Copyright: WWW.MBSM.PRO

Reciprocating Compressors, Q Series, Reciprocating Fixed Speed, R134a, 100g, LBP, QA66C14GAX5, RSIR, 145W, 1/5HP, 170L

Category: compressor

written by www.mbsm.pro | 20 December 2022



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

MODEL QA66C14GAX5
220V ~ 50Hz 1PH R134a
THERMALLY PROTECTED
MATSUSHITA ELECTRIC IND. CO., LTD.
MADE IN MALAYSIA



Electrostar
الالكتروستار

Model **ES170 T**

طراز

W **136** وات

A **1.12** أمبير

HZ **50** نذبنة

Ser No.



018018

ممتسل

V

220

فولت

R134a

100 gm

وزن وسيط
التبريد

Total Capacity 170 Lit.

Class T

صنع في مصر

ZMC, zanussi, Made in Egypt,
Compressor, Frost Free Freezer,
GM90AZ, EGM90AZ, 155W, 1/5Hp, 134A,
150G, Electrostar Freezer, 260L
CRoss, 235L Storage , 220v-50H, 1.2A,
Class T

Category: compressor
written by www.mbsm.pro | 20 December 2022



OO HUAWEI NOVA 5T
OO AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO

COMPRESSOR TECHNICAL DATA

General Data

Refrigerant: R134a

Application: LBP

Evaporating Temperature Range: -30°C to -10°C
Voltage/Frequency: 220/240V/50 HZ
Compressor Cooling: Static
Expansion Device: Capillary Tube
Packaging Quantity: Multi – 96:120 pcs
Approvals: CE-VDE-GOST

Mechanical Data

Oil Charge: 300 cm³
Oil Type Configuration: ester
Oil Type Viscosity: 19 cSt
Weight: 10 kg

Electrical Data

Motor Type: RSIR / RSCR*
Voltage working range at 50 Hz: 187-264V
Maximum Motor Temperature: 130°C
Locked Rotor Current: 14.46 / 9.86 A
Start Winding Resistance: 23.40Ω at 25°C
Run Winding Resistance: 8.08 Ω at 25°C
Phase: 1 ph

External Characteristics

Internal Diameter (mm)
Suction Connector 6.5
Discharge Connector 4.9
Process Connector 6.5
Material Copper

Electrical Components

Starting Device: PTC 14Ω
Motor Protection: T0490/xx

ZMC

GM90AZ

1137

R 134 a


220-240V-50Hz



474

0002263

OO HUAWEI NOVA 5T
OO AI QUAD CAMERA



Made In Egypt

Frost Free Freezer

Model **ES 260 NF** طراز

Voltage **220 V - 50 HZ** **1.2A** **155 W**

Freezing Capacity 22 Kg/24Hr Freezer Stopage Volume 235 Lit.

Total Gross Volume 260 Lit Refrig. Storage Volume



024287

R134a **150g** وزن وسيط

التبريد

Class T صنع في مصر

max. lamp input	Without	15 W
Protection Rating	IPX 4	
According To	ES 6000 / 2008 - ISO 15502 / 2005	

OO HUAWEI NOVA 5T
OO AI QUAD CAMERA