


Mbsm.pro, TOSHIBA, REFRIGERATOR,  
FREEZER, GR-EFV35, 12 feet, 3 D00R,  
307 L, compressor, 1/5 hp, 140 w,  
lbp, r134a, 145 g

Category: Refrigerator

written by www.mbsm.pro | 9 March 2024

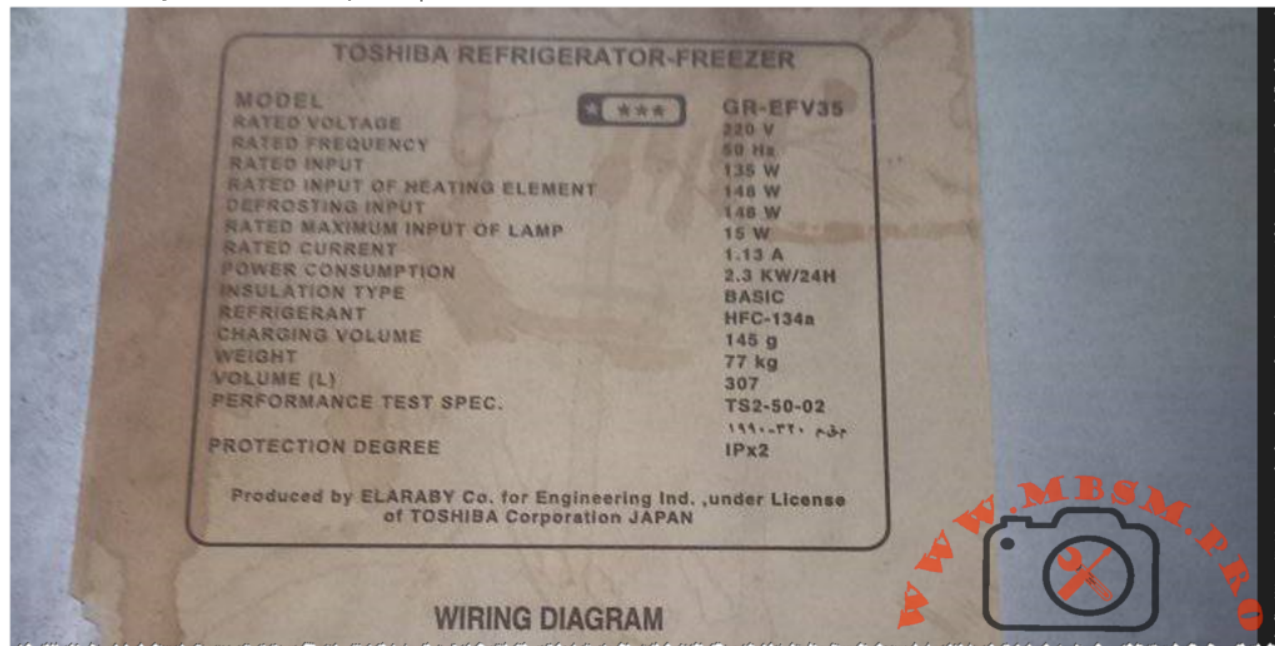

Mbsm.pro, TOSHIBA, REFRIGERATOR, FREEZER, GR-EFV35, 12 feet, 3 D00R, 307 L,  
compressor, 1/5 hp, 140 w, lbp, r134a, 145 g

Deep Freezer, Crown, CR120w, 120 L,  
140 W, 1.1 a, r600a, 40 g, 4.23 feet,  
Compressor , 1/6 hp, Lbp, 140 w,

Category: expertise

written by Amina | 9 March 2024




Deep Freezer, Crown, CR120w, 120 L, 140 W, 1.1 a, r600a, 40 g, 4.23 feet, Compressor , 1/6 hp, Lbp, 140 w,

---

**Mbsm.pro, refrigerator, No frost, brf-44wa, 44wa-140, 12 feet, 340wL, 140 w, Compressor, 1/5 hp, r134a, 140 G, defrost power 155 w**

Category: compressor, Refrigerator  
written by [www.mbsm.pro](http://www.mbsm.pro) | 9 March 2024

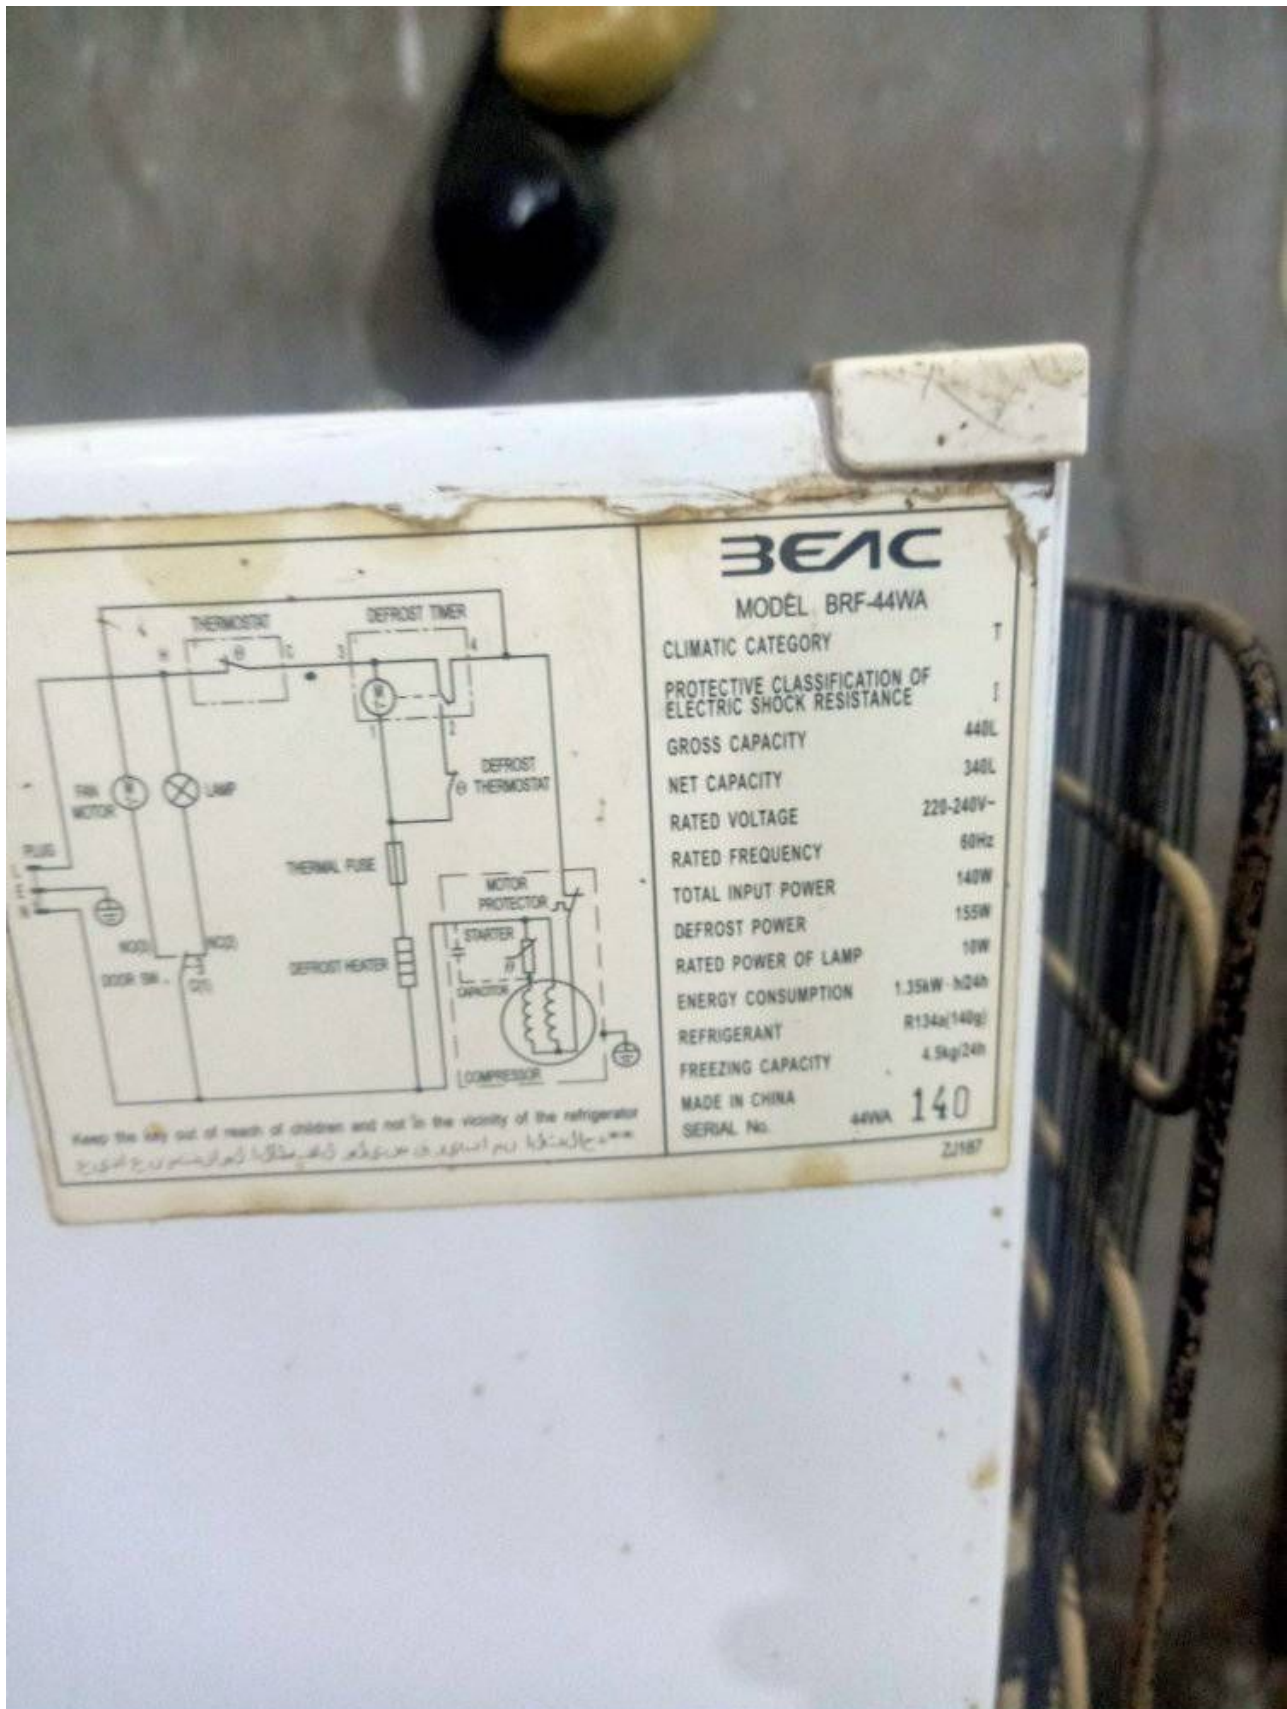

**BEAC**

MODEL BRF-44WA

CLIMATIC CATEGORY	T
PROTECTIVE CLASSIFICATION OF ELECTRIC SHOCK RESISTANCE	I
GROSS CAPACITY	440L
NET CAPACITY	340L
RATED VOLTAGE	220-240V~
RATED FREQUENCY	60Hz
TOTAL INPUT POWER	140W
DEFROST POWER	155W
RATED POWER OF LAMP	10W
ENERGY CONSUMPTION	1.35kW-h/24h
REFRIGERANT	R134a(140g)
FREEZING CAPACITY	4.5kg/24h
MADE IN CHINA	
SERIAL No.	44WA 140

Keep the key out of reach of children and not in the vicinity of the refrigerator  
 احتفظوا بمفتاح التبريد بعيداً عن متناول الأطفال ولا في مكان قريب من الثلاجة

Z/187

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, refrigerator, No frost, brf-44wa, 44wa-140,12 feet, 340wL, 140 w, Compressor, 1/5 hp, r134a, 140 G, defrost power 155 w

Mbsm.pro, Freezer, Electrostara, 210 L, ES210ST, Compressor, Donper, L65CZ1, 1/5 hp, 1bp, R134 A, 130 G, 220-244V, 50Hz, 140 w, 1 A, Class T

Category: expertise,Freezer

written by [www.mbsm.pro](http://www.mbsm.pro) | 9 March 2024



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Freezer, Electrostara, 210 L, ES210ST, Compressor, Donper, L65CZ1, 1/5 hp, lbp, R134 A, 130 G, 220-244V, 50Hz, 140 w, 1 A, Class T

---

Sangchai refrigeration, Fl series, Rl series, Cl series, Hitachi Compressor, FL1675-sc, 1/5 Hp, R-134A, Low back pressure, 160 w, Deplacement 7.5 cm cube, 220-240 v 50 hz

Category: compressor

written by www.mbsm.pro | 9 March 2024

**Hitachi Hermetic Compressors**

**FL Series**

**STANDARD MODEL**

Application & Refrigerant LBP R134a

Model	Nominal Power		Cooling Capacity				D cm3	Cooling			O cm3	Wg Kg	Motor Type	Power Source					Dimension Type - H
	HP	W	Hz	W	Kcal/h	BTU/h		N	Oil	Fan				1	2	3	4	5	
FL0634	1/12	65	50	78	67	266	3.42				200	6.8		•			•	Type1-165	
		60	90	77	307	•								•	•				
FL0739	1/10	75	50	95	82	324	3.94				270	7.8		•			•	Type1-179	
		60	108	93	368	•								•	•				
FL0845	1/8	85	50	105	90	358	4.50				270	8.1	RSIR	•			•	Type2-180	
		60	118	101	403	•								•	•				
FL1052	1/6	100	50	120	103	409	5.19	•			270	8.3	CSIR	•			•	Type1-195	
		60	140	120	478	•								•	•				
FL1157	1/6	110	50	135	116	461	5.70				240	8.7		•			•	Type1-195	
		60	158	136	539	•								•	•				
FL1262	1/5	125	50	150	129	512	6.23	•			320	9.5		•			•	Type2-200	
		60	170	146	580	•								•	•				
FL1675	1/5	160	50	185	159	631	7.47		•	•	300	10.6		•			•	Type3-211	
		60	210	181	717	•								•	•				
FL1888	1/4	180	50	215	185	734	8.83		•	•	300	11.1		•			•	Type4-216	
		60	250	215	853	•								•	•				

Private Picture Copyright: WWW.MBSM.PRO

Sangchai refrigeration, Fl series, Rl series, Cl series, Hitachi Compressor, FL1675-sc, 1/5 Hp, R-134A, Low back pressure, 160 w, Deplacement 7.5, 220-240 v 50 hz



**Hitachi Hermetic Compressors**

**FL Series**

**STANDARD MODEL**

Application & Refrigerant LBP R134a


Model	Nominal Power		Cooling Capacity				D	Cooling			O	Wg	Motor Type	Power Source					Dimension
	HP	W	Hz	W	Kcal/h	BTU/h		N	Oil	Fan				cm3	Kg	1	2	3	
FL0634	1/12	65	50	78	67	266	3.42				200	6.8		•			•	Type1-165	
			60	90	77	307								•	•	•			
FL0739	1/10	75	50	95	82	324	3.94				270	7.8		•			•	Type1-179	
			60	108	93	368								•	•	•			
FL0845	1/8	85	50	105	90	358	4.50				270	8.1	RSIR	•			•	Type1-179	
			60	118	101	403								•	•	•			
FL1052	1/6	100	50	120	103	409	5.19	•			240	8.7	CSIR	•			•	Type1-195	
			60	140	120	478								•	•	•			
FL1157	1/6	110	50	135	116	461	5.70				240	8.7		•			•	Type1-195	
			60	158	136	539								•	•	•			
FL1262	1/5	125	50	150	129	512	6.23	•			320	9.5		•			•	Type2-200	
			60	170	146	580								•	•	•			
FL1675	1/5	160	50	185	159	631	7.47		•	•	300	10.6		•			•	Type3-211	
			60	210	181	717								•	•	•			
FL1888	1/4	180	50	215	185	734	8.83		•	•	300	11.1		•			•	Type4-216	
			60	250	215	853								•	•	•			

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

## Detail of Label

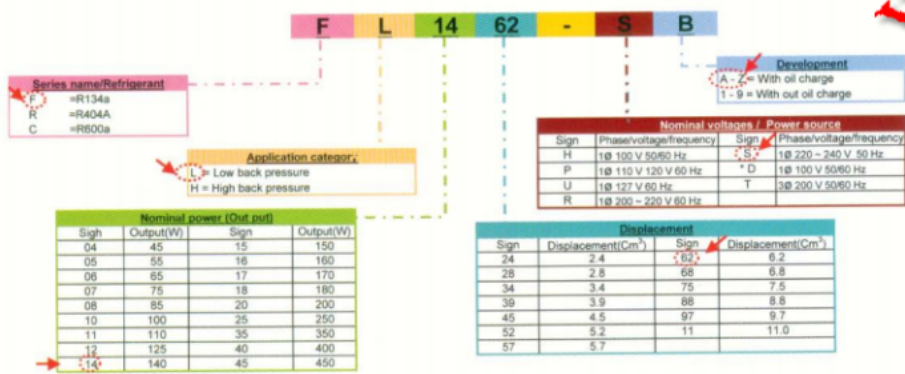

Private Picture Copyright: WWW.MBSM.PRO

Mbsm\_dot\_pro\_private\_PDF\_Hitachi-catalogueTélécharger  
Mbsm\_dot\_pro\_private\_PDF\_FL1675Télécharger