Mbsm.pro, DONPER, Refrigeration, Compressor, S96CY1, H170CY1, R600a (56 g), LBP, 240V 50HZ, 1/5 HP, 155W, CHEST FREEZER, Nikai, NCF340N5, Nikai 340L Chest Freezer

Category: compressor
written by www.mbsm.pro | 22 June 2024



Mbsm.pro, DONPER, Refrigeration, Compressor, S96CY1, H170CY1, R600a (56 g), LBP, 240V 50HZ, 1/5 HP, 155W, CHEST FREEZER, Nikai, NCF340N5, Nikai 340L Chest Freezer

---

Mbsm.pro, Compressor, 155w, 1/5 hp, lbp, R600a, New Dongbei, HU155CY1, LC111CY, LW60CY

Category: compressor
written by www.mbsm.pro | 22 June 2024



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, 155w, 1/5 hp, lbp, R600a, New Dongbei, HU155CY1, LC111CY, LW60CY



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO




Private Picture Copyright : WWW.MBSM.PRO

ZMC, zanussi, Made in Egypt, Compressor, Frost Free Freezer, GM90AZ, EGM90AZ, 155W, 1/5Hp, 134A,

150G, Electrostar Freezer, 260L CRoss, 235L STorage , 220v-50H, 1.2A, Class T

Category: compressor
written by www.mbsm.pro | 22 June 2024

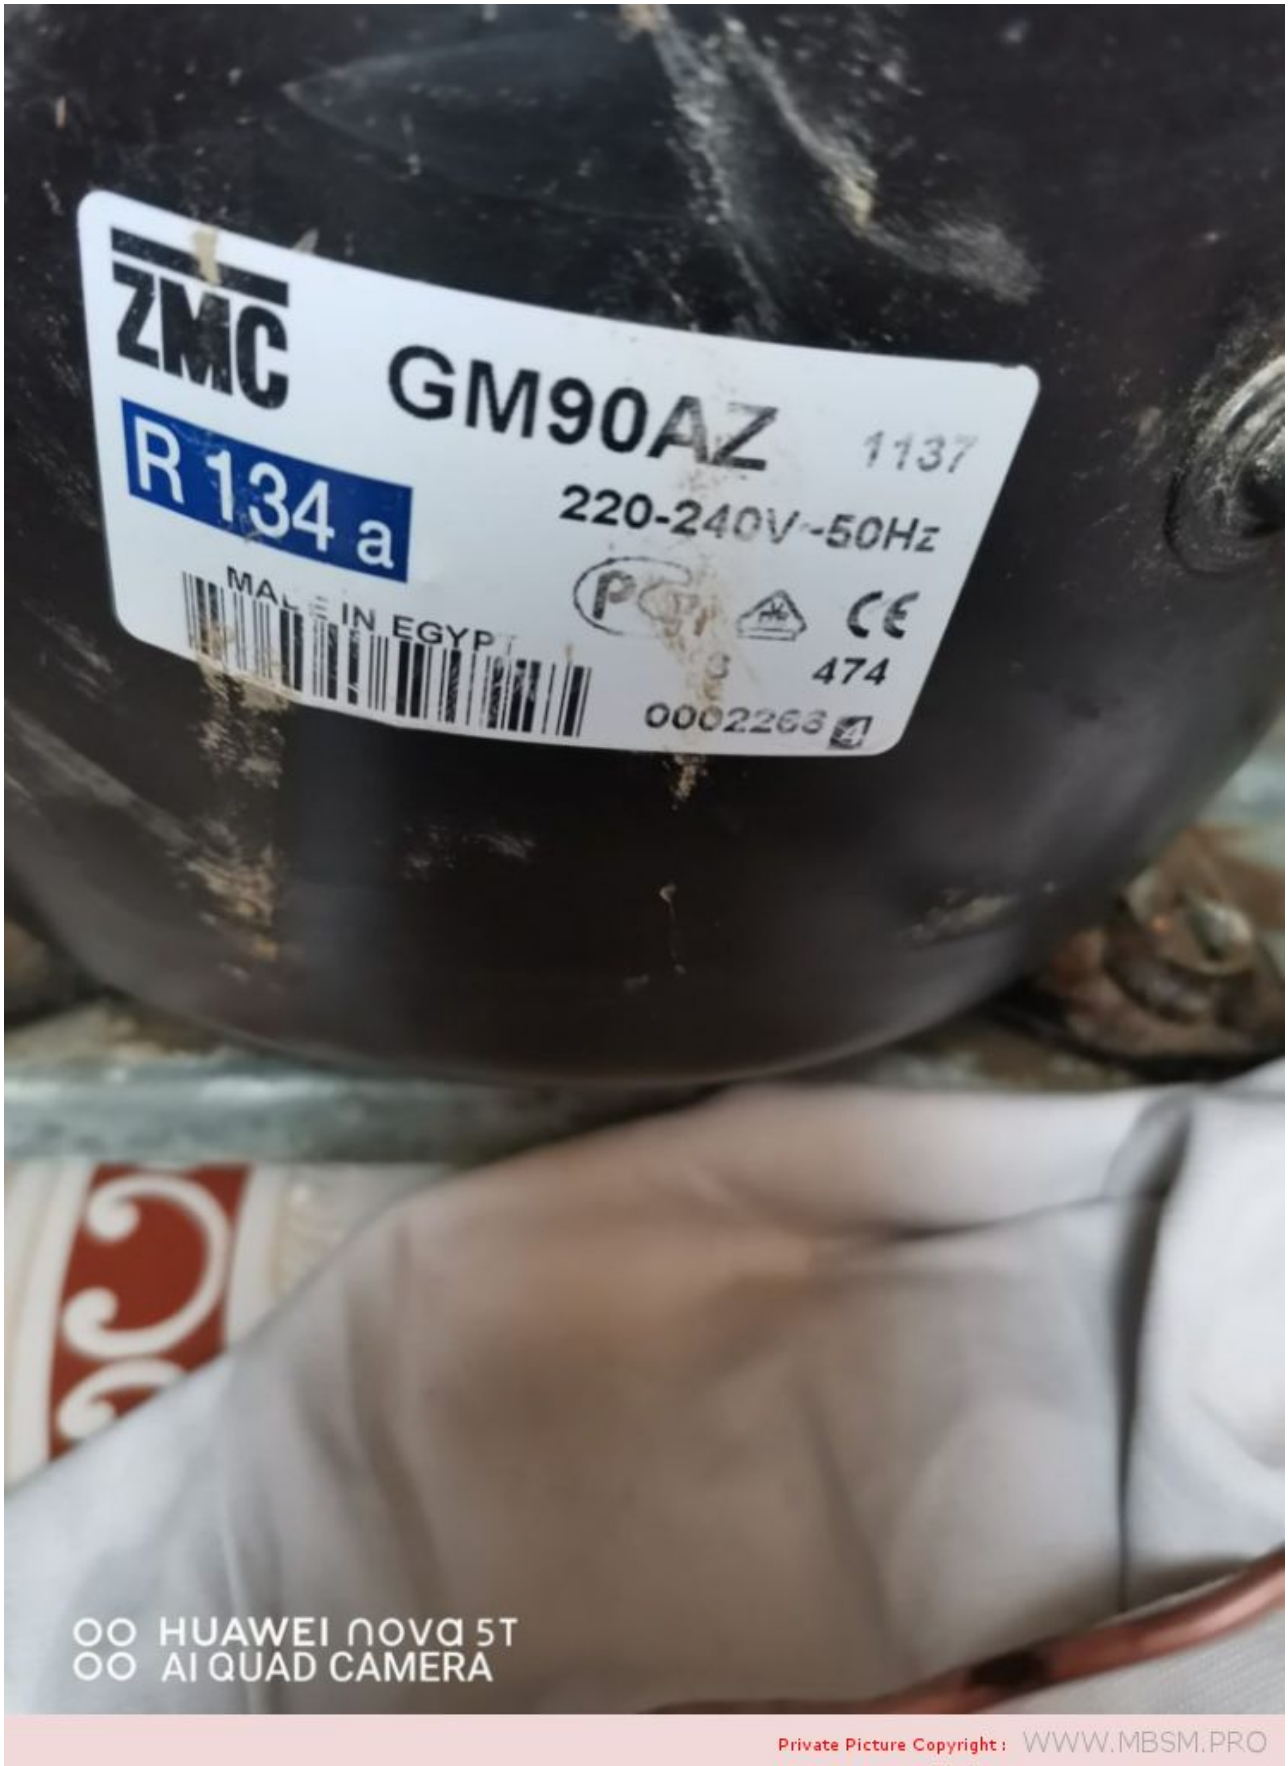

COMPRESSOR TECHNICAL DATA

General Data

Refrigerant:	R134a
Application:	LBP

Evaporating Temperature Range:	-30°C to -10°C
Voltage/Frequency:	220/240V/50 HZ
Compressor Cooling:	Static
Expansion Device:	Capillary Tube
Packaging Quantity:	Multi – 96:120 pcs
Approvals:	CE-VDE-GOST

Mechanical Data

Oil Charge:	300 cm3
Oil Type Configuration:	ester
Oil Type Viscosity:	19 cSt
Weight:	10 kg

Electrical Data

Motor Type:	RSIR / RSCR*
Voltage working range at 50 Hz:	187-264V
Maximum Motor Temperature:	130°C
Locked Rotor Current:	14.46 / 9.86 A
Start Winding Resistance:	23.40Ω at 25°C
Run Winding Resistance:	8.08 Ω at 25°C
Phase:	1 ph

External Characteristics


Internal Diameter	(mm)
Suction Connector	6.5
Discharge Connector	4.9
Process Connector	6.5
Material	Copper

Electrical Components

Starting Device:	PTC 14Ω
Motor Protection:	T0490/xx



Private Picture Copyright : WWW.MBSM.PRO

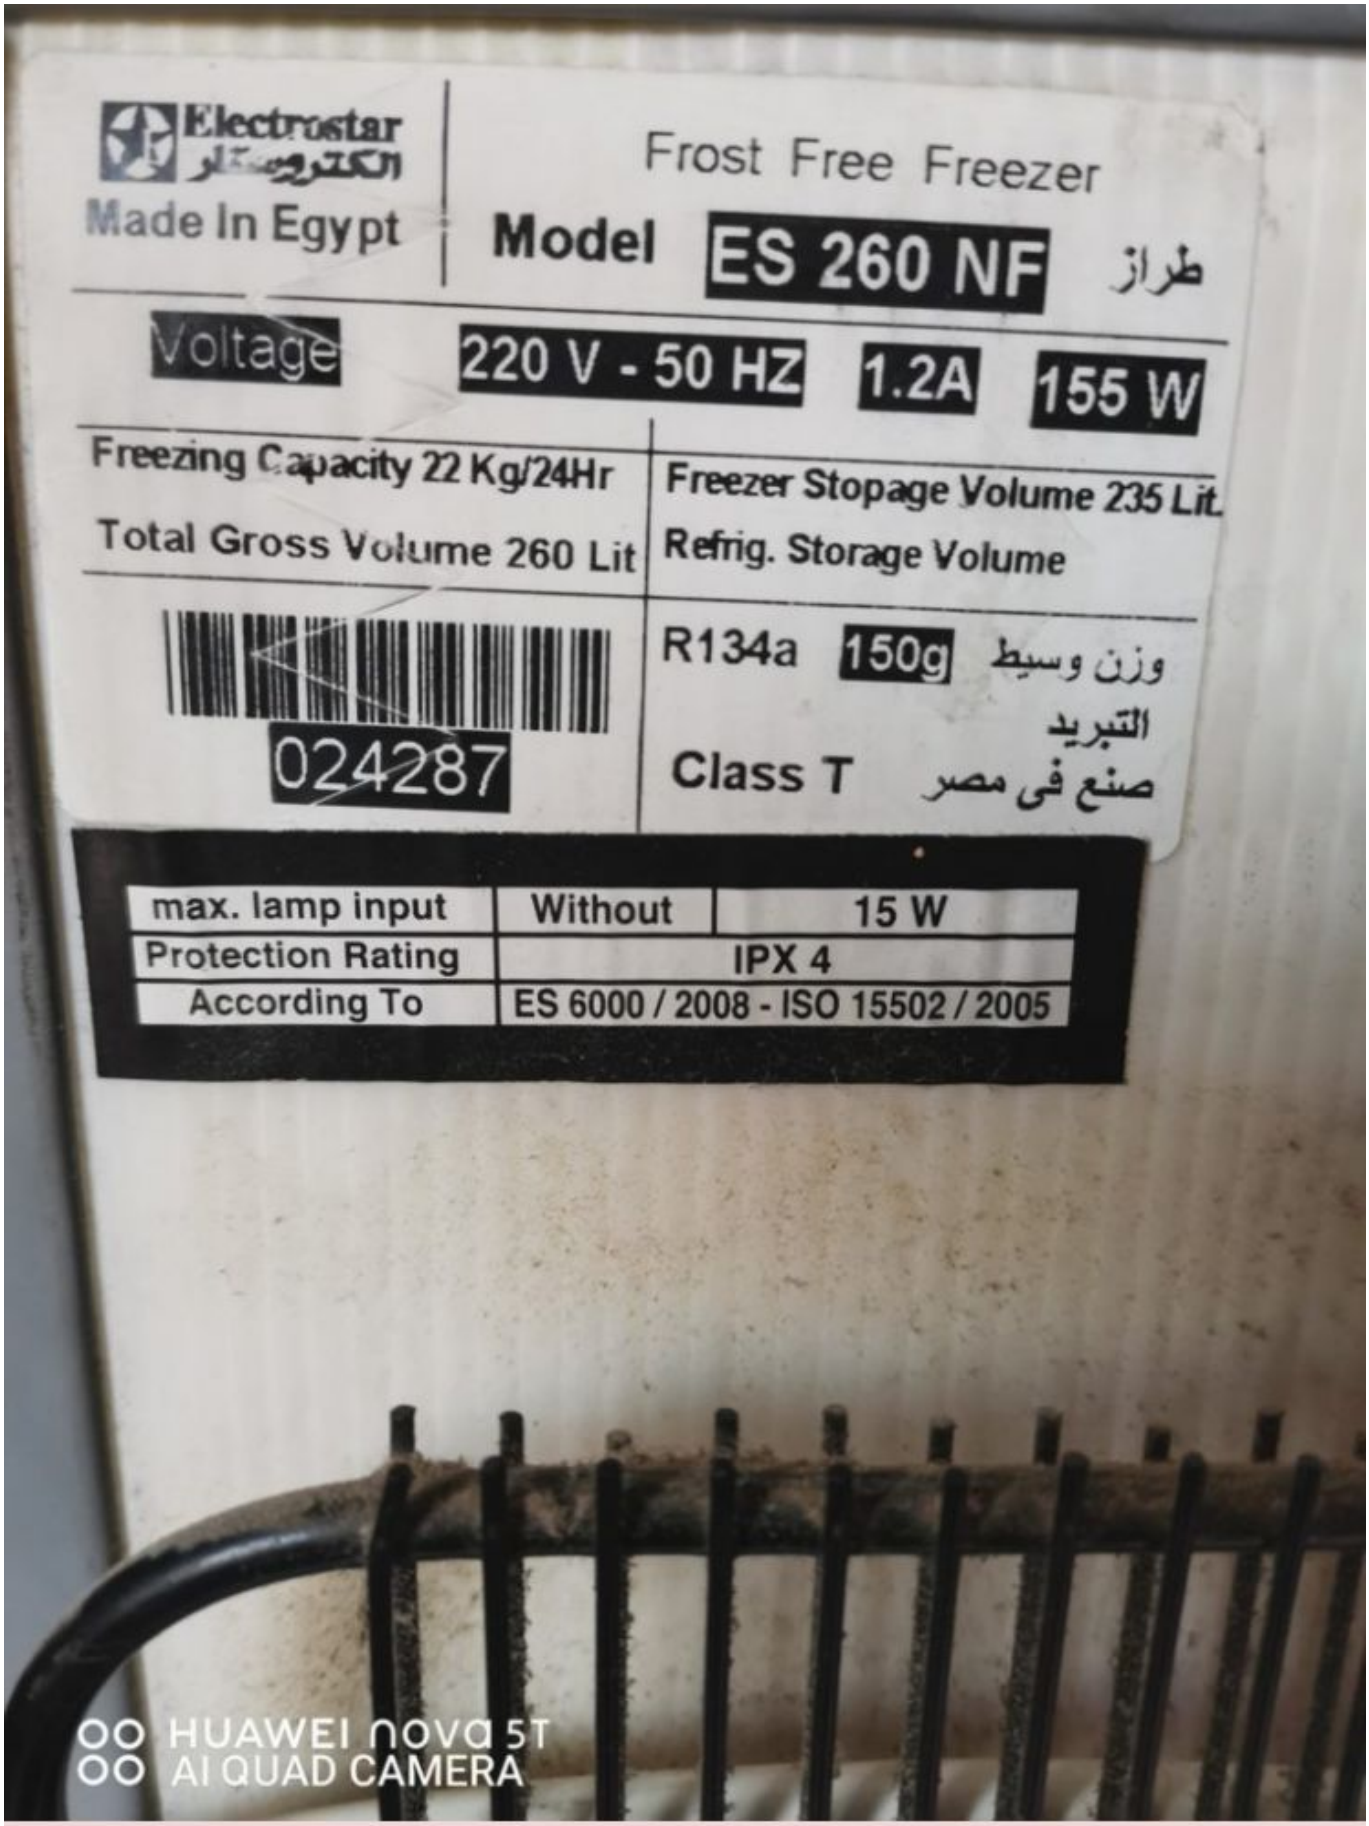

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_EGM90AZTélécharger

Hitachi Compressor, LBP, R134a, FL1152-RG, 1/6 Hp, 155W, série R012

Category: compressor
written by www.mbsm.pro | 22 June 2024

Code No.	Model	HP	Capacity (W)	Current (A)	Efficiency COP (w/w)	Voltage / Frequency
R134a Models						
R012001	FL 06S34-TAB	1/12	85	0.70	0.93	220V – 240V / 50Hz
R012002	FL 0739-SQ	1/10	114	0.72	1.20	
R012003	FL 0847-SD	1/8	130	0.83	1.19	
R012005	FL 1152-SB	1/6	143	0.82	1.27	
R012006	FL 1257-SR	1/5	160	0.90	1.25	
R012007	FL 14S62-TAD	1/5	175	0.95	1.30	
R012008	FL 1568-SQ	1/4	200	1.11	1.30	
R012009	FL 20S88-TAC	1/3	255	1.50	1.25	
R012010	FL1888-SE	1/3	245	1.51	1.25	
R600a Models						
	CL 0545-SZ	1/12	62	0.70	1.12	220V – 240V / 50Hz
	CL 1297-SA	1/5	156	0.90	1.46	
	CL 1310-SA	1/5+	163	0.95	1.48	
R600a Models (Inverter)						
	CL 1588-DZ	1/6	134	0.83	1.62	220V – 240V / 50Hz
	CL 1610-DL	1/5	160	0.90	1.65	


Private Picture Copyright : WWW.MBSM.PRO

Code No.	Model	HP	Capacity (W)	Current (A)	Efficiency COP (w/w)	Voltage / Frequency
R134a Models						
R012001	FL 06S34-TAB	1/12	85	0.70	0.93	220V – 240V / 50Hz
R012002	FL 0739-SQ	1/10	114	0.72	1.20	
R012003	FL 0847-SD	1/8	130	0.83	1.19	
R012005	FL 1152-SB	1/6	143	0.82	1.27	
R012006	FL 1257-SR	1/5	160	0.90	1.25	
R012007	FL 14S62-TAD	1/5	175	0.95	1.30	
R012008	FL 1568-SQ	1/4	200	1.11	1.30	
R012009	FL 20S88-TAC	1/3	255	1.50	1.25	
R012010	FL1888-SE	1/3	245	1.51	1.25	
R600a Models						
	CL 0545-SZ	1/12	62	0.70	1.12	220V – 240V / 50Hz
	CL 1297-SA	1/5	156	0.90	1.46	
	CL 1310-SA	1/5+	163	0.95	1.48	
R600a Models (Inverter)						
	CL 1588-DZ	1/6	134	0.83	1.62	220V – 240V / 50Hz
	CL 1610-DL	1/5	160	0.90	1.65	

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

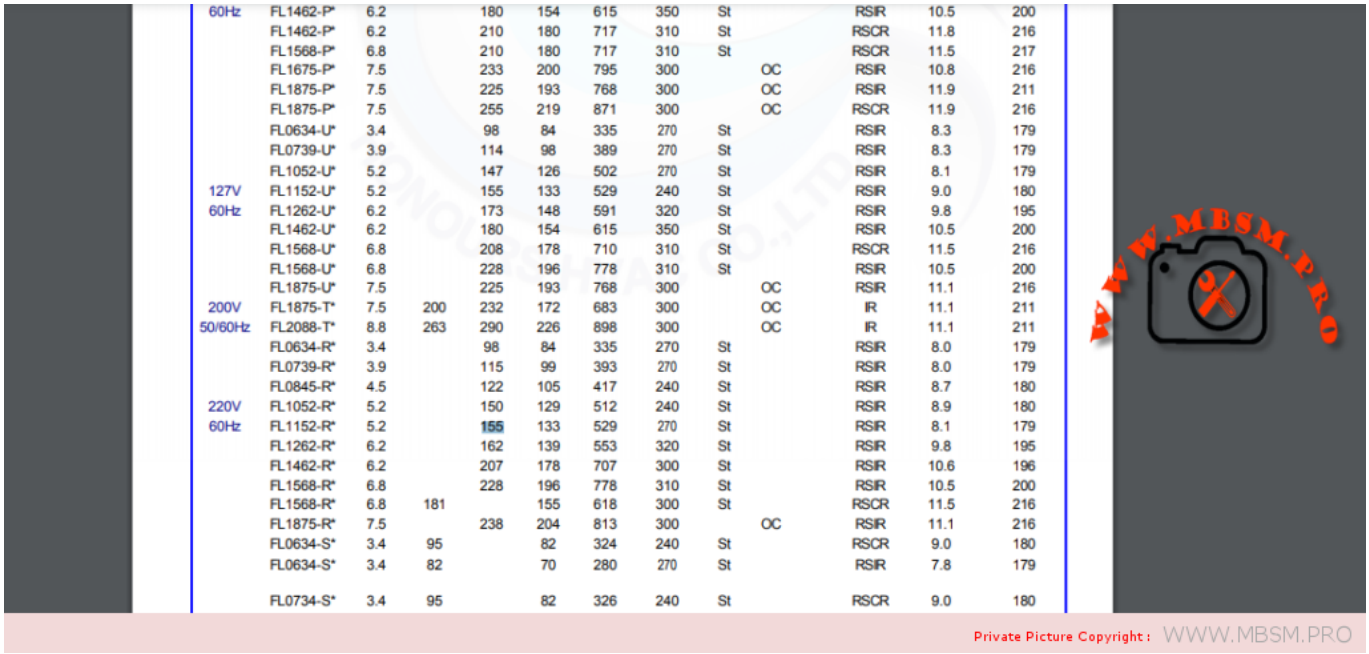

60Hz	FL1462-P*	6.2		180	154	615	350	St		RSIR	10.5	200
	FL1462-P*	6.2		210	180	717	310	St		RSCR	11.8	216
	FL1568-P*	6.8		210	180	717	310	St		RSCR	11.5	217
	FL1675-P*	7.5		233	200	795	300		OC	RSIR	10.8	216
	FL1875-P*	7.5		225	193	768	300		OC	RSIR	11.9	211
	FL1875-P*	7.5		255	219	871	300		OC	RSCR	11.9	216
	FL0634-U*	3.4		98	84	335	270	St		RSIR	8.3	179
	FL0739-U*	3.9		114	98	389	270	St		RSIR	8.3	179
	FL1052-U*	5.2		147	126	502	270	St		RSIR	8.1	179
127V	FL1152-U*	5.2		155	133	529	240	St		RSIR	9.0	180
60Hz	FL1262-U*	6.2		173	148	591	320	St		RSIR	9.8	195
	FL1462-U*	6.2		180	154	615	350	St		RSIR	10.5	200
	FL1568-U*	6.8		208	178	710	310	St		RSCR	11.5	216
	FL1568-U*	6.8		228	196	778	310	St		RSIR	10.5	200
	FL1875-U*	7.5		225	193	768	300		OC	RSIR	11.1	216
200V	FL1875-T*	7.5	200	232	172	683	300		OC	IR	11.1	211
50/60Hz	FL2088-T*	8.8	263	290	226	898	300		OC	IR	11.1	211
	FL0634-R*	3.4		98	84	335	270	St		RSIR	8.0	179
	FL0739-R*	3.9		115	99	393	270	St		RSIR	8.0	179
	FL0845-R*	4.5		122	105	417	240	St		RSIR	8.7	180
220V	FL1052-R*	5.2		150	129	512	240	St		RSIR	8.9	180
60Hz	FL1152-R*	5.2		155	133	529	270	St		RSIR	8.1	179
	FL1262-R*	6.2		162	139	553	320	St		RSIR	9.8	195
	FL1462-R*	6.2		207	178	707	300	St		RSIR	10.6	196
	FL1568-R*	6.8		228	196	778	310	St		RSIR	10.5	200
	FL1568-R*	6.8	181		155	618	300	St		RSCR	11.5	216
	FL1875-R*	7.5		238	204	813	300		OC	RSIR	11.1	216
	FL0634-S*	3.4	95		82	324	240	St		RSCR	9.0	180
	FL0634-S*	3.4	82		70	280	270	St		RSIR	7.8	179
	FL0734-S*	3.4	95		82	326	240	St		RSCR	9.0	180

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_FL1152-RGTélécharger

---

www.mbsm.pro, COMPRESSOR , 1/5Hp ,EGL75AA , R134A, 155W, LBP, 7.39CM3

Category: Solutions,Tester ok
written by www.mbsm.pro | 22 June 2024



PictureS Mbsm Dot Pro : www.mbsm.pro

Low-temperature refrigerator compressor with a cylinder capacity of 7.39cm 3 and a cooling capacity of 155W. Works with refrigerant R134a.