

# mbsm.pro , Compresseur Aspera , Embraco ,NEK2168GK , R404a/R507 , LBP ,3/4 HP,nominal output: 707 W

Category: Technologie,Tester ok  
written by www.mbsm.pro | 18 April 2019



Picture5 Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

EMBRACO is a company specialized in cooling solutions and world leader in the hermetic compressor market. Our mission: provide innovative solutions for a better quality of life, always attentive to technological excellence and sustainability. Technological leadership, operational excellence and sustainability are some of the pillars which ensure the EMBRACO differential over other companies in the world market. Its products are now considered the favorite leading home appliance manufacturers by major automakers and are spotlighted by manufacturers of commercial refrigeration equipment. With global operations and production capacity exceeding 34 million units a year, the company offers solutions that are differentiated for their innovation and low energy consumption. Its 11.500 employees work in factories and offices located in Brazil

(headquarters), China, Italy, Slovakia, Mexico, the United States and Russia. Energy efficiency is constantly sought in the processes, products and relationships with the communities where it operates. Our company is the absolute leader in this segment, being able to offer products that meet the most restrictive international standards regarding energy consumption. As a worldwide leader, EMBRACO tries to anticipate market changes, and in doing so, our company is in a state of permanent transformation. We continuously assess our processes in order to maintain our leadership within the industry and promote growth, without forgetting the pillars of our organization.


**Compressor ASPERA NEK2168GK | NEK 2168 GK**

Refrigerant	R404/R507
Working range[stC] <b>LBP</b>	-40 to -10
Nominal capacity [W] (evaporating temperature -23,3C, Condensing temperatur +54,4C)	688
Power supply	220-240V 50Hz
Engine type	CSIR
Displacement [cm³]	14,28
Weight [kg]	11,6
Evaporating temperature +55 C	

<b>Evaporating Temperature</b>	<b>Cooling Capacity +/-5%</b>	<b>Power Consumption +/-5%</b>	<b>Current Consumption +/-5%</b>	<b>Gas Flow Rate +/-5%</b>	<b>Efficiency +/-7%</b>			
°C	(kcal/h)	(W)	(Btu/h)	(W)	(A)	(kg/h)	(kcal/Wh)	(W/W)
-40	226	263	897	370	3,46	6,01	0,61	0,71
-35	309	359	1.224	435	3,57	8,22	0,71	0,82
-30	413	481	1.640	506	3,73	11,06	0,82	0,95
-25	541	629	2.146	584	3,95	14,52	0,93	1,08
-20	691	803	2.740	668	4,21	18,64	1,03	1,20
-15	863	1.004	3.424	759	4,53	23,43	1,14	1,32
-10	1.058	1.230	4.197	856	4,90	28,92	1,24	1,44

Refrigerant: R404A, R507

		R404A / R507							
		LBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]	MBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]
NE NEK	NEK2117GK	A	125	4,51	NEK6144GK	A	550	4,51	
	NEK2121GK	A	151	5,44	NEK6165GK	A	743	6,20	
	NEK2125GK	A	182	6,20	NEK6181GK	A	841	7,28	
	NEK2130GK	A	213	7,37	NEK6210GK	A / N	1.005	8,77	
	NEK2134GK	A / N	248	8,77	NEK6213GK	A	1.337	12,11	
	NEK2150GK	A	329	12,11	NEK6217GK	A / N	1.164	14,28	
	NEK2168GK	A	378	14,28					
	NEK2172GK	C	819	16,80					

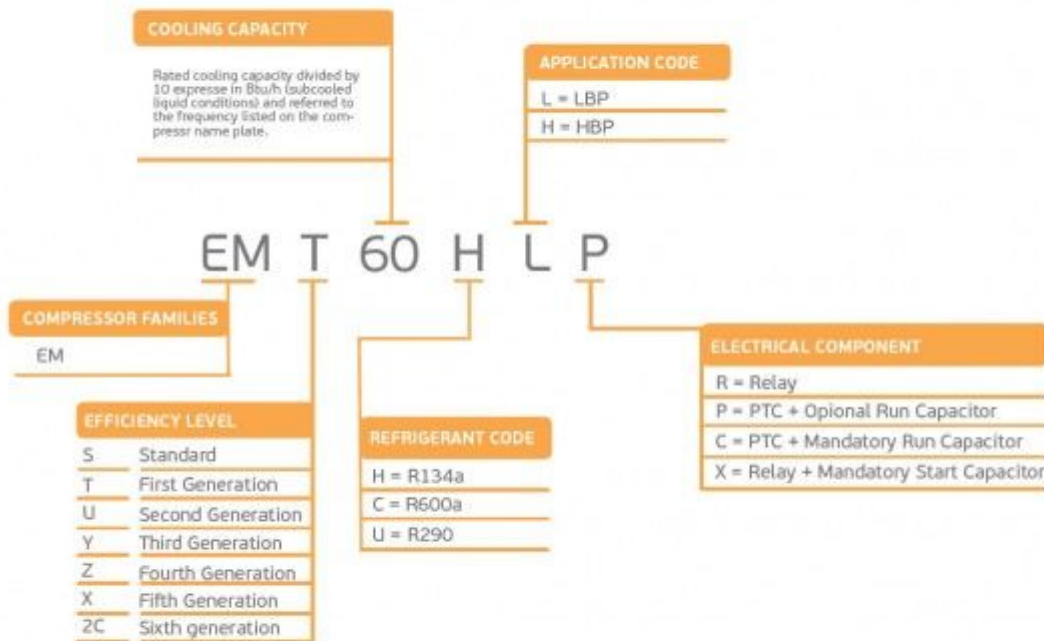

embraco **NEK**



**R404A**

**LBP**

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)



Picture5 Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

mbsm.pro , Compresseur Aspera , Embraco NEK2168GK , R404A , LBP ,3/4 HP  
Compresseur hermetique de Aspera – Embraco NEK2168GK – R404A  
3/4 HP  
220-240V 50 Hz  
Cylindrée = 14.3 CM3  
APPLICATIONS = LBP  
Moteur type: CSR

---

**[www.mbsm.pro](http://www.mbsm.pro), AEZ1360A, Kirby,  
Tecumseh, Compressors ,low back,  
pressure, models, 240v/50HT , 1PH ,  
1/5Hp , Gaz 12A**

Category: Solutions,Technologie,Tester ok  
written by [www.mbsm.pro](http://www.mbsm.pro) | 18 April 2019



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

Points forts : Compresseur aez1360a pour réfrigérateur fagor FAGOR  
MA-10CA562COMP-QZQAZ

www.mbsm.pro , Original New, ASD53K,  
Original New 1/6HP, R134a, LBP,  
Wanbao, Refrigerator, compressor,  
China, R134A, 220V/50Hz, 1PH, 144W,  
Huaguang, Refrigerator Reciprocating

Category: Solutions,Technologie,Tester ok  
written by Jamila | 18 April 2019



Picture5 Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

[www.mbsm.pro](http://www.mbsm.pro) , Original New, ASD53K, Original New 1/6HP, R134a, LBP, Wanbao, Refrigerator, compressor, China, R134A, 220V/50Hz, 1PH, 144W, Huaguang, Refrigerator Reciprocating

www.mbsm.pro , TLES7FT.4 ,  
COMPRESSORE SECOP ,TLES7FT.4 4707,  
R134a , LBP ,1/4 hp/60hz, 1/5 hp/50hz  
, 1ph ,Danfoss,4707, compressors  
,medium temperature, Kiriazi 335l

Category: Technologie,Tester ok  
written by www.mbsm.pro | 18 April 2019



Private Picture Copyright : WWW.MBSM.PRO

www.mbsm.pro , TLES7FT.4 , COMPRESSORE SECOP ,TLES7FT.4 , R134a , LBP ,Danfoss  
compressors ,medium temperature, HMBP

---

Mbsm.Pro , Tecumseh Refrigeration  
Compressor, CAE9460Z ,R404A  
refrigerant ,3/8 hp, mhbp, 1/2HP  
,1PH(phase) , 220V to 240V

Category: Solutions,Tester ok  
written by Jamila | 18 April 2019

411445

   
6B88330200  
CAE9460Z

R404A LRA 17  
220-240V ~ 50Hz I<sub>LA</sub> 3.40

  
53 D1510 10 195819 A  
COUNTRY OF ORIGIN: FRANCE THERMALLY PROTECTED

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

Mbsm.Pro , Tecumseh Refrigeration Compressor ,R404A refrigerant ,1/2HP  
,1PH(phase) , 220V to 240V

- Brand Name:Tecumseh
- Certification:RoHS
- Application:Refrigeration Parts
- Type:Refrigeration Compressor

411445

   
6B88330200  
CAE9460Z

R404A LRA 17  
220-240V ~ 50Hz I<sub>A</sub> 3.40

  
53 D1510 10 195819 A  
COUNTRY OF ORIGIN: FRANCE THERMALLY PROTECTED

**LOW BACK PRESSURE COMPRESSORS**

Type	COMPRESSOR MODELS	Nominal Power (H.P.)			REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)								VOLTAGE
		t	Refrigerant	Displacement (cm <sup>3</sup> )	Evaporating Temperature								
					Oil charge (cm <sup>3</sup> )	-45°C	-40°C	-35°C	-30°C	-23.3°C	-20°C	-10°C	
				t		t	t	t	t	t	t	t	
PISTON	AEZ2415Z	7/16	R404A	8.1	350			160	231	355	429	703	220-240V/1/50Hz
	CAE2417Z	7/16	R404A	11.3	350	37.8	62	161	280	460	557	891	220-240V/1/50Hz
	CAE2420Z	1/2	R404A	12.6	350	194	179	232	357	547	654	1047	220-240V/1/50Hz
	CAE2424Z	5/8	R404A	15.1	350	228	180	291	442	664	783	1199	220-240V/1/50Hz
	CAJ2428	3/4	R404A	15.2	887			306	434	628	773	1246	220-240V/1/50Hz 400V/3/50Hz
	TAJ2428Z												
	CAJ2432Z	3/4	R404A	18.3	887	331	285	318	510	792	950	1560	220-240V/1/50Hz 400V/3/50Hz
	TAJ2432Z												
	CAJ2440Z	1	R404A	21	887	532	394	452	647	975	1166	1876	220-240V/1/50Hz
	CAJ2446Z	1	R404A	26.15	887	702	575	549	797	1194	1423	2290	220-240V/1/50Hz 400V/3/50Hz
	TAJ2446Z												
	CAJ2464Z	1-1/2	R404A	34.45	887	805	626	723	1076	1605	1902	3012	220-240V/1/50Hz 400V/1/3/50Hz
	TAJ2464Z												
	FH2480Z	2	R404A	53.2	1625	292	420	738	1319	2183	2662	4419	220-240V/1/50Hz 400V/3/50Hz
TFH2480Z													
FH2511Z	3	R404A	74.25	1625	1561	1203	1380	2016	3135	3796	6222	220-240V/1/50Hz 400V/3/50Hz	
TFH2511Z													
TAG2516Z	4	R404A	112.5	1960	1696	1407	1743	2704	4356	5335	9038	400V/3/50Hz	
TAGP2516Z													
TAG2522Z	6	R404A	134.8	1960	2541	2012	2378	3542	5522	6688	11062	400V/3/50Hz	
TAGP2522Z													
TAG2532Z	8	R404A	225	2030	2200	2814	2488	5400	8710	10871	18078	400V/3/50Hz	

Picture5 Mbsm Dot Pro : www.mbsm.pro

**THE NEW TWO GENERATION BRAZIL COMPRESSORS**

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)			REFRIGERATION CAPACITY AT 50HZ Rafed 54.5°C Cond Temp (Watts)								VOLTAGE
		t	Refrigerant	Displacement (cm <sup>3</sup> )	Evaporating Temperature								
					Oil charge (cm <sup>3</sup> )	-20°C	-15°C	-10°C	-5°C	0°C	+5°C	+10°C	
				t		t	t	t	t	t	t	t	
PISTON	AE4425Z-FZ1A	1/5	R404A	4.24	222	228	290	362	446	545	659	792	220-240V/1/50Hz
	AE4430Z-FZ1A	1/4	R404A	5.16	216	293	375	466	568	685	821	977	220-240V/1/50Hz
	AE4440Z-FZ1A	1/3	R404A	6.69	278	377	482	599	730	881	1055	1257	220-240V/1/50Hz
	AE4450Z-FZ1A	7/16	R404A	8.85	369	500	640	795	970	1170	1401	1688	220-240V/1/50Hz
	AE4460Z-FZ1C	1/2	R404A	10.33		636	784	959	1160	1380	1630	1920	220-240V/1/50Hz

**Tecumseh Compressor**

**LOW BACK PRESSURE COMPRESSORS**

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)			REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)						VOLTAGE	
		t	Refrigerant	Displacement (cm <sup>3</sup> )	Evaporating Temperature							
					Oil charge (cm <sup>3</sup> )	-35°C	-30°C	-25°C	-20°C	-15°C		-10°C
				t		t	t	t	t	t		t
ROTARY	RGA/HGA2426Z	2/3	R404A	9.50	290	375	474	590	726	888	1080	220-240V/1/50Hz
	RGA/HGA2432Z	4/5	R404A	11.50	290	451	567	707	872	1065	1290	220-240V/1/50Hz
	RGA/HGA2436Z	1	R404A	12.70	290	508	643	804	994	1219	1483	220-240V/1/50Hz

Picture5 Mbsm Dot Pro : www.mbsm.pro

## Tecumseh Compressor

### MEDIUM/HIGH BACK PRESSURE COMPRESSORS

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)		REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)								VOLTAGE	
		Displacement (cm <sup>3</sup> )	Oil charge (cm <sup>3</sup> )	Evaporating Temperature									
				Refrigerant									
				-15°C	-10°C	-5°C	0°C	+5°C	+10°C	+15°C			
ROTARY	RGA/HGA4467Z	1/2	R404A	9.50	290	679	847	1047	1283	1557	1872	2231	220-240V/1/50Hz
	BGA/HGA4480Z	2/3	R404A	11.50	290	825	1017	1252	1530	1851	2212	2613	220-240V/1/50Hz
	RGA/HGA4492Z	3/4	R404A	12.50	290	905	1133	1398	1706	2060	2468	2932	220-240V/1/50Hz
	RGA/HGA4512Z	1	R404A	16.10	290	1183	1438	1770	2160	2609	3118	3689	220-240V/1/50Hz
	RGA/HGA4445Y	1/3	R134a	9.50	290	392	493	618	770	954	1173	1430	220-240V/1/50Hz
	RGA/HGA4450Y	2/5	R134a	11.50	290	501	625	778	963	1184	1445	1749	220-240V/1/50Hz
	RGA/HGA4460Y	1/2	R134a	12.70	290	537	677	844	1045	1287	1576	1920	220-240V/1/50Hz

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)



# MBSM.PRO , Copeland , KCE432HAG , Compresseur Hermétique, 1/4HP, R134, 1ph , Afcon Industrial Equipment, High / Medium temperature (HBP / CBP)

Category: Solutions, Tester ok  
 written by Jamila | 18 April 2019

High Back Pressure			Performance Nominals						Commercial Back Pressure		
Model	HP	Displacement cc per Rev	Capacity						Coating Type (CFM)	Oil Charge Qty (cc)	Net Wt. (Kg.)
			7.2°C			-6.7°C					
			Btu/Hr.	kJ/Cal/Hr.	Watt	Btu/Hr.	kJ/Cal/Hr.	Watt			
<b>R134a, 50 Hz, 1 Phase</b>											
KCE419HAG	1/6	5.79	1585	399	465	860	217	252	Fan 350	310	10.2
KCN413CAG	1/6	6.15	-	-	-	1080	272	316	Fan 350	340	9.7
KCE425HAG	1/5	7.58	2145	540	629	1075	271	315	Fan 350	310	10.8
KCN416CAG	1/5	7.31	-	-	-	1380	338	392	Fan 350	340	9.7
KCE432HAG	1/4	9.42	2690	678	788	1330	332	390	Fan 350	310	11.5
KCE444HAG	3/8	12.05	3675	926	1077	1890	474	551	Fan 350	310	11.8
KCN444HAG	3/8	12.58	3700	932	1064	1720	433	504	Fan 350	890	20.2
KCN463HAG	1/2	15.33	5250	1323	1538	3130	789	917	Fan 350	380	11.5
KCE467HAG	1/2	18.27	5600	1411	1640	2830	713	829	Fan 350	890	21.0
KCE498HAG	3/4 +	25.91	8200	2066	2402	4100	1033	1201	Fan 350	890	21.5
<b>R134a, 60 Hz, 1 Phase, 230V</b>											
KCE432HAG	1/4	9.42	3225	813	944	1595	402	487	Fan 350	310	11.8
KCE444HAG	3/8	12.05	4275	1077	1252	2187	551	640	Fan 350	310	11.8
KCN463HAG	1/2	15.33	6300	1588	1845	3243	868	1008	Fan 350	380	11.5
KCN467HAG	1/2	18.27	6700	1688	1964	3120	786	914	Fan 350	890	21.0
KCN498HAG	3/4 +	25.91	9250	2330	2710	4633	1167	1358	Fan 350	890	21.5
<b>R134a, 60 Hz, 115V</b>											
KCE444HAG	1/3	12.05	4200	1058	1231	2175	548	637	Fan 350 FM	310	11.8
<b>R22, 50 Hz, 1 Phase</b>											
KCE443HAE	1/3	8.00	3600	907	1054	1620	408	475	Fan 350	310	11.8
KCE461HAE	1/2	11.50	5100	1285	1494	2590	653	759	Fan 350	590	13.4
KCE511HAE	1	18.27	9350	2356	2740	4210	1061	1234	Fan 350	905	21.5
KCE513HAE	1 1/4	25.91	12800	3225	3749	6366	1604	1865	Fan 350	890	22.5
CR22K6M-FF1	1 1/2+	40.80	19000	4768	5563	8920	2248	2614	Fan 400	1330	29.8
CR30K6M-FF1	2 1/2	51.47	25000	6300	7330	12000	3024	3516	Fan 400	1330	32.5
CR36K6-FFZ	3	59.65	30100	7585	8814	14200	3578	4161	Fan 400	1330	34.9
CR42K6-FFZ	3 1/2	72.08	36100	9100	10570	17300	4360	5069	Fan 400	1330	34.9
<b>R22, 50 Hz, 3 Phase</b>											
CR22K6M-TRM	1 1/2+	40.80	18350	4633	5373	8260	2092	2420	Fan 400	1330	29.5
CR30K6M-TRM	2 1/2	51.47	24400	6161	7144	11600	2923	3399	Fan 400	1330	30.0
CR36K6-TF6	3	59.66	29900	7535	8755	14500	3654	4249	Fan 400	1330	31.0
CR42K6-TF5	3 1/2	72.09	35100	8845	10278	17200	4334	5040	Fan 400	1330	32.7
KCE554HAE	4 1/2	99.96	45000	11340	13185	-	-	-	Fan 420	2250	50.1
KCE562HAE	5	117.65	52000	13100	15236	-	-	-	Fan 420	2250	50.7
KCE572HAE	6	133.22	60000	15120	17580	-	-	-	Fan 420	2250	51.4
<b>R22, 60 Hz, 1 Phase</b>											
KCE461HAE	1/2	11.50	6100	1537	1788	3082	-	-	Fan 350	510	13.4
KCE511HAE	1	18.27	10500	2646	3077	4210	1061	1234	Fan 350	905	21.5

Private Picture Copyright : WWW.MBSM.PRO

MBSM.PRO , Copeland , KCE432HAG , Compresseur Hermétique, 1/4HP, R134, 1ph , Afcon Industrial Equipment, High / Medium temperature (HBP / CBP)

# Mbsm.pro, ATA72XL, Lbp compressor, HuaGuang coolant, R134a, 220-240V 50/60Hz, 1/4HP, 1PH, 205 w, Lbp

Category: Solutions, Tester ok  
 written by Jamila | 18 April 2019



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

Mbsm.pro , ATA72XL , compressor , HuaGuang coolant , R134a , 220-240V 50/60Hz , 1/4HP , 1PH

Détails rapides

Lieu d'origine:  
Guangdong, Chine

Marque:  
Wanbao

Type:  
Compresseur de réfrigération

Application:  
Pièces de réfrigération

Certification:  
ce, CCC / CB / VDE

Réfrigérant:  
R134A

Marque:  
Wanbao

Tension:  
220-240V 50HZ

Déplacement:  
72 cm<sup>3</sup>

Refroidissement:

ST / OC

Type de moteur:

RSIR

Capacité de refroidissement:

185 W

Capacité:

631 BTU

Max. Hauteur "A":

188

Wanbao Group Compressor Co., Ltd (anciennement connue sous le nom de Guangzhou Refrigeration Company Ltd, ci-après dénommée The Co.), a commencé sa production en 1987, est le premier fabricant à introduire une technologie et des équipements étrangers pour la production à grande échelle de compresseurs de réfrigérateurs en Chine . En 2014, The Co. a acquis le fabricant de compresseurs de réfrigérateurs à l'étranger-Italie ACC, puis a fondé l'italien Wanbao-ACC Co., Ltd. Cette action améliore le compresseur Wanbao de l'internationalisation du marché à l'internationalisation de la fabrication et jette des bases solides à l'internationalisation de la marque pour la prochaine étape.

La Co.a quatre bases de production à Guangzhou, Qingdao, Hefei et en Italie, avec une capacité de production annuelle de 26 millions d'unités, forgeant ainsi une configuration mondiale stratégique couvrant les principaux clients nationaux et étrangers. Wanbao Chine approvisionne principalement les grands fabricants de réfrigérateurs nationaux, y compris Haier, Hisense, Midea, Meiling, etc., ainsi que les fabricants d'appareils électroménagers de renommée internationale, y compris Electrolux Whirlpool, etc., en tant que fournisseur mondial. Wanbao-ACC Italy est un fournisseur majeur de fabricants européens d'appareils électroménagers haut de gamme.

Modèle	Réfrigérant	Tension	Capacité de refroidissement (w)	Application	COP (w / w)
AS43	R134a	220V / 50Hz	84	LBP	0,94
AS51	R134a	220V / 50Hz	107	LBP	1,01
ASD43K	R134a	220V / 50Hz	117	LBP	1.13
ASD53K	R134a	220V / 50Hz	144	LBP	1.2
ASD65	R134a	220V / 50Hz	173	LBP	1,23
ATA72X	R134a	220V / 50Hz	205	LBP	1,35
ATA80X	R134a	220V / 50Hz	230 1/4 hp++	LBP	1,35
ANA90	R134a	220V / 50Hz	255	LBP	1,35
AQAW110R	R134a	220V / 50Hz	260	LBP	1,15
ANA120	R134a	220V / 50Hz	345	LBP	1,3

Autre compresseur de congélateur wanbao que nous avons:

Pas	HP	Modèle	Réfrigérant	Qté/Une Palette
-----	----	--------	-------------	-----------------

1	1/10HP	ASD35K	R134a	100
2	1/6HP	ASD53K	R134a	80
3	1/5HP	AQAW66X	R134a	80
4	1/4HP	AQAW77X	R134a	80
5	1/4HP Gros	AQAW91	R134a	80
6	1/3HP	AQAW110	R134a	80
7	3/8HP	AL120	R134a	80
8	1/2HP	AL150	R134a	80
9	1/2HP, grand	AL180	R134a	80

型号 Model	气缸容积 Displacement cm <sup>3</sup>	冷却方式 Cooling	电机类型 Motor Type	制冷量 Cooling Capacity		COP			认证 Certification	最大高度 "A" Max. Height "A"
				ASHRAE	CECOMAF	ASHRAE	CECOMAF			
				-23.3°C	-25°C	-23.3°C	-25°C			
				W	Btu	W	W/W	EER	W/W	

LBP

220-240V 50HZ R134a

T系列 T Series

型号	气缸容积	冷却方式	电机类型	ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF	认证	最大高度 "A"
ATA72X	7.2	ST/OC	RSIR	205	699	155.3	1.35	4.6	1.05	CCC/CB/VDE	185/188
ATA80X	8.1	ST/OC	RSIR	230	785	174.2	1.35	4.6	1.05	CCC/CB	185/188
ATK72X	7.2	ST/OC	RSCR	205	699	154.0	1.40	4.8	1.09	CCC/CB/VDE/CE	185/188
ATK80X	8.1	ST/OC	RSCR	230	785	174.0	1.40	4.8	1.09	CCC/CB	185/188
▲ATD50V	5.0	ST	RSIR	140	478	105.2	1.25	4.3	0.98	CCC/CB	182
ATD66X	6.6	ST/OC	RSIR	190	648	142.8	1.25	4.3	0.98	CCC/CB	182
△ATA50K	5.0	ST	RSIR	144	491	108.9	1.35	4.6	1.05	CCC/CB	182/185
△ATA66K	6.6	ST	RSIR	190	648	142.8	1.25	4.3	0.98	CCC/CB	182
ATA66K(OC)	6.6	OC	RSIR	190	648	143.7	1.35	4.6	1.05	CCC/CB	188
ATA72K(OC)	7.2	OC	RSIR	205	699	154.0	1.35	4.6	1.05	CCC/CB	188
ATK55	5.5	ST	RSCR	160	546	121.0	1.35	4.6	1.05	CCC/CB	185
ATK60	6.0	ST	RSCR	180	614	135.0	1.51	5.2	1.18	CCC/CB/CE	185
ATK66	6.6	ST	RSCR	192	655	144.0	1.55	5.3	1.21	CCC/CB/CE	185

Private Picture Copyright : WWW.MBSM.PRO

Mbsm\_dot\_pro\_private\_PDF\_ATA72X-220-240V\_50HZ\_R134A-1Télécharger



PictureS Mbsm Dot Pro : www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 8T  
AI QUAD CAMERA



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



REDMI NOTE 8T  
AI QUAD CAMERA



Mbsm.pro , GL80AF , ZEM, EGL80AF,  
Compressors , Hermetic compressors,  
220-230V 50/60Hz , 1/5HP , 1PH , HBP,  
R134A

Category: Solutions, Tester ok  
written by Jamila | 18 April 2019



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

Mbsm.pro , GL80AF ,ZEM Compressors , Hermetic compressors, 220-230V 50/60Hz , 1/5HP ,1PH , HBP, R134A

GD40AF 1/9 , GL45AF 1/8 , GL60AF. GL60AF, GL70AF , GL70ANa 1/5.,GL70AND. , GL80AF 1/5.

LBP															
R134a 60 Hz			CECOMAF (W)						ASHRAE		R134a 60 Hz				
			-35	-30	-25		-10	-23.3							
					W	COP		kcal/h	COP						
<b>200-220/220-230V 50/60Hz ~I</b>															
GD30AG	1/12	S	3.08	25	39	57	0.67	130	68	0.88	C	200	5.8	RSIR	P
GD40AF	1/10	S	4.03	35	54	77	0.70	171	91	0.91	C	200	6.8	RSIR	P
GL99BL	1/4	OC	9.93	102	148	204	0.93	434	239	1.21	C	470	11.3	RSCR	P
GL45AF	1/8	S	4.55	41	64	94	0.76	214	111	0.99	C	270	9.0	RSIR	P
GL60AF	1/6	S	5.99	66	94	131	0.81	286	154	1.05	C	270	9.1	RSIR	P
GL70AF	1/5	S	6.65	80	110	150	0.90	323	175	1.17	C	345	10.1	RSIR	P
GL70ANa	1/5	S	6.65	80	110	150	0.90	323	175	1.17	C	345	10.1	RSIR	P
GL70ANb	1/5	OC	6.65	80	110	150	0.90	323	175	1.17	C	445	10.4	RSIR	P
GL80AF	1/5	S	8.10	87	123	172	0.92	384	202	1.19	C	445	10.6	RSIR	P
GL80ANa	1/5	S	8.10	87	123	172	0.92	384	202	1.19	C	445	10.6	RSIR	P
GL80ANb	1/5	OC	8.10	87	123	172	0.92	384	202	1.19	C	445	10.7	RSIR	P
GL90AF	1/4	S	9.08	96	134	185	0.93	421	218	1.20	C	445	10.8	RSIR	P
GL90ANa	1/4	S	9.08	96	134	185	0.93	421	218	1.20	C	445	10.8	RSIR	P
GL90ANb	1/4	OC	9.08	96	134	185	0.93	420	218	1.20	C	445	10.9	RSIR	P
<b>115V 60Hz ~I</b>															
GD24AD	1/20	S	2.42	14	25	40	0.52	99	48	0.70	C	200	5.1	RSIR	P
GD36AD	1/12	S	3.62	30	47	68	0.65	149	80	0.85	C	240	6.1	RSIR	P
GL45ADa	1/8	S	4.55	41	65	95	0.80	214	112	1.05	C	265	8.1	RSIR	P
GL45ADb	1/8	S	4.55	41	65	95	0.80	214	112	1.05	C-V	265	8.1	CSIR	R
GL60ADa	1/6	S	5.99	64	94	132	0.85	290	155	1.10	C	265	9.1	RSIR	P
GL60ADb	1/6	S	5.99	64	94	132	0.85	290	155	1.10	C	210	9.1	CSIR	R
GL60BK	1/6	OC	5.99	66	95	132	0.84	290	155	1.10	C	400	10.0	RSCR	P
GL70ADa	1/5	S	6.65	79	108	148	0.86	322	173	1.12	C	345	9.6	RSIR	P
GL70ADb	1/5	S	6.65	79	108	148	0.86	322	173	1.12	C	345	9.6	CSIR	R
GL80ADa	1/5	S	8.10	84	121	171	0.87	383	201	1.13	C	345	9.8	RSIR	P
GL80ADb	1/5	S	8.10	84	122	171	0.87	384	201	1.13	C-V	345	9.8	CSIR	R
GL80BK	1/5	OC	8.10	79	119	169	0.85	381	200	1.11	C	470	11.1	RSCR	P
GL90ADa	1/4	S	9.08	97	138	191	0.88	420	224	1.14	C	445	10.5	RSIR	P
GL90ADb	1/4	S	9.08	97	138	191	0.88	420	224	1.14	C	445	10.5	CSIR	R



**ZMC**

**EGL80AF** 0609

**R 134 a**



200-220V~50Hz  
220-230V~60Hz



MADE IN EGYPT

3 445

0265983



					kcal/h	W	W/W	W/W	W/W	W/W
▶ <input type="checkbox"/>	<a href="#">GL45AA</a>	LBP-R134a	1/8	43	A	96	82	1.06	0.82	
▶ <input type="checkbox"/>	<a href="#">GL45AN</a>	LBP-R134a	1/8	50	C	96	81	1.05	0.8	
▶ <input type="checkbox"/>	<a href="#">GL60AA</a>	LBP-R134a	1/6	43	A	132	114	1.14	0.89	
▶ <input type="checkbox"/>	<a href="#">GL60AF</a>	LBP-R134a	1/6	43	D	132	113	1.07	0.82	
▶ <input type="checkbox"/>	<a href="#">GL60AH</a>	LBP-R134a	1/6	43	A	133	114	1.31	1.01	
▶ <input type="checkbox"/>	<a href="#">GL60AN</a>	LBP-R134a	1/6	50	C	132	114	1.07	0.83	
▶ <input type="checkbox"/>	<a href="#">GL70AA</a>	LBP-R134a	1/5	43	A	149	128	1.18	0.9	
▶ <input type="checkbox"/>	<a href="#">GL70AN</a>	LBP-R134a	1/5	50	D	150	129	1.08	0.83	
▶ <input type="checkbox"/>	<a href="#">GL70AT</a>	LBP-R134a	1/5	43	E	144	122	1.09	0.84	
▶ <input type="checkbox"/>	<a href="#">GL75AA</a>	LBP-R134a	1/5	43	A	155	133	1.18	0.92	
▶ <input type="checkbox"/>	<a href="#">GL80AA</a>	LBP-R134a	1/5	43	A	173	148	1.19	0.93	
▶ <input type="checkbox"/>	<a href="#">GL80AF</a>	LBP-R134a	1/5	43	D	166	141	1.14	0.88	
▶ <input type="checkbox"/>	<a href="#">GL80AH</a>	LBP-R134a	1/5	43	A	175	150	1.35	1.06	
▶ <input type="checkbox"/>	<a href="#">GL80AN</a>	LBP-R134a	1/4	43	A	196	168	1.36	1.06	
▶ <input type="checkbox"/>	<a href="#">GL90AA</a>	LBP-R134a	1/4	43	A	195	167	1.19	0.93	
▶ <input type="checkbox"/>	<a href="#">GL90AH</a>	LBP-R134a	1/4	43	A	215	182	1.39	1.08	
▶ <input type="checkbox"/>	<a href="#">GL90AN</a>	LBP-R134a	1/4	50	D	190	163	1.1	0.85	
▶ <input type="checkbox"/>	<a href="#">GL90AT</a>	LBP-R134a	1/4	43	E	190	163	1.18	0.87	



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

## Données techniques

- Modèle: **GL80AA**
- Gaz réfrigérant: **R-134a**
- Pression / température: **LBP**
- Puissance: **1/5 HP**
- Type de courant: **monophasé**
- Fréquence: **50 Hz**
- Type de compresseur: **hermétique**
- Déplacement: **8,10 cm<sup>3</sup>**
- Consommation d'énergie. Énergie -35 ° C: **117 W**
- Consommation d'énergie. Énergie -25°C: **158 W**
- Consommation d'énergie. Énergie -10 ° C: **237 W**
- T ° Condensation: **40 ° C**
- Capuchon de refroidissement. -35 ° C: **95 Kcal / h**
- Capuchon de refroidissement. -30 ° C: **132 Kcal / h**
- Capuchon de refroidissement. Énergie -25 ° C: **178 Kcal / h**
- Capuchon de refroidissement. -20 ° C: **234 Kcal / h**

- Capuchon de refroidissement. -15 ° C: **300 Kcal / h**
- Capuchon de refroidissement. Énergie -10 ° C: **375 Kcal / h**
- Type de test: **Ashare 32**

Mbsm\_dot\_pro\_private\_PDF\_GLy60aaTélécharger

Mbsm\_dot\_pro\_private\_PDF\_GLy60aa-1Télécharger

## Mbsm.pro, DAEWOO Compressor , HSL27YE-5, 1/4HP , 1PH, R134a ,220-240V 50Hz,Puissance frigorifique 244 W, 833 Btu / h

Category: Solutions,Tester ok

written by Jamila | 18 April 2019



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, DAEWOO Compressor , HSL27YE-5, 1/4HP , 1PH, R134a ,220-240V  
50Hz,Puissance frigorifique 244 W, 833 Btu / h

## Mbsm.pro, QA57C12GAX5 , 1PH , 1/6 HP ,Panasonic ,Matsushita Electric, Company, Malaysia , R134a , 220/240V 50Hz

Category: Solutions,Tester ok

written by Jamila | 18 April 2019



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

Mbsm.pro, QA57C12GAX5 , 1PH , 1/6 HP ,Panasonic ,Matsushita Electric, Company, Malaysia , R134a , 220/240V 50Hz



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)