

Mbsm.pro, Compressor ACC , ZEL,
HDK14AA, LBP, R600a, 1/3HP,
220-240V/1/50Hz, 240 w

Category: compressor

written by www.mbsm.pro | 24 September 2023

C 58337955

HKD14AA 16-41
220-240V, 50Hz
SUCTION
8 041 0646410 5
CE
ROHS

OK
14-10-2020

OPPO A31
11/11 14:11/5/15

Mbsm.pro, Compressor ACC , ZEL, HDK14AA, LBP, R600a, 1/3HP, 220-240V/1/50Hz, 240 W

Mbsm.pro, Compressor, cubigel, huayi, ACC, Electrolux, HPY14AA, LBP, R600a, 1/5HP, 220-240V/1/50Hz, 166 W

Category: compressor

written by www.mbsm.pro | 24 September 2023



Private Picture Copyright : WWW.MBSM.PRO

Compressors/Compressors ACC – Electrolux HP14AH, LBP – R600a, Power consumption

1/5HP, 220-240V/1/50Hz, Motor type RSIR, Injection: Capillary operation, Displacement 14.32 cm³, Oil type ISO VG10 Mineral oil, Oil quantity 300 cm³, Power 147 W at -25 / +55 °C, Power consumption 166 W, Power 0.0 W, Cooling capacity

-10 °C -15 °C -20 °C -25 °C -30 °C -35 °C

344 276 216 166 124 92

Shipping Class	Standard
Scope Of Application	LBP
Lieferzeit	2-3 Wochen
Type Of Construction	Piston
Condensation Temperature	55°C
Maker	ACC
Manufacturer No.	HPY14AA
Displacement In Cm³	14.32
Measuring Requirements	Ashrae
Refrigerants	R600a
Series	HPY
Condensing Units Compressors	Compressors
Suspense	220-240V
Weight In Kg	13

Compressor ACC Cubigel Huayi Electrolux ZEM HPY14AA, LBP -R600a, 220-240V/1/50Hz, 1/5 HP, discharge 14.32 cm³, motor type RSIR, oil type ISO VG10 mineral, oil charge 300 cm³, 166 W at -25 / +55 °, input power, current 147 W, 0.96 A, expansion device: capillar, cooling: static, weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with "immediately available" and "scarce stock", usually delivery within 2 days. For "currently not available" delivery time usually 2 weeks or delivery time in urgent cases contact us.

Refrigerant:	R600a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	6,5 mm
Suction:	8,1 mm
Working area:	LBP
Design type:	Hermetic
Model series:	HPY
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 10 Mineral
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions (length × width × height):	20,40 × 16,20 × 19,60 cm

customs tariff number:	84143081
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	HPY14AA
Modelname:	HP14AH
Stroke volume (cm ³):	14,32
Cooling capacity (W):	147
Power (HP):	0,25
Max. Starting current (A):	11,5
Max. Operating current (A):	0,96
Engine type:	RSIR
Note:	Static cooling
Oil quantity (l):	0,3
Compressor type:	Piston
Power range:	-35 C to -10 C
Alternative:	NBM1118Y , EMX70CLC , NBM1116Y
Pressure line (mm):	6,5
Suction line (mm):	8,1





Private Picture Copyright : WWW.MBSM.PRO

[Mbsm_dot_pro_private_PDF_HPYP14AA-1Télécharger](#)

[Mbsm_dot_pro_private_PDF_HPYP14AATélécharger](#)

COMPRESSOR, DANFOSS, NL8.4MF, R134A,
1/4HP, 8.35CM³, Compressor Danfoss
Secop NL8.4MF, 105G6879, MBP -R134a,
220-240V/1/50Hz, discharge 8.35 cm³,

motor type RSIR / CSIR, oil type POE,
oil charge 320 cm³, 741 W at +7.2 /
+55° C, LRA 11.7 A, maximum
refrigerant charge 600 g, height: 197
mm, weight 10.5 kg

Category: compressor

written by www.mbsm.pro | 24 September 2023



Private Picture Copyright : WWW.MBSM.PRO

230V 50/60HZ

FICHE TECHNIQUE COMPRESSEUR DANFOSS NL8.4MF AU R134A 1/4HP 8.35CM3

Puissance HP	1/4
Tension (V)	230
Fréquence (Hz)	50/60
Marque pie	DANFOSS
Cylindré	8.35

Référence marque NL8.4MF



Private Picture Copyright : WWW.MBSM.PRO

R134a	refrigerant	605089	رقم القطعة
HP 1/4	power	NL8.4MF	type
RSIR/CSIR	motor system	cm ³ 8.35	cylinder capacity
W 491	power at -5°C	W 390	power at -10°C
W 749	power at +5°C	W 610	power at 0°C
W 235	power at -20°C	W -	power at -25°C
W 912	power at +10°C	W 305	power at -15°C
HMBP	application	ASHRAE	test method
Hz 50	frequency	kg 10.5	weight
mm 197	height	V 220-240	voltage



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_NL8.4MFTélécharger

no frost, egl99aa zmc refrigerator,
DF40, silver, ideal, zanussi, IDEAL

ZANUSSI, EGL99AA ZMC, DF 40 Elgance, Compressor, ACC Cubigel, Huayi, Electrolux, ZEM GL99AA, GL99AA, LBP , R134a, 220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm³, motor type RSIR, LRA 14.4A

Category: compressor

written by www.mbsm.pro | 24 September 2023



Private Picture Copyright: WWW.MBSM.PRO



[Mbsm_dot_pro_private_PDF_GL99AA-compresseur-acc-cubigell-gl99aaTélécharger](#)
[Mbsm_dot_pro_private_PDF_GL99AATélécharger](#)

Compressor ACC Cubigel Huayi Electrolux ZEM GL99AA, LBP – R134a, 220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm³, motor type RSIR, LRA 14.4A, expansion device: capillary, cooling: static, weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with “immediately available” and “scarce stock”, usually delivery within 2 days. For “currently not available” delivery time usually 2 weeks or delivery time in urgent cases contact us.

Refrigerant:	R134a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	4,9 mm
Suction:	6,5 mm
Working area:	LBP
Design type:	Hermetic
Model series:	GL

Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 22 Ester
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions (length × width × height):	23,10 × 16,20 × 18,60 cm
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	GL99AA
Stroke volume (cm3):	9,93
Cooling capacity (W):	174
Power (HP):	0,25
Max. Starting current (A):	14,4
Max. Operating current (A):	1,31
Engine type:	RSIR
COP:	0,92
Note:	Static cooling
Conveying and suction volume (m3):	1,72
Oil quantity (l):	0,295
Compressor type:	Piston
Cooling:	Static
RPM:	2900
Power range:	-35 C to -10 C
Alternative:	HLY90AA, NL11F
Pressure line (mm):	4,9
Suction line (mm):	6,5

ZMC C **GL99AA** 0326
220-240V~50Hz
R 134a
MADE IN EGYPT
CE
482
50-3975 6

GL99AAa VE09
220-240V 50Hz ~1

COMPRESSOR

Displacement (cm ³)	9.95
Diameter (mm)	25.4
Stroke (mm)	19.62
Net Weight (Kg)	9.6
Oil type	ISO VG 22 ESTER
Oil charge (cm ³)	295

MOTOR

Approximate Power (CV)	1/4
Voltage/Frequency (V/Hz)	220V 50Hz
Voltage range (V)	187-264
Code	-
Type	RSIR
Phase number	1 PH
Locked rotor current (A)	14.0
Main W. resist. at 25°C (Ω)	9.96
Start W. resist. at 25°C (Ω)	20.39

ELECTRICAL COMPONENTS

Relay	PTC 3003 - K100		
Nominal voltage (V)	200 - 240		
Resistance μ	14,00		
Protector	MRP336JZ	T0377	AE11FU

APPLICATION

Application	Low back pressure
Refrigerant	R134a
Evaporating (°C)	-35 to -10
Expansion	Capillar
Comp. cooling	Static
Max. ambient temp. (°C)	43

NOMINAL PERFORMANCE

	CYCLE A	CYCLE B
Cooling capacity (W)	175	238
Input power (W)	189	200
EER (kcal/Wh)	0.79	1.02
COP (W/W)	0.92	1.19
Current (A)	1.31	1.34

TEST CONDITIONS

	CYCLE A	CYCLE B
Evaporating temp. (°C)	-25.0	-23.3
Condensing temp. (°C)	55.0	55.0
Liq.t. entering expan. (°C)	55.0	32.0
Ambient t. and return (°C)	32.0	32.0
Tens/Freq (V/Hz)	220V 50Hz	220V 50Hz



موديل : KGT1

الشركة العالمية لصناعة الأجهزة المنزلية - الاسكندرية

١,٢ امبير

١٩٥ وات

٥٠ هيرتز

٢٢٠ فولت ~

السعة : ١,٣ اقدم

درجة الحماية : IPX2

التصنيف : ST

الشحنة : ١٧٠ جم ف ١٣٤ ا

سنة الانتاج

No.

٢٠٠٥/٣٢٠

صنع في مصر

200

3 2

٢٠٠٥/٣٢٠

Made in Egypt



Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 9 PRO
AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 9 PRO
AI QUAD CAMERA


Private Picture Copyright : WWW.MBSM.PRO



Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

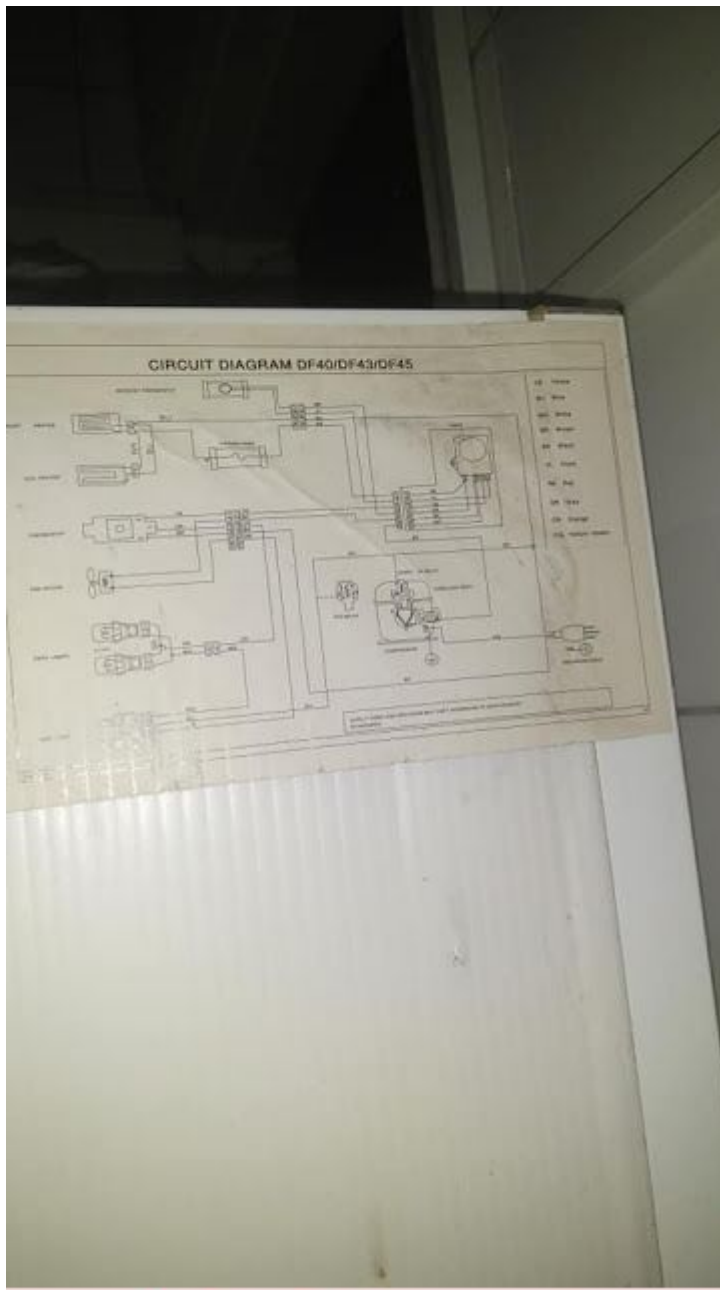

Private Picture Copyright : WWW.MBSM.PRO

ZMC

EGL99AA 1002

220-240V~50Hz

R 134 a

MADE IN EGYPT



3

480

0250659

IDEAL ZANUSSI

MODEL

DF 40 Elegance

TYPE

Nofrost

COLOR

WHITE

CODE



922213401

SERIAL NUMBER :



DF40 Feb. 10 11018589

REFRIGERANT	GAS CHARGE	CAPACITY
R134 a	130 g	340 Lit
VOLTAGE	FREQUENCY	CURRENT
220V	50 Hz	1.4 A

Made In Egypt By
Delt Engineering Industrials
6th October City

Under License Of
Electrolux International SpA - Italy

اولمبيك OLYMPIC
GROUP