

Mbsm.pro , Compressor, CR62KQM- TFD-202, Copeland, Hermetic, 5 hp, 3ph

Category: compressor

written by www.mbsm.pro | 18 November 2024



Mbsm.pro , Compressor, CR62KQM-TFD-202, Copeland, Hermetic, 5 hp, 3ph

Mbsm.pro, DANFOSS, MANEUROP, ALTERNATOR, COMPRESSOR, Mt80hp4, 6.6 hp, 3ph

Category: compressor

written by rober us | 18 November 2024

Maneurop
RECIPROCATING COMPRESSOR

MODEL : MT80HP4



SERIAL : JK 2610933



THERMALLY PROTECTED

PROTECTION THERMIQUE




460V 3~ 60 Hz
23 A Max

380-400V 3~ 50 Hz
LR 69 A

CE

TEST

LP 25bar / 363psi



REFRIGERANT: R22

CAUTION Use of hydrocarbons is not approved by the manufacturer
ATTENTION L'utilisation d'hydrocarbures n'est pas autorisée par le fabricant
BEWEGUNG Keine Herstellerfreigabe für Kohlenwasserstoffe

LUBRICANT:

MINERAL OIL. 160 P

Danfoss Maneurop S.A.
CORPORATION COMPRESSORS
MADE IN FRANCE

Private Picture Copyright : WWW.MBSM.PRO

DANFOSS MANEUROP ALTERNATOR COMPRESSOR

AIR DRYER

Type	FD1000 USD A	Serial nr	APF138497		
Weight	560 kg	V	50 Hz	5,1 kW	Ph
Comp air Pmax	12 bar(e)	Tmax	55 °C		
Ambient: Max	45 °C	Min	0 °C		
Refr. type:	R404 A	Amount	6 kg		
Refr. Pmax high	29 bar	Pmax low	26 bar		
Year of construction	20 08				
MADE BY ATLAS COPCO AIRPOWER n.v. WILRIJK BELGIUM					

1617 4483 00

CE 0038

Atlas Copco



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO




Private Picture Copyright : WWW.MBSM.PRO

Maneurop

RECIPROCATING COMPRESSOR

MODEL : MT80HP4

SERIAL : JK 2610933

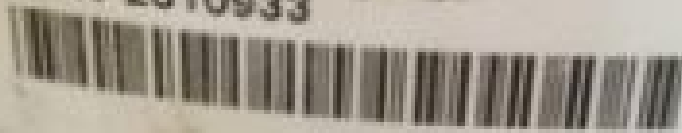

THERMALLY PROTECTED

PROTECTION THERMIQUE

450V 3~ 50 Hz
23 A Max

380-400V 3~ 50 Hz
LR 69 A

CE

2000
1/1000

REFRIGERANT: R22



Lubrifiant et réfrigérant à utiliser sont indiqués par le fabricant.
REMARQUE : L'utilisation d'hydrocarbures avec des moteurs par le fabricant
est interdite. Toute responsabilité est assumée par l'utilisateur.

LUBRIFIANT

MINERAL OIL 150 P

Centross Maneurop S.A.
MADE IN ITALY

Private Picture Copyright : WWW.MBSM.PRO

Model (mineral oil R22; polyolester oil R134A, R404) (MT, MTZ, NTZ SERIES)

Danfoss Maneurop MT22JC5PVE Piston Compressor (2.0HP / 1PH); [R22]
Danfoss Maneurop MT22JC4AVE piston compressor (2.0HP / 3PH); [R22]
Danfoss Maneurop MT28JC5PVE AC Compressor (2.3HP/1PH); [R22]
Danfoss Maneurop MT28JE4AVE AC Compressor (2.3HP/3PH); [R22]
Danfoss Maneurop MT32JF5MVE AC Compressor (2.6HP/1PH); [R22]
Danfoss Maneurop MT32JF4DVE AC Compressor (2.6HP/3PH); [R22]
Danfoss Maneurop MT36JG5CVE AC Compressor (3.0HP/1PH); [R22]
Danfoss Maneurop MT36JG4FVE AC Compressor (3.0HP/3PH); [R22]
Danfoss Maneurop MT40JH4EVE AC Compressor (3.3HP/3PH); [R22]
Danfoss Maneurop MT44HJ4BVE reciprocating compressor (3.6HP / 3PH); [R22]
Danfoss Maneurop MT50HK4CVE Piston Compressor (4.0HP/3PH); [R22]
Danfoss Maneurop MT56HL4BVE AC Compressor (4.6HP/3PH); [R22]
Danfoss Maneurop MT64HM4DVE AC Compressor (5.3HP/3PH); [R22]
Danfoss Maneurop MT72HN4AVE AC Compressor (6.0HP/3PH); [R22]
Danfoss Maneurop MT80HP4AVE AC Compressor (6.6HP/3PH); [R22]
Danfoss Maneurop MT100HS4DVE AC Compressor (8.3HP / 3PH); [R22]
Danfoss Maneurop MT125HU4DVE Reciprocating Compressor (10.0HP/3PH); [R22]
Danfoss Maneurop MT144HV4AVE Reciprocating Compressor (12.0HP/3PH); [R22]
Danfoss Maneurop MT160HW4EVE AC Compressor (13.3HP/3PH); [R22]Danfoss Maneurop
MTZ22JC5VE AC Compressor (2.0HP/1PH); [R134A, R404]
Danfoss Maneurop MTZ22JC4AVE AC Compressor (2.0HP/3PH); [R134A, R404]
Danfoss Maneurop MTZ28JE5AVE AC Compressor (2.3HP / 1PH); [R134A, R404]
Danfoss Maneurop MTZ28JE4AVE AC Compressor (2.3HP / 3PH); [R134A, R404]
Danfoss Maneurop MTZ32JF5AVE AC Compressor (2.6HP/1PH); [R134A, R404]
Danfoss Maneurop MTZ32JF4BVE Reciprocating Compressor (2.6HP / 3PH); [R134A,
R404]
Danfoss Maneurop MTZ36JG5AVE AC Compressor (3.0HP/1PH); [R134A, R404]
Danfoss Maneurop MTZ36JG4BVE Reciprocating Compressor (3.0HP / 3PH); [R134A,
R404]
Danfoss Maneurop MTZ40JH4AVE reciprocating compressor (3.3HP / 3PH); [R134A,
R404]
Danfoss Maneurop MTZ50HK4CVE Reciprocating Compressor (4.0HP / 3PH); [R134A,
R404]
Danfoss Maneurop MTZ56HL4BVE Reciprocating Compressor (4.6HP / 3PH); [R134A,
R404]
Danfoss Maneurop MTZ64HM4CVE Reciprocating Compressor (5.3HP / 3PH); [R134A,
R404]
Danfoss Maneurop MTZ72HN4AVE Reciprocating Compressor (6.0HP/3PH); [R134A, R404]
Danfoss Maneurop MTZ80HP4AVE Reciprocating Compressor (6.6HP/3PH); [R134A, R404]
Danfoss Maneurop MTZ100HS4VE Reciprocating Compressor (8.3HP / 3PH); [R134A,
R404]
Danfoss Maneurop MTZ125HU4VE Reciprocating Compressor (10.0HP/3PH); [R134A,
R404]
Danfoss Maneurop MTZ144HV4AVE Reciprocating Compressor (12.0HP/3PH); [R134A,
R404]
Danfoss Maneurop MTZ160HE4AVE AC Compressor (13.3HP/3PH); [R134A, R404]
Danfoss Maneurop NTZ048A4LR1A Reciprocating Compressor (2.0HP / 3PH); [R134A,
R404, R507]
Danfoss Maneurop NTZ068A4LR1A Reciprocating Compressor (3.5HP / 3PH); [R134A,
R404, R507]

Danfoss Maneurop NTZ096A4LR1A Reciprocating Compressor (4.5HP / 3PH); [R134A, R404, R507]

Danfoss Maneurop NTZ108A4LR1A AC Compressor (5.0HP / 3PH); [R134A, R404, R507]

Danfoss Maneurop NTZ136A4LR1A Reciprocating Compressor (6.5HP / 3PH); [R134A, R404, R507]


Danfoss Maneurop NTZ215A4LR1A Reciprocating Compressor (10.0HP / 3PH); [R134A, R404, R507]

Danfoss Maneurop NTZ271A4LR1A Piston Compressor (13.0HP / 3PH); [R134A, R404, R507]

Mbsm.pro, Scroll, Danfoss,
HRP051T4LP6, compressors, Hermetic,
49.15 kBtu/h, R22, R407C, 4 1/4Hp,
3Ph, POE, Lra 60A

Category: compressor

written by www.mbsm.pro | 18 November 2024

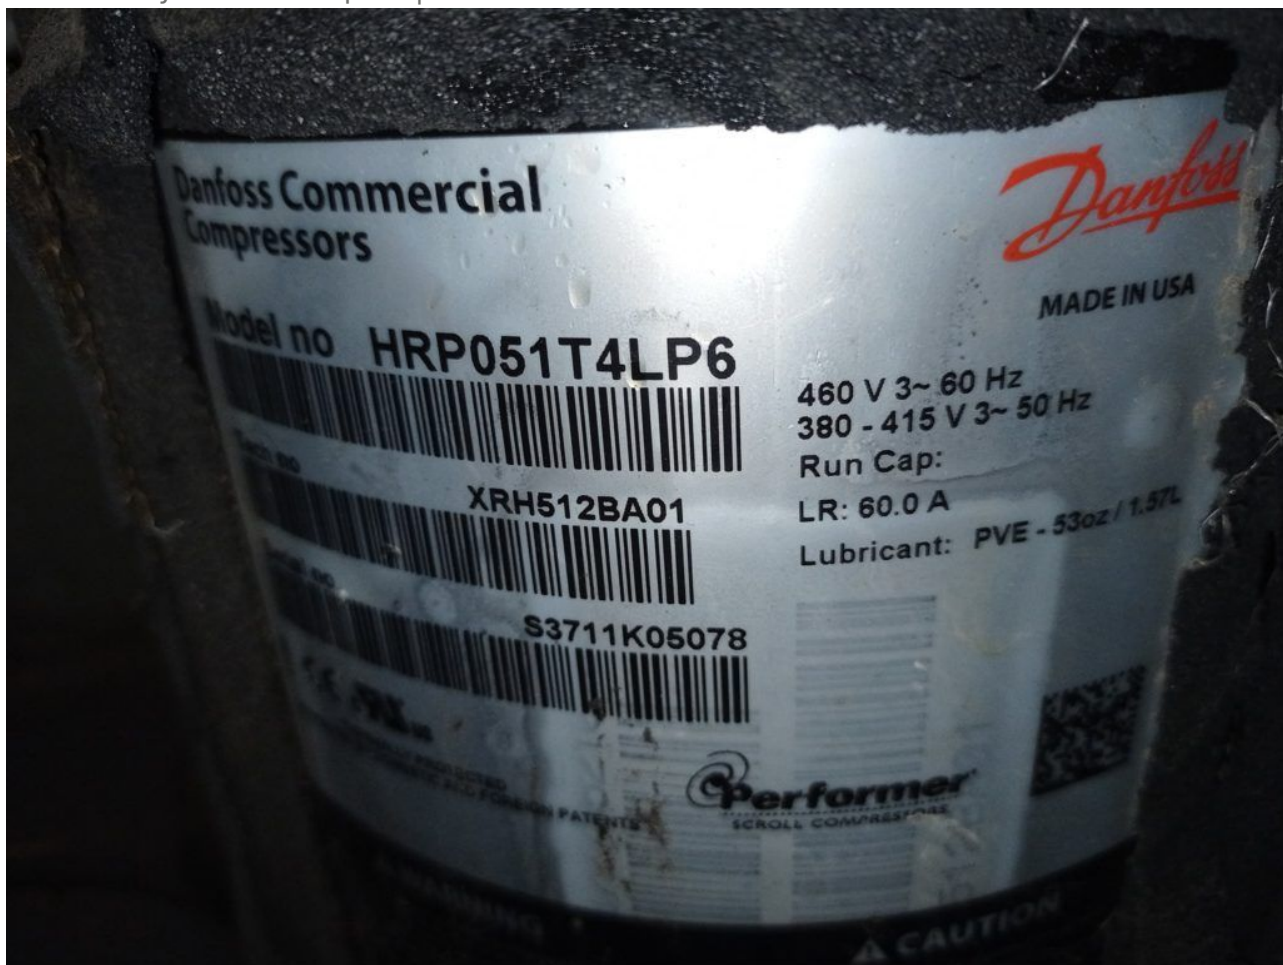

Private Picture Copyright: WWW.MBSM.PRO

bsm.pro, Scroll, Danfoss, HRP051T4LP6, compressors, Hermetic, 49.15 kBtu/h, R22, R407C, 4 1/4Hp, 3Ph, POE, Lra 60A

Mbsm.pro, Danfoss, Compressor, SM160T4RC, SM-160, 13hp, 3ph, R22, 133500BTU

Category: compressor

written by www.mbsm.pro | 18 November 2024



Private Picture Copyright : WWW.MBSM.PRO

SM160T4RC

Basic Info.

Model NO.Sm160N.W.90kgTransport PackagePackage: Wooden Case/Pallet or as Your RequirementSpecificationSM series SM090TrademarkperformerOriginFranceHS Code8414301300Production Capacity50000 Sets/Year

Product Description

SM-160 Performer Scroll compressor for R22
 13HP Performer Scroll Compressor SM160

SPECIFICATIONS FOR SM160

Products Details	Models: SM160 Type	Hermetic
Power	Phase	3
Horse Power	HP	13
Main performance parameters	Input Power	W 380-420/3/60
REFRIGRANT		R22
SIZE		54.0/35.0
Physcial parameters	Hight	MM 353
Weight	KG	90
Q'ty / Pallet	PIECE	6

Product Description

5.Techincal sheet as below:

50Hz
 Data

Model	Nominal Cap.60HZ	Nominal cooling capacity	Power input	Cop	E.E.R.	Swept Volume	Displacement	Oil charge	N.W.
TR	W	Btu/h	KW	W/W	Btu/h/W	cm/rew	m/h	dm	kg
SM084	7	20400	69600	6.12	3.33	11.4	114.5	19.92	3.3 64
SM090	7.5	21800	74400	6.54	3.33	11.4	120.5	20.97	3.3 65
SM100	8	23100	79000	6.96	3.33	11.3	127.2	22.13	3.3 65
SM110	9	25900	88600	7.82	3.32	11.3	144.2	25.09	3.3 73
SM112	9.5	27600	94400	7.92	3.49	11.9	151.5	26.36	3.3 64
SM115	9.5	28000	95600	8.31	3.37	11.5	155	26.97	3.8 78
SM120	10	30100	102800	8.96	3.36	11.5	166.6	28.99	3.3 73
SM124	10	31200	106300	8.75	3.56	12.2	169.5	29.5	3.3 64
SM125	10	30100	102800	8.93	3.37	11.5	166.6	28.99	3.8 78
SM147	12	36000	123000	10.08	3.58	12.2	193.5	33.7	3.3 67
SM148	12	36100	123100	10.8	3.34	11.4	199	34.6	3.6 88
SM160	13	39100	133500	11.6	3.37	11.5	216.6	37.69	4 90
SM161	13	39000	133200	11.59	3.37	11.5	216.6	37.69	3.6 88
SM175	14	42000	143400	12.46	3.37	11.5	233	40.54	6.2 100

Product details

Gross weight 102 kg

Net weight 90 kg

EAN 5702428980432

Approval standard	CE UL
Brand technique	After sale
Capacity control	Fixed speed
Colour	Blue
Compressor power supply [V/Ph/Hz]	400/3/50 460/3/60
Configuration code	Single
Connection type	Rotolock
Description	SM160-4
Diameter [mm]	266 mm
Discharge connection height [mm]	596 mm
Discharge connection mounting torque [Nm]	110 Nm
Discharge connection pipe size [in]	7/8 in
Discharge connection rotolock size [in]	1 3/4 in
Discharge connection size [in]	1 3/4 in
Discharge connection sleeve pipe size [in]	7/8 in
Drawing number	8551120b
Economizer	No
Factory HP [bar]	33 bar
Factory LP [bar]	25 bar
Fitting remark	(shipped with rotolock version only)
Fitting sleeve	ODF
Fitting standard	Rotolock
Frequency [Hz]	50/60
Gauge port HP	None
Gauge port LP	Schrader
Generation code	C
Glass mounting	Threaded
Glass torque [Nm]	50 Nm
GP LP torque [Nm]	15 Nm
High side max pressure (Ps)	30.2 bar
High Side TS Max	150 °C
High Side TS Min	-35 °C
High Side Volume	1.7 L
High value of nominal voltage at 50Hz [V]	400 V
High value of nominal voltage at 60Hz [V]	460 V
High value of voltage range at 50Hz [V]	440 V

High value of voltage range at 60Hz [V]	506 V
IP protection class	IP54 (with cable gland)
Low side max pressure (Ps)	25 bar
Low Side TS Max	63 °C
Low Side TS Min	-35 °C
Low Side Volume	16.5 L
Low value of nominal voltage at 50Hz [V]	380 V
Low value of nominal voltage at 60Hz [V]	460 V
Low value of voltage range at 50Hz [V]	342 V
Low value of voltage range at 60Hz [V]	414 V
LRA	150 A
Maximum Operating Current [MOC]	29 A
MMT	29 A
Model number	SM160T4RC
Motor protection	Internal thermostat, ext. overload protector needed
Mounting torque [Nm]	21 Nm
Nominal cooling capacity 60 kBTU/h	163.14 kBtu/h
Nominal cooling capacity at 50Hz	35.3 kW
Nominal cooling capacity at 60Hz	47.8 kW
Number of starts per hour [Max]	12
Oil charge [L]	4 L
Oil drain	1/4" flare
Oil drain torque [Nm]	35 Nm
Oil equalization	3/8" flare SAE
Oil equalization torque [Nm]	48 Nm
Oil reference	160P
Oil type	Mineral
Packaging height [mm]	671 mm
Packaging length [mm]	470 mm
Packaging weight [Kg]	671 kg
Packaging width [mm]	370 mm
Packing format	Single pack
Packing quantity	1
Phase	3
Power connections	Screw 4.8 mm
Refrigerant	R22
Refrigerant charge [kg] [Max]	12.5 kg
Relief valve	None
Rotational speed at 50Hz [rpm]	2900 rpm
Rotational speed at 60Hz [rpm]	3500 rpm
Segment usage	Air conditioning
Shipped fittings	Suction and discharge solder sleeves, rotolock nuts and gaskets
Shipped instructions	Installation instructions

Shipped mounting	Mounting kit with grommets, bolts, nuts, sleeves and washers
Shipped oil	Initial oil charge
Suction connection height [mm]	180 mm
Suction connection mounting torque [Nm]	130 Nm
Suction connection pipe size [in]	1 3/8 in
Suction connection rotolock size [in]	2 1/4 in
Suction connection size [in]	2 1/4 in
Suction connection sleeve pipe size [in]	1 3/8 in
Swept volume [cm³]	216.6 cm ³
Technology	Scroll
Test dif [bar] [Max]	24 bar
Test HP [bar] [Max]	32 bar
Test LP [bar] [Max]	25 bar
Torque earth [Nm]	2 Nm
Torque Ebox cover [Nm]	2.3 Nm
Torque power [Nm]	3 Nm
Total height [mm]	631 mm
Type	SM
Type designation	Compressor
Viscosity [cP]	32 cP
Winding resistance for three-phase compressors with identical windings [Ohm]	0.94 Ohm



Performer
SCROLL COMPRESSOR

MODEL: SM160T4RC G
SERIAL: TC11 5414465

THERMALLY PROTECTED SYSTEM		SYSTEME DE PROTECTION THERMIQUE	
460 V 3 ~ 60 Hz 29 A Max	380-400 V 3 ~ 50 Hz LR 150 A		
P.E.D. Marking L.P. side	Ps = 25 bar Ts max = 63 °C Ts min = -35 °C		

LUBRICANT: MINERAL OIL 160P

CAUTION Use of hydrocarbons is not approved by the manufacturer
ATTENTION L'utilisation d'hydrocarbures n'est pas autorisée par le fabricant

REFRIGERANT: R22

Danfoss Commercial Compressors
MADE IN FRANCE 8907

Manufactured under one or more of the following US or French patents and foreign counterparts thereto.
US: 4840545, 4415317 French: 8906292, 8202323

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_Sm160Tarc-
meituo_en_made_in_china_com_product_ENYJSPnUTrkR_China_Sm_16Télécharger
Mbsm_dot_pro_private_PDF_SM-160-10993_danfossTélécharger

Mbsm.pro, 5HP, 3PH, DAIKIN, scroll, compressor, JT160BCBY1L, 15000W

Category: compressor
written by www.mbsm.pro | 18 November 2024



Private Picture Copyright : WWW.MBSM.PRO

Nominal Capacity: 51200 BTU/H(61100 BTU/H),15KW(17.9KW)

Output: 5 HP

Power Source : 380V 50/60Hz 3 PHASE

Testing Power Source: 380V 50(60Hz)

Input : 4.66 KW(5.54KW)

Current: 8.6 A(9.2A)

COP: 3.22(3.23) W/W

Capacity: 83.1 cubic centimeter/r

Color: Black

Voltage: 380-415V

Frequency: 50Hz

Horse Power: 5HP

Capacity: 15000W

Oil Charge: 1.4L

Daikin Scoll CompressorJT160BCBY1L for Air Conditioner

air conditioner compressor parts Daikin compressor JT160BCBY1L

Technical data

Daikin Scroll Compressor JT series

Model	Output (HP)	Power Source (V/Hz)	Performance
Nominal Capacity (W)	Input Power (Kw)	COP (W/W)	Noise (dB)
JT90BCB-Y1L	3	220/50	8540 2.89 2.96 58
JT90BC-Y1L	3	380/50	8540 2.75 3.11 58
JT95BCB-Y1L	3	380/50	8540 2.75 3.11 58
JT95BC-Y1L	3	380/50	9030 2.89 3.12 58
JT125BC-Y1L	4	380/50	11900 3.8 3.13 60
380/60	14200	4.53	3.13 63
JT125BCB-Y1L	4	380/50	11900 3.8 3.13 60
380/60	14200	4.53	3.13 63
JT160BC-Y1L	5	380/50	15000 4.66 3.22 60
380/60	17900	5.53	3.23 63
JT160BCB-Y1L	5	380/50	15000 4.66 3.22 60
380/60	17900	5.53	3.23 63
JT212D-Y1L	7.5	380/50	21500 6.49 3.31 72
JT212D-YE	400/60	25100	7.66 3.28 75
JT236D-Y1L	7.5	380/50	24000 7.2 3.33 72
JT236D-YE	400/60	28300	8.53 3.32 75
JT265D-Y1L	8	380/50	26700 7.95 3.36 72
JT265D-YE	400/60	31800	9.45 3.37 75
JT300D-Y1L	10	380/50	29900 8.85 3.38 72
JT300D-YE	400/60	35200	10.4 3.38 75
JT315D-Y1L	11	380/50	31100 9.15 3.4 72
JT335D-Y1L	12	380/50	34000 9.98 3.41 72
JT335D-YE	400/60	40100	11.8 3.4 75

Model	Power(HP)	Voltage	Test Voltage	Capacity	Input power	Current	COP	Displacement
			KW	BTU/H	KW	A	W/W	Cm3/r
JT212DA-Y1	7	380-415V, 3P, 50Hz	380V/50Hz	18.9	64500	6.87	11.7	2.75 117.3
JT265DA-Y1	8.5		23.4	79800	8.36	14.1	2.8	144.7
JT300DA-Y1	10	400V/50Hz	26.5	90400	9.44	16	2.81	163
JT335DA-Y1	12		29.9	102000	10.7	17.9	2.79	184.2
JT300DA-Y1L	10	380V/50Hz	29.6	101000	9.55	16.4	3.1	163
JT335DA-Y1L	12		33.7	115000	18.3	3.12	184.2	
JT212D-P1YE	7	380-415V/400-440V, 3P, 50/60Hz	380V/50Hz; 400V/60Hz	21.3/24.9	73400/85700	6.56/7.74	11.3/11.9	3.25/3.22 117.3
JT236D-P1YE	7.5	380V/50Hz	23.8	81900	7.27	12.4	3.27	131
400V/60Hz	28.1	96600	8.62	13.2	3.26			
JT265D-P1YE	8.5	380V/50Hz	26.5	91100	8.03	13.7	3.3	144.7
400V/60Hz	31.5	108500	9.55	14.6	3.3			
JT300D-P1YE	10	380V/50Hz	29.6	102000	8.94	15.2	3.31	163
400V/60Hz	34.9	120200	10.51	16.2	3.32			
JT335D-P1YE	12	380V/50Hz	33.7	116000	10.08	17.2	3.34	184.2
400V/60Hz	39.4	136900	11.92	18.4	3.34			

 **DAIKIN**

COMPRESSOR

MODEL	JT160BCBY1L			
POWER SOURCE	THREE	PHASE		
	380	V	50	Hz
REF.	380	V	60	Hz
REF.OIL	R22			
MFG.NO.	DAPHNE SE56P			
DP-AP	07002624			
SP	H	3.0	MPa	L 1.3 MPa
	H	10.5	MPa	L 10.5 MPa



MADE IN CHINA
XI'AN DAIKIN QING'AN COMPRESSOR CO.,LTD.

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_JT160BCBY1L-Technical-ManualTélécharger