

# Mbsm.pro , Compressor, CR62KQM- TFD-202, Copeland, Hermetic, 5 hp, 3ph

Category: compressor

written by www.mbsm.pro | 18 November 2024




Mbsm.pro , Compressor, CR62KQM-TFD-202, Copeland, Hermetic, 5 hp, 3ph

# Mbsm.pro, Toshiba, Rotary, refrigerator ,compressor, PH360X3C-4KTS1, 1.5T++, 2,5 hp, 1 ph, r22

Category: compressor

written by www.mbsm.pro | 18 November 2024

PH350X3C - 4KTS1

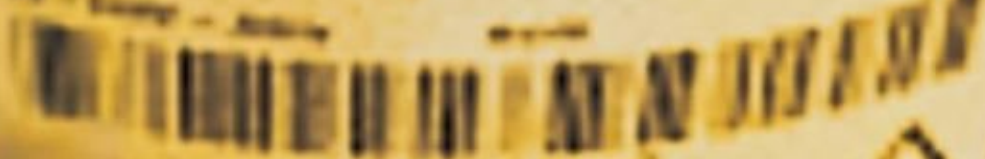

TOSHIBA

Mbsm.pro, Toshiba, Rotary, refrigerator ,compressor, PH360X3C-4KTS1, 1.5T++, 3 hp, 1 ph, r22

---

## ZR61KCE - TFD - 522

Category: compressor

written by www.mbsm.pro | 18 November 2024



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, COPELAND, COMPRESSOR, ZR61KCE-TFD-522, 5 hp, 43000 btu

---

Mbsm.pro, compressor, jt160gabtal, 5 hp, 400 v, 3 ph, DAIKIN scroll, air

# conditioning

Category: air conditioner, compressor  
written by [www.mbsm.pro](http://www.mbsm.pro) | 18 November 2024



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, compressor, jt160gabtal, 5 hp, 400 v, 3 ph, DAIKIN scroll, air

conditioning

# Mbsm.pro, Copeland, Reciprocating, Hermetic, Compressors, CRNQ-0500-TFD, 5 hp, R22, HCFC, R-22, 50 Hz, 3 – Phase, 380/420 V , CR QR Series

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 18 November 2024




Mbsm.pro, Copeland, Reciprocating, Hermetic, Compressors, CRNQ-0500-TFD, 5 hp, R22, HCFC, R-22, 50 Hz, 3 – Phase, 380/420 V , CR QR Series

---

**Mbsm.pro, AIR CONDITIONER, Fresh Smart, SFW36H, IP-SEW36H/0, Cooling & Heating Split Air Conditioner, 5 hp, 36000 Btu/h, 3 Ton , r22, 2700 g, 3322 w**

Category: air conditioner,Archivation  
written by [www.mbsm.pro](http://www.mbsm.pro) | 18 November 2024

<b>FRESH</b>		
Model	SFW36H/O	
Cooling Capacity	36000Btu/h	
	3322W	
Heating Capacity	37800Btu/h	
	3050W	
Refrigerant	R22/2.7Kg	
Max Operating Pressure for the Discharge / suction Side	3.0Mpa	
	1.5Mpa	
Weight	82Kg	
Rated Voltage	220-240V~	
Rated Frequency	50Hz	
Rated Current	Cooling	20.8A
	Heating	20.8A
Rated Input	Cooling	4700W
	Heating	4700W
Max Current	24A	
Isolation	I	
Climate Type	T3	
Sound Pressure Level	60dB(A)	
Moisture Protection	IP24	
SPLIT AIR CONDITIONER OUTDOOR UNIT (Made In Egypt)		
 63229943455		

Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, AIR CONDITIONER, Fresh Smart, SFW36H, IP-SEW36H/O, Cooling & Heating Split Air Conditioner, 5 hp, 36000 Btu/h, 3 Ton , r22, 2700 g, 3322 w

# Mbsm.pro, Compressor, C-SB261H5A, Sanyo, C-SB Scroll, Compressor C- SB261H5A, 3,5 hp, 31000 btu/h

Category: air conditioner,Archivation,compressor  
written by [www.mbsm.pro](http://www.mbsm.pro) | 18 November 2024



---

Mbsm.pro, Compressor, C-SB261H5A, Sanyo, C-SB Scroll, Compressor C-SB261H5A, 3,5  
hp, 31000 btu/h

---

# Tecumseh, Compressor, 5/8HP, HMBP – R404A , R448A , R449A, MBP, CAJ9480Z, 230V

Category: compressor  
written by [www.mbsm.pro](http://www.mbsm.pro) | 18 November 2024



## Caractéristiques techniques

- Marque : TECUMSEH UNITÉ HERMÉTIQUE
- Modèle : CAJ9480Z-R
- CYLINDRÉE (CM<sup>3</sup>)15,2
- FLUIDER404A , R448A , R449A
- APPLICATIONHMBP
- PLAGÉ D'APPLICATION-25/+15
- PUISSANCE (W)1159
- PUISSANCE FRIGORIFIQUE (TK+40°C)15/3350 5/2355 -10/1294 -25/609
- TENSION (V)240/1/50
- DÉMARRAGECSR
- I.MAX (A)6,7
- Ø ASPIRATION1/2
- Ø REFOULEMENT5/16
- DIMENSIONS (MM)235x178x280
- Gaz: **R-404a**
- Température/Pression: **Haute Pression**
- Puissance: **5/8 HP**
- Voltage: **230 V**
- Type De Courant: **Monophasé**
- Fréquence: **50 Hz**
- Type De Compresseur: **Hermétique**
- Décalage: **15.2 cm<sup>3</sup>**
- Cons.Énergie -25°C: **496 W**
- Cons.Énergie -10°C: **669 W**
- Cons.Énergie -5°C: **718 W**

- Cons.Énergie 0°C: **762 W**
- Cons.Énergie +5°C: **798 W**
- Cons.Énergie +10°C: **828 W**
- T° De Condensation: **40 °C**
- Capacité Frigorífica -25°C: **524 Kcal/h**
- Capacité Frigorífica -20°C: **692 Kcal/h**
- Capacité Frigorífica -15°C: **887 Kcal/h**
- Capacité Frigorífica -10°C: **1113 Kcal/h**
- Capacité Frigorífica -5°C: **1374 Kcal/h**
- Capacité Frigorífica 0°C: **1677 Kcal/h**
- Capacité Frigorífica 5°C: **2025 Kcal/h**
- Capacité Frigorífica 10°C: **2425 Kcal/h**
- Tipo Test: **EN.12900**

Compresseur L'unité Hermetique – Tecumseh CAJ9480Z – R404A, R449A, R407A, R452A

220 – 240V 1~ 50 Hz

Cylindrée = 15.2 CM3

APPLICATIONS = HBP / MHBP

Moteur type: CSR



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





● ○ REDMI NOTE 9 PRO  
∞ AI QUAD CAMERA

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





● ○ REDMI NOTE 9 PRO  
∞ AI QUAD CAMERA

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_caj9480Z\_2494-specetélécharger

Compresseur AJ = Le produit de référence associant silence, fiabilité et

efficacité du froid commercial.

Product Code	Model Number	Compressor Horsepower	Compressor Displacement	Cooling Oil Charge
	CAJ9480Z-FZ	5/8 HP	15.2 cm3/rev	Fan 475 ml
	CAJ9510Z-FZ	1 HP	18.3 cm3/rev	Fan 475 ml
	CAJ9513Z-FZ	1 1/8 HP	24.2 cm3/rev	Fan 475 ml
	CAJ4517Z-FZ	1.25 HP	25.95 cm3/rev	Fan 475 ml
	TAJ4517Z-TZ	1.25 HP	25.95 cm3/rev	Fan 475 ml
	CAJ4519Z-FZ	1.5 HP	34.45 cm3/rev	Fan 475 ml
	TAJ4519Z-TZ	1.5 HP	34.45 cm3/rev	Fan 475 ml

---


## Danfoss, Compressor, 5 Hp, R22, Démontage, ouverture, DESTRUCTION

Category: compressor


written by [www.mbsm.pro](http://www.mbsm.pro) | 18 November 2024



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

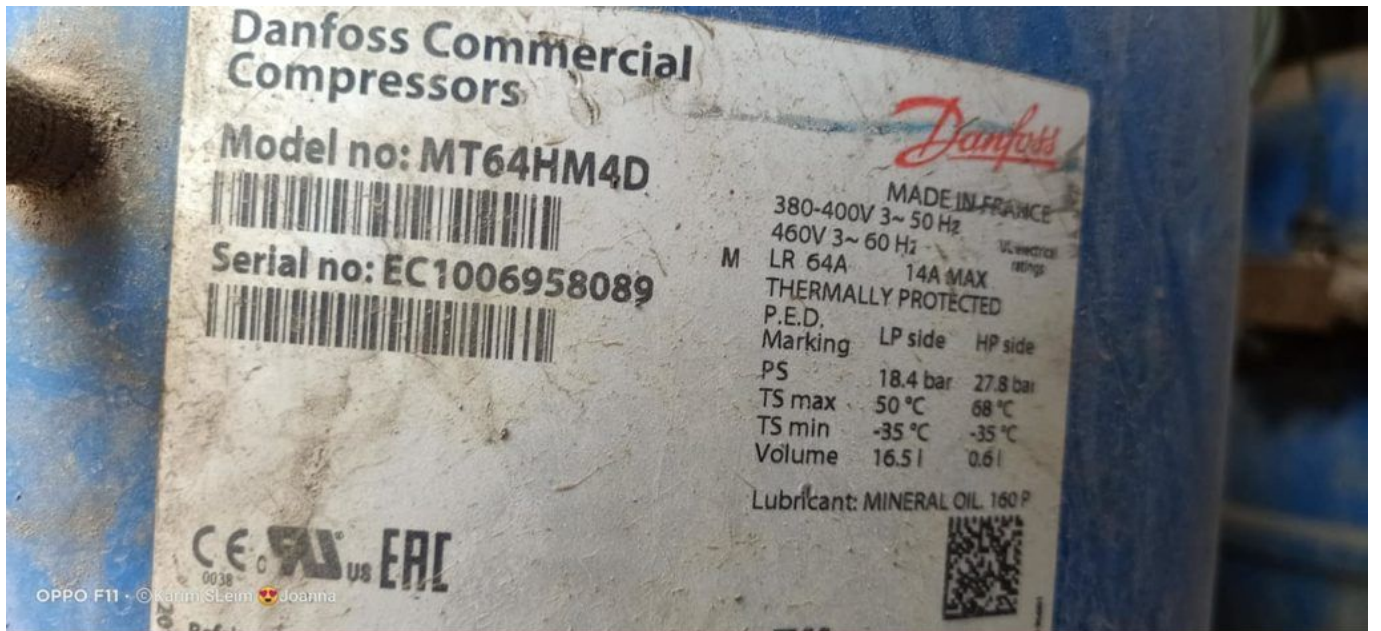

Private Picture Copyright: WWW.MBSM.PRO

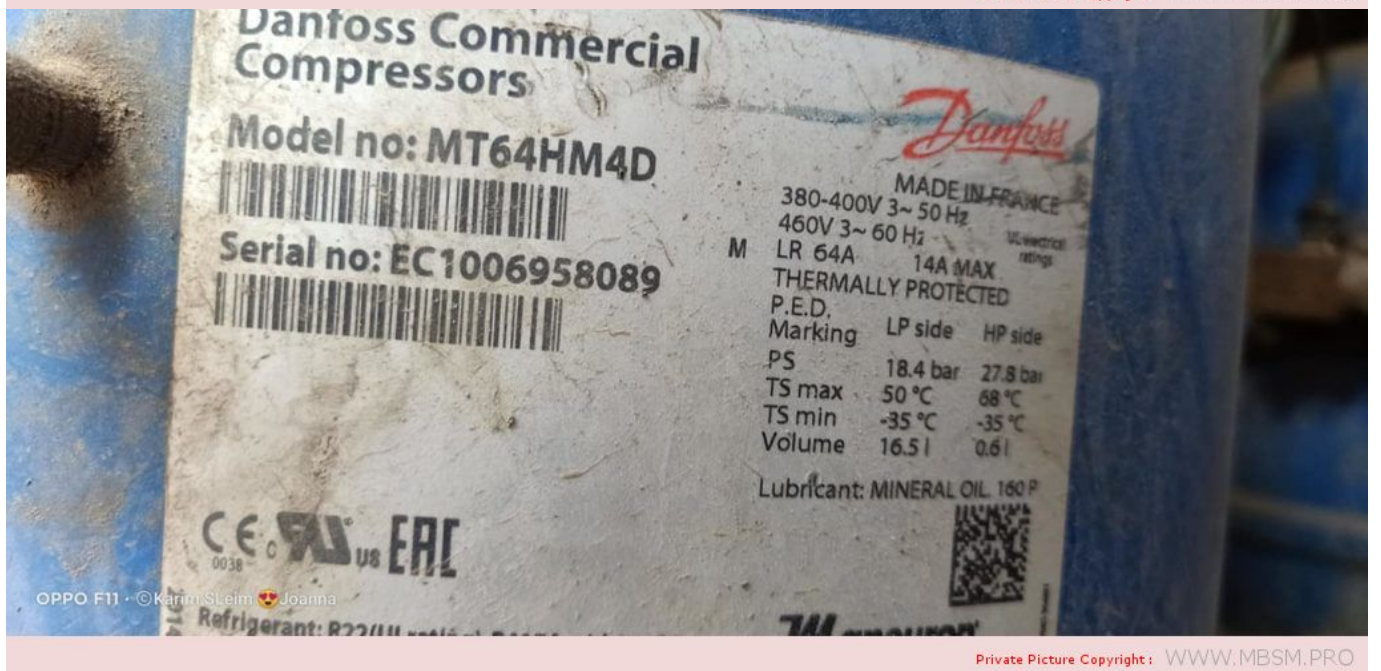

Private Picture Copyright: WWW.MBSM.PRO

Product : Compressor  
 产地: 法国制造  
 Plant : Made in France  
 客户: 丹佛斯自动控制管理(上海)有限公司  
 Customer service: Danfoss Automatic Controls Management (Shanghai) Co.Ltd  
 地址电话: 上海市宜山路900号科技大楼C楼20层200233 / (021)61513000  
 Address/Tel: 20th Floor Block C, Hi-Tech Building  
 900 Yi Shan Road Shanghai 200233 / (021)61513000  
 警告: 只有具备一定经验和安全程序  
 培训的授权人员才可以进行安装和维修。  
 Warning: The installation and maintenance  
 should be performed by the authorized  
 person only



**Danfoss Commercial Compressors**




型号: MT64HM4DVE  
  
 序列号: EC1006983516  


产地法国  
 380-400V 3~ 50 Hz  
 460V 3~ 60 Hz  
 额定电流: 6A 最大工作电流: 14A  
 过热保护  
 低压倒  
 最高额定压力 18.4 bar  
 最高额定温度 50 °C  
 最低额定温度 -35 °C

润滑油: MINERAL OIL 160 P



R410A 制冷剂: R22 或 R417A 仅和 160PZ



**WARNING**

Installation and servicing shall be performed by trained personnel only. Failure to observe these safety warnings could result in personal injury or death.  
 1. Before working on the compressor, turn off power before removing the charge of capacitors.  
 2. Never connect power in place and securely fastened whenever power is applied to the compressor. Use this equipment on a grounded system only.  
 3. The system contains refrigerant and oil under pressure. Release pressure from both the high and low side before servicing under safety conditions.  
 4. Do not touch the hot surface of the compressor.



**CAUTION**

Use only manufacturer's approved refrigerants, lubricants, and electrical components. Unauthorized refrigerants / lubricant / electrical component could cause fire, explosion, electrical shorting.  
 For details refer to multi language instruction and technical documents available on Danfoss website at [www.danfoss.com](http://www.danfoss.com)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)









