


Compressor, Danfoss, Secop, SC18G, 104g8822, 1/2HP, R134A, 685 Litres, Presentoire cokacolla, LBP/HBP

written by Lilianne | 8 May 2021



Private Picture Copyright : WWW.MBSM.PRO

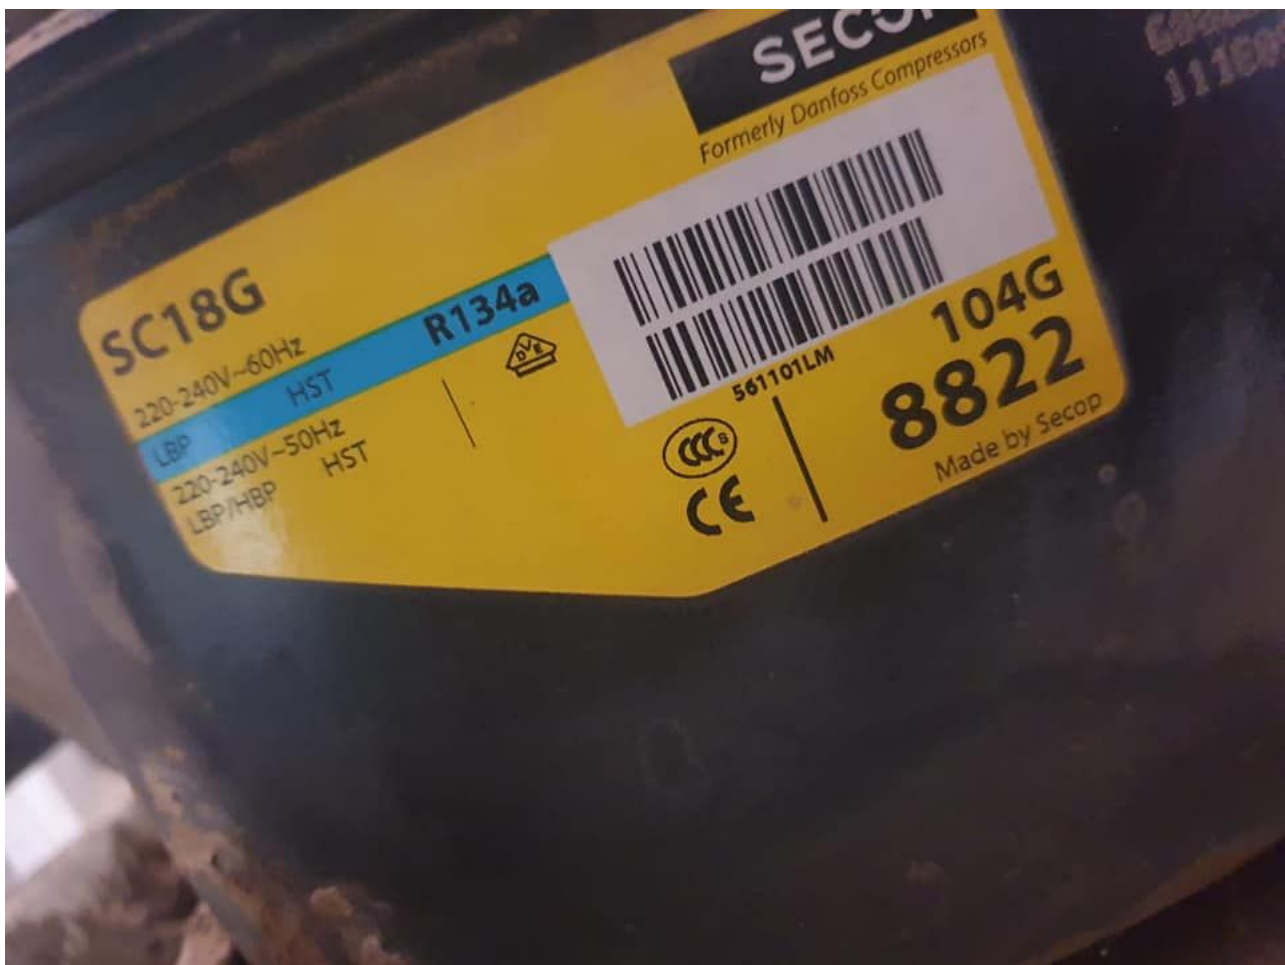

Private Picture Copyright : WWW.MBSM.PRO

OverviewQuick detailsType :compressorBrand Name :SECOPModel Number : ASC18GCertification :CE, CCCAfter-sales service provided :No overseas service provided.Gas :R134aType :PistonPower Source :AC PowerLubrication Style :LubricatedMute :YesPackage :wooden case or cartonApplication :Danfoss Freezer CompressorDelivery time :7-20 DaysSpecial period :1 monthSupply AbilitySupply Ability3000 Piece / Pieces per MonthPackaging and shippingPackaging Details1.For small order quantity: packed with a wooden case or carton.
2.For full container: packed with pallet, 24 pallets in one 20ft container.postureGuangZhou, huangpu portProcessing time:: A.7-30 days

1.Product name:

1, Danfoss refrigeration / refrigeration compressor SC18G

2.Type: LBP 3.Voltage
: 220 ~ 240V / 50Hz, 1 / 2HP

No	Model	HP	Temperature	Electricity	Refrigerant
1	SC10C	1/3	LBP	220~240V/50HZ	R22
2	SC12C	3/8	LBP	220~240V/50HZ	R22
3	SC15CM	1/2	LBP	220~240V/50HZ	R22
4	SC18CM	5/8	LBP	220~240V/50HZ	R22
5	SC10D	3/8	MBP	220~240V/50HZ	R22
6	SC12D	1/2	MBP	220~240V/50HZ	R22
7	SC15D	5/8	MBP	220~240V/50HZ	R22
8	SC10G	5/16	MBP	220~240V/50HZ	R22
9	SC12G	1/3	MBP	220~240V/50HZ	R134A
10	SC15G	3/8	MBP	220~240V/50HZ	R134A
11	SC18G	1/2	MBP	220~240V/50HZ	R134A
12	SC21G	5/8	MBP	220~240V/50HZ	R134A
13	SC10CL	1/3	LBP	220~240V/50HZ	R404a
14	SC12CL	3/8	LBP	220~240V/50HZ	R404a
15	SC15CL	1/2	LBP	220~240V/50HZ	R404a
16	SC18CL	5/8	LBP	220~240V/50HZ	R404a
17	SC21CL	7/8	LBP	220~240V/50HZ	R404a

Private Picture Copyright : WWW.MBSM.PRO

4.Gas consumption: R134a



Everest

Number	: 1117825	Model	: EV 024 SD		
Volume	: 1.2 CBM	Capacity	: 685 LTRS		
Weight	: 157 KG	Color/Logo	: RED		
Consumption	: 14 Kwh/24 hrs	Date	: DEC 2011		
0 Hz	: 50	Ref. Type	: R134A	GRMS	: 475
2 Watt	: 646	Climate Class	: D		
Capacity at 0 Deg.C evaporator temperature: 980					



Wattage of Lamps: 20(TOP) 40(SIDE)

MADE IN EGYPT

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_104g8822Télécharger



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

PARIS 210 (-)



AHT

Serialnr 409974 00007779

Gerätedaten
cabinet data

Innenraumbeleuchtung
Light inside cabinet

class 3 (25°C/60%rH)

(-)

Nennspannung/frequ. Nom Voltg./frequ.
Tension/Fréquence nominale

220-240 V/50Hz

220-240 V/50Hz

Nennaufnahme Nom Consump.
Prise de courant nominale

480 W

50 W

Nennstrom Nom Current
Courant nominal

2,6 A

0,21 A

Schutzart Protection class
Type de protection

IP 21

IP 21

Typ Type

B 825

LE221

Energieaufnahme Energy consump.
Absorption d'énergie

9,2 kWh/24h

Absicherung Fuse
Protection par fusibles

16 A

Kältemittel(Menge) Refrigerant(Quan)
Type / Quantité de réfrigérant

R404A/0,250 kg

Nettoinhalt Net Content

724 dm³

Capacité nette
Lampe Lamp
Lampe

max. zul. Betriebsüberdruck 30 bar
Eigensicher nach VVV-VBG 20, § 7.3
Dichtheit geprüft

Suppression max. de service adm.
Sécurité propre selon VVV-VBG 20
Imperméabilité examinée



RoHS

ENTSORGUNGSHINWEIS

WÄRMEDÄMMSTOFF: PU MIT PENTAN

Das Gerät nicht dem normalen Müll, sondern in einer für die Entsorgung vorgesehenen Weise zu entsorgen.
Sonderentsorgung zuführen.
Darauf achten, daß dabei die Rohrleitungen nicht beschädigt werden.

DISPOSAL

THERMAL INSULATION: PU WITH PENTAN

The cabinet is not standard waste but has to be disposed of in a special way according to local waste disposal regulations.
with local waste disposal regulations.
Make sure that the tubes are not damaged.

MISE AU REBUT

ISOLATION THERMIQUE: PU AVEC PENTANE

Votre bahut n'est pas de rebut ordinaire. Il doit être traité conformément aux consignes locales de la mise au rebut.
Faites attention de ne pas endommager les conduites.