

Kulthorn, compressor, Kulthorn compressor, c- qn76l6f, c-qn76l6f-l, 1/10 Hp, 1Ph, Serie C-q, R134a, 76 watt, Low back pressure, 200-220V/50hz, 220v/60hz, Compressor modifier

written by Lilianne | 7 January 2021

Kulthorn, compressor, Kulthorn compressor, c-qn76l6f, 1/10 Hp, 1Ph, Serie C-q, R134a, 76 watt, Low back pressure, 200-220V/50hz, 220v/60hz, Compressor modifier

Compressor Motor Protectors

Each compressor incorporates a motor protection device or system. Generally, the larger the compressor, the more sophisticated the motor protector.

It is essential that an electric motor is protected against conditions that could otherwise result in damage to the motor or to the electrical supply system. For this reason, every Kulthorn compressor is supplied with a motor protector, sometimes referred to as an overload. The more expensive the compressor, the greater is the economic justification for specifying a motor protector that has the ability to protect over a wider range of conditions.

1. External Motor Protectors

A smaller compressor (such as an AZ, AE or WJ) is fitted

with an external motor

protector. Most commonly, this is a compact, cylindrical device that contains a snapaction bimetallic disc. The protector is mounted in contact with the surface of the compressor housing, inside the terminal guard.

The compressor current passes through the bimetallic disc. The resistance of this disc

causes the disc temperature to increase as the motor current increases. There is usually

a small heater, located under the disc and connected in series with the disc itself. This

heater further raises the temperature of the disc. There is also the impact of the

compressor shell temperature, and a hot compressor will further increase the disc

temperature. The temperature of the disc is thus influenced by the combined effects of –

- the compressor motor current
- the compressor shell temperature

When the bimetallic disc reaches a predetermined temperature (often either 105°C or

120°C) the disc will snap open, and power supply to the compressor will be interrupted.

The compressor will cool, and at a reduced disc temperature the protector will reset

and the compressor will restart, or attempt to restart.

If the abnormal condition that

caused the protector to trip in the first place still exists, the compressor is likely to continue


to cycle on the overload until that condition is corrected.

There are two situations where a motor protector is expected to operate.

2. When the compressor is running under extreme conditions.
3. When the compressor is in a locked rotor condition. This is a situation where the compressor cannot start because the voltage is too low,

the system pressures are outside the range for which the compressor is approved, there is internal damage to the compressor, or there is some other reason why the compressor is incapable of starting



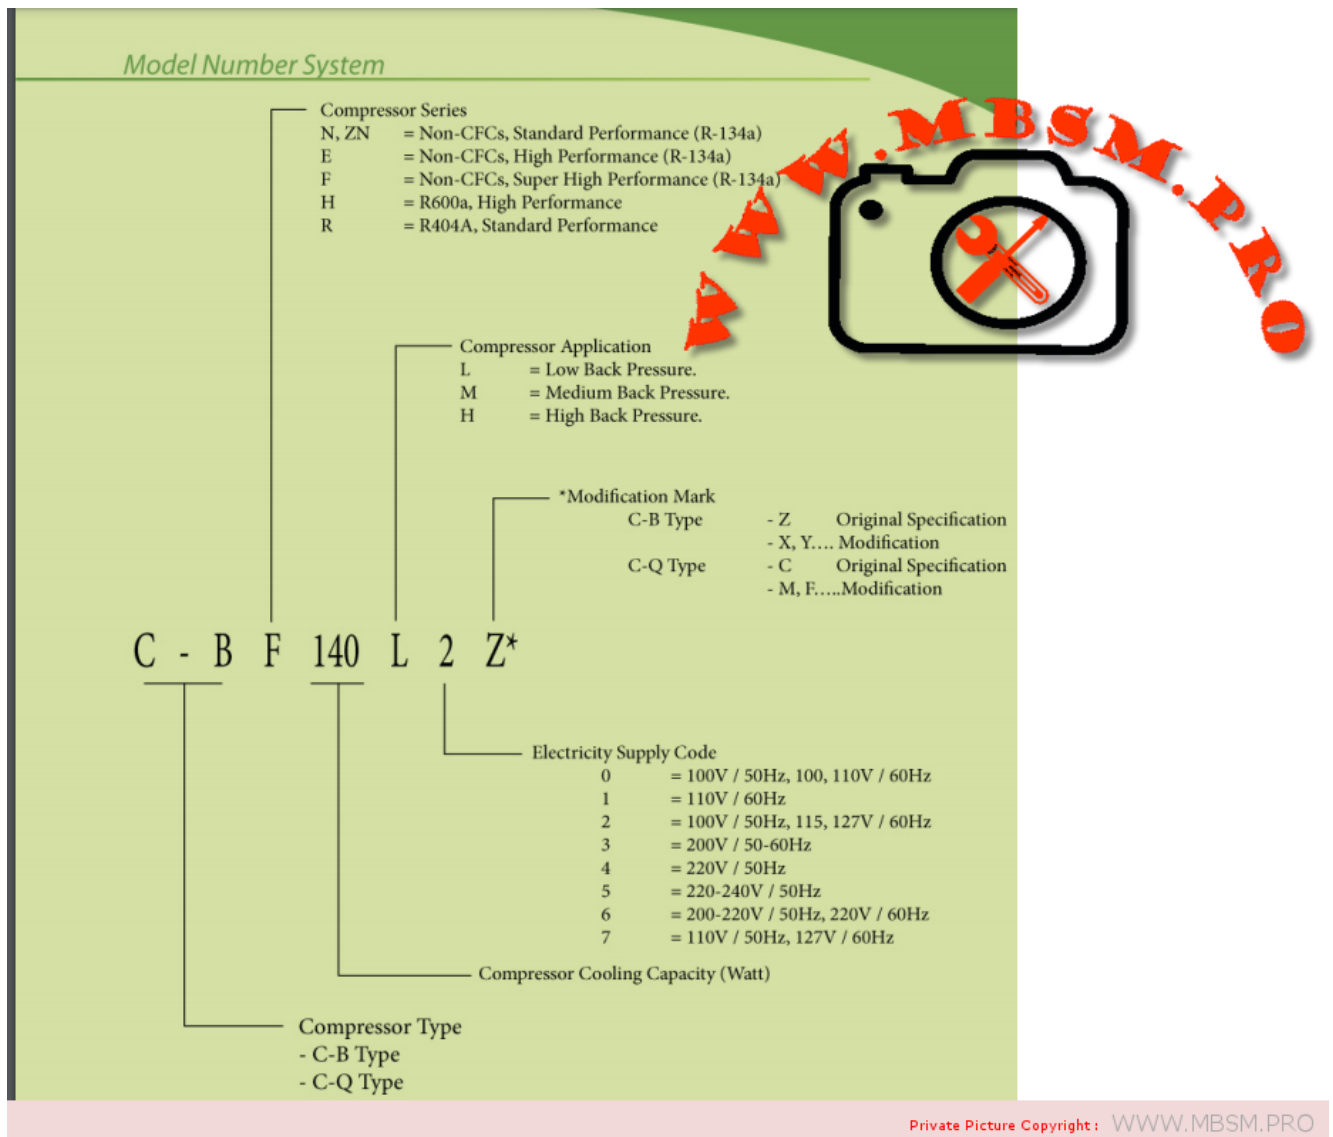

Mbsm_dot_pro_private_PDF_2019-06-13_110312_technical_bulletinT
 télécharger

Mbsm_dot_pro_private_PDF_kpccatalogTélécharger

Mbsm_dot_pro_private_PDF_KULTHORN-CATALOGUE_webTélécharger

Mbsm_dot_pro_private_PDF_Kulthorn-CatalogTélécharger

Mbsm_dot_pro_private_PDF_Model-Number-SystemTélécharger



KULTHORN
COMPRESSOR

Private Picture Copyright : WWW.MBSM.PRO

Name: Kulthorn Premier Company Limited (KPC)
 Established: December 1982
 Registered Capital: Baht 1,125 Million
 Address: 446/3 Moo 9 Chachoengsao – Nakornratchasima Road,
 Kabinburi Industrial Estate, Nongki, Kabinburi, Prachinburi 32160, Thailand
 Telephone: (037) 204835, 455516
 Fax: (037) 455525, 204844
 E-mail: sales_kpc@kulthorn.com
 kamjorn@kulthorn.com
 Employees: 900 persons
 Land area: 91 rai (145,600 m²)
 Building of area: 41,500 m²
 Business Products: Hermetic Reciprocating Compressor (Scotch Yoke Mechanism)
 (Product under license SANYO Japan) Size 30-250 Watt.
Compressor series / Refrigerant
 C-BN, C-BZN, C-BE, C-BF / R-134a
 C-QN / R-134a
 C-BH / R-600a
 C-BR / R-404A
 Shareholder: Kulthorn Kirby Public Company Limited 100%
 Customers: *Domestic* – Haier, Sanyo, Toshiba, Hitachi, Daewoo, Samsung, Sanden, etc.
Total = 35%
Export – Daewoo, Sanyo Group, GE, Sanden, Haier, Singer, Videocon,
 Toshiba, etc.
Total = 65%
 Quality System: ISO 9001:2000 Certified by TUV Nord Year 2003
 Q-Mark Certified by F.T.I. Year 2007

