

no frost, egl99aa zmc refrigerator,
DF40, silver, ideal, zanussi, IDEAL
ZANUSSI, EGL99AA ZMC, DF 40 Elgance,
Compressor, ACC Cubigel, Huayi,
Electrolux, ZEM GL99AA, GL99AA, LBP ,
R134a, 220-240V/1/50Hz, 1/4 HP,
discharge 9.93 cm3, motor type RSIR,
LRA 14.4A

Category: compressor

written by www.mbsm.pro | 9 April 2021



Private Picture Copyright: WWW.MBSM.PRO



[Mbsm_dot_pro_private_PDF_GL99AA-compresseur-acc-cubigell-gl99aaTélécharger](#)
[Mbsm_dot_pro_private_PDF_GL99AATélécharger](#)

Compressor ACC Cubigel Huayi Electrolux ZEM GL99AA, LBP – R134a,
220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm³, motor type RSIR, LRA 14.4A,
expansion device: capillary, cooling: static, weight 11 kg , the statutory
warranty period shall apply (24 months), Delivery time Info: with “immediately
available” and “scarce stock”, usually delivery within 2 days. For “currently
not available” delivery time usually 2 weeks or delivery time in urgent cases
contact us.

Refrigerant:	R134a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	4,9 mm
Suction:	6,5 mm

Working area:	LBP
Design type:	Hermetic
Model series:	GL
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 22 Ester
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions (length × width × height):	23,10 × 16,20 × 18,60 cm
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	GL99AA
Stroke volume (cm3):	9,93
Cooling capacity (W):	174
Power (HP):	0,25
Max. Starting current (A):	14,4
Max. Operating current (A):	1,31
Engine type:	RSIR
COP:	0,92
Note:	Static cooling
Conveying and suction volume (m3):	1,72
Oil quantity (l):	0,295
Compressor type:	Piston
Cooling:	Static
RPM:	2900
Power range:	-35 C to -10 C
Alternative:	HLY90AA, NL11F
Pressure line (mm):	4,9
Suction line (mm):	6,5

ZMC C **GL99AA** 0326
220-240V~50Hz
R 134a
MADE IN EGYPT
CE
482
55-3975 6

COMPRESSOR

Displacement (cm ³)	9.95
Diameter (mm)	25.4
Stroke (mm)	19.62
Net Weight (Kg)	9.6
Oil type	ISO VG 22 ESTER
Oil charge (cm ³)	295

MOTOR

Approximate Power (CV)	1/4
Voltage/Frequency (V/Hz)	220V 50Hz
Voltage range (V)	187-264
Code	-
Type	RSIR
Phase number	1 PH
Locked rotor current (A)	14.0
Main W. resist. at 25°C (Ω)	9.96
Start W. resist. at 25°C (Ω)	20.39

ELECTRICAL COMPONENTS

Relay	PTC 3003 - K100		
Nominal voltage (V)	200 - 240		
Resistance μ	14,00		
Protector	MRP336JZ	T0377	AE11FU

APPLICATION

Application	Low back pressure
Refrigerant	R134a
Evaporating (°C)	-35 to -10
Expansion	Capillar
Comp. cooling	Static
Max. ambient temp. (°C)	43

NOMINAL PERFORMANCE

	CYCLE A	CYCLE B
Cooling capacity (W)	175	238
Input power (W)	189	200
EER (kcal/Wh)	0.79	1.02
COP (W/W)	0.92	1.19
Current (A)	1.31	1.34

TEST CONDITIONS

	CYCLE A	CYCLE B
Evaporating temp. (°C)	-25.0	-23.3
Condensing temp. (°C)	55.0	55.0
Liq.t. entering expan. (°C)	55.0	32.0
Ambient t. and return (°C)	32.0	32.0
Tens/Freq (V/Hz)	220V 50Hz	220V 50Hz



موديل : KGT1

الشركة العالمية لصناعة الأجهزة المنزلية - الاسكندرية

١,٢ امبير

١٩٥ وات

٥٠ هيرتز

٢٢٠ فولت ~

السعة : ١,٣ اقدم

درجة الحماية : IPX2

التصنيف : ST

الشحنة : ١٧٠ جم ف ١٣٤ ا

سنة الانتاج

No.

٣٠٣٣

صنع في مصر

200

3 2

٢٠٠٥/٢٢٠

Made in Egypt



Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 9 PRO
AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 9 PRO
AI QUAD CAMERA


Private Picture Copyright : WWW.MBSM.PRO



Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

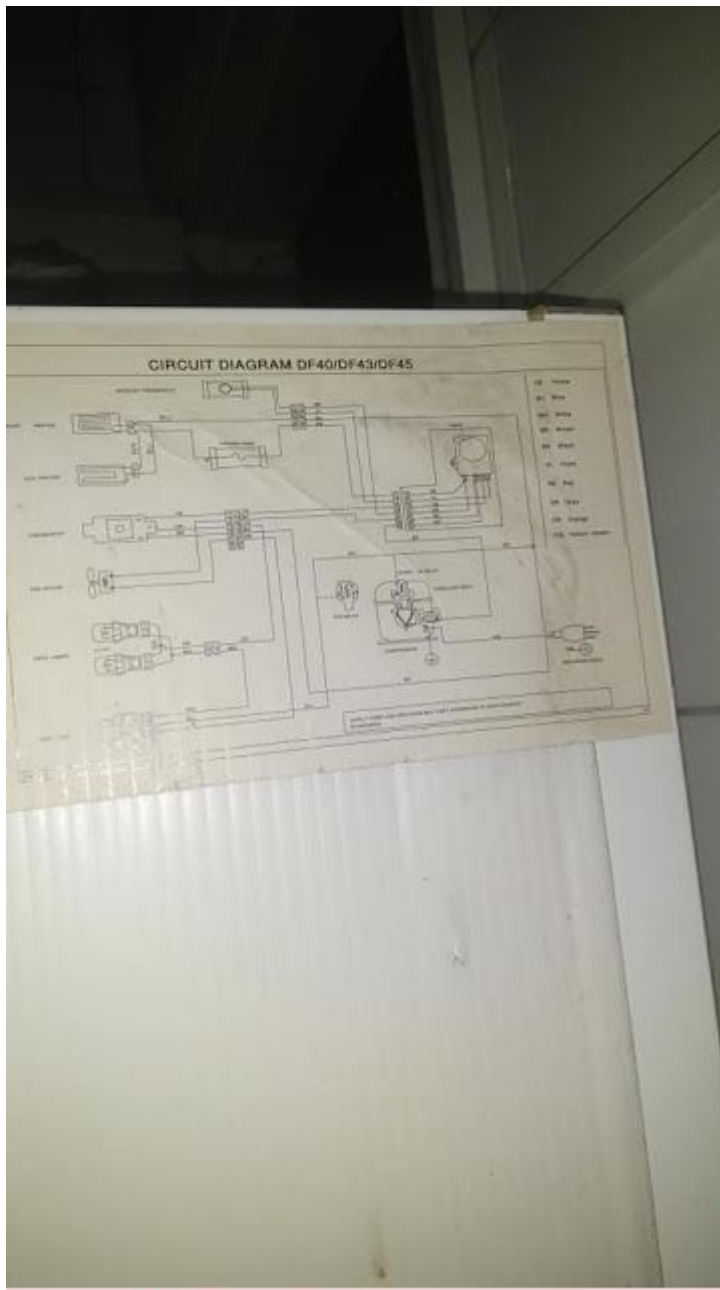

Private Picture Copyright : WWW.MBSM.PRO

ZMC

EGL99AA 1002

220-240V~50Hz

R 134 a

MADE IN EGYPT



3

480

0250659



Private Picture Copyright : WWW.MBSM.PRO

Compressor ,ACC Cubigel ,Huayi
,Electrolux ,ZEM ,GP16TG, HMBP,R134a,
200- 220V / 220-230V/1/50/60Hz, 3/8
HP, displacement 16,15 cm³

Category: Technologie,Tester ok
written by www.mbsm.pro | 9 April 2021



Private Picture Copyright : WWW.MBSM.PRO

Compressor ,ACC Cubigel ,Huayi ,Electrolux ,ZEM ,GP16TG, HMBP,R134a, 200- 220V / 220-230V/1/50/60Hz, 3/8 HP, displacement 16,15 cm³

Compressor ,ACC Cubigel ,Huayi
Electrolux ,ZEM GL80AA / GVY75AA, LBP
– R134a, 220 – 240V/1/50Hz, 1/4 HP,
discharge 7.52 cm³, motor type RSIR /
RSCR, oil type ester, oil charge 180
cm³, 150 W at -25 / +55 °, input
power, current 146 W, 1.16 A,
expansion device: capillary, cooling:
static, weight 8.6 kg

Category: Technologie,Tester ok
written by www.mbsm.pro | 9 April 2021

cubigel compressors

ORIGINAL INSTRUCTIONS MANUAL / MANUAL DE INSTRUCCIONES ORIGINAL / MANUALE D'ISTRUZIONI ORIGINALE / RANGE / GAMA / GAMMA / GAMME / BAUREIHE / ДИАПАЗОН / 系列 "D"/"L"/"P"/"S"/"X"

ORIGINAL INSTRUCTIONS MANUAL / ORIGINAL ANWEISUNGEN – HANDBUCH / Оригинальное руководство по эксплуатации / 原版操作規程

RSIR / RSCR PTC "D"/"L"/"P"

RSIR / CSIR "D"/"L"/"P"/"X"

CSR "L"/"P"

EXTERNAL CONNECTING BOX / CAJAS CONEXIONES / SCATOLE CONNESSIONI / BOÎTIER ELECTRIQUE / EXTERNE ELEKTRIKBOX / внешняя клемная коробка / 外置接线盒

CSIR "S"

CSIR / CSR "S"

CSR "P"/"S"/"X"

CSR "P"/"X"

PSC

CS"

RUSSIAN
 a-Compressor 1-White
 b-Overload 2-Blue
 c-PTC 3-Black
 d-Relay 4-Green
 e-Start capacitor 5-Yellow
 f-Run capacitor
 g-Thermostat
 h-Start connection
 ITALIANO
 a-Compressore 1-Bianco
 b-Protettore 2-Azzurro
 c-PTC 3-Nero
 d-Relè 4-Verde
 e-Condens. avviamento 5-Giallo
 f-Condens. permanente
 g-Termistato
 h-Terza
 FRANÇAIS
 a-Compresseur 1-Blanc
 b-Protecteur 2-Bleu
 c-PTC 3-Noir
 d-Réle 4-Vert
 e-Condens. démarrage 5-Jaune
 f-Condens. permanent
 g-Thermostat
 h-Troisième
 DEUTSCH
 a-Kompressor 1-Weiß
 b-Überlastschutz 2-Blau
 c-PTC 3-Schwarz
 d-Relais 4-Grün
 e-Anlaufkondensator 5-Gelb
 f-Betriebskondensator
 g-Thermostat
 h-Einfachleiterschleife
 ЧИНСКИЙ
 a-компрессор 1-Белый
 b-перегрузка 2-Синий
 c-PTC резистор 3-Черный
 d-реле 4-Зелено-зеленый
 e-стартовый конденсатор
 f-рабочий конденсатор
 g-термистат
 h-пространство
 中文
 a-压缩机 1-白色
 b-过载保护器 2-蓝色
 c-启动器 3-黑色
 d-继电器 4-黄-绿色
 e-启动电容 5-黄色
 f-运行电容
 g-温控器
 h-接地

Private Picture : www.MBSM.PRO

mult. our web site: www.cubigel.com

02/2010 1164133

Compressor ,ACC Cubigel ,Huayi Electrolux ,ZEM GL80AA / GUY75AA, LBP – R134a, 220 – 240V/1/50Hz, 1/5 HP, discharge 7.52 cm³, motor type RSIR / RSCR, oil type ester, oil charge 180 cm³, 150 W at -25 / +55 °, input power, current 146 W, 1.16 A, expansion device: capillary, cooling: static, weight 8.6 kg

Rsir/Rscr ,Compresseur , ACC Cubigel ,Electrolux ,HTH14AA ,R600 , 220 / 240 V/50 Hz,1/4HP ,Engine 14 cm³,LBP ,245W

Category: Technologie,Tester ok
written by www.mbsm.pro | 9 April 2021

C46553544

ACC

R600a



HTH14AA 1149

220--240V

50Hz

← **SUCTION** **CE**

8 486 0723410 2 





Private Picture : www.MBSM.PRO

Rsir/Rscr ,Compresseur , ACC Cubigel ,Electrolux ,HTH14AA ,R600 , 220 / 240 V/50 Hz, 9,37kg ,1/4HP ,Engine 14 cm³,LBP ,245W