

Mbsm.pro, Compressor, B43H, HUAYI,  
1/7 Hp, LBP, ACC, CUBIGEL, Danfoss,  
RSIR , r134a

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022



HUAYI

B43H

R134a

220-240V~50/60Hz

⑤



A008210



HUAYI COMPRESSOR(JINGZHOU)CO.,LTD.

Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Compressor, B43H, HUAYI, 1/7 Hp, LBP, ACC, CUBIGEL, RSIR , r134a

# Mbsm.pro, Compressor, ACC, Cubigel, Huayi, Electrolux, ZEM, MPT14LA, MPT14RA, LBP, R404A, R507, 1/2HP, 220-240V

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Compressor Tecumseh L` Unite CAJ2432Z, LBP – R404A, 220 – 240V, 50 Hz, 1 phase, discharge: 18.3 cm<sup>3</sup>, oil type: POE, oil charge: 887 cm<sup>3</sup>, electrical equipment: CSR, cooling power 381 W at -35 / +40 °C, connection: suction: 1/2 inch, discharge: 5/16 inch, sound level: 56 dBA, start capacitor: 8 8 uF/250V, run capacitor: 15 uF/400V, expansion device: capillary or expansion valve, height: 271 mm, weight: 21.5kg

Type: Low back pressure (LBP)

Refrigerant: R404a/507

Displacement: 14.32cm<sup>3</sup>

Power: 1/2CV

Voltage: 230V – 50Hz

Single-phase

Motor type: CSR

Weight: 13.4 kg

Evaporation temperature

-40°C: 243W


-30°C: 420W

-25°C: 535W

-10°C: 988W



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

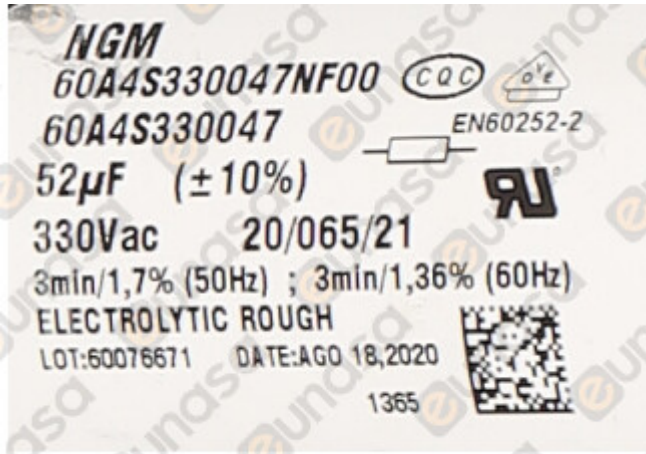

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_MPT14LATélécharger

Mbsm.pro, Compressor, cubigel, huayi,

# ACC, Electrolux, HPY14AA, LBP, R600a, 1/5HP, 220-240V/1/50Hz, 166 W

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Compressors/Compressors ACC – Electrolux HP14AH, LBP – R600a, Power consumption 1/5HP, 220-240V/1/50Hz, Motor type RSIR, Injection: Capillary operation, Displacement 14.32 cm<sup>3</sup>, Oil type ISO VG10 Mineral oil, Oil quantity 300 cm<sup>3</sup>, Power 147 W at -25 / +55 °C, Power consumption 166 W, Power 0.0 W, Cooling capacity

-10 °C -15 °C -20 °C -25 °C -30 °C -35 °C

344	276	216	166	124	92
<b>Shipping Class</b>	Standard				
<b>Scope Of Application</b>	LBP				
<b>Lieferzeit</b>	2-3 Wochen				
<b>Type Of Construction</b>	Piston				
<b>Condensation Temperature</b>	55°C				
<b>Maker</b>	ACC				
<b>Manufacturer No.</b>	HPY14AA				
<b>Displacement In Cm3</b>	14.32				
<b>Measuring Requirements</b>	Ashrae				
<b>Refrigerants</b>	R600a				
<b>Series</b>	HPY				
<b>Condensing Units Compressors</b>	Compressors				
<b>Suspense</b>	220-240V				
<b>Weight In Kg</b>	13				

Compressor ACC Cubigel Huayi Electrolux ZEM HPY14AA, LBP -R600a, 220-240V/1/50Hz, 1/5 HP, discharge 14.32 cm<sup>3</sup>, motor type RSIR, oil type ISO VG10 mineral, oil charge 300 cm<sup>3</sup>, 166 W at -25 / +55 °, input power, current 147 W, 0.96 A, expansion device: capillar, cooling: static, weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with "immediately available" and "scarce stock", usually delivery within 2 days. For "currently not available" delivery time usually 2 weeks or delivery time in urgent cases contact us.

---

Refrigerant:	R600a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	6,5 mm
Suction:	8,1 mm
Working area:	LBP
Design type:	Hermetic
Model series:	HPY
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 10 Mineral
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions ( length × width × height ):	20,40 × 16,20 × 19,60 cm
customs tariff number:	84143081
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	HPY14AA
Modelname:	HP14AH

Stroke volume (cm <sup>3</sup> ):	14,32
Cooling capacity (W):	147
Power (HP):	0,25
Max. Starting current (A):	11,5
Max. Operating current (A):	0,96
Engine type:	RSIR
Note:	Static cooling
Oil quantity (l):	0,3
Compressor type:	Piston
Power range:	-35 C to -10 C
Alternative:	NBM1118Y , EMX70CLC , NBM1116Y
Pressure line (mm):	6,5
Suction line (mm):	8,1





Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_HPYP14AA-1Télécharger](#)


[Mbsm\\_dot\\_pro\\_private\\_PDF\\_HPYP14AATélécharger](#)

---

## Compressor, ACC, Cubigel, GL60AN, R134a, 220-240V, HMBP, 1/6HP

Category: Non classé

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022

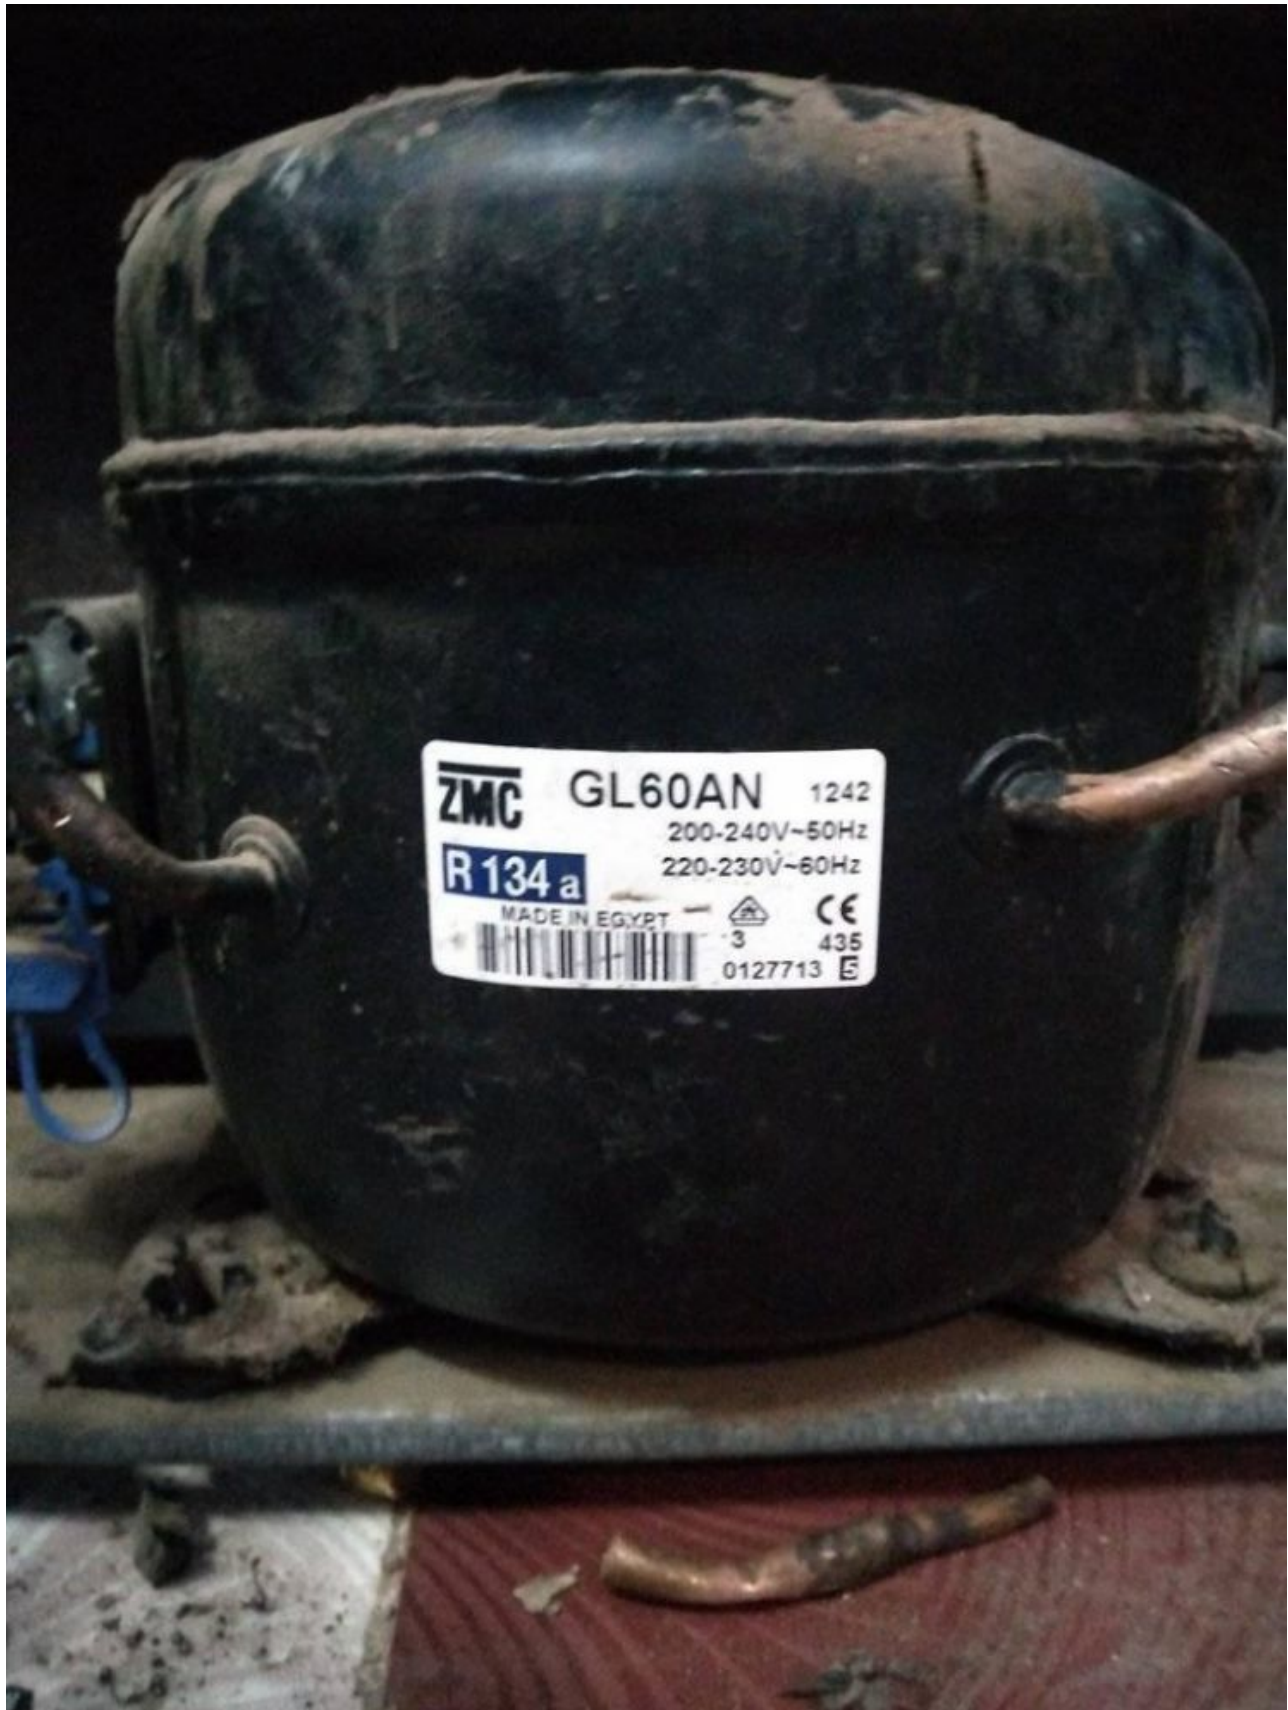

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Type: Hermetic piston compressors Producer: ACC Series: HMBP

Model: GL60AN

General data

Refrigerant: R134a

Discharge element: C

Cooling: S  
Maximum ambient temperature [°C]: 50

### Compressor's data

Cylinder capacity [cm<sup>3</sup>]: 6  
Displacement [m<sup>3</sup>/h]: 1  
Weight [kg]: 9,9  
Oil charge [cm<sup>3</sup>]: 345  
Oil type: ISO VG 19 ESTER

### Engine's data


Engine type: RSIR  
Power [KM]: 1/6  
Starting element: LST  
Power supply: 220V 50Hz  
Voltage range: 170-264  
Locked rotor current [A]: 14,6  
Running winding resistance (25°C) [Ω]: 9,33  
Starting winding resistance (25°C) [Ω]: 10,81

### Electrical data

Relays: 3003  
Shielding element: MRA38085, T0515, AF11BJ  
Starting capacitor volume [μF]:

### Connections

	milimeters	inches
Suction tube:	6,5	
Service tube:	6,5	
Discharge tube:	4,9	

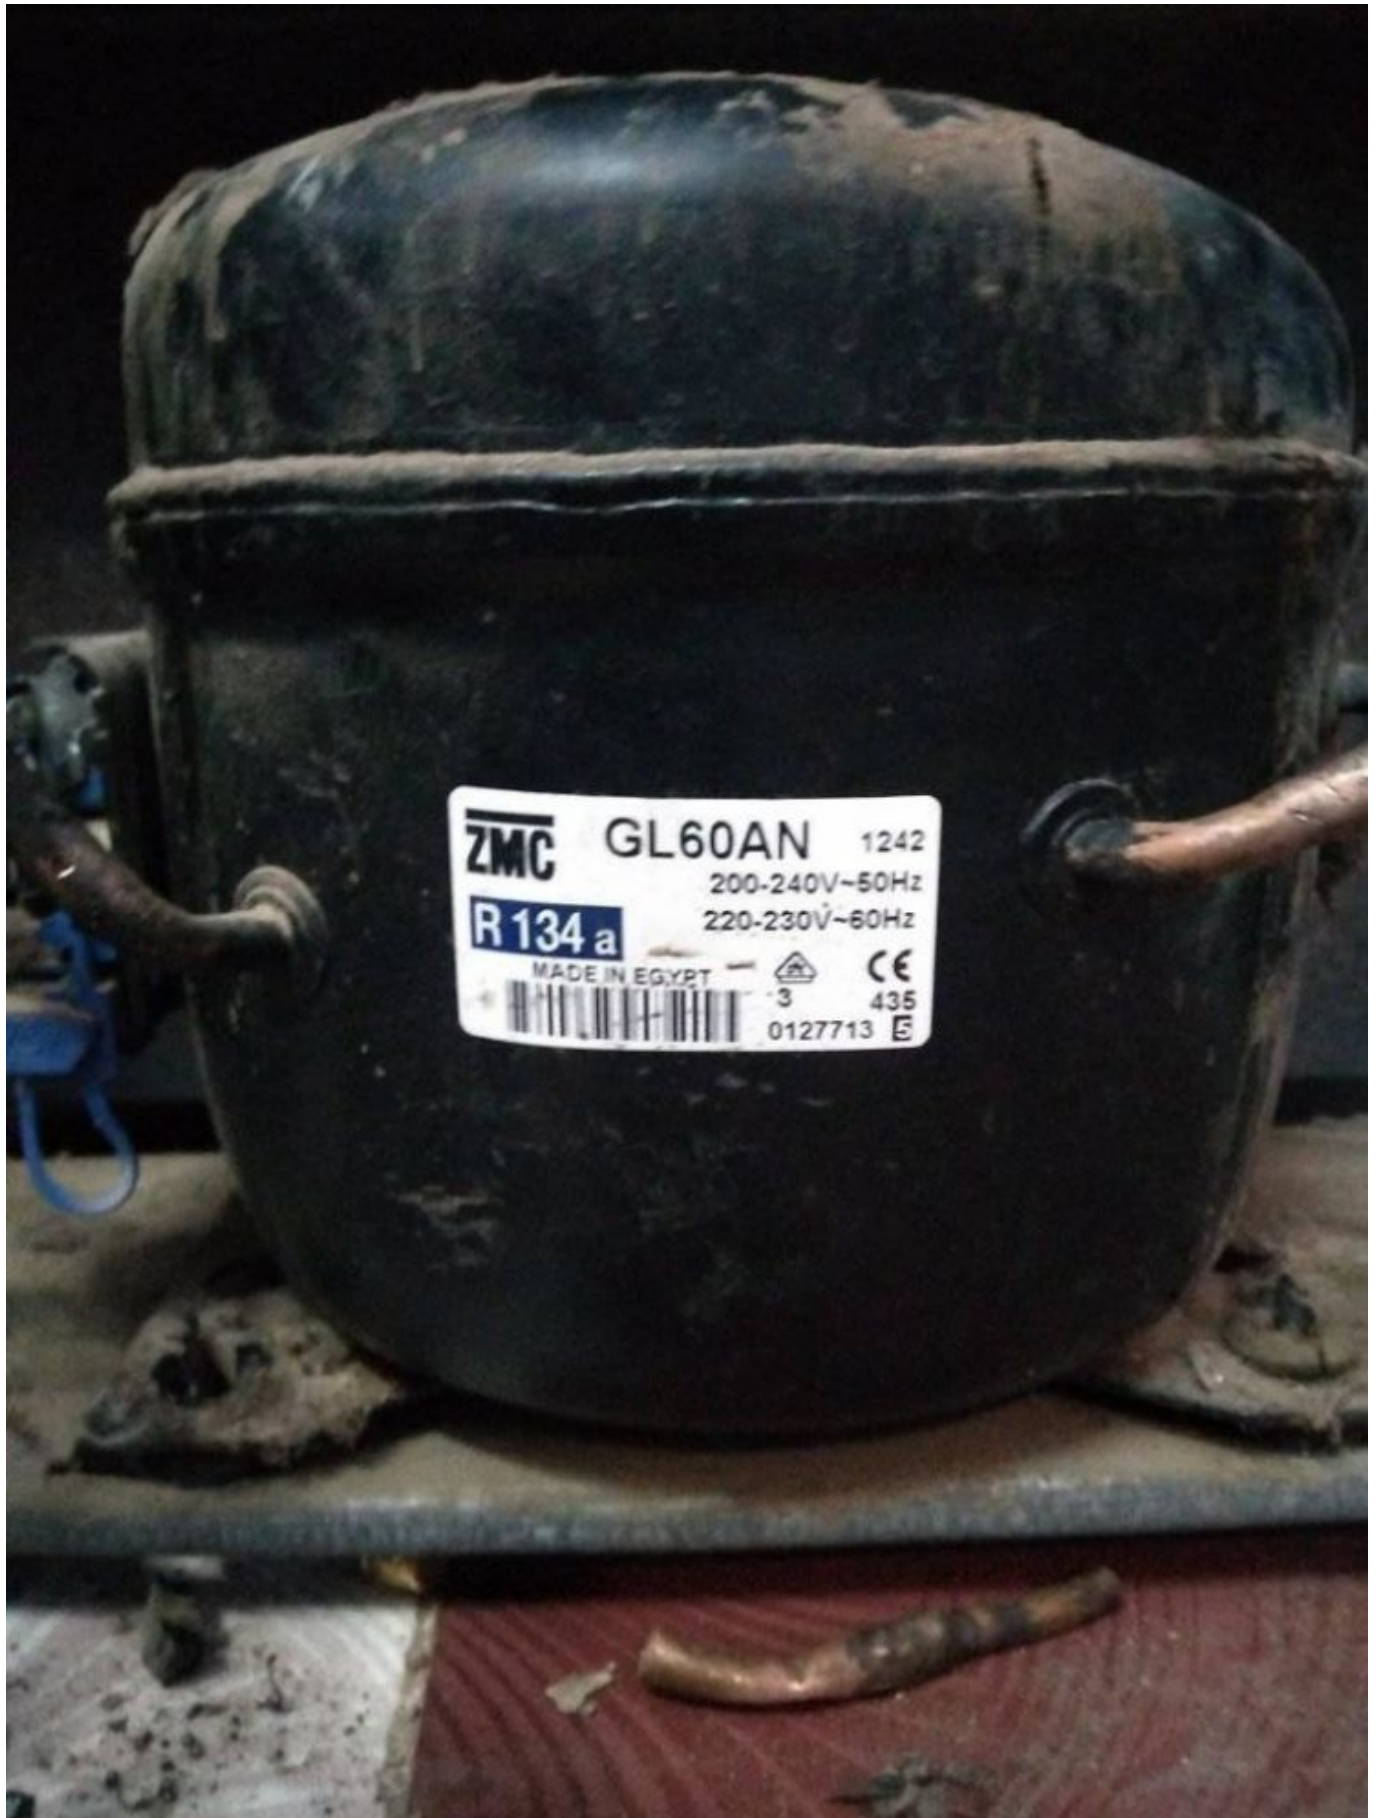

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_GL60ANTélécharger

---

Compressor, nbu1118y, réfrigérateur,  
brandt, BRANDT, MA-45CA562COMP-KU950,  
R600a, 1/4 Ch, 11,2 cm<sup>3</sup>, ACC,  
HMK12AA, SECOP, EMBRACO, NBU1118Y  
DANFOSS, NLE13KK3

Category: Non classé

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022

**Embraco®** NBU1118Y

THERMALLY PROTECTED		0-240V-50Hz
CE	800a	
MIN. OIL 200°C / PH		

SUCKTION SKM NO START WITHOUT STARTING DEVICE



815DA42 16/SEP/08 PA8LCI0P

CAUTION RISK OF FIRE



R 600a

Compressor, nbu1118y, réfrigérateur, brandt, BRANDT, MA-45CA562COMP-KU950,  
R600a, 1/4 Ch, 11,2 cm<sup>3</sup>, ACC, HMK12AA, SECOP, EMBRACO, NBU1118Y DANFOSS,  
NLE13KK3

Modèles d'appareils concernés: 42X0249 – DZN4710XE – DZN4710XE/1 Pièce d'origine  
constructeur

Référence : MA-45CA562COMP-KU950

COMPRESSEUR R600a – 1/4 Ch – 11,2 cm<sup>3</sup>

ACC HMK12AA SECOP

Equivalent :

EMBRACO NBU1118Y

DANFOSS NLE13KK3 – NLE15K – HMK12AA

ELECTROLUX HP16AH

SECOP HMK12AA

**Embraco®** NBU1118Y

THERMALLY PROTECTED		0-240V-50Hz
CE	800a	
MIN. OIL 200°C / 375°F		

SUCKTION SKM NO START WITHOUT STARTING DEVICE



815DA42 16/SEP/08 PA8LC10P

CAUTION RISK OF FIRE



R 600a



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_NBU1118y-ametist-produse-doc1702-5Télécharger](#)

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_NBU1118y-EMBRACO-ASPERATélécharger](#)

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_NBU1118y-embraco-r600-compressorsTélécharger](#)

---

## PDF : Calcul , désenfumage , pour immeuble

Category: Solutions

written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

note de calcul désenfumage pour immeuble contient atrium

---

Compressor ELECTROLUX, CUBIGEL  
,GP12TB ,Hermetic piston ,ACC ,HMBP ,  
moteur HP , 3/8 HP++, 1/2 hp- , 1PH ,  
R134A , Pression 1.7 Bar , 220V

Category: compressor,Technologie,Tester ok  
written by [www.mbsm.pro](http://www.mbsm.pro) | 13 February 2022

	<b>Model</b>	<b>Refr.</b>	<b>HP</b>
▶ <input type="checkbox"/>	<b><u>GL45PB</u></b>	HMBP::R134a	1/6
▶ <input type="checkbox"/>	<b><u>GL45PB</u></b>	HMBP::R134a	1/6
▶ <input type="checkbox"/>	<b><u>GL45TB</u></b>	HMBP::R134a	1/6
▶ <input type="checkbox"/>	<b><u>GL60PB</u></b>	HMBP::R134a	1/5
▶ <input type="checkbox"/>	<b><u>GL60TB</u></b>	HMBP::R134a	1/5
▶ <input type="checkbox"/>	<b><u>GL80PB</u></b>	HMBP::R134a	1/5
▶ <input type="checkbox"/>	<b><u>GL80TB</u></b>	HMBP::R134a	F
▶ <input type="checkbox"/>	<b><u>GL90TB</u></b>	HMBP::R134a	1/4
▶ <input type="checkbox"/>	<b><u>GP12TB</u></b>	HMBP::R134a	3/8

Picture5 Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Compressor ELECTROLUX, CUBIGEL GP12TB ,Hermetic piston ,ACC ,HMBP , moteur HP , 3/8 HP , 1PH , R134A , Pression 1.7 Bar