

Compresseur Embraco ,Aspera,  
nbm1118y, nby1118y ,coolant ,R600a  
,NBY1118Y ,220-240V 50Hz, LBP ,fully  
hermetic, 10,8kg ,1/4HP

Category: Technologie,Tester ok  
written by [www.mbsm.pro](http://www.mbsm.pro) | 9 May 2020



**Embraco®**

**NBY1118Y**



THERMALLY PROTECTED		220-240V~50Hz
	R 600a	
MIN. OIL 280CC		1 PH

SUCTION →

SKM

NO START WITHOUT STARTING DEVICE



816BA42

19/AUG/08

PA8HQHBL

Private Picture : [www.MBSM.PRO](http://www.MBSM.PRO)

ompresseur Embraco ,Aspera, nbm1118y, nby1118y ,coolant ,R600a ,NBY1118Y ,220-240V 50Hz, LBP ,fully hermetic, 10,8kg ,1/4HP,nbt1118y

# Compressor Bpm111z , r134a 1/6hp ,5.6cc, 240v 50hz ,ASPERA, EMBRACO

Category: Technologie,Tester ok  
written by [www.mbsm.pro](http://www.mbsm.pro) | 9 May 2020





PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

Compressor Bpm111z , r134a 1/6hp ,5.6cc, 240v 50hz ,ASPERA, EMBRACO

# Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a ,power 3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

Category: Solutions, Tester ok  
written by www.mbsm.pro | 9 May 2020



Picture5 Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a ,power 3/4 Hp,  
displacement 22.40 cc , gas R134a HMBP , 220/240V

Compresseur hermetique de Aspera – Embraco NT6220Z – R134a  
3/4 HP

220V 50Hz 1~

Cylindrée = 22.37 CM3

APPLICATIONS = HBP

Moteur type: CSIR

## EMBRACO Asprea Compressor NT6220Z

### Technical Details

- 220/240V
- 50Hz
- power 3/4 Hp, displacement 22.40 cc
- gas R134a HMBP

- ASPERA

SKU: 3070180

**Suitable For/Compatible With**

- NT6220Z ASPERA
- NT6220Z-CSIR ASPERA
- NT6220Z EMBRACO
- NT6220Z-CSIR EMBRACO




embraco NT



R134a

HBP

# EM/NE/NT/NJ

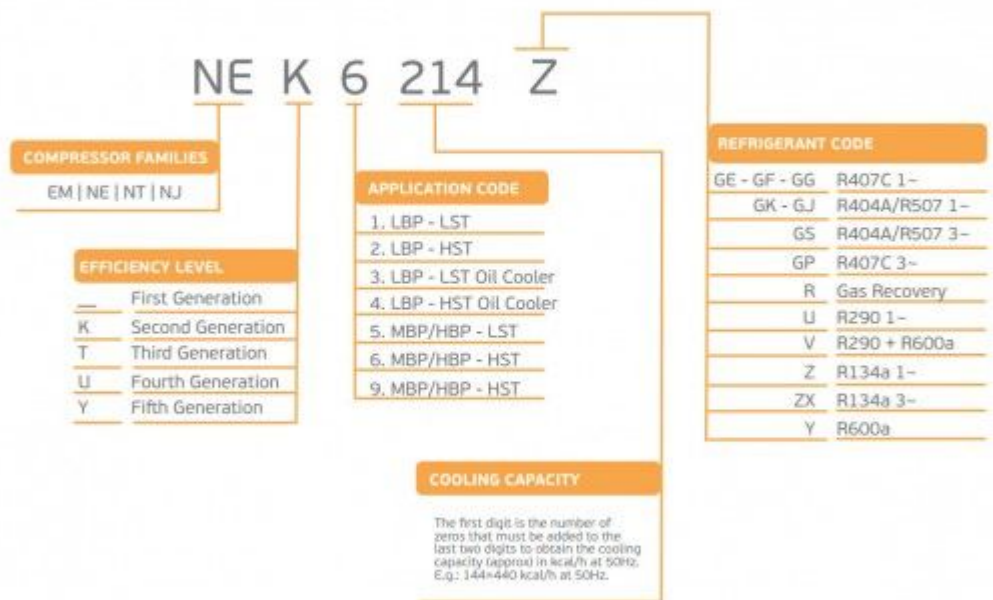

R134a								
50Hz 50-60Hz	LBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]	HBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]
NT NTU					NT6215Z	C / N	1.405	17,39
					NT6217Z	A / N	1.619	20,44
					NT6220Z	N	1.744	22,37
					NTU6222ZV	A	2.117	23,70
					NTU6224ZV	A	2.582	27,80

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

## MBSM.PRO , Compressor, Electrolux-Zem GL60AA R134A , 1/6 HP , 1PH , 220-240 V 50 Hz

Category: Solutions, Tester ok  
written by Jamila | 9 May 2020



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

MBSM.PRO , Compressor, Electrolux-Zem GL60AA R134A ,1/6 HP , 1PH , 220-240 V 50 Hz



- Puissance en cheval 1/6 CV
- Cylindrée 5.99 cm<sup>3</sup>
- 220-240 V 50 Hz
- Gaz R134a LBP
- Température d'utilisation max. 32°C
- Avec boîtier et système de démarrage

La photo montre l'aspect du compresseur, pas son étiquette réelle

#### Codes fabricants

- ACC-GL60AA
- ACC-GL60AB
- ACC-GL60AH
- CUBIGEL-GL60AA
- CUBIGEL-GL60AB
- CUBIGEL-GL60AH
- MONDIAL ELITE-4106004
- MONDIAL ELITE-1147031
- Embraco Aspera- B1112Z





PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

Mbsm\_dot\_pro\_private\_PDF\_GL60AATélécharger  
Mbsm\_dot\_pro\_private\_PDF\_-GL60AATélécharger

590689

GL60AA 99H271A

**GL60AA**

08283

03254

267799

THERMALLY 220 - 240 V~ 50 Hz PH1  
PROTECTED

**R134a**



CE H



**Type: Hermetic piston compressors** **Producer: ACC** **Series: HMBP**

**Model: GL60AA**

### **General data**

Refrigerant: R134a  
Discharge element: C  
Cooling: S  
Maximum ambient temperature [°C]: 43

### **Compressor's data**

Cylinder capacity [cm<sup>3</sup>]: 6  
Displacement [m<sup>3</sup>/h]: 1  
Weight [kg]: 9,1  
Oil charge [cm<sup>3</sup>]: 265  
Oil type: ISO VG 19 ESTER

### **Engine's data**

Engine type: RSIR  
Power [KM]: 1/6  
Starting element: LST  
Power supply: 220V 50Hz  
Voltage range: 187-264  
Locked rotor current [A]: 9,9  
Running winding resistance (25°C) [Ω]: 15,6  
Starting winding resistance (25°C) [Ω]: 21,31

### **Electrical data**

Relays: 3003  
Shielding element: MRA38028, T0508, AF18FU  
Starting capacitor volume [μF]:

### **Connections**

	milimeters	inches
Suction tube:	6,5	
Service tube:	6,5	
Discharge tube:	4,9	