


# Panasonic, refrigerator, compressor, SB48C95GAW5, 110w, White-Westinghouse refrigerator, 220v, 50 Hz, 85L, R134A/80G, 1/6 Hp

Category: compressor

written by www.mbsm.pro | 16 March 2021

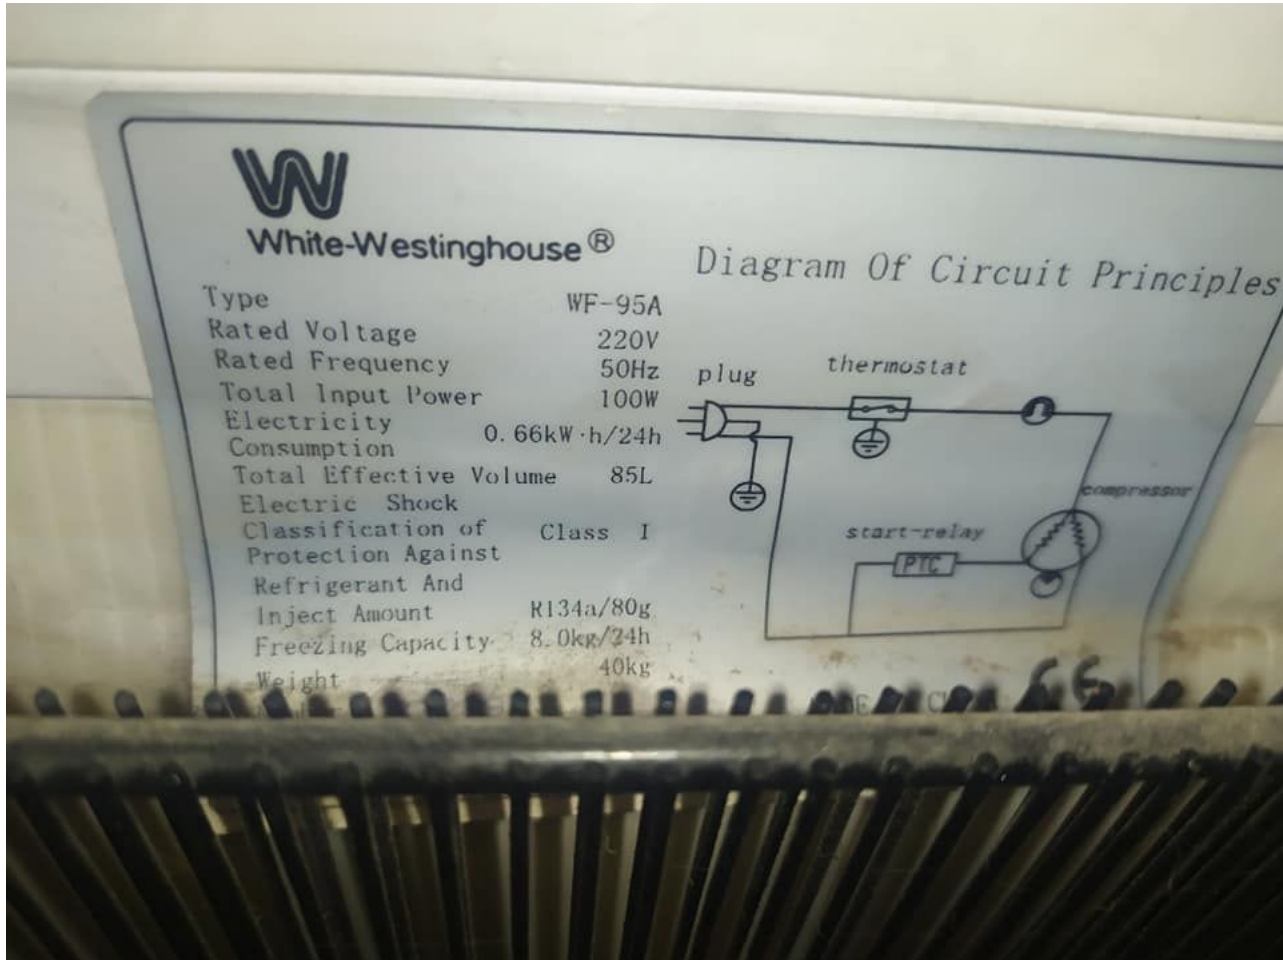


Private Picture Copyright : WWW.MBSM.PRO

## Specification

Item	Performance characteristics
Refrigerant	R134a
Displacement (cm <sup>3</sup> )	4.8
Voltage (V)	220/240
Frequency (Hz)	50
Motor Type	RSIR
Capacity@ASHRAE	110
COP@ASHRAE	1.03/0.99
Capacity@CECOMAF	—
COP@CECOMAF	—



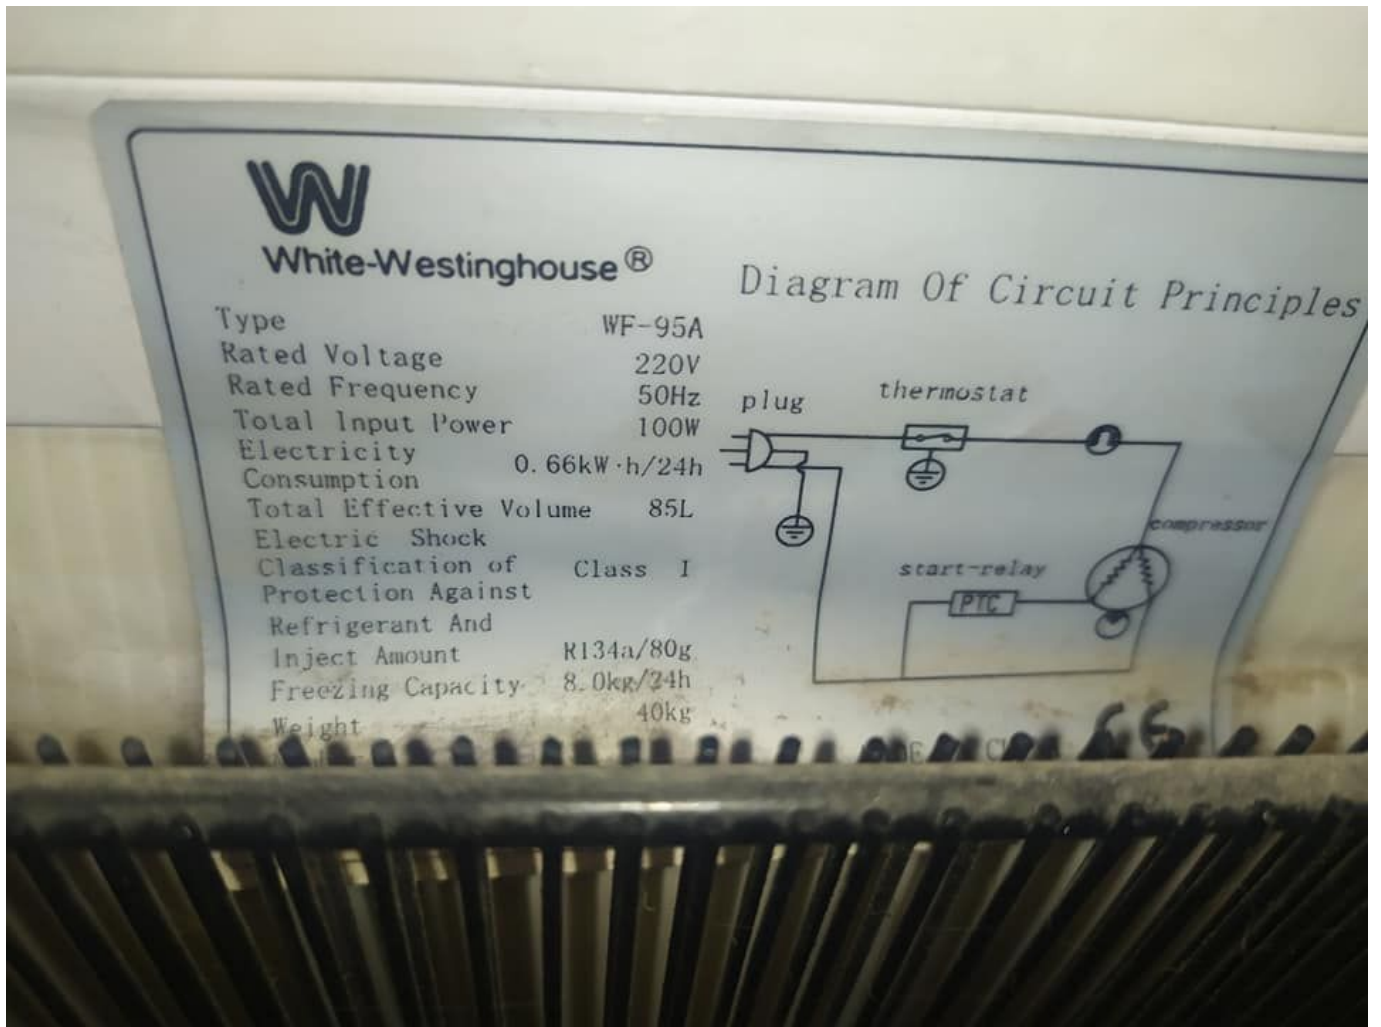

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_SB48C95GAW5Télécharger

**HERMETIC, Freezer, COMPRESSOR, ZEL, GTH86AA, R134A, 1/4 Hp, Lbp, 230W, 8.6CC**

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 March 2021



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

## COMPRESSOR ZEL GTH86AA

APPLICATION: LBP

FREON: R134A

DISPLACEMENT: 8.6CC

POWER SUPPLY: 220V

POWER: 1 / 4HP – 230W

APPLICATION: UNIVERSAL

### Specifications

### Description

### Detailed Product Description

1.Low levels of noise and vibration

2.Standard,medium,high and very high levels of efficiency

R134a 220-240V/50HZ

Model	Displ.(cm <sup>3</sup> )	Motor Type	Cooling capacity(w)	Input Power without RC(w)	Input Power with RC(w)	COP without RC(w/w)	COP with RC(w/w)	Run Capacltor	Start Capacltor	Height(mm)
Standard Efficiency Range										
0F789	4.4	RSIR	110	102		1.08				174

OF1033A5.7	RSIR	141	118	1.19				174
OF1350A7.5	RSIR	178	158	1.13				183
GTH86AA8.6	RSIR/RSCR230		161	1.43	1.50	5		174
GTH93AA9.3	RSIR/RSCR260		182	1.43	1.50	5		183
Medium Efficiency Range								
GTM40AT4.0	RSIR	102	91	1.12				163
GTM57AT5.7	RSIR	156	128	1.21				183
GTM60AT6.0	RSIR	165	136	1.27				163
GVY75AT7.5	RSIR/RSCR200		149	1.34	1.44	5		183
GTM75AA7.5	RSIR	200	166	1.20			50	183
GTM93AA9.3	RSIR	270	220	1.35				183
GTM10AA11.0	RSIR/RSCR300		222	1.35			50	183
GTM12AA12.0	RSIR/RSCR330		241	1.37			50	183



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Compressor, NL7.3FT, SECOP, 105G6726, DANFOSS, 6726, 105G, 105 G 6726, 105G 6726, 1/5 HP, 180W, LBP, Zanussi, Kiriazi Electric Company, TGV 335L,

NO FROST, TSV 320L, FC 83L , R134A,  
125G, 220-240V 50Hz, CSIR

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 March 2021

# KIRIAZI



ELECTRIC  
COMPANY



Product	No Frost Refrigerator	Class	T
Model	E 335N/3	Current / Amp.	1.1/~
Rated Voltage	220-240V/50HZ	Refrigerant	R 134a 125g
Rated input of lamp	1 x 25 w	Total Gross Volume	335 L
Ins : Basic	Type II IPX4	Total Storge Volume	320 L
Freezing Capacity	4 kg/24hr	Freezer Capacity	83L
ES 6000 / 2008		Tow Door Ref.	
ES 3793 / 2006			
Serial Number		Made in Egypt	



● ○ REDMI NOTE 8  
○ ∞ AI QUAD CAMERA

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

R134a is a low pressure refrigerant, very efficient for high temperature applications.

This makes it ideal in air conditioning applications that may leak refrigerant like car air conditioning.

Now it is being phased out because of its high global warming potential and replaced by R134

R404a is a high pressure refrigerant ideal for applications in low and medium temperature.

You want low pressure refrigerants in household applications like refrigerators that may be inside kitchens with (possible) high ambient temperature, so you make sure nothing will blow up. For the same reason you want R134a in your car air conditioning.

R404a instead has pressures slightly above atmospheric in low temperature applications where R134a would have negative pressures and its heat transmission coefficients would be much lower.

<b>Type de gaz</b>	<b>App</b>	<b>HP</b>	<b>Watt</b>	<b>Modèle</b>	<b>TL</b>
<b>R134A</b>	<b>LBP</b>	<b>1/6</b>	<b>134</b>	<b>TLY5.1FK</b>	
<b>R134A</b>	<b>LBP</b>	<b>1/4</b>	<b>183</b>	<b>TLES7FT.4</b>	


R134A	LBP	1/5	156	NL6FT.2	
R134A	LBP	1/5	185	NL7.3FT (RSIR)	
R134A	LBP	+ 1/4	219	NL9FT.2 (RSIR)	
R134A	LBP	1/4	185	NL7.3FT (CSIR)	
R134A	LBP	+ 1/4	219	NL9FT.2 (CSIR)	NL
R134A	LBP	1/3	284	NL10FT	
R134A	MBP	1/3	621	NL11MF	
R404A	LBP	1/3	433	NL7CLX	
R404A	LBP	1/3	471	NL8.4CLX	
R134A	LBP	1/4	187	NLY6F	
R134A	LBP	+ 4 /	213	NLY7F	
		(1)			
R134A	LBP	1/3	237	NLY9FK	
R600A	LBP	+ 1/4	227	NLE13KTK.2	
R600A	LBP	1/3	253	NLE15KTK.2	
R600A	LBP	+ 1/4	225	NLX13KK.3	
R600A	LBP	1/3	254	NLX15KK.3	

R134A	LBP / MBP / 1/3 HBP	264	SC12G	
R134A	LBP / MBP / 1/2 HBP	392	SC18G	
R134A	LBP / MBP / 3/4 HBP	456	SC21G	SC
R134A	MBP 3/4	1073	SC21MFX	
R134A	LBP 3/4	567	SC21FTX	
R404A	LBP 1	1033	ST21CL	
R404A	LBP 1	986	SC18CLX.2	
R404A	MBP 1/2	359/650	SC15MLX	
R404A	MBP 7/8	762/1584	SC18MLX	

# KIRIAZI



# CE



ELECTRIC  
COMPANY

®

Product	No Frost Refrigerator	Class	T
Model	E 335N/3	Current / Amp.	1.1/~
Rated Voltage	220-240V/50HZ	Refrigerant	R 134a 125g
Rated input of lamp	1 x 25 w	Total Gross Volume	335 L
Ins : Basic	Type II IPX4	Total Storage Volume	320 L
Freezing Capacity	4 kg/24hr	Freezer Capacity	83L
ES 6000 / 2008		Tow Door Ref.	
ES 3793 / 2006			
Serial Number		Made in Egypt	



REDMI NOTE 8  
AI QUAD CAMERA



REDMI NOTE 8  
AI QUAD CAMERA



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_NL7.3FTTélécharger  
Mbsm\_dot\_pro\_private\_PDF\_nl73ft\_105g6731\_r134a\_220v\_50hz\_11-2011\_desd406c102Télé  
charger

Refrig	Applic	oil cooling	Evaporating temperature [°C]													Evaporating tem			
			-35	-30	-25	-20	-15	-10	-5	0	5	10	15	-25	-10				
			1/20	1/16	1/10	1/8+	1/6	1/5	1/4	3/8	1/2	5/8	3/4	1	1 1/4	1 1/2			
R134a	LBP		PL50F	101G0220		1/20	14	26	40	56	74	95						60	86
			TL53FT	102G4324		1/16	21	34	50	69	92	120						62	93
			TL54FT	102G4424		1/10	27	43	63	88	117	152						88	123
			TL55FT	102G4524		1/8+	48	71	98	131	170	216						114	165
			TL55.7FT.3	102G4615		1/6	66	90	120	156	200	253						120	170
			TL56.5FT.3	102G4703		1/5			136									139	
			NL6FT	105G6628		1/6	60	84	115	152	198	253						123	184
			NL6.1FT	105G6620		1/6	60	84	115	152	198	253						123	184
			NL7FT	105G6728	105G6738	1/5	71	100	136	181	235	299						145	220
			NL7.3FT	105G6726		1/5	71	100	136	181	235	299						145	220
			NL8.4FT	105G6865		1/4	87	120	162	213	275	350						169	252
			NL9FT	105G6828	105G6838	1/4	87	120	162	213	275	350						169	252
			NL10FT	105G6829	105G6839	1/3	113	158	213	281	361	455						215	316
			NLE7.3FT	105G6710		1/4	92	118	154	201	258	325						148	221
			SC12FT	104G8205	104G8215	1/3	103	163	233	314	408	517	645					265	380
			SC15FT	104G8505		1/2	126	197	280	376	489	620	772					311	451
			SC18FTX	104G8805		5/8	144	229	325	437	567	719	896					365	517
			SC21FTX 50Hz	104G8105		3/4	192	296	415	553	713	901	1119					428	613
			SC21FTX 60Hz	104G8106		3/4	240	345	470	620	800	1012	1262					475	707
			TL2.5G	102G4251		1/12	11	23	36	51	69	90	116	145	179	219	264	60	84
		TL3G	102G4350		1/12		25	41	59	81	106	136	170	211	258	312	66	96	
		TL4G	102G4452		1/8		41	58	80	107	140	180	226	280	342	413	83	118	
		TL5G	102G4550		1/6		56	79	107	139	178	224	278	341	414	497	100	149	
		FR6G	103G6660		1/5		48	83	124	171	226	290	365	452	552		109	172	
		FR7.5G	103G6680	103G6690	1/5		62	99	142	193	254	325	408	505	618		126	194	
		FR8.5G	103G6780	103G6790	1/4		85	123	171	228	298	381	478	592	722		151	231	
		FR10G	103G6880	103G6890	1/4		92	136	188	250	324	412	516	638	779		179	265	
		FR11G	103G6980		1/3		115	170	233	307	395	501	628	780			202	317	
		TL6.5MF	102G4781		1/4			174	219	279	349	425	520					202	
		NL6.1MF	105G6660		1/5			141	189	245	312	390	482	588	709			187	
		NL7.3MF	105G6772		1/4			179	236	304	385	480	591	719	867			227	
		NL8.4MF	105G6879		1/4+			213	277	353	445	553	679	825	994			261	
		NL10MF	105G6885		1/3			266	346	441	554	687	843	1023	1231			323	
		NLE10MF	105G6888		1/3	88	137	194	262	343	440	554	688	845			198	308	
		NL11MF	105G6151		3/8			292	380	485	609	756	927	1125	1354			360	
		SC10G	104G8000		5/16	23	60	113	183	268	369	486	618	764	925	1100	181	290	
		SC12G	104G8240	104G8250	3/8	65	113	175	252	348	464	603	768	960	1182	1437	227	355	
		SC15G	104G8520	104G8530	1/2			164	290	424	568	728	908	1110	1340	1600	233	440	
		SC18G	104G8820	104G8830	1/2+			283	394	526	684	870	1087	1337	1624	1950	273	507	

model	watt	HP	LBP/MBP	نوع گاز	توضیحات
SC12G	246	1/3	LBP/MBP	134	
SC18G	392	1/2	LBP/MBP	134	
SC21G	456	3/4	LBP/MBP	134	
SC21MFX	1073	3/4	MBP	134	هیجرتین SC21G
SC21FTX	567	3/4	LBP	134	هیجرتین SC21G
SC12CL	629		LBP	404	
SC15CL	782		LBP	404	
SC18CLX.2	986		LBP	404	
TLS5FT(PTC)	134	1/6	LBP	134	
TLES5.7FT(PTC)	163	1/5	LBP	134	
TLES6.5FT(PTC)	183	1/4	LBP	134	سلفن NL7
NL6FT.2(PTC)*	156	1/5	LBP	134	
NL7FT.2(PTC)*	185	1/4	LBP	134	
NL9FT.2(PTC)*	219	1/4+	LBP	134	
NL10FT	284	1/3	LBP	134	هیجرتین SC12G (پارنه و سلفن)
NL11MF	621	1/3	MBP	134	هیجرتین SC12G (پارنه و سلفن)
NL7CLX	433		LBP	404	
NL8.4CLX	471		LBP	404	
NL7.3MF	393		MBP	134	
NL8.4MF	455		MBP	134	
NLY6F	187		LBP	134	سلفن NL7 - High efficiency (7% در رانندگی)
NLY7F	213		LBP	134	سلفن NL9 - High efficiency (7% در رانندگی)
NLY9FK	237		LBP	134	High efficiency (7% در رانندگی)
BD50F	72		LBP/MBP	134	
BD350GH	167		LBP/MBP	134	
GS21MLX	2200		MBP	404	
GS26CLX	1430		LBP	404	
GS34CLX	2072		LBP	404	
GS26MLX	2866		MBP	404	
GS34MLX	3726		MBP	404	

(LBP @ -33.3°C ASHRAE) زیر صفر  
(MBP @ -6.7°C ASHRAE) بالای صفر

Refrigeration, Compressor, K270CZ1, 1/3++, DONPER, Dongbei , K325CZ1, K375CZ1 , freezer, R134a, White HIK-BD-500 Chest Freezers, Top Open Door, -18 degrees to +10 degrees, 500L

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 March 2021

# PRODUCT PARAMETERS

MODEL NO.	K270CY1
COOLING CAPACITY	270W
REFRIGERANTS	R600a
INPUT POWER	208W
HORSE POWER	1/3+
DISPLACEMENT	16.2cm <sup>3</sup>



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

## Quick Details

Temperature:

-25° ~ +15°

Cooling Capacity:

1ton

Panel Thickness:

50mm

Applicable Industries:

Retail

After Warranty Service:

Online support

Local Service Location:

None

Showroom Location:

None

Condition:

New

Place of Origin:

Hubei, China

Voltage:

220V, 220V/50HZ

Dimension(L\*W\*H):

10-10\*10

Weight:

15KGS

Certification:

CE ROHS

Warranty:

1 Year

After-sales Service Provided:

Online support, No overseas service provided

Key Selling Points:

Sustainable

Machinery Test Report:

Not Availabl

Video outgoing-inspection:

Provided

Marketing Type:

New Product 2020

Warranty of core components:

1 Year

Core Components:

Motor

Color:

Balck

Product name:

Refrigerator Compressor

Refrigerant:

R134a

model:

K270CZ1

Cooling capacity:

230W

## Product Description

Refrigerant	R134a	Cooling capacity	270W
Input power	220W	Hose Power	220W
Temperature application	L/MBP	Displacement	9.5cm <sup>3</sup>
Working Current	1.5A	Voltage	220V~240V/50Hz
COP	1.3W/W	Motor type	RSIR
Cylinder capacity	9.5cm <sup>3</sup>	Weight	9.8±0.4kg

## Structure



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



# PRODUCT PARAMETERS

MODEL NO.	K270CY1
COOLING CAPACITY	270W
REFRIGERANTS	R600a
INPUT POWER	208W
HORSE POWER	1/3+
DISPLACEMENT	16.2cm <sup>3</sup>



Private Picture Copyright : WWW.MBSM.PRO

**Notice :** process channel and air suction pipe can not interchangeable

Product Name : Donper Compressor	Model: K270CZ1
Application : Refrigerator	Power supply :220v~240v/50Hz
Refrigeration capacity:270W	Power :220W
cylinder volume:9.5cm <sup>3</sup>	refrigerant: R134a
Motor :RSIR	COP:1.3W/W
Weight :9.8±0.4kg	working current :1.5A



Private Picture Copyright : WWW.MBSM.PRO

## Compressor Details

Production Name	Refrigerator compressor	Model	K270CZ1
Application	Refrigerator/ Freezer(300L~400L)	Power	220V~240V/50HZ
Cooling capacity	270W	Input power	220W
Cylinder volume	9.5Cm <sup>3</sup>	Refrigerant	R134a
Motor type	RSIR	COP	1.3W/W
Weight	9.8±0.4kg	Current	1.5A

Private Picture Copyright : WWW.MBSM.PRO

## Product Specification

Capacity	500 L
Type	Top Open
Temperature Range	-18 degrees to +10 degrees
Model Number	HIK-BD-500
Model Number/Name	HIK-BD-500

Energy Consumption	2.02 kWh/24hr
Product Dimensions	1650 x 755 x 830mm
Door Type	Top Open Door
Color	White
Door No.	2
Features	Adjustable Temperature Control,Digital Display,75mm Insulation Wall Thickness,Defrost Water Drain
Usage/Application	Freezer/Chiller
Weight	73kg
Depth	755mm
Refrigerant Used	R134a
Number Of Basket	2
Height	830 mm
Power Source	Electric
Energy Efficiency	2.02 kWh/24hr
Compressor Brand	Donper
Compressor Model	K270CZ1
Power	255 W
Width	1650 mm
Colour	White
Refrigerant	R134a
No of Doors	1
Number of Baskets	2

## Product Description

Haikawa now launches its latest range of Chest Freezers in 200 L, 300 L, 400 L and 500 L variants. The freezers come with an Adjustable Temperature Control, enabling its use as a freezer (-18 degrees to 0 degrees) or as a chiller (0 degrees to 10 degrees), depending on requirement. The 75mm Insulation Wall Thickness helps improve energy efficiency, while the unique digital display brings in a whole new level of convenience. The Chest freezers come with removable baskets and a defrost water drain. The Inner PP lining improves hygiene while a lock and key mechanism ensures maximum safety. Insulation: Cyclopentane. Refrigerant: R134a. The HIK-BD-500 model has a rated current of 1.5A, thus lowering the power consumption. The Chest Freezer is packed with the following features:

- Adjustable Temperature Control
- Electronic Controller with Digital Display
- 75mm Insulation Wall Thickness
- Low Power Consumption
- Inner PP Lining for Improved Hygiene
- Store-More Removable Basket
- Defrost Water Drain
- Lid Handle
- Lock and Key Safety Mechanism

# Additional Information

Packaging Details Box Dimensions: 1695 x 760 x 880mm Included: 1 Chest Freezer/ 1 Instruction Manual/ 2 Keys/ 2 Inner Metal Trays



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Compresseur de réfrigérant R134a Donper K375CZ1 220-240V 50Hz SC-SD-388Y

## Description

Compresseur de réfrigérant R134a Donper K375CZ1 220-240V 50Hz SC-SD-388Y

Réfrigérant: R134a

Tension: 220 V ~ 240 V / 50 HZ

Puissance en chevaux: 1/2 ph

Puissance d'entrée: 235 W

Capacité de refroidissement: 325 W

Cylindre de capacité: 11,4 centimètres cubes

Courant de travail: 1.6A

Type de moteur: CSIR

Poids: 9,9 ± 0 4 kg

875000033

 **K375CZ**  
220-240V~50Hz 1PH  
THERMALLY PROTECTED

     1

<http://www.donper.com>  
  
160111104220202452

R134a



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

FR6B, Compressor, 103U2654, FR6B  
103U2654, DANFOSS TL, FR and SC  
Hermetic Compressors, DANFOSS,  
Kiriazi, 343L, 1/5 Hp, MBP, R12,  
280g, équivalence, 1/4Hp, R134A, 190g

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 March 2021



Private Picture Copyright : WWW.MBSM.PRO

## Compresseurs hermétiques DANFOSS TL, FR et SC

BOC partie No.	Code Danfoss	Puissance nominale et applic	Refrig.	Capacité nominale (watts)	Réf. BOC	Code Danfoss	Puissance nominale et applic	Réfrigérer	Capacité nominale (watts)
FR6B	103U2654	1/5 MBP	R12	354	TL3F	102G4300	1/10 LBP	R134a	58
FR8.5B	103U2854	1/4 MBP	R12	450	TL4F	102G4400	1/8 LBP	R134a	84
SC10B *	104L2510	1/3 MBP	R12	588	TL55F	102G4520	1/6 LBP	R134a	127
FR11B	103U2154	1/3 MBP	R12	624	TL57F	102G4720	1/5 LBP	R134a	162
SC12B *	104L2670	4/9 MBP	R12	756	NL7F	105G6706	1/4 LBP	R134a	183
SC15B *	104L2830	1/2 MBP (LBP)	R12 (R502)	912 (768)	NL9F **	105G6802	1/4 LBP	R134a	214
SC18B *	1042110	2/3 MBP (LBP)	R12 (R502)	1044 (900)	NL11F **	105G6910	1/4 LBP	R134a	274
SC21B	104L2310	3/4 MBP	R12	1212	SC15F **	104G8500	1/3 LBP	R134a	319
SC10B	104L2510	1/3 LBP	R502	468	SC18F **	104G8800	4/9 LBP	R134a	395
SC12B	104L2670	4/9 LBP	R502	612	TL3G	104G4350	1/8 MBP	R134a	175
SC15C	104L2832	2/3 LBP	R502	768	TL4G	102G4452	1/6 MBP	R134a	215
SC18C	104L2111	3/4 LBP	R502	900	FR6G	103G6660	1/5 MBP	R134a	351
SC10G	104G8000	1/3 MBP	R134a	591	FR8.5G	103G6780	1/4 MBP	R134a	468
SC12G	104G8240	4/9 MBP	R134a	751	FR11G	103G6980	1/3 MBP	R134a	609
SC18G	104G8820	2/3 MBP	R134a	1059	SC15G	104G8520	1/2 MBP	R134a	892
SC21G	104G8140	3/4 MBP	R134a	1256	SC10CL	104L2523	1/3 MBP	R507	450
SC12CL	104L2623	4/9 LBP	R507	624	SC15CL	104L2853	2/3 LBP	R507	758
SC18CL	104L2123	3/4 LBP	R507	893					

Remarque:

1. Les compresseurs marqués \*\* sont équipés de raccords de refroidisseur d'huile.
2. Les compresseurs marqués \* peuvent être utilisés sur les systèmes R502 avec fonctionnement à tube capillaire dans la gamme LBP.
3. (Systèmes sans dégivrage automatique uniquement).

Capacités nominales basées sur:

LBP = -23,3 ° C température d'évaporation

MBP = -5 ° C température d'évaporation

Relais de remplacement (appareil de démarrage)	
Réf . BOC	Convient au modèle de compresseur
103N0011	TL3A à TL5A, FR7.5A à FR11A
103N0002	SC12A, SC15A





Private Picture Copyright : WWW.MBSM.PRO

FR6B	103 U26 54	1/ 5 M BP	R 1 2	3 5 4	T L 3 F	1 0 2 G 4 3 0 0	1 /	R 1 3 4 a	5 8
------	------------------	--------------------	-------------	-------------	------------------	--------------------------------------	--------	-----------------------	--------



Private Picture Copyright : WWW.MBSM.PRO

# Compresseur, MPT18LA, R-404A / R-507, Cubigel Compressors, 1/2 HP, LBP, CSR

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 March 2021



**cubigel**  
compressors

**MPT18LA**  
220-240V-50Hz PH1

**R404A**  
**R507**

THERMALLY PROTECTED

CE

MADE IN SPAIN

2

09121

9041257434100130

Le compresseur à piston hermétique à basse température Cubigel MPT18LA est utilisé dans les équipements de réfrigération avec des températures de fonctionnement d'évaporation inférieures à -20 °C:

1. Réfrigérateurs
2. Congélateurs
3. Réfrigérées vitrines
4. Chambres frigorifiques pour produits surgelés.

## Caractéristiques du compresseur Cubigel MPT18LA:

- Travailler sur le fréon R404a / R507a
- Application de LBP (Low Dack Pressure)
- Volume du cylindre 18 cm<sup>3</sup>
- Capacité d'huile 450 cm<sup>3</sup>
- Type d'huile ISO VG 32 ESTER
- Courant de démarrage 19 A
- Poids 12,5 kg

## Caractéristiques du moteur du compresseur Cubigel MPT18LA:

- Type de moteur CSR
- Puissance 1/2 CV
- Tension 200-220V 50Hz
- Tension admissible 170-242 V



**cubigel**  
compressors

**MPT18LA**  
220-240V-50Hz PH1

**R404A**  
**R507**

THERMALLY PROTECTED

CE

MADE IN SPAIN

9041257434100130

09121

Mbsm\_dot\_pro\_private\_PDF\_compresseur-acc-cubigell-electrolux-MPT16LATélécharger  
Mbsm\_dot\_pro\_private\_PDF\_huayi\_compressor\_mpt18la\_\_r404a\_220\_50\_1Télécharger

---

Compressor, AE4470Z-FZ3C, AE4470Z-FZ,  
Compressor Tecumseh, AE4470Z FZ,  
HBP/CBP, 1/2 HP, ++BIG, R-404a

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 March 2021



# Données techniques

- Modèle: **AE4470Z**
- Gaz: **R-404a**
- Température/Pression: **Haute Pression**
- Puissance: **1/2 HP**
- Voltage: **230 V**
- Type De Courant: **Monophasé**
- Fréquence: **50 Hz**
- Type De Compresseur: **Hermétique**
- Décalage: **12.01 cm<sup>3</sup>**
- Cons.Énergie -10°C: **597 W**
- Cons.Énergie -5°C: **631 W**
- Cons.Énergie 0°C: **663 W**
- Cons.Énergie +5°C: **693 W**
- Cons.Énergie +10°C: **721 W**
- T° De Condensation: **40 °C**
- Capacité Frigorífica -20°C: **637 Kcal/h**
- Capacité Frigorífica -15°C: **796 Kcal/h**
- Capacité Frigorífica -10°C: **975 Kcal/h**
- Capacité Frigorífica -5°C: **1178 Kcal/h**
- Capacité Frigorífica 0°C: **1408 Kcal/h**
- Capacité Frigorífica 5°C: **1671 Kcal/h**
- Capacité Frigorífica 10°C: **1970 Kcal/h**
- Tipo Test: **EN.12900**



Mbsm\_dot\_pro\_private\_PDF\_AE4470Z-FZ3CTélécharger

Mbsm\_dot\_pro\_private\_PDF\_compresseur-unite-hermetique-tecumseh-ae4470zTélécharger

---


# Danfoss, Compressor, 5 Hp, R22, Démontage, ouverture, DESTRUCTION

Category: compressor


written by [www.mbsm.pro](http://www.mbsm.pro) | 16 March 2021



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

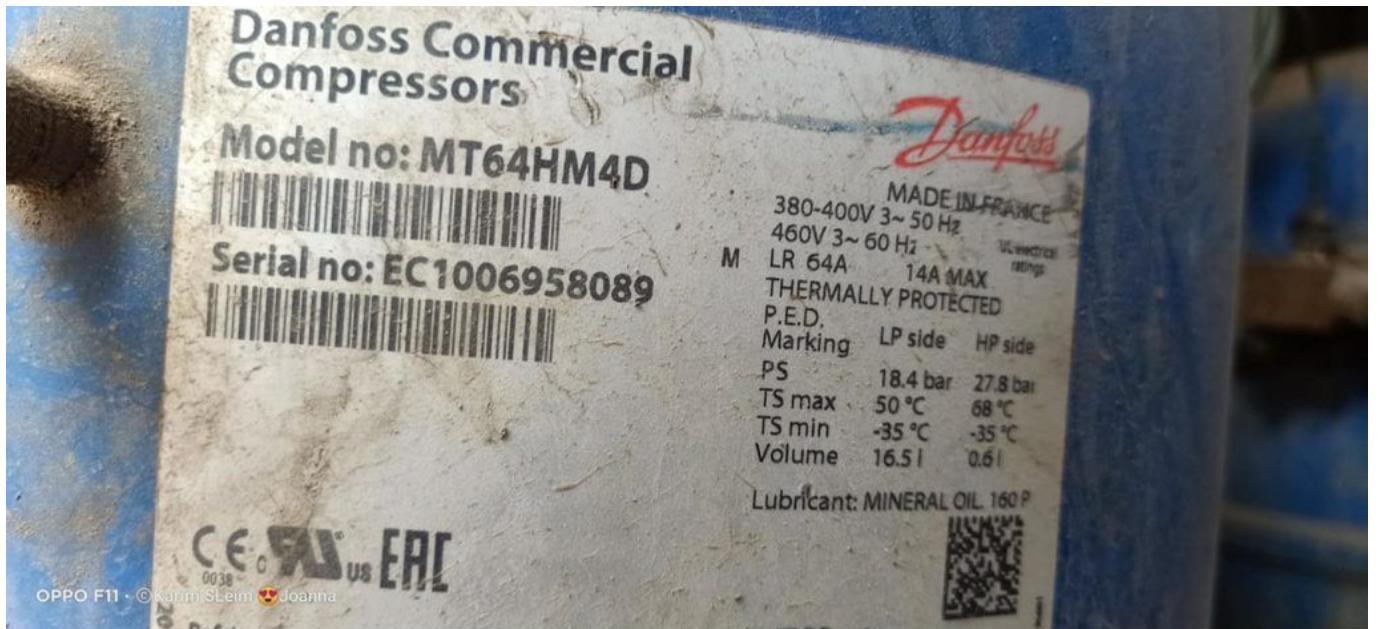

Private Picture Copyright: WWW.MBSM.PRO

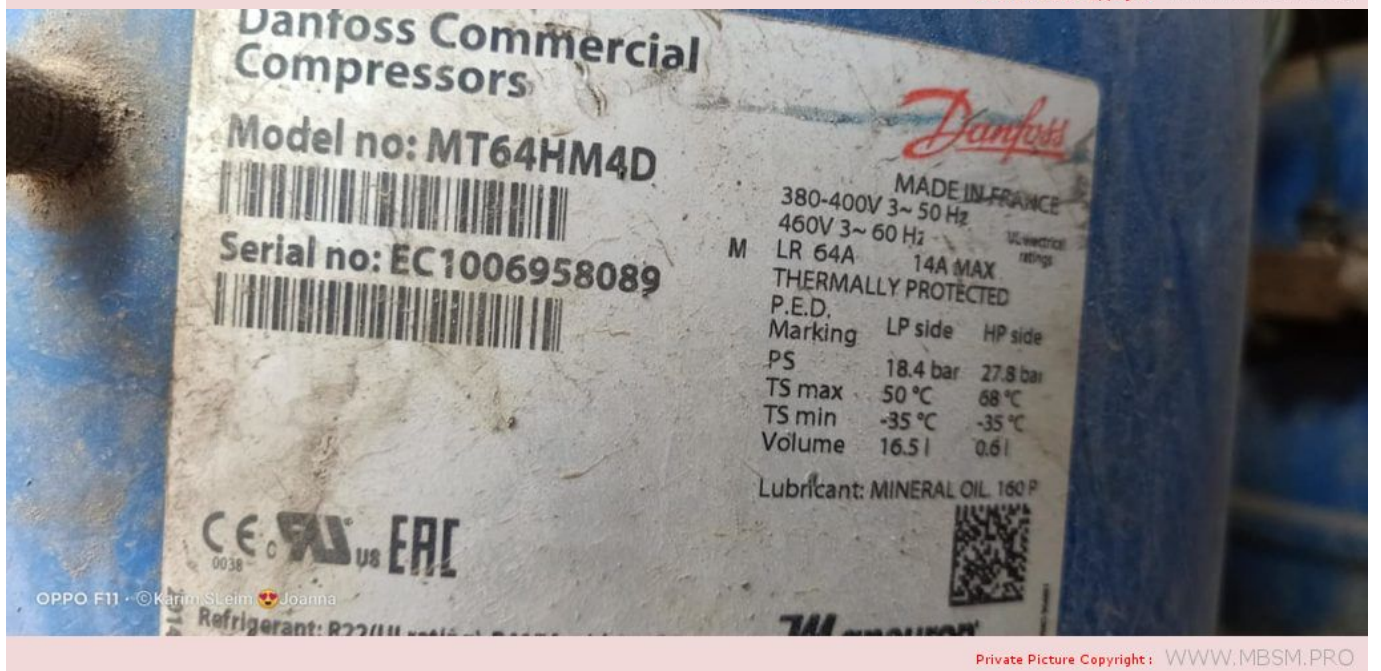

Private Picture Copyright: WWW.MBSM.PRO

Product : Compressor  
 产地: 法国制造  
 Plant : Made in France  
 客户: 丹佛斯自动控制管理(上海)有限公司  
 Customer service: Danfoss Automatic Controls Management (Shanghai) Co.Ltd  
 地址电话: 上海市宜山路900号科技大楼C楼20层200233 / (021)61513000  
 Address/Tel: 20th Floor Block C, Hi-Tech Building  
 900 Yi Shan Road Shanghai 200233 / (021)61513000  
 警告: 只有具备一定经验和安全程序  
 培训的授权人员才可以进行安装和维修。  
 Warning: The installation and maintenance  
 should be performed by the authorized  
 person only



**Danfoss Commercial Compressors**




型号: MT64HM4DVE  
  
 序列号: EC1006983516  


产地法国  
 380-400V 3~ 50 Hz  
 460V 3~ 60 Hz  
 额定电流: 6.4A 最大工作电流: 1.4A  
 过热保护  
 低压倒  
 最高额定压力 18.4 bar  
 最高额定温度 50 °C  
 最低额定温度 -35 °C

润滑油: MINERAL OIL 160 P



R410A 制冷剂: R22 或 R417A 仅和 160PZ



**WARNING**

Installation and servicing shall be performed by trained personnel only. Failure to observe these safety warnings could result in personal injury or death.  
 Read the safety manual before servicing this equipment.  
 This equipment contains refrigerant and electrical components. System contains refrigerant and electrical components. Read the safety manual before servicing this equipment.  
 Read the safety manual before servicing this equipment.

**CAUTION**

Use only manufacturer's approved refrigerants, lubricants, and electrical components. Unauthorized refrigerants / lubricants / electrical components could cause fire, explosion, electrical shorting.  
 For details refer to multi language instructions and technical documents available on Danfoss website at [www.danfoss.com](http://www.danfoss.com)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)







Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

# Embraco, NBT1118Z, Refrigerator, Freezer, Compressor, 1/4 HP, R134a, LBP, RSCR

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 March 2021



Réfrigérant: R-134a

Application: LBP

Fréquence: 50Hz

Déplacement: 8.40cm<sup>3</sup> / 0.51in<sup>3</sup>

B.OM : 298BA

Tension / Fréquence: 220-240V 50Hz 1 ~

Type de moteur: Démarrage résistif Inductif Run-Resistive Start Capacitive Run  
LRA (A): 6.9

Dispositif d'expansion:

Lubrifiant capillaire : Charge: 350cm<sup>3</sup>, 6.2oz<sup>3</sup>;

Type: polyolester 10

Poids: 10,8 kg, 23,8

lb Hauteur maximale: 200,0 mm, 7,9 pouces

Type de refroidissement: (Refroidissement statique) – le compresseur n'a pas besoin de refroidissement forcé, mais il doit être installé afin de garantir la circulation naturelle de l'air en convection, pour éviter la surchauffe.

Capacité nominale / température d'évaporation, W / ° C (avec une température de température de 54,4 ° C): 150 / -30,204 / -25,271 / -20,352 / -15? 446 / -10,554 / -5

Capacité nominale / température d'évaporation, W / ° C (avec température ambiante de 45 ° C): 165 / -30, 220 / -25,289 / -20,371 / -15? 468 / -10,579 / -5

Point nominal -23,3 ° C : Refroidissement: 225 W, 194 kcal / h;

W. entrée: 151W;

Courant: 0,60A;

EER: 1,49 W / W, 1,28 kcal / hW

### **Détails techniques**

220/240V 50Hz

puissance 1/4L – cylindrée 8,40 cc

gaz R134a LBP

ASPERA

### **MONDIAL FRAMEC**

**Mondial Framec** Armoire réfrigérée BRIO ICE 4 SK, KIC N40 R134A EBA210815, KIC NX40 R134A EBA210813

...et d'autres dispositifs

NBT1118Z-RSCR – ASPERA

NBT1118Z-RSCR – EMBRACO

LF3070231 – GEV – MONDIAL FRAMEC

...numéros de fabricant supplémentaires possibles



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_NBT1118Z\_Embraco\_VerdichterTélécharger

Compressor, Zanussi, HLY80AA, 1/7Hp, 220-240V 50Hz ~1, R600a, ZEM, Low Back Pressure, RSIR

Category: compressor

written by [www.mbsm.pro](http://www.mbsm.pro) | 16 March 2021



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Technical Data Sheet

Compressor model HLY80AAa

Voltage 220-240V 50Hz ~1

Refrigerant R600a

APPLICATION COMPRESSOR MOTOR

Application Low Back Pressure Displacement 8,10 cm<sup>3</sup> Nominal Power 1/7 hp

Refrigerant R600a Diameter 24,29 mm Voltage/Frequency 220-240V 50Hz  
Evaporating Temp. -35,0 °C to -10,0 °C Stroke 17,47 mm Voltage range 187-264 V  
Expansion Capillar Net Weight 9,45 Kg Type RSIR  
Comp. Cooling Static Oil type ISO VG 10 MINER Phase number 1 PH  
Max. ambient temp. 43,0 °C Oil charge 205 cm<sup>3</sup> Locked Rotor Amps (LRA) 8,60 A  
Max. Cont. Current (MCC) 1,00 A  
Main W. resist. at 25°C 22,02 Ω  
Start W. resist. at 25°C 22,53 Ω

#### NOMINAL PERFORMANCE

##### ASHRAE CECOMAF

Cooling Capacity 113 kCal/h 99 W  
COP 1,41 W/W 1,11 W/W  
EER 1,22 kCal/Wh 0,96 kCal/Wh  
Input Power 93 W 89 W  
Current 0,62 A 0,60 A

#### TEST CYCLE CONDITIONS

##### ASHRAE CECOMAF

LBP (B) LBP (A)

Evaporating temp. -23,3 °C -25,0 °C  
Condensing temp. 55,0 °C 55,0 °C  
Liquid temp. 32,0 °C 55,0 °C  
Ambient temp. 32,0 °C 32,0 °C  
Suction temp. 32,0 °C 32,0 °C  
Voltage/Frequency 220 V 50 Hz 220 V 50 Hz

#### ELECTRICAL COMPONENTS

Relay Option 1

Reference PTC K100

Voltage 200-240 V

Resistance 14.00 Ω

Protector Option 1 Option 2 Option 3 Option 4

Reference MSP318LZ 4TM189NFBYY T0462 AE37FJ

Current 5,90 A 5,50 A 6,20 A 5,90 A

Time check 7,5-14 seg 5-15 seg 7,5-14 seg 7,5-14 seg

Disc temp. (Open/Close) 120,00 / 61,00 °C 120,00 / 61,00 °C 110,00 / 62,00 °C  
115,00 / 62,00 °C

Mbsm\_dot\_pro\_private\_PDF\_HLY80aa\_danfoss\_HLY80AAa\_R600a\_220\_50Télécharger



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

